



TEST REPORT

Reference No...... : WTX26X05150609W001
Manufacturer..... : Shenzhen Youge Intelligent Co., Ltd
Address..... : Unit 702, unit 6, Taoyuanju 14 District, Taoyuan community, Xixiang street,
Bao'an District, Shenzhen
Product Name..... : Smart Watch Sleep TWS headset
Model No...... : X10PRO
Standards..... : ETSI EN 300 328 V2.2.2 (2019-07)
Date of Receipt sample.... : 2026-06-01
Date of Test..... : 2026-06-03 to 2026-06-24
Date of Issue..... : 2026-06-30
Test Report Form No...... : WTX_ETSI EN 300 328_2019W
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Approved by:

Mike Shi/Project Engineer

Jason Su/Manager



TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 TEST STANDARDS	9
1.3 TEST METHODOLOGY	9
1.4 TEST FACILITY	9
1.5 EUT SETUP AND TEST MODE	10
1.6 MEASUREMENT UNCERTAINTY	11
1.7 TEST EQUIPMENT LIST AND DETAILS	12
2. SUMMARY OF TEST RESULTS	15
3. RF OUTPUT POWER	16
3.1 STANDARD APPLICABLE	16
3.2 TEST PROCEDURE	16
3.3 SUMMARY OF TEST RESULTS	17
4. ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE	18
4.1 STANDARD APPLICATION	18
4.2 TEST PROCEDURE	18
4.3 SUMMARY OF TEST RESULTS/PLOTS	20
5. HOPPING FREQUENCY SEPARATION	21
5.1 STANDARD APPLICATION	21
5.2 TEST PROCEDURE	21
5.3 SUMMARY OF TEST RESULTS/PLOTS	22
6. POWER SPECTRAL DENSITY	23
6.1 STANDARD APPLICABLE	23
6.2 TEST PROCEDURE	23
6.3 SUMMARY OF TEST RESULTS	24
7. OCCUPIED CHANNEL BANDWIDTH	25
7.1 STANDARD APPLICATION	25
7.2 TEST PROCEDURE	25
7.3 SUMMARY OF TEST RESULTS/PLOTS	25
8. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	26
8.1 STANDARD APPLICATION	26
8.2 TEST PROCEDURE	26
8.3 SUMMARY OF TEST RESULTS/PLOTS	28
9. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	29
9.1 STANDARD APPLICABLE	29
9.2 TEST PROCEDURE	29
9.3 SUMMARY OF TEST RESULTS/PLOTS	29
10. RECEIVER SPURIOUS EMISSIONS	39
10.1 STANDARD APPLICABLE	39
10.2 TEST PROCEDURE	39
10.3 SUMMARY OF TEST RESULTS/PLOTS	39
11. RECEIVER BLOCKING	45
11.1 STANDARD APPLICATION	45
11.2 TEST PROCEDURE	48
11.3 TEST SETUP	48
11.4 SUMMARY OF TEST RESULTS/PLOTS	49
APPENDIX SUMMARY	51
APPENDIX A: RF OUTPUT POWER	52
APPENDIX B: POWER SPECTRAL DENSITY	68
APPENDIX C: OCCUPIED CHANNEL BANDWIDTH	71



Reference No.: WTX26X05150609W001

APPENDIX D: ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE.....	76
APPENDIX E: HOPPING FREQUENCY SEPARATION.....	84
APPENDIX F: TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN.....	86
APPENDIX G: TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	92
APPENDIX H: RECEIVER SPURIOUS EMISSIONS	98
EXHIBIT 1 - EUT PHOTOGRAPHS.....	102
EXHIBIT 2 - TEST SETUP PHOTO.....	103

WALTEK



Report version

Version No.	Date of issue	Description
Rev.00	2026-06-30	Original
/	/	/

WALTEK



1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Smart Watch Sleep TWS headset
Trade Name:	callmusic
Model No.:	X10PRO
Adding Model(s):	/
Rated Voltage:	Smart Watch: Charging port: DC5V Battery:DC3.8V TWS headset: Charging port: DC5V Battery:DC3.7V
Battery Capacity:	Smart Watch: 240mAh TWS headset: 25mAh
Adapter Model:	/
Software Version:	/
Hardware Version:	/
Radio Technology:	TWS headset: Bluetooth V5.3(BR+EDR Mode) Smart Watch: Bluetooth V5.0(LE Mode)
Operation Frequency:	2402MHz-2480MHz
Modulation:	GFSK, $\pi/4$ DQPSK
Antenna Type:	Ceramic Chip Antenna
Antenna Gain:	Smart Watch:3.35dBi TWS headset:2dBi
<i>Note: 1: The Antenna Gain is provided by the customer and can affect the validity of results. 2: The data provided by the customer and can affect the validity of results. 3: The sample information is provided by the customer.</i>	



E.1 Product Information (Bluetooth V5.3)	
a) Type of modulation:	☒ FHSS ☐ other forms of modulation
b) In case of FHSS modulation:	
Max. No. of hopping freq.:	79 CH
Min. No. of hopping freq.:	15 CH
Accumulated Dwell time:	320.234ms
Frequency Occupation(Burst Number)	2
c) Adaptive / non-adaptive:	adaptive equipment without a non-adaptive mode
d) In case of adaptive equipment:	The equipment has implemented an LBT based DAA mechanism
e) In case of non-adaptive equipment:	No
f) The worst case operational mode for each of the following tests:	
RF output power	DH5
Accumulated dwell time	DH5
Minimum frequency occupation	DH5
Occupied channel bandwidth	DH5, 3DH5 (Min, Max)
Transmitter unwanted emissions in the OOB domain	DH5
Transmitter unwanted emissions in the spurious domain	DH5
Receiver spurious emissions	DH5
g) Operating mode(antenna):	Single Antenna Equipment
h) In case of smart antenna systems:	No
i) Operating frequency range(s) of the equipment:	2402 MHz to 2480 MHz
j) Occupied channel bandwidth(s):	Bandwidth 1(Min): 0.89MHz Bandwidth 2(Max): 1.21MHz
k) Type of equipment:	☒ Stand-alone ☐ Combined equipment ☐ Plug-in device
l) The extreme operating conditions	
Extreme voltage range:	Please refer to Section 1.5
Extreme temperature range:	Please refer to Section 1.5
m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:	
Antenna type:	☒ Ceramic Chip Antenna ☐ Dedicated Antennas
Antenna Gain:	2dBi
n) Nominal voltage:	Please refer to Section 1.5
o) Describe the test modes available which can facilitate testing:	Please refer to Section 1.5



p) The equipment type	Bluetooth
E.2 Power Level Setting	
Highest EIRP value:	5.54dBm
Conducted power:	3.54dBm
Listed as power setting:	Default
E.3 Additional Information	
Modulation:	GFSK, $\pi/4$ DQPSK
Unmodulated modes:	No
Duty cycle:	Continuous operation possible for testing purposes
Type of the UUT:	Production models
Supporting equipment:	Combined equipment

E.1 Product Information (Bluetooth V5.0)	
a) Type of modulation:	☐ FHSS ☒ other forms of modulation
b) Adaptive / non-adaptive:	Adaptive equipment without a non-adaptive mode
c) In case of adaptive equipment:	The equipment has implemented an LBT based DAA mechanism
d) In case of non-adaptive equipment:	No
e) The worst case operational mode for each of the following tests	
RF output power:	LE
Power spectrum density:	LE
Occupied channel bandwidth:	LE
Transmitter unwanted emissions in the OOB domain:	LE
Transmitter unwanted emissions in the spurious domain:	LE
Receiver spurious emissions:	LE
f) Operating mode(antenna):	Single Antenna Equipment
g) In case of smart antenna Systems:	No
h) Operating frequency range(s) of the equipment:	2402MHz-2480MHz
i) Occupied channel bandwidth(s):	1Mbps Bandwidth 1(Min): 1.02MHz Bandwidth 2(Max): 1.02MHz 2Mbps Bandwidth 1(Min): 2.01MHz Bandwidth 2(Max): 2.01MHz
j) Type of equipment:	☒ Stand-alone ☐ Combined equipment ☐ Plug-in device
k) The extreme operating conditions	



Reference No.: WTX26X05150609W001

Extreme voltage range:	Please refer to Section 1.5
Extreme temperature range:	Please refer to Section 1.5
l) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels	
Antenna type:	☒ Ceramic Chip Antenna ☐ Dedicated Antennas
Antenna gain:	3.35dBi
m)Nominal voltage:	Please refer to Section 1.5
n) Describe the test modes available which can facilitate testing:	Please refer to Section 1.5
o) The equipment type	Bluetooth
E.2 Power Level Setting	
Highest EIRP value:	1Mbps: 5.41dBm 2Mbps: 5.40dBm
Conducted power:	1Mbps: 2.06dBm 2Mbps: 2.05dBm
Listed as power setting:	Default
E.3 Additional Information	
Modulation:	GFSK
Unmodulated modes:	No
Duty cycle:	Continuous operation possible for testing purposes
Type of the UUT:	Production models
Supporting equipment:	Combined equipment



1.2 Test Standards

The tests were performed according to following standards:

ETSI EN 300 328 V2.2.2 (2019-07): Wideband transmission systems; Data transmission equipment operating in the 2.4 GHz band; Harmonised Standard for access to radio spectrum.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission/immunity should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ETSI EN 300328, the equipment under test (EUT) was configured to measure its highest possible emission level. For more detail refer to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.



1.5 EUT Setup and Test Mode

The equipment under test (EUT) was configured to measure its highest possible emission/immunity level. The test modes were adapted according to the operation manual for use, the EUT was operated in the engineering mode to fix the Tx/Rx frequency that was for the purpose of the measurements, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	EDR	2402/2441/2480MHz
TM2	Hopping	2402-2480MHz
TM3	LE	2402/2440/2480MHz

	NTNV	LTNV	HTNV
Temperature (°C)	25	-10	+50
Voltage (V)	3.8V		
Relative Humidity:		45 %.	
ATM Pressure:		1019 mbar	

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/



1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Uncertainty	Note
Radio frequency	$\pm 0.4\text{ppm}$	(1)
Conducted RF Output Power	$\pm 0.57\text{dB}$	(1)
Occupied Bandwidth	$\pm 0.015\text{MHz}$	(1)
Conducted Power Spectral Density	$\pm 0.70\text{dB}$	(1)
Conducted Spurious Emission	$\pm 2.17\text{dB}$	(1)
Radiated Spurious Emissions chamber A	@9kHz to 30MHz: $\pm 3.0\text{dB}$	(1)
	@30MHz to 1GHz: $\pm 5.70\text{dB}$	(1)
	@1GHz to 6GHz: $\pm 5.88\text{dB}$	(1)
	@6GHz to 18GHz: $\pm 5.96\text{dB}$	(1)
	@18GHz to 40GHz: $\pm 6.12\text{dB}$	(1)
Radiated Spurious Emissions chamber B	@30MHz to 1GHz: $\pm 5.36\text{dB}$	(1)
Radiated Spurious Emissions chamber C	@9kHz to 30MHz: $\pm 3.0\text{dB}$	(1)
	@30MHz to 1GHz: $\pm 5.28\text{dB}$	(1)
	@1GHz to 6GHz: $\pm 5.56\text{dB}$	(1)
	@6GHz to 18GHz: $\pm 5.72\text{dB}$	(1)
	@18GHz to 40GHz: $\pm 6.12\text{dB}$	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
MXA Signal Analyzer	Agilent	N9020A	US47140102	2026-03-25	2027-03-24
Signal Generator	Agilent	83752A	3610A01453	2026-02-06	2027-02-05
MXG Vector Signal Generator	Agilent	N5182A	MY47420108	2026-02-06	2027-02-05
Power Sensor	Keysight Technologies	U2021XA	MY55160007	2026-02-06	2027-02-05
Power Sensor	Agilent	U2021XA	MY54240001	2026-02-06	2027-02-05
Simultaneous Sampling switch	Keysight Technologies	U2531A	TW55183510	2026-02-06	2027-02-05
MXA signal Analyzer	KEYSIGHT	N9020A	MY51285678	2026-02-06	2027-02-05
RF Control Unit	Tonscend	JS0806-2	/	2026-02-06	2027-02-05
Temperature&Humidity Chamber	/	HTC-1	/	2026-02-06	2027-02-05
Communication Tester	Rohde & Schwarz	CMW500	1201.0002k 50-148650-FB	2026-03-25	2027-03-24
RF ATTENUATOR	FEIYANG	N-JK	/	2026-02-06	2027-02-05
Coaxial Cable	/	0M4RFC	/	2026-02-23	2027-02-22
Minitype temper ature chamber	Manufactured by ESPECTEST EQUIPMENT (GUANGDONG) CO., LTD	GSU-24	0060-001324	2026-05-28	2027-05-27
☐ Chamber A: Below 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2026-02-05	2027-02-04
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2026-02-05	2027-02-04
Amplifier	HP	8447F	2805A03475	2026-02-05	2027-02-04
Loop Antenna	Schwarz beck	FMZB 1516	9773	2026-02-05	2027-02-04
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2026-03-11	2029-03-10
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
☐ Chamber A: Above 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2026-02-05	2027-02-04
Spectrum Analyzer	Rohde & Schwarz	FSP40	1164.4391K38 Ser.100368	2026-04-29	2027-04-28
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2026-02-05	2027-02-04
Amplifier	C&D	PAP-1.0G18	14918	2026-02-05	2027-02-04



Horn Antenna	ETS	3117	00086197	2026-02-05	2027-02-04
DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2026-02-10	2027-02-09
Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2026-02-05	2027-02-04
Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
☐ Chamber B: Below 1GHz					
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
Amplifier	Agilent	8447D	2944A10457	2026-02-05	2027-02-04
EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2026-02-05	2027-02-04
Coaxial Cable	/	1.5MRFC-LWB3	/	2026-02-23	2027-02-22
Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
☒ Chamber C: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2026-02-05	2027-02-04
Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
Loop Antenna	Schwarz beck	FMZB 1516	9773	2026-02-05	2027-02-04
Amplifier	HP	8447F	2944A03869	2026-02-05	2027-02-04
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
☒ Chamber C: Above 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2026-02-05	2027-02-04
Horn Antenna	POAM	RTF-118A	1820	2025-06-13	2027-06-12
Amplifier	Tonscend	TAP01018050	AP22E806235	2026-02-05	2027-02-04
DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2026-02-10	2027-02-09
Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2026-02-05	2027-02-04
Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22



Software List			
Description	Manufacturer	Model	Version
EMI Test Software/EZ-EMC (Radiated Emission A)	Farad	RA-03A1	1.1.4.2
EMI Test Software/EZ-EMC (Radiated Emission B)	Farad	RA-03A1	1.1.4.2
EMI Test Software/EZ-EMC (Radiated Emission C)	Farad	RA-03A1-2	1.1.4.2
RF Test System	Tonscend	JS1120-3	V3.5.39
RF Test System	Ascentest	AT890	V3.0

*Remark: indicates software version used in the compliance certification testing

WALTEK



2. SUMMARY OF TEST RESULTS

Standards	Reference	Description of Test Item	Result
EN 300 328	4.3.1.2 / 4.3.2.2	RF Output Power	Passed
	4.3.2.3	Power Spectral Density	Passed
	4.3.1.3 / 4.3.2.4	Duty Cycle, Tx-sequence, Tx-gap	N/A
	4.3.1.4	Accumulated Transmit Time, Frequency Occupation and Hopping Sequence	Passed
	4.3.1.5	Hopping Frequency Separation	Passed
	4.3.1.6 / 4.3.2.5	Medium Utilisation (MU) Factor	N/A
	4.3.1.7 / 4.3.2.6	Adaptivity (Adaptive Frequency Hopping)	N/A
	4.3.1.8 / 4.3.2.7	Occupied Channel Bandwidth	Passed
	4.3.1.9 / 4.3.2.8	Transmitter Unwanted Emissions in the Out-of-band Domain	Passed
	4.3.1.10 / 4.3.2.9	Transmitter Unwanted Emissions in the Spurious Domain	Passed
	4.3.1.11 / 4.3.2.10	Receiver Spurious Emissions	Passed
	4.3.1.12 / 4.3.2.11	Receiver Blocking	Passed
	4.3.1.13 / 4.3.2.12	Geo-location capability	N/A
Passed: The EUT complies with the essential requirements in the standard. Failed: The EUT does not comply with the essential requirements in the standard. N/A: Not applicable.			



3. RF Output Power

3.1 Standard Applicable

According to Section 4.3.1.2.3, the maximum RF output power for adaptive Frequency Hopping equipment shall be equal to or less than 20dBm. The maximum RF output power for non-adaptive Frequency Hopping equipment, shall be declared by the supplier. The maximum RF output power for this equipment shall be equal to or less than the value declared by the supplier. This declared value shall be equal to or less than 20dBm.

According to Section 4.3.2.2.3, for adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20dBm. The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20dBm. For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.

This limit shall apply for any combination of power level and intended antenna assembly.

3.2 Test Procedure

According to section 5.4.2.2.1.2 of the standard EN 300328, the test procedure shall be as follows:

Step 1:

- Use a fast power sensor suitable for 2,4 GHz and capable of 1 MS/s.
- Use the following settings: - Sample speed 1 MS/s or faster.
- The samples must represent the power of the signal.
- Measurement duration: For non-adaptive equipment: equal to the observation period defined in clauses 4.3.1.3.2 or clause 4.3.2.4.2. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) are captured.

NOTE 1: For adaptive equipment, to increase the measurement accuracy, a higher number of bursts may be used.

Step 2:

- For conducted measurements on devices with one transmit chain:
 - Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.
- For conducted measurements on devices with multiple transmit chains:
 - Connect one power sensor to each transmit port for a synchronous measurement on all transmit ports.
 - Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than half the time between two samples.
 - For each individual sampling point (time domain), sum the coincident power samples of all ports and store them. Use these summed samples in all following steps..



Reference No.: WTX26X05150609W001

Step 3:

- Find the start and stop times of each burst in the stored measurement samples.

The start and stop times are defined as the points where the power is at least 30 dB below the highest value of the stored samples in step 2.

NOTE 2: In case of insufficient dynamic range, the value of 30 dB may need to be reduced appropriately.

Step 4:

- Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. Save these Pburst values, as well as the start and stop times for each burst.

$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

Step 5:

- The highest of all Pburst values (value "A" in dBm) will be used for maximum e.i.r.p. calculations.

Step 6:

- Add the (stated) antenna assembly gain "G" in dBi of the individual antenna.
- If applicable, add the additional beamforming gain "Y" in dB.
- If more than one antenna assembly is intended for this power setting, the maximum overall antenna gain (G or G + Y) shall be used.
- The RF Output Power (P) shall be calculated using the formula below: $P = A + G + Y$
- This value, which shall comply with the limit given in clause 4.3.1.2.3 or clause 4.3.2.2.3, shall be recorded in the test report.

3.3 Summary of Test Results

Please refer to Appendix A



4. Accumulated Transmit Time, Frequency Occupation and Hopping Sequence

4.1 Standard Application

According to section 4.3.1.4.3,

Adaptive Frequency Hopping equipment shall be capable of operating over a minimum of 70 % of the band specified in clause 1.

The Accumulated Transmit Time on any hopping frequency shall not be greater than 400 ms within any observation period of 400 ms multiplied by the minimum number of hopping frequencies (N) that have to be used.

In order for the equipment to comply with the Frequency Occupation requirement, it shall meet either of the following two options:

Option 1: Each hopping frequency of the hopping sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use.

Option 2: The occupation probability for each frequency shall be between $((1 / U) \times 25 \%)$ and 77 % where U is the number of hopping frequencies in use.

The hopping sequence(s) shall contain at least N hopping frequencies at all times, where N is 15 or 15 divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.

4.2 Test procedure

According to section 5.4.4.2.1, the test procedure shall be as follows:

Step 1:

- The output of the transmitter shall be connected to a spectrum analyzer or equivalent.
- The analyzer shall be set as follows:
 - Centre Frequency: Equal to the hopping frequency being investigated
 - Frequency Span: 0 Hz
 - RBW: ~ 50 % of the Occupied Channel Bandwidth
 - VBW: $\geq$ RBW
 - Detector Mode: RMS
 - Sweep time: Equal to the applicable observation period (see clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2)
 - Number of sweep points: 30000
 - Trace mode: Clear / Write
 - Trigger: Free Run

Step 2:

- Save the trace data to a file for further analysis by a computing device using an appropriate software application or program.



Reference No.: WTX26X05150609W001

Step 3:

- Identify the data points related to the frequency being investigated by applying a threshold.

The data points resulting from transmissions on the hopping frequency being investigated are assumed to have much higher levels compared to data points resulting from transmissions on adjacent hopping frequencies. If a clear determination between these transmissions is not possible, the RBW in step 1 shall be further reduced. In addition, a channel filter may be used.

- Count the number of data points identified as resulting from transmissions on the frequency being investigated and multiply this number by the time difference between two consecutive data points.

Step 4:

- The result in step 3 is the accumulated Dwell Time which shall comply with the limit provided in clauses 4.3.1.4.3.1 or 4.3.1.4.3.2 and which shall be recorded in the test report.

Step 5:

NOTE 1: This step is only applicable for equipment implementing Option 1 in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2 for complying with the Frequency Occupation requirement and the manufacturer decides to demonstrate compliance with this requirement via measurement.

- Make the following changes on the analyser and repeat step 2 and step 3.

Sweep time: $4 \times \text{Dwell Time} \times \text{Actual number of hopping frequencies in use}$

The hopping frequencies occupied by the equipment without having transmissions during the dwell time (blacklisted frequencies) should be taken into account in the actual number of hopping frequencies in use. If this number cannot be determined (number of blacklisted frequencies unknown) it shall be assumed that the equipment uses the maximum possible number of hopping frequencies.

- The result shall be compared to the limit for the Frequency Occupation defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2. The result of this comparison shall be recorded in the test report.

Step 6:

- Make the following changes on the analyzer:

- Start Frequency: 2400MHz
- Stop Frequency: 2483.5MHz
- RBW: ~ 50 % of the Occupied Channel Bandwidth (single hopping frequency)
- VBW: $\geq$ RBW
- Detector Mode: RMS
- Sweep time: 1s
- Trace Mode: Max Hold
- Trigger: Free Run

NOTE 2: The above sweep time setting may result in long measuring times. To avoid such long measuring times, an FFT analyser could be used.

- Wait for the trace to stabilize. Identify the number of hopping frequencies used by the hopping sequence.
- The result shall be compared to the limit (value N) defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2. This value shall be recorded in the test report.



Reference No.: WTX26X05150609W001

For equipment with blacklisted frequencies, it might not be possible to verify the number of hopping frequencies in use. However they shall comply with the requirement for Accumulated Transmit Time and Frequency Occupation assuming the minimum number of hopping frequencies (N) defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2 is used.

Step 7:

- For adaptive systems, using the lowest and highest -20 dB points from the total spectrum envelope obtained in step 6, it shall be verified whether the system uses 70 % of the band specified in clause 1. The result shall be recorded in the test report.

RBW/RBW=500/500kHz

4.3 Summary of Test Results/Plots

Please refer to Appendix D

WALTEK



5. Hopping Frequency Separation

5.1 Standard Application

According to section 4.3.1.5.3, for adaptive Frequency Hopping equipment, the minimum Hopping Frequency Separation shall be 100kHz.

Adaptive Frequency Hopping equipment, which for one or more hopping frequencies, has switched to a non-adaptive mode because interference was detected on all these hopping positions with a level above the threshold level defined in clause 4.3.1.7.2.2 or clause 4.3.1.7.3.2, is allowed to continue to operate with a minimum Hopping Frequency Separation of 100kHz on these hopping frequencies as long as the interference is present on these frequencies. The equipment shall continue to operate in an adaptive mode on other hopping frequencies.

Adaptive Frequency Hopping equipment which decided to operate in a non-adaptive mode on one or more hopping frequencies without the presence of interference, shall comply with the limit in clause 4.3.1.5.3.1 for these hopping frequencies as well as with all other requirements applicable to non-adaptive frequency hopping equipment.

5.2 Test procedure

According to the section 5.4.5.2.1, the option 2 test method shall be used.

Step 1:

The output of the transmitter shall be connected to a spectrum analyzer or equivalent.

The analyzer shall be set as follows:

- Centre Frequency: Centre of the two adjacent hopping frequencies
- Frequency Span: Sufficient to see the complete power envelope of both hopping frequencies
- RBW: 1 % of the Span
- VBW: $3 \times \text{RBW}$
- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep Time: 1s

NOTE: Depending on the nature of the signal (modulation), it might be required to use a much longer sweep time, e.g. in case switching transients are present in the signals to be investigated.

Step 2:

- Wait for the trace to stabilize.
- Use the marker-delta function to determine the Hopping Frequency Separation between the centres of the two adjacent hopping frequencies (e.g. by indentifying peaks or notches at the centre of the power envelope for the two adjacent signals). This value shall be compared with the limits defined in clause 4.3.1.5.3 and shall be recorded in the test report.

RBW/VBW=30/100kHz



5.3 Summary of Test Results/Plots

Please refer to Appendix E

WALTEK



6. Power Spectral Density

6.1 Standard Applicable

According to Section 4.3.2.3.3, for equipment using wide band modulations other than FHSS, the maximum Power Spectral Density is limited to 10 dBm per MHz.

6.2 Test Procedure

According to section 5.4.3.2.1 of the standard EN 300328, the test procedure shall be as follows:

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Start Frequency: 2 400MHz
- Stop Frequency: 2 483.5MHz
- Resolution BW: 10kHz
- Video BW: 30kHz
- Sweep Points: > 8 350

NOTE: For spectrum analysers not supporting this number of sweep points, the frequency band may be segmented.

- Detector: RMS
- Trace Mode: Max Hold
- Sweep time: 10 s; the sweep time may be increased further until a value where the sweep time has no impact on the RMS value of the signal

For non-continuous signals, wait for the trace to stabilize.

Save the data (trace data) set to a file.

Step 2:

For conducted measurements on smart antenna systems using either operating mode 2 or operating mode 3 (see clause 5.1.3.2), repeat the measurement for each of the transmit ports. For each sampling point (frequency domain), add up the coincident power values (in mW) for the different transmit chains and use this as the new data set.

Step 3:

Add up the values for power for all the samples in the file using the formula below.

$$P_{Sum} = \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

Step 4:

Normalize the individual values for power (in dBm) so that the sum is equal to the RF Output Power (e.i.r.p.) measured in clause 5.3.2 and save the corrected data. The following formulas can be used:

$$C_{Corr} = P_{Sum} - P_{e.i.r.p.}$$

$$P_{Samplecorr}(n) = P_{Sample}(n) - C_{Corr}$$



with 'n' being the actual sample number

Step 5:

Starting from the first sample $P_{\text{Samplecorr}}(n)$ (lowest frequency), add up the power (in mW) of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to sample #100). This is the Power Spectral Density (e.i.r.p.) for the first 1 MHz segment which shall be recorded.

Step 6:

Shift the start point of the samples added up in step 5 by one sample and repeat the procedure in step 5 (i.e. sample #2 to sample #101).

Step 7:

Repeat step 6 until the end of the data set and record the Power Spectral Density values for each of the 1 MHz segments.

From all the recorded results, the highest value is the maximum Power Spectral Density for the UUT. This value, which shall comply with the limit given in clause 4.3.2.3.3, shall be recorded in the test report.

RBW/VBW=10/30 kHz

6.3 Summary of Test Results

Please refer to Appendix B

WALTEK



7. Occupied Channel Bandwidth

7.1 Standard Application

According to section 4.3.1.8.3, the Occupied Channel Bandwidth for each hopping frequency shall fall completely within the band given in clause 1.

For non-adaptive Frequency Hopping equipment with e.i.r.p greater than 10 dBm, the Occupied Channel Bandwidth for every occupied hopping frequency shall be equal to or less than the value declared by the supplier. This declared value shall not be greater than 5MHz.

According to section 4.3.2.7.3, the Occupied Channel Bandwidth shall fall completely within the band given in clause 1. In addition, for non-adaptive systems using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20MHz.

7.2 Test procedure

According to the section 5.4.7.2.1, the measurement procedure shall be as follows:

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- Resolution BW: $\sim 1\%$ of the span without going below 1%
- Video BW: $3 \times \text{RBW}$
- Frequency Span for frequency hopping equipment: Lowest frequency separation that is used within the hopping sequence
- Frequency Span for other types of equipment: $2 \times \text{Nominal Channel Bandwidth}$ (e.g. 40MHz for a 20 MHz channel)
- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep time: 1 s

Step 2:

Wait until the trace is completed.

Find the peak value of the trace and place the analyser marker on this peak.

Step 3:

Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT. This value shall be recorded.

7.3 Summary of Test Results/Plots


Please refer to Appendix C



8. Transmitter Unwanted Emissions in the Out-of-band Domain

8.1 Standard Application

According to section 4.3.1.9.3&4.3.2.8.3, the transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure below:

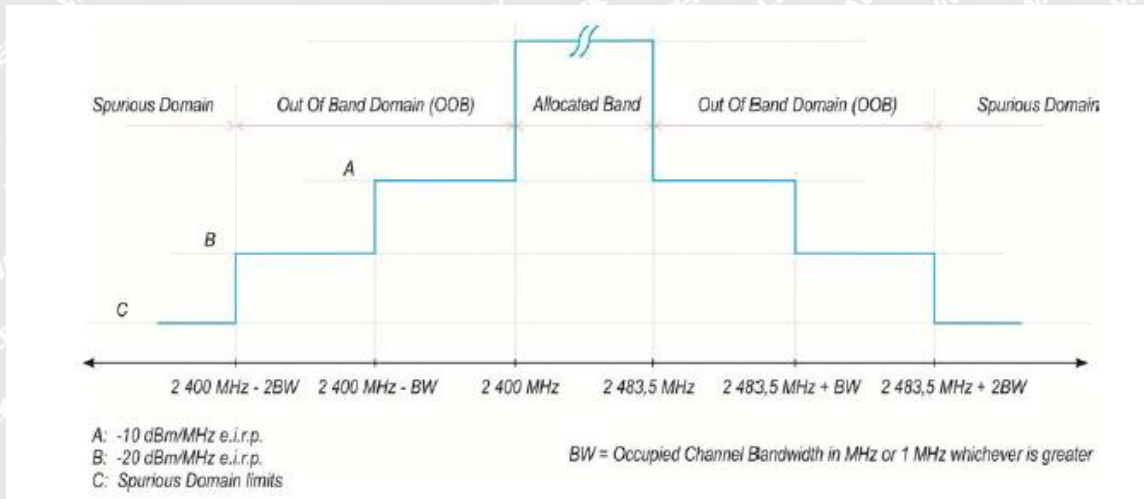

Within the 2400MHz to 2 483.5MHz band, the Out-of-band emissions are fulfilled by compliance with the Occupied Channel Bandwidth requirement

8.2 Test procedure

According to the section 5.4.8.2.1, the measurement procedure shall be as follows:

The Out-of-band emissions within the different horizontal segments of the mask provided in figures 1 and 3 shall be measured using the steps below. This method assumes the spectrum analyser is equipped with the Time Domain Power option.

Step 1:

- Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: 2484MHz
- Span: 0Hz
- Resolution BW: 1MHz
- Filter mode: Channel filter
- Video BW: 3MHz
- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep Mode: Continuous
- Sweep Points: Sweep Time [s] / (1 μs) or 5000 whichever is greater
- Trigger Mode: Video trigger

NOTE 1: In case video triggering is not possible, an external trigger source may be used.



Reference No.: WTX26X05150609W001

- Sweep Time: > 120 % of the duration of the longest burst detected during the measurement of the RF Output Power

Step 2: (segment 2483.5MHz to 2483.5MHz + BW)

- Adjust the trigger level to select the transmissions with the highest power level.
- For frequency hopping equipment operating in a normal hopping mode, the different hops will result in signal bursts with different power levels. In this case the burst with the highest power level shall be selected.
- Set a window (start and stop lines) to match with the start and end of the burst and in which the RMS power shall be measured using the Time Domain Power function.
- Select RMS power to be measured within the selected window and note the result which is the RMS power within this 1 MHz segment (2483.5MHz to 2484.5MHz). Compare this value with the applicable limit provided by the mask.
- Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2483.5MHz to 2483.5MHz + BW. The centre frequency of the last 1 MHz segment shall be set to 2483.5MHz + BW – 0.5MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 3: (segment 2 483.5 MHz + BW to 2 483.5MHz + 2BW)

- Change the centre frequency of the analyser to 2484 MHz + BW and perform the measurement for the first 1 MHz segment within range 2483.5MHz + BW to 2483.5MHz + 2BW. Increase the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2483.5MHz + 2 BW – 0.5MHz.

Step 4: (segment 2400MHz - BW to 2400MHz)

- Change the centre frequency of the analyser to 2 399.5MHz and perform the measurement for the first 1MHz segment within range 2 400MHz - BW to 2400MHz Reduce the centre frequency in 1MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400MHz - 2BW + 0.5MHz.

Step 5: (segment 2400MHz - 2BW to 2400MHz - BW)

- Change the centre frequency of the analyser to 2 399.5 MHz - BW and perform the measurement for the first 1 MHz segment within range 2400MHz - 2BW to 2400MHz - BW. Reduce the centre frequency in 1MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1MHz segment shall be set to 2400MHz - 2BW + 0.5MHz.

Step 6:

- In case of conducted measurements on equipment with a single transmit chain, the declared antenna assembly gain "G" in dBi shall be added to the results for each of the 1 MHz segments and compared with the limits provided by the mask given in figure 1 or figure 3. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.
- In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the measurements need to be repeated for each of the active transmit chains. The declared antenna assembly gain "G" in dBi for a single antenna shall be added to these results. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.



Reference No.: WTX26X05150609W001

Comparison with the applicable limits shall be done using any of the options given below:

- Option 1: the results for each of the transmit chains for the corresponding 1 MHz segments shall be added. The additional beamforming gain "Y" in dB shall be added as well and the resulting values compared with the limits provided by the mask given in figure 1 or figure 3.

NOTE 2: A ch refers to the number of active transmit chains.

It shall be recorded whether the equipment complies with the mask provided in figure 1 or figure 3.

RBW=1MHz VBW=3MHz

8.3 Summary of Test Results/Plots

Please refer to Appendix F

WALTEK



9. Transmitter Unwanted Emissions in the Spurious Domain

9.1 Standard Applicable

According to section 4.3.1.10.3& 4.3.2.9.3, the transmitter unwanted emissions in the spurious domain shall not exceed the values given in the following table.

Transmitter limit for spurious emissions

Frequency range	Maximum power	Bandwidth
30MHz to 47MHz	-36dBm	100kHz
47MHz to 74MHz	-54dBm	100kHz
74MHz to 87.5MHz	-36dBm	100kHz
87.5MHz to 118MHz	-54dBm	100kHz
118MHz to 174MHz	-36dBm	100kHz
174MHz to 230MHz	-54dBm	100kHz
230MHz to 470MHz	-36dBm	100kHz
470MHz to 694MHz	-54dBm	100kHz
694MHz to 1GHz	-36dBm	100kHz
1GHz to 12.75GHz	-30dBm	1MHz

9.2 Test Procedure

The device under test has an integral antenna and the radiated measurement shall apply to the device, using the method of measurement as described in the EN300328 section 5.4.9.2.


RBW=100kHz VBW=300kHz 30MHz-1GHz
 RBW=1MHz VBW=3MHz 1GHz-12.75GHz

9.3 Summary of Test Results/Plots


According to the data, the EUT complied with the EN 300328 standards, and had the worst cases:




➤ Spurious Emission From 30MHz To 1GHz
For EDR

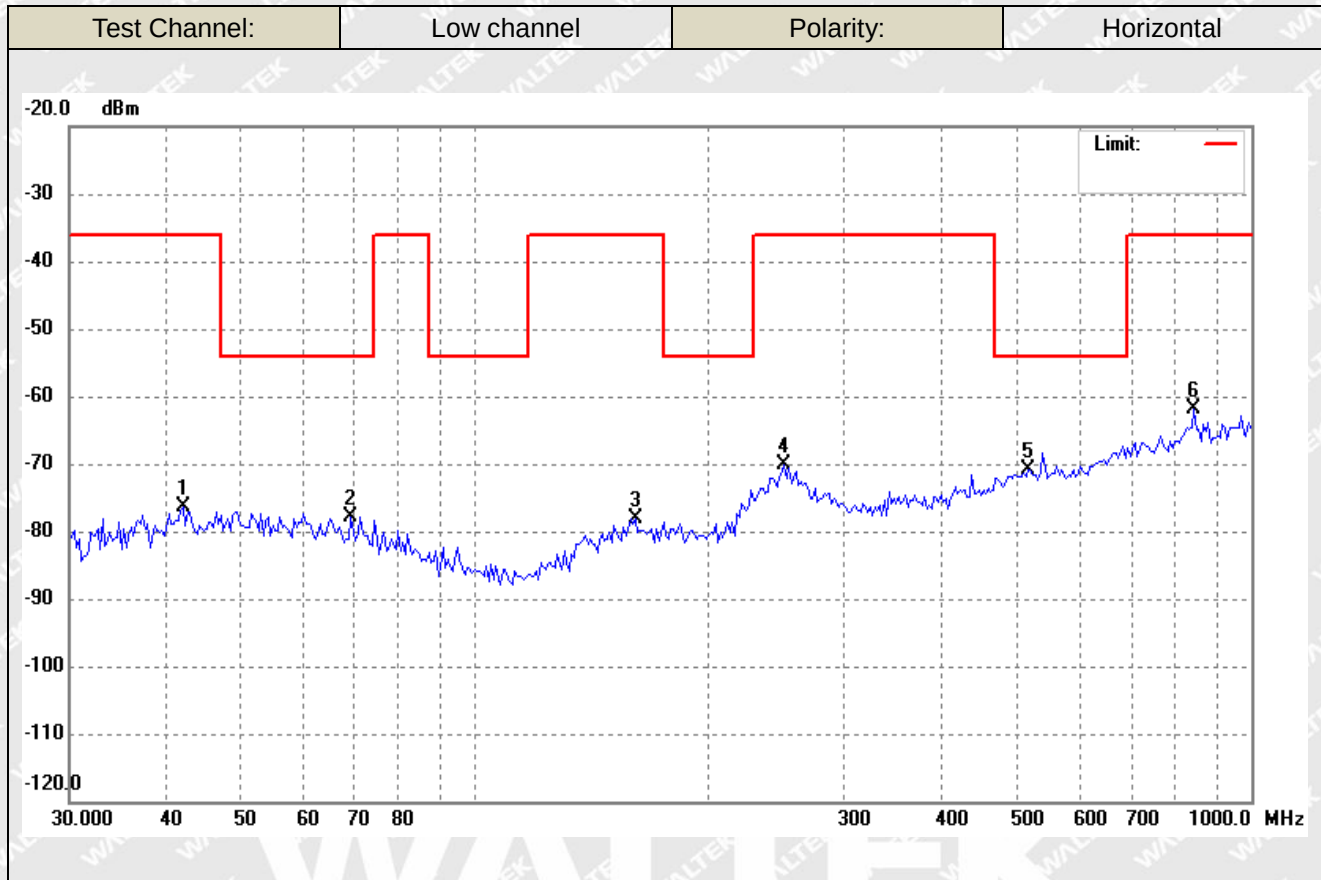


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	42.0349	-79.12	2.74	-76.38	-36.00	-40.38	ERP
2	69.2297	-78.96	1.16	-77.80	-54.00	-23.80	ERP
3	160.8851	-79.14	0.98	-78.16	-36.00	-42.16	ERP
4	250.4859	-78.66	8.51	-70.15	-36.00	-34.15	ERP
5	516.5650	-78.26	7.44	-70.82	-54.00	-16.82	ERP
6	844.8027	-75.56	13.63	-61.93	-36.00	-25.93	ERP

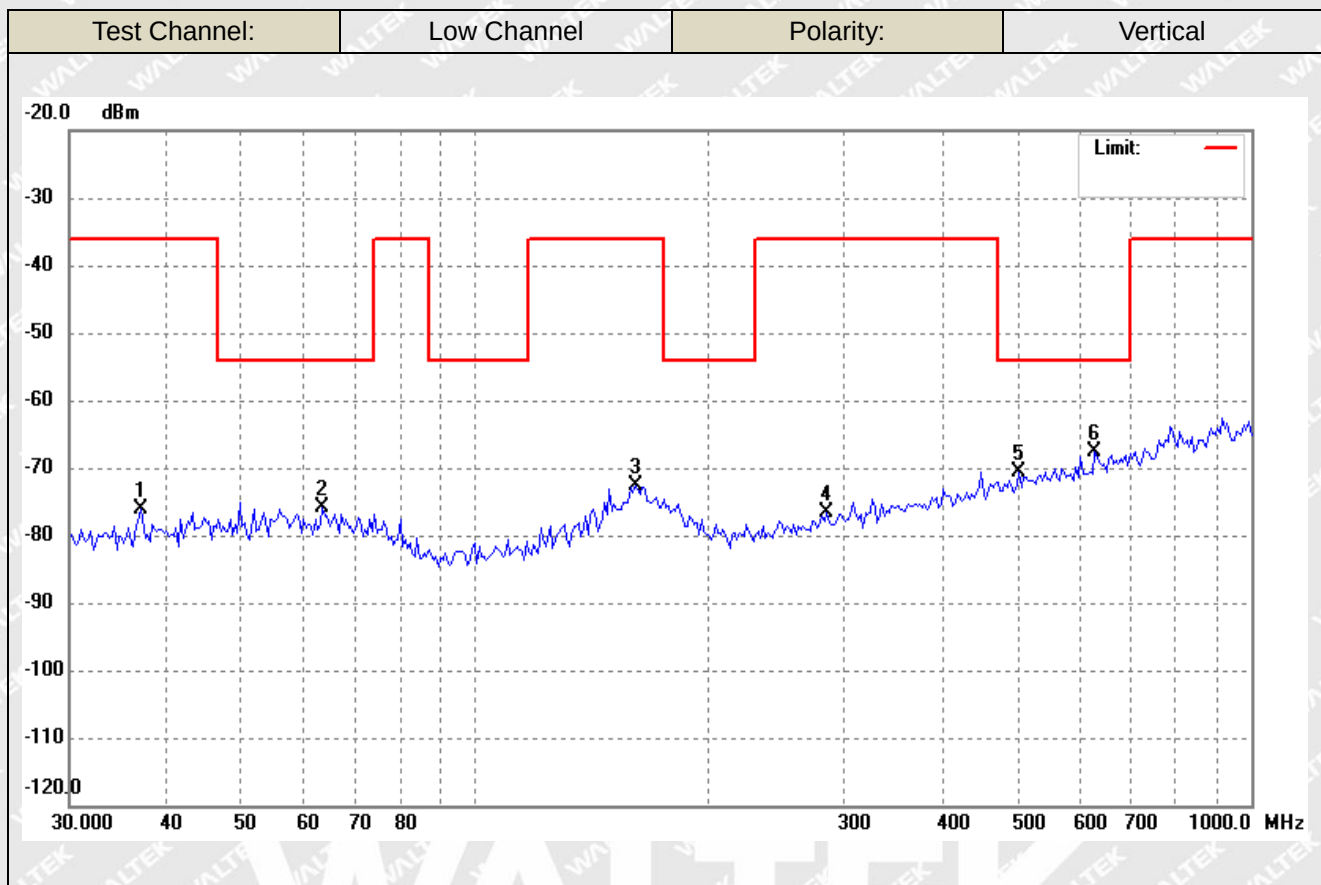

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	37.0405	-78.51	2.27	-76.24	-36.00	-40.24	ERP
2	63.6312	-79.09	3.22	-75.87	-54.00	-21.87	ERP
3	160.8851	-80.42	7.77	-72.65	-36.00	-36.65	ERP
4	284.2606	-79.23	2.54	-76.69	-36.00	-40.69	ERP
5	502.2472	-77.76	7.21	-70.55	-54.00	-16.55	ERP
6	628.8935	-76.69	9.19	-67.50	-54.00	-13.50	ERP

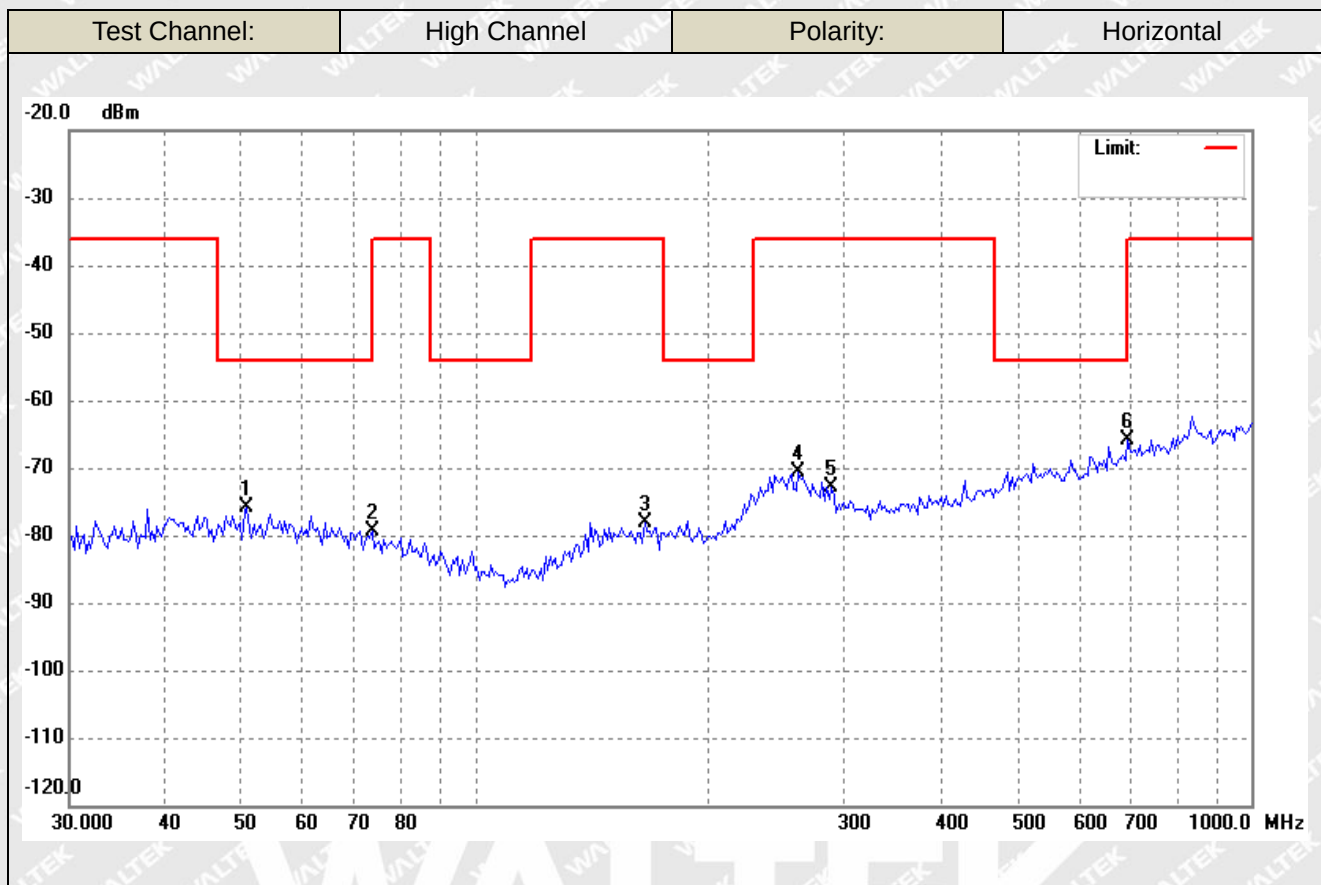


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	50.8172	-79.35	3.40	-75.95	-54.00	-21.95	ERP
2	73.7495	-79.84	0.41	-79.43	-54.00	-25.43	ERP
3	165.4716	-79.03	0.98	-78.05	-36.00	-42.05	ERP
4	261.2729	-78.17	7.61	-70.56	-36.00	-34.56	ERP
5	288.2840	-78.34	5.36	-72.98	-36.00	-36.98	ERP
6	693.9101	-76.80	10.82	-65.98	-54.00	-11.98	ERP

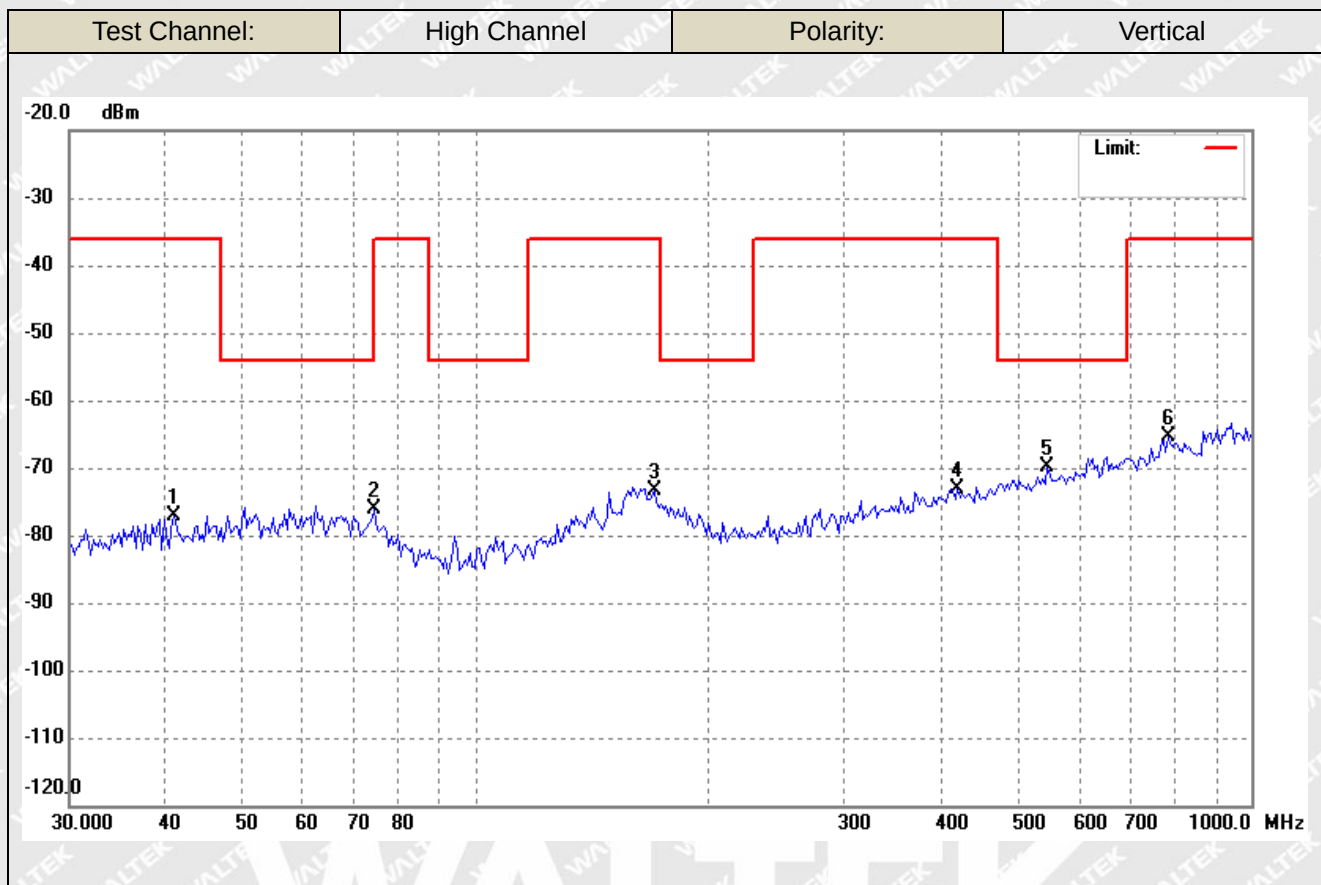


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	40.8698	-79.85	2.63	-77.22	-36.00	-41.22	ERP
2	74.2696	-77.98	1.94	-76.04	-36.00	-40.04	ERP
3	170.1887	-79.56	6.14	-73.42	-36.00	-37.42	ERP
4	418.3783	-78.72	5.70	-73.02	-36.00	-37.02	ERP
5	546.4366	-77.86	7.94	-69.92	-54.00	-15.92	ERP
6	781.9605	-77.61	12.20	-65.41	-36.00	-29.41	ERP




For LE 1Mbps(worst case)

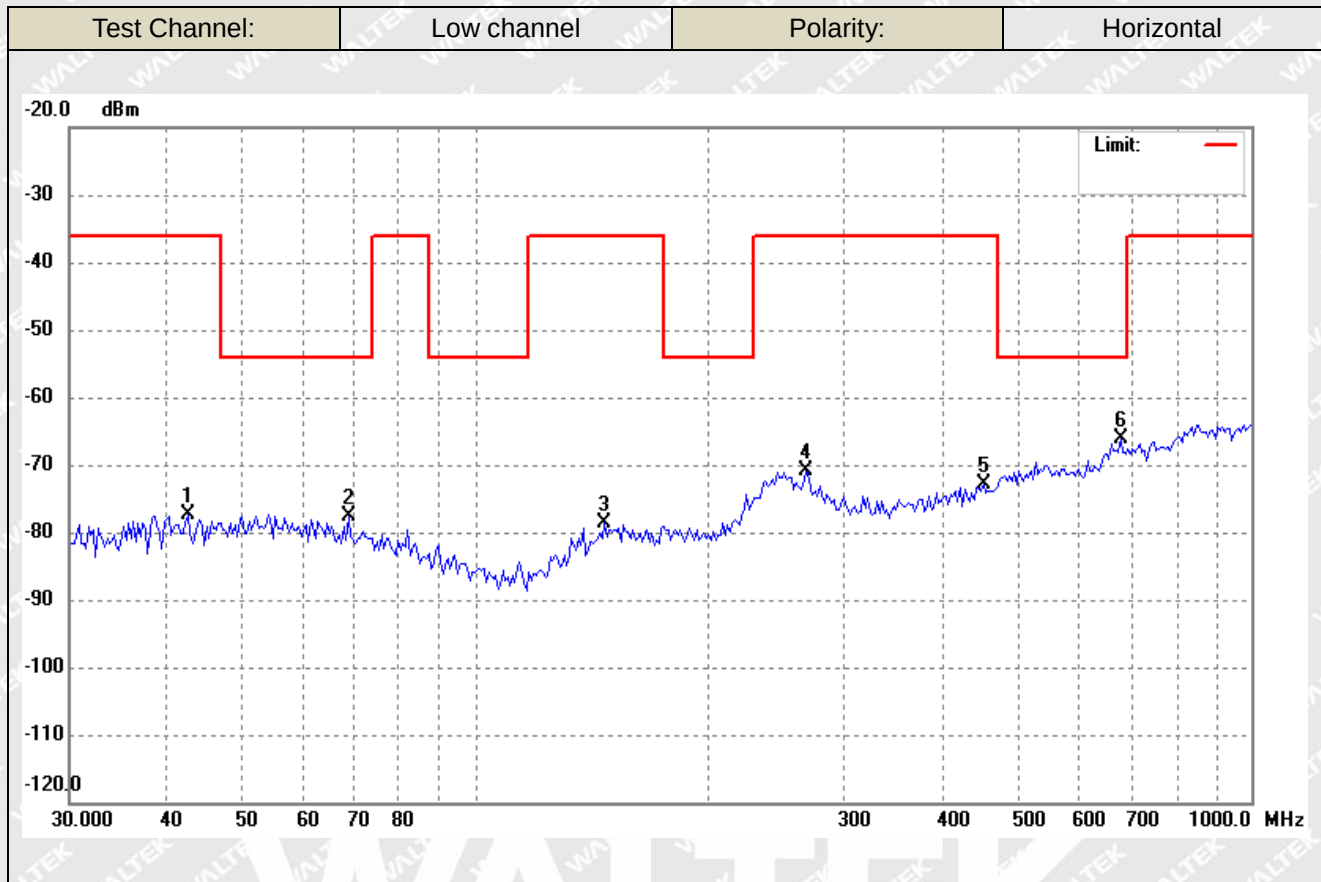


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	42.6298	-80.07	2.80	-77.27	-36.00	-41.27	ERP
2	68.7449	-78.84	1.22	-77.62	-54.00	-23.62	ERP
3	146.8391	-79.23	0.50	-78.73	-36.00	-42.73	ERP
4	266.8394	-78.14	7.15	-70.99	-36.00	-34.99	ERP
5	452.0012	-78.84	6.02	-72.82	-36.00	-36.82	ERP
6	679.4345	-76.51	10.41	-66.10	-54.00	-12.10	ERP

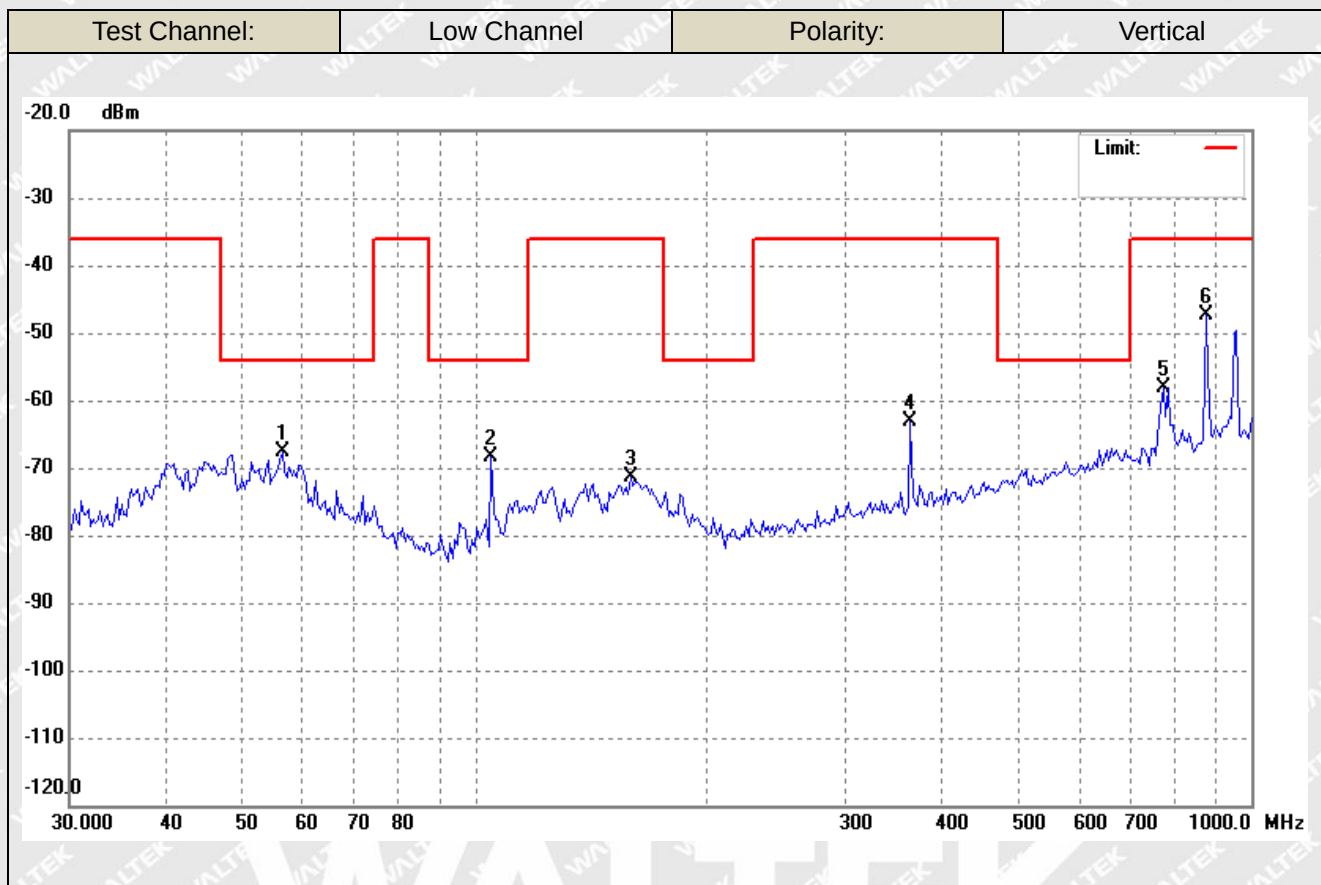

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	56.4662	-71.08	3.37	-67.71	-54.00	-13.71	ERP
2	104.7978	-67.13	-1.35	-68.48	-54.00	-14.48	ERP
3	158.6397	-78.80	7.39	-71.41	-36.00	-35.41	ERP
4	363.5230	-67.65	4.62	-63.03	-36.00	-27.03	ERP
5	771.0475	-70.04	11.92	-58.12	-36.00	-22.12	ERP
6	875.0132	-59.37	12.05	-47.32	-36.00	-11.32	ERP

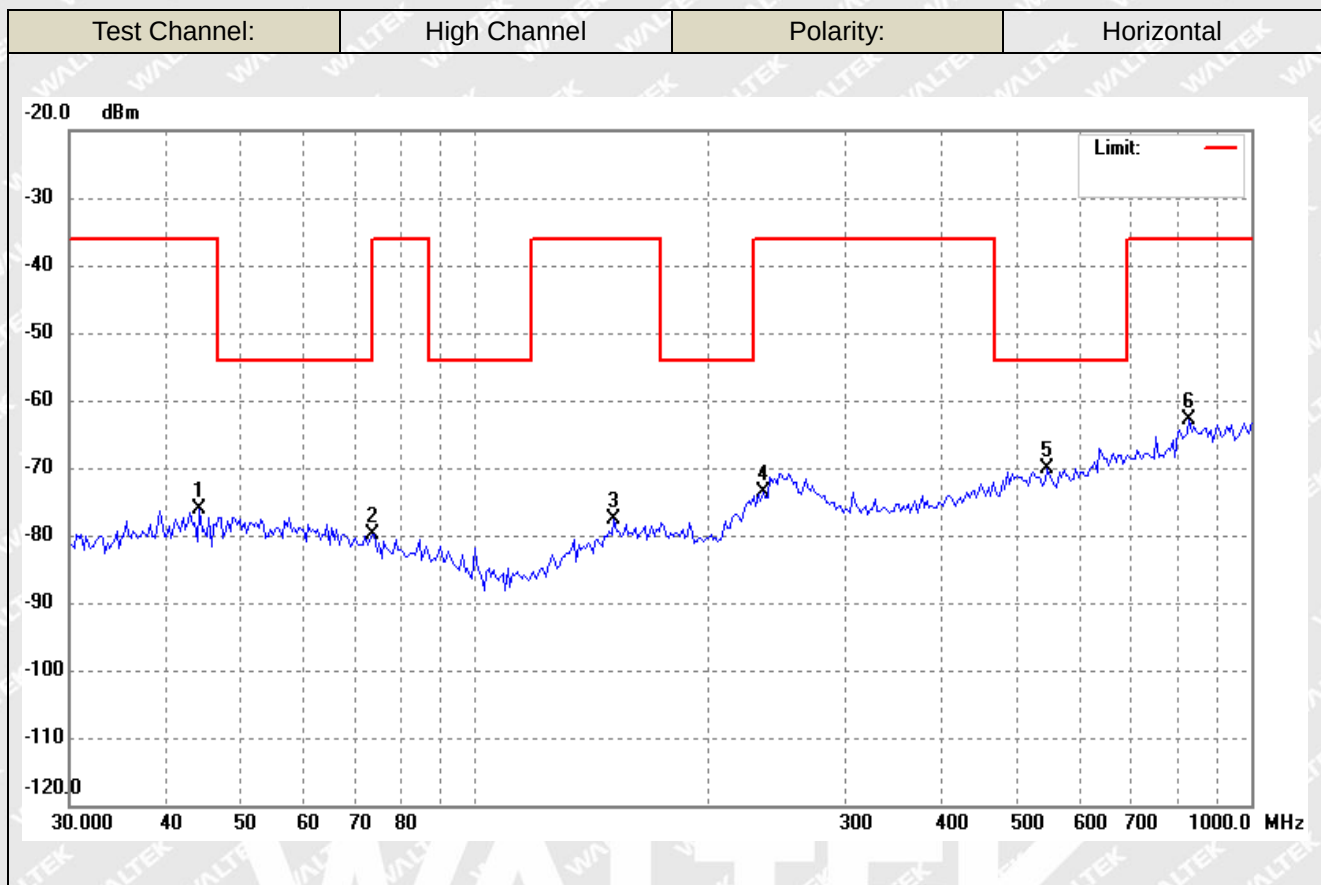

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	44.1543	-79.04	2.94	-76.10	-36.00	-40.10	ERP
2	73.7495	-80.22	0.41	-79.81	-54.00	-25.81	ERP
3	151.0251	-78.58	0.89	-77.69	-36.00	-41.69	ERP
4	235.1346	-79.72	6.00	-73.72	-36.00	-37.72	ERP
5	546.4366	-77.75	7.71	-70.04	-54.00	-16.04	ERP
6	833.0126	-76.19	13.37	-62.82	-36.00	-26.82	ERP

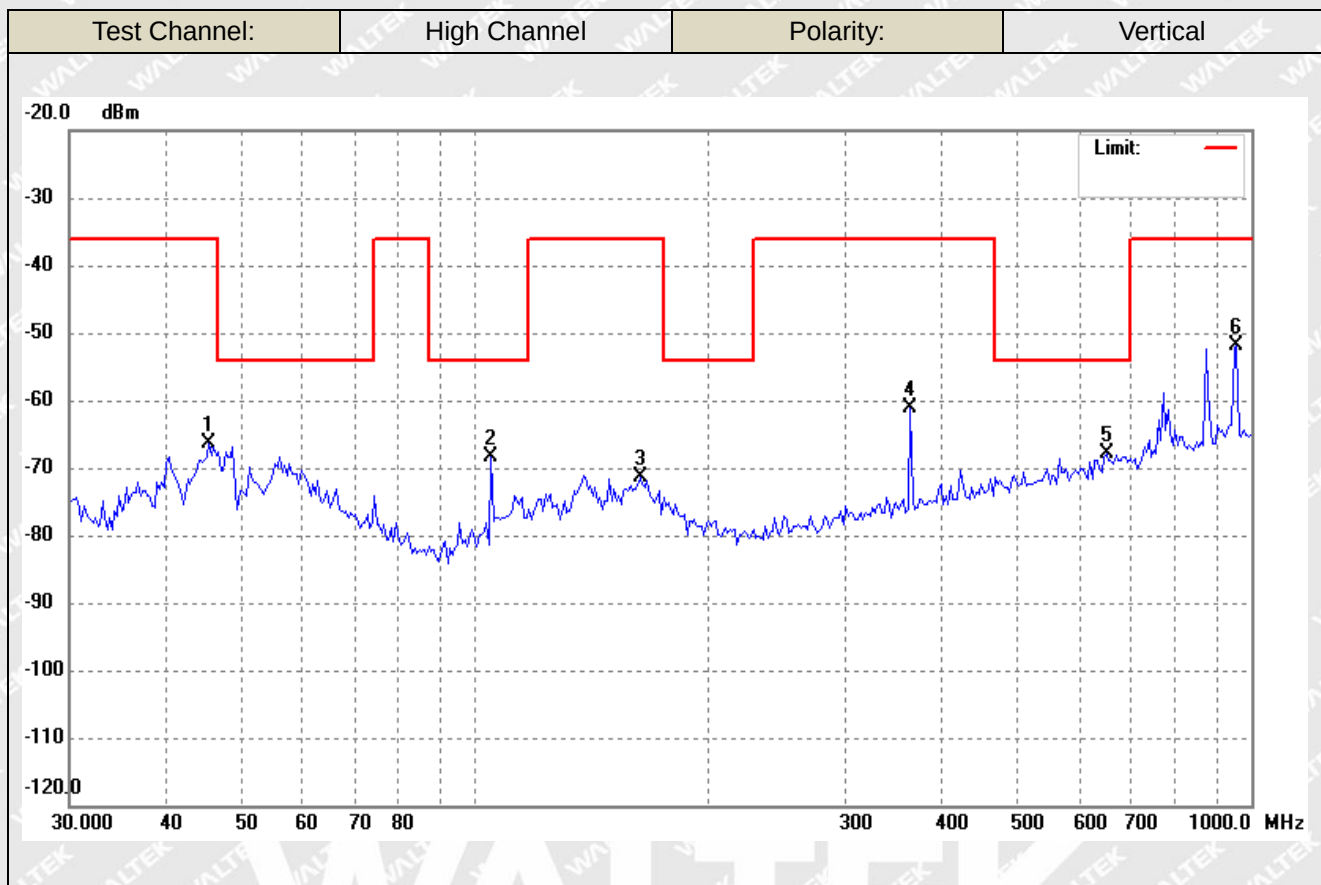

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	45.4130	-69.54	3.06	-66.48	-36.00	-30.48	ERP
2	104.7978	-67.05	-1.35	-68.40	-54.00	-14.40	ERP
3	163.1622	-78.83	7.37	-71.46	-36.00	-35.46	ERP
4	363.5230	-65.72	4.62	-61.10	-36.00	-25.10	ERP
5	651.3830	-77.30	9.48	-67.82	-54.00	-13.82	ERP
6	958.7134	-64.55	12.69	-51.86	-36.00	-15.86	ERP



➤ Spurious Emission Above 1GHz
For EDR

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel-2402MHz						
4804	-38.05	0.24	-37.81	-30	-7.81	H
7206	-50.93	4.46	-46.47	-30	-16.47	H
4804	-39.19	0.24	-38.95	-30	-8.95	V
7206	-49.42	4.46	-44.96	-30	-14.96	V
High Channel-2480MHz						
4960	-37.01	0.70	-36.31	-30	-6.31	H
7440	-50.50	6.64	-43.86	-30	-13.86	H
4960	-40.22	0.70	-39.52	-30	-9.52	V
7440	-49.12	6.64	-42.48	-30	-12.48	V

For LE 1Mbps(worst case)

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel-2402MHz						
4804	-48.68	0.24	-48.44	-30	-18.44	H
7206	-43.86	4.46	-39.40	-30	-9.40	H
4804	-48.18	0.24	-47.94	-30	-17.94	V
7206	-50.95	4.46	-46.49	-30	-16.49	V
High Channel-2480MHz						
4960	-48.80	0.70	-48.10	-30	-18.10	H
7440	-43.86	6.64	-37.22	-30	-7.22	H
4960	-47.41	0.70	-46.71	-30	-16.71	V
7440	-49.85	6.64	-43.21	-30	-13.21	V

Note 1: Testing is carried out with frequency rang 30MHz to 12.75GHz, which above 4th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Note 2: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

➤ **Conducted Transmitter Spurious Emission:**
Please refer to Appendix G



10. Receiver Spurious Emissions

10.1 Standard Applicable

According to section 4.3.1.11.3&4.3.2.10.3, the spurious emissions of the receiver shall not exceed the values given in table below:

NOTE: In case of equipment with antenna connectors, these limits apply to emissions at the antenna port (conducted) and to the emissions radiated by the cabinet. In case of integral antenna equipment (without temporary antenna connectors), these limits apply to emissions radiated by the equipment. Spurious emission limits for receivers

Frequency range	Maximum power	Bandwidth
30MHz to 1GHz	-57dBm	100kHz
1GHz to 12.75GHz	-47dBm	1MHz

10.2 Test Procedure

The device under test has an integral antenna and the radiated measurement shall apply to the device, using the method of measurement as described in the EN300328 section 5.4.10.2.


RBW=100kHz VBW=300kHz 30MHz-1GHz
RBW=1MHz VBW=3MHz 1GHz-12.75GHz

10.3 Summary of Test Results/Plots


According to the data, the EUT complied with the EN 300328 standards, and had the worst case:




➤ Receiver Spurious Emission From 30MHz To 1GHz

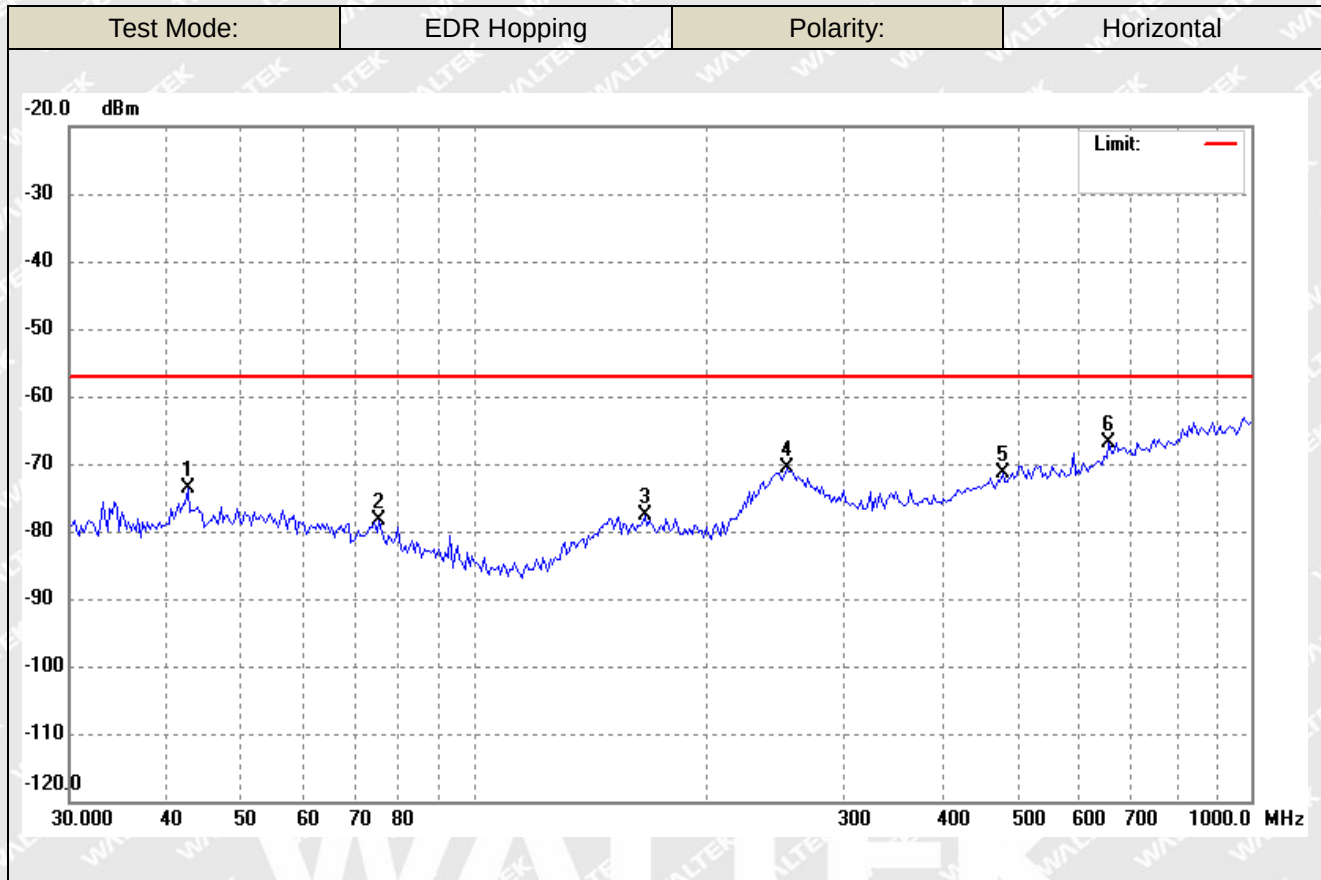


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	42.6299	-76.47	2.80	-73.67	-57.00	-16.67	ERP
2	75.3208	-78.45	0.14	-78.31	-57.00	-21.31	ERP
3	165.4716	-78.61	0.98	-77.63	-57.00	-20.63	ERP
4	252.2523	-79.06	8.36	-70.70	-57.00	-13.70	ERP
5	478.1394	-78.07	6.71	-71.36	-57.00	-14.36	ERP
6	655.9766	-76.55	9.76	-66.79	-57.00	-9.79	ERP

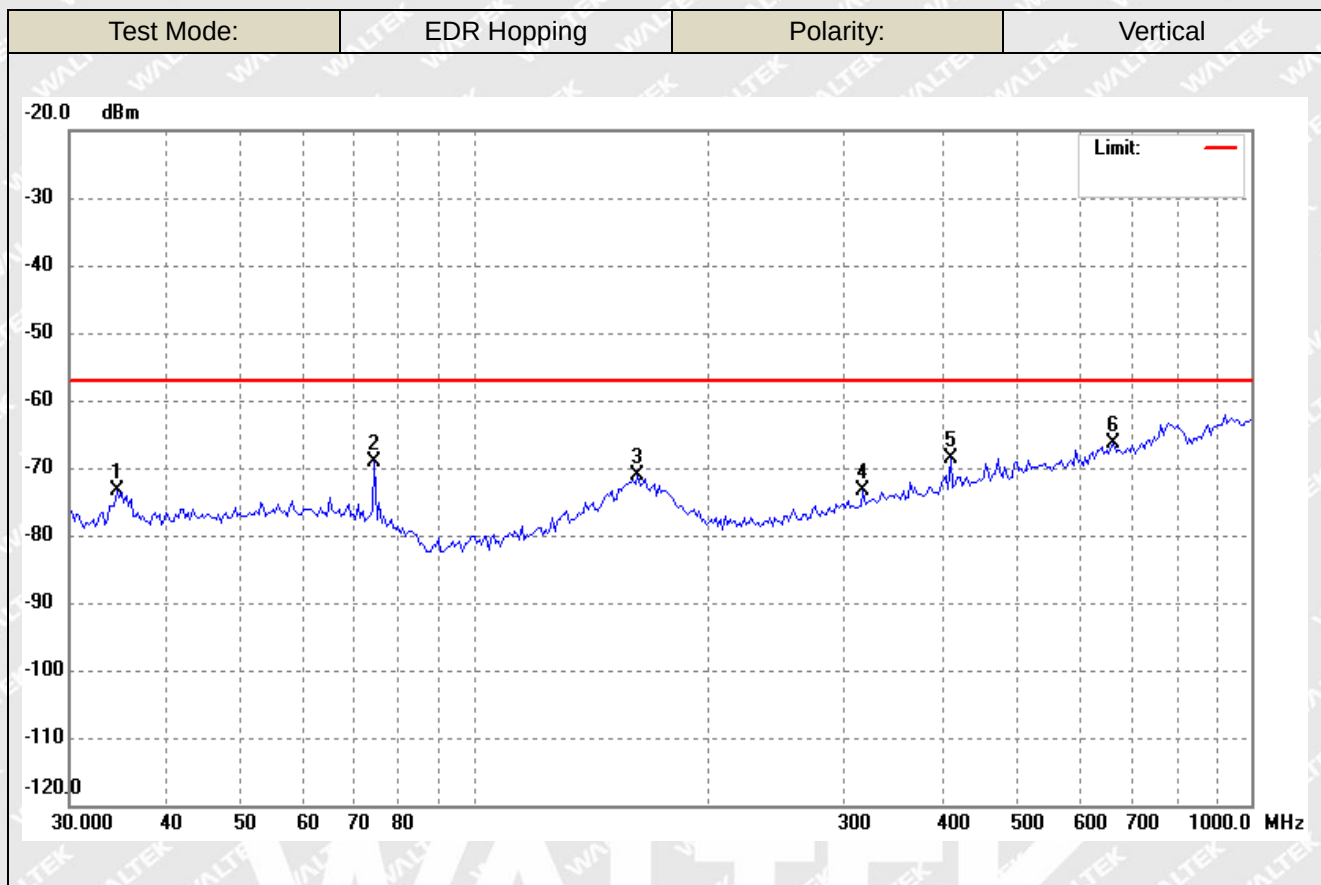

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	34.5270	-75.35	2.03	-73.32	-57.00	-16.32	ERP
2	74.2696	-70.98	1.94	-69.04	-57.00	-12.04	ERP
3	162.0197	-78.73	7.57	-71.16	-57.00	-14.16	ERP
4	315.8601	-77.03	3.64	-73.39	-57.00	-16.39	ERP
5	409.6506	-74.23	5.54	-68.69	-57.00	-11.69	ERP
6	665.2610	-76.01	9.65	-66.36	-57.00	-9.36	ERP

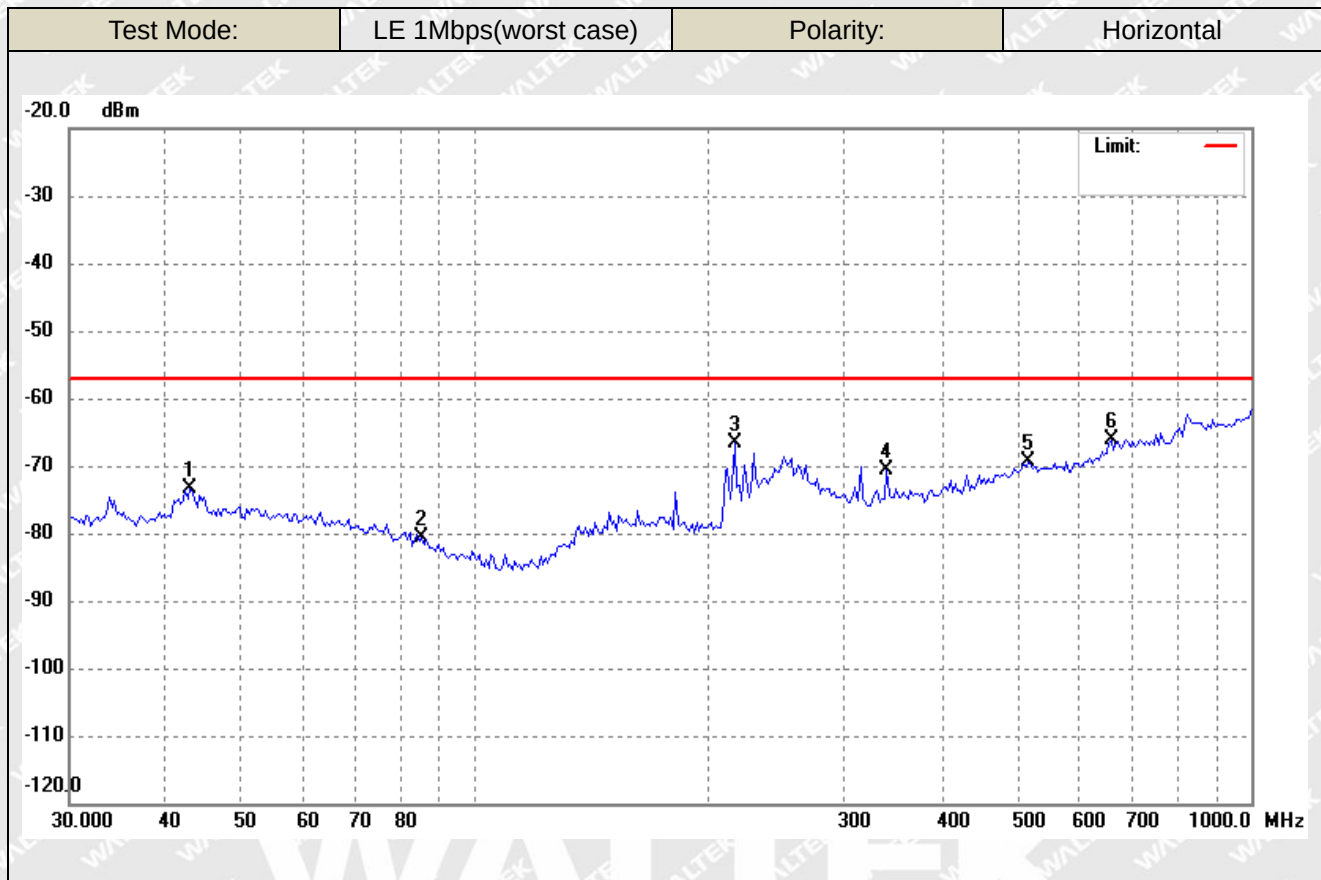

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	42.9305	-76.19	2.83	-73.36	-57.00	-16.36	ERP
2	85.4769	-79.00	-1.65	-80.65	-57.00	-23.65	ERP
3	216.1197	-69.34	2.74	-66.60	-57.00	-9.60	ERP
4	338.8546	-75.14	4.49	-70.65	-57.00	-13.65	ERP
5	516.5651	-76.81	7.44	-69.37	-57.00	-12.37	ERP
6	660.6025	-76.08	9.89	-66.19	-57.00	-9.19	ERP

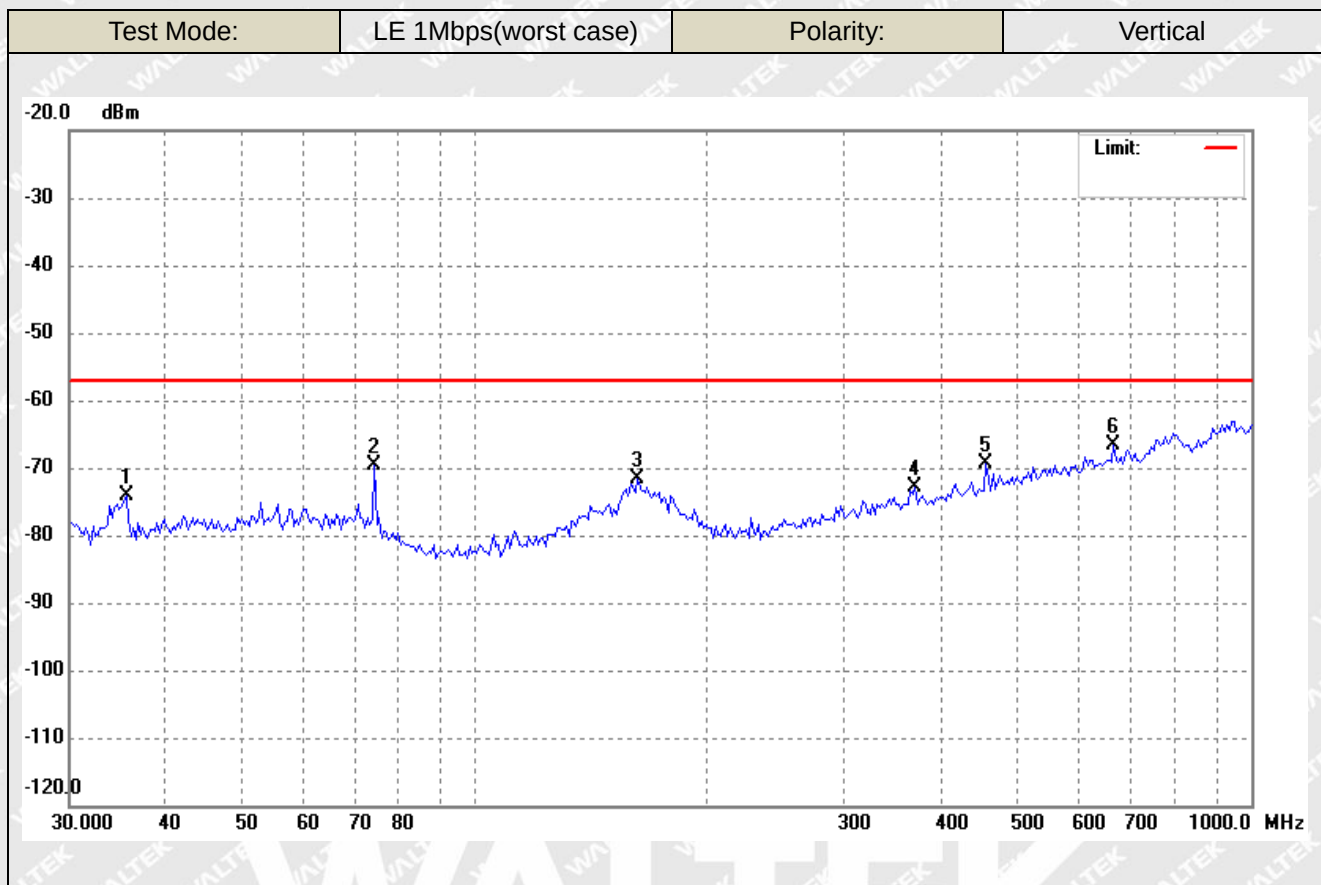

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	35.5112	-76.30	2.12	-74.18	-57.00	-17.18	ERP
2	74.2696	-71.45	1.94	-69.51	-57.00	-12.51	ERP
3	162.0197	-79.15	7.57	-71.58	-57.00	-14.58	ERP
4	368.6682	-77.67	4.72	-72.95	-57.00	-15.95	ERP
5	455.1888	-75.75	6.36	-69.39	-57.00	-12.39	ERP
6	665.2610	-76.34	9.65	-66.69	-57.00	-9.69	ERP



➤ Receiver Spurious Emission Above 1GHz

Hopping Mode

Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
2785.27	-58.71	-47	-11.71	H
6740.64	-62.25	-47	-15.25	H
2823.51	-57.65	-47	-10.65	V
6741.59	-62.13	-47	-15.13	V

LE 1Mbps Mode(worst case)

Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
2787.90	-57.84	-47	-10.84	H
6743.29	-61.66	-47	-14.66	H
2825.07	-57.65	-47	-10.65	V
6742.63	-61.99	-47	-14.99	V

Note: Testing is carried out with frequency rang 30MHz to 12.75GHz, which above 1GHz are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Conducted Receiver Spurious Emission:

Please refer to Appendix H

WALTEK



11. Receiver Blocking

11.1 Standard Application

Receiver blocking is a measure of the ability of the equipment to receive a wanted signal on its operating channel without exceeding a given degradation due to the presence of an unwanted input signal (blocking signal) on frequencies other than those of the operating band and spurious responses.

Performance Criteria

For equipment that supports a PER or FER test to be performed, the minimum performance criterion shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER test to be performed, the minimum performance criterion shall be no loss of the wireless transmission function needed for the intended use of the equipment.

The minimum performance criterion shall be a PER less than or equal to 10 %. The manufacturer may declare alternative performance criteria as long as that is appropriate for the intended use of the equipment (see clause 5.4.1.t)).

While maintaining the minimum performance criteria as defined in clause 4.3.1.12.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 6, table 7 or table 8.

Receiver category 1

Adaptive equipment with a maximum RF output power greater than 10 dBm e.i.r.p. shall be considered as receiver category 1 equipment.

Receiver category 2

non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % (irrespective of the maximum RF output power); or equipment (adaptive or non-adaptive) with a maximum RF output power greater than 0 dBm e.i.r.p. and less than or equal to 10 dBm e.i.r.p.

Receiver category 3

non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % (irrespective of the maximum RF output power); or equipment (adaptive or non-adaptive) with a maximum RF output power of 0 dBm e.i.r.p.



Table 6: Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
(-133 dBm + $10 \times \log_{10}(\text{OCBW})$) or -68 dBm whichever is less (see note 2)	2380 2504	-34	CW
(-139 dBm + $10 \times \log_{10}(\text{OCBW})$) or -74 dBm whichever is less (see note 3)	2300 2330 2360 2524 2584 2674		

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26$ dB where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 20$ dB where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.



Table 7: Receiver Blocking parameters receiver category 2 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$ or $(-74 \text{ dBm} + 10 \text{ dB})$ whichever is less (see note 2)	2380 2504 2300 2584	-34	CW
NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

Table 8: Receiver Blocking parameters receiver category 3 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 20 \text{ dB})$ or $(-74 \text{ dBm} + 20 \text{ dB})$ whichever is less (see note 2)	2380 2504 2300 2584	-34	CW
NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where $P_{\min}$ is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			



11.2 Test Procedure

Step 1: • For non-frequency hopping equipment, the UUT shall be set to the lowest operating channel.

Step 2: • The blocking signal generator is set to the first frequency as defined in the appropriate table corresponding to the receiver category and type of equipment.

Step 3: • With the blocking signal generator switched off, a communication link is established between the UUT and the associated companion device using the test setup shown in figure 6. The variable attenuator is set to a value that achieves the minimum performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 with a resolution of at least 1 dB. The resulting level for the wanted signal at the input of the UUT is P_{min} . This value shall be measured and recorded in the test report.

• The signal level is increased by the value provided in the table corresponding to the receiver category and type of equipment.

Step 4: • The blocking signal at the UUT is set to the level provided in the table corresponding to the receiver category and type of equipment. It shall be verified and recorded in the test report that the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is met.

Step 5: • Repeat step 4 for each remaining combination of frequency and level for the blocking signal as provided in the table corresponding to the receiver category and type of equipment.

Step 6: • For non-frequency hopping equipment, repeat step 2 to step 5 with the UUT operating at the highest operating channel.

11.3 Test Setup

According to the section 5.4.11.2.1, the test block diagram shall be used.

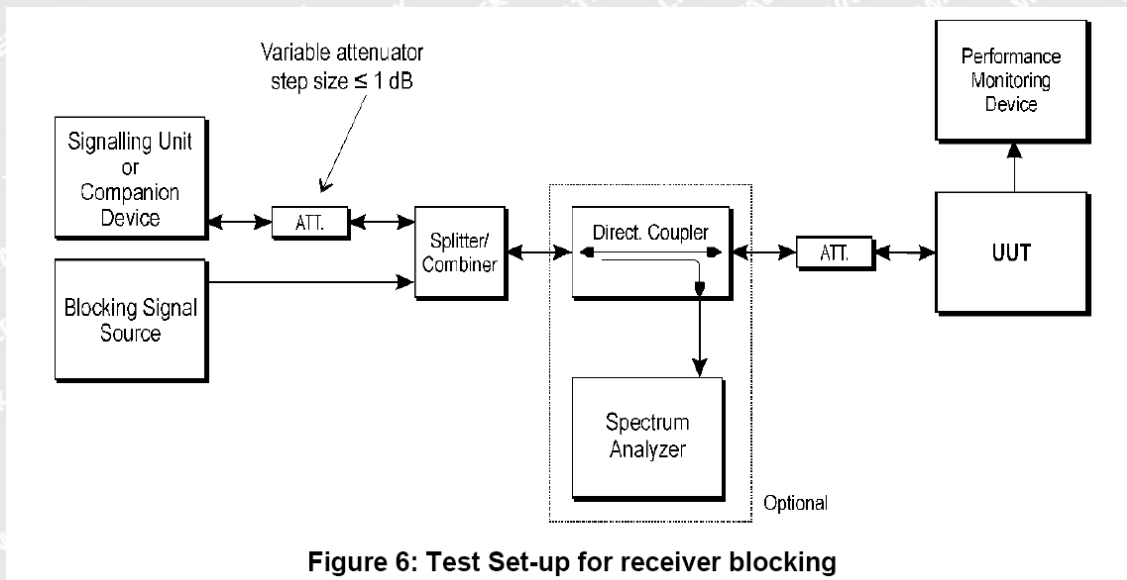


Figure 6: Test Set-up for receiver blocking

All test procedure is carried to the section 5.4.11.2.1

RBW/VBW=8MHz/30MHz



Reference No.: WTX26X05150609W001

11.4 Summary of Test Results/Plots

The product is receiver category 2

Mode/ Channel	Wanted signal power (dBm)	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	Test PER(%)	Limit(%)	Result
GFSK-Hopping	-68	2380	-32	0	<10	Pass
		2504				
		2300				
		2584				
$\pi/4$ DQPSK - Hopping	-66	2380	-32	0	<10	Pass
		2504				
		2300				
		2584				
8DPSK-Hopping	-66	2380	-32	0	<10	Pass
		2504				
		2300				
		2584				
LE 1Mbps- Low channel	-65.65	2380	-30.65	0	<10	Pass
		2504				
		2300				
		2584				
LE 1Mbps- High channel	-65.65	2380	-30.65	0	<10	Pass
		2504				
		2300				
		2584				



LE 2Mbps- Low channel	-62.65	2380	-30.65	0	<10	Pass
		2504				
		2300				
		2584				
LE 2Mbps- High channel	-62.65	2380	-30.65	0	<10	Pass
		2504				
		2300				
		2584				

**communication link is established between the UUT and the associated companion device using the test setup shown in figure 6. While the Companion device (CMW500) adjust to a level which can obtain the minimum performance criteria PER 10%, This level define to Pmin*

Remark: the smallest channel bandwidth shall be used together with the lowest data rate for this channel bandwidth. This mode of operation are aligned with the performance criteria defined in clause 4.3.1.12.3 or clause 4.3.2.11.3 as declared by the manufacturer (see clause 5.4.1.t)).

WALTEK



APPENDIX SUMMARY

Project No.	WTX26X05150609W001	Test Engineer	BAlDi zhong
Start date	2026-06-15	Finish date	2026-06-15
Temperature	25℃	Humidity	56%
RF specifications	CE-BR+EDR&LE		

APPENDIX	Description of Test Item	Result
A	RF Output Power	Compliant
B	Power Spectral Density	Compliant
C	Occupied Channel Bandwidth	Compliant
D	Accumulated Transmit Time, Frequency Occupation and Hopping Sequence	Compliant
E	Hopping Frequency Separation	Compliant
F	Transmitter Unwanted Emissions In The Out-Of-BandDomain	Compliant
G	Transmitter unwanted emissions in the spurious domain	Compliant
H	Receiver spurious emissions	Compliant



Appendix A: RF Output Power

Test Result

Test Condition	Test Mode	Antenna	Frequency[MHz]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
LTVN	LE_1M	Ant1	2402	4.53	20	PASS
LTVN	LE_1M	Ant1	2440	5.07	20	PASS
LTVN	LE_1M	Ant1	2480	5.41	20	PASS
NTNV	LE_1M	Ant1	2402	4.54	20	PASS
NTNV	LE_1M	Ant1	2440	5.08	20	PASS
NTNV	LE_1M	Ant1	2480	5.41	20	PASS
HTNV	LE_1M	Ant1	2402	4.53	20	PASS
HTNV	LE_1M	Ant1	2440	5.07	20	PASS
HTNV	LE_1M	Ant1	2480	5.40	20	PASS
LTVN	LE_2M	Ant1	2402	4.47	20	PASS
LTVN	LE_2M	Ant1	2440	5.06	20	PASS
LTVN	LE_2M	Ant1	2480	5.40	20	PASS
NTNV	LE_2M	Ant1	2402	4.46	20	PASS
NTNV	LE_2M	Ant1	2440	5.06	20	PASS
NTNV	LE_2M	Ant1	2480	5.40	20	PASS
HTNV	LE_2M	Ant1	2402	4.49	20	PASS
HTNV	LE_2M	Ant1	2440	5.07	20	PASS
HTNV	LE_2M	Ant1	2480	5.40	20	PASS

Test Condition	Test Mode	Antenna	Frequency[MHz]	EIRP[dBm]	Limit[dBm]	Verdict
LTVN	DH5	Ant1	2402	5.10	20	PASS
LTVN	DH5	Ant1	2441	5.41	20	PASS
LTVN	DH5	Ant1	2480	5.43	20	PASS
LTVN	DH5	Ant1	Hop	5.54	20	PASS
NTNV	DH5	Ant1	2402	5.17	20	PASS
NTNV	DH5	Ant1	2441	5.43	20	PASS
NTNV	DH5	Ant1	2480	5.43	20	PASS
NTNV	DH5	Ant1	Hop	5.52	20	PASS
HTNV	DH5	Ant1	2402	5.06	20	PASS
HTNV	DH5	Ant1	2441	5.41	20	PASS
HTNV	DH5	Ant1	2480	5.45	20	PASS
HTNV	DH5	Ant1	Hop	5.53	20	PASS
LTVN	2DH5	Ant1	2402	3.60	20	PASS
LTVN	2DH5	Ant1	2441	4.02	20	PASS




Reference No.: WTX26X05150609W001


LTNV	2DH5	Ant1	2480	4.07	20	PASS
LTNV	2DH5	Ant1	Hop	4.15	20	PASS
NTNV	2DH5	Ant1	2402	3.62	20	PASS
NTNV	2DH5	Ant1	2441	4.01	20	PASS
NTNV	2DH5	Ant1	2480	4.08	20	PASS
NTNV	2DH5	Ant1	Hop	4.14	20	PASS
HTNV	2DH5	Ant1	2402	3.61	20	PASS
HTNV	2DH5	Ant1	2441	4.01	20	PASS
HTNV	2DH5	Ant1	2480	4.08	20	PASS
HTNV	2DH5	Ant1	Hop	4.15	20	PASS

WALTEK




Test Graphs

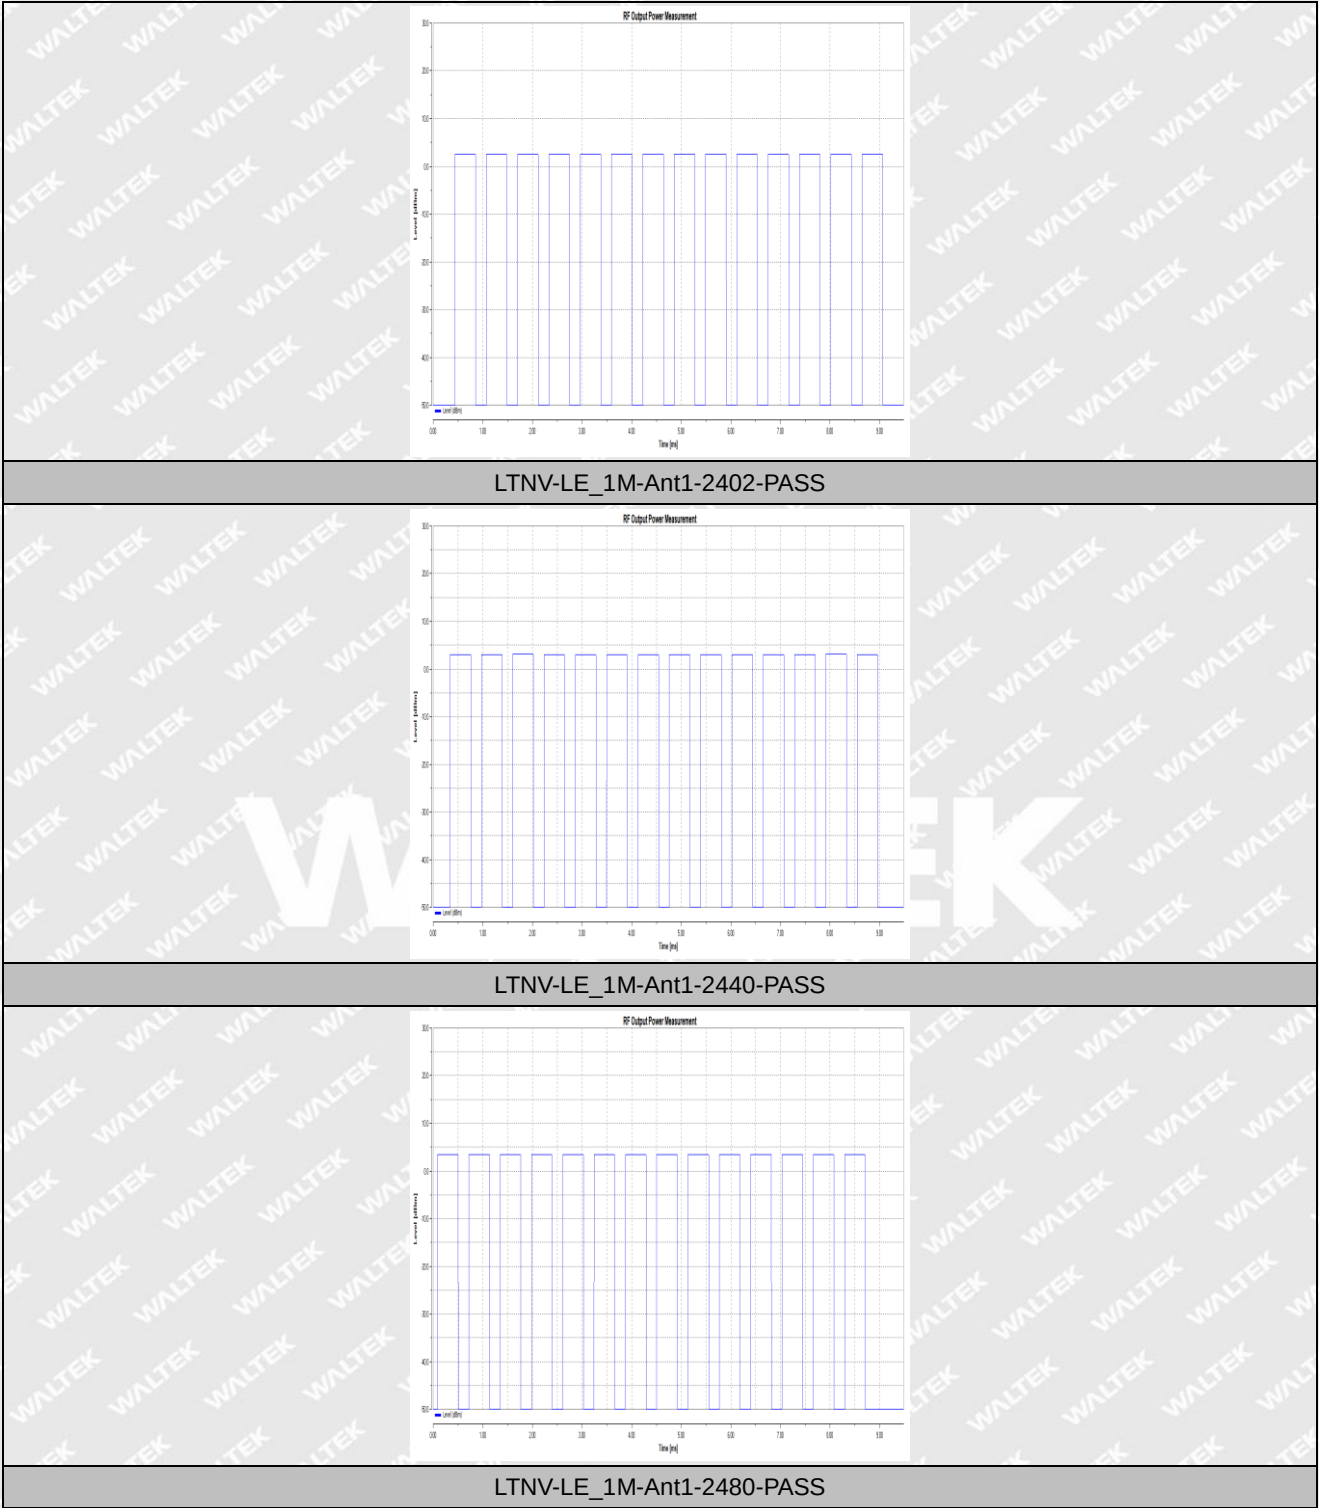


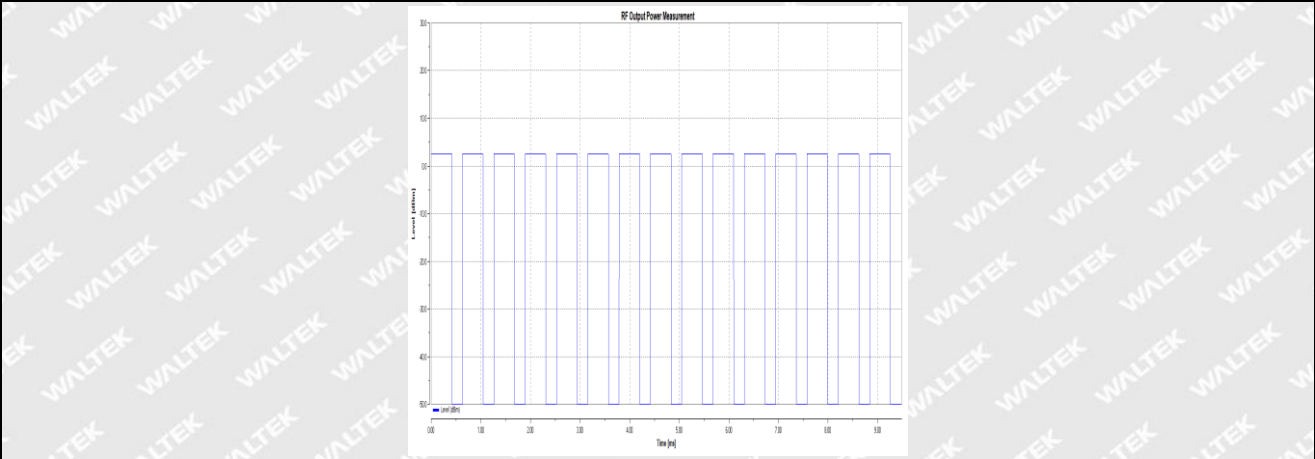


NTNV-LE_1M-Ant1-2402-PASS

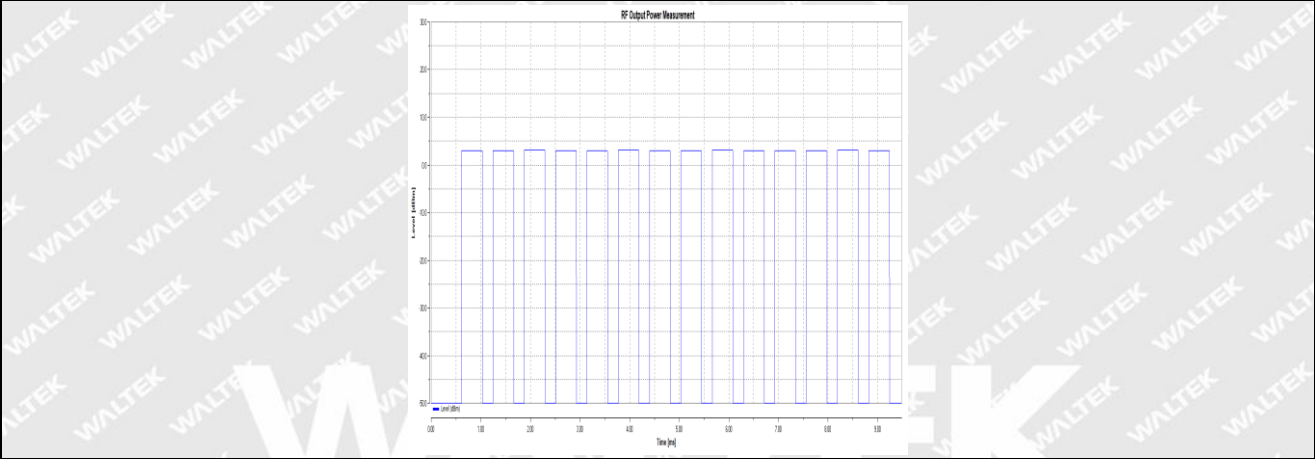


NTNV-LE_1M-Ant1-2440-PASS

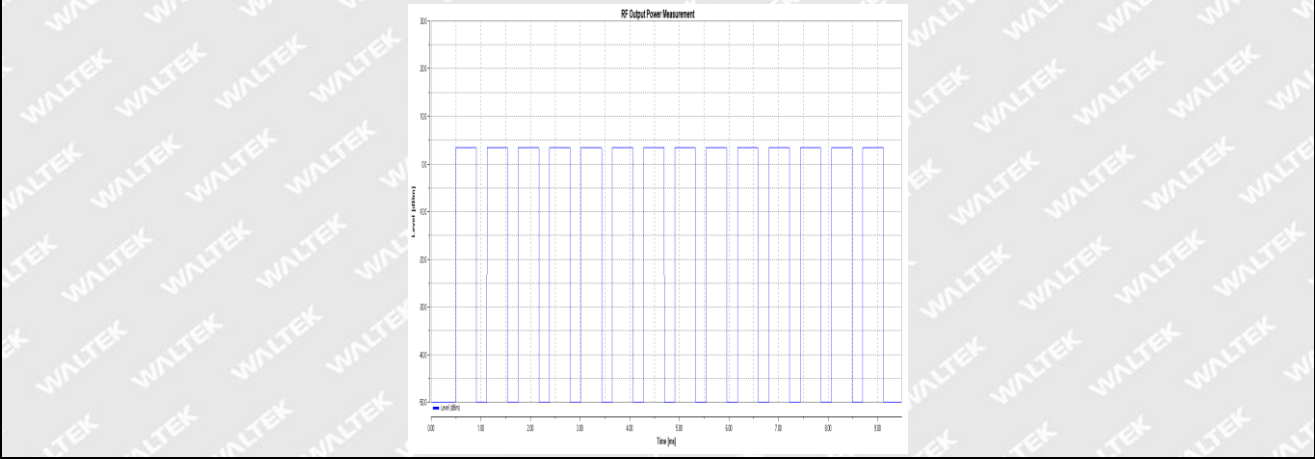


NTNV-LE_1M-Ant1-2480-PASS

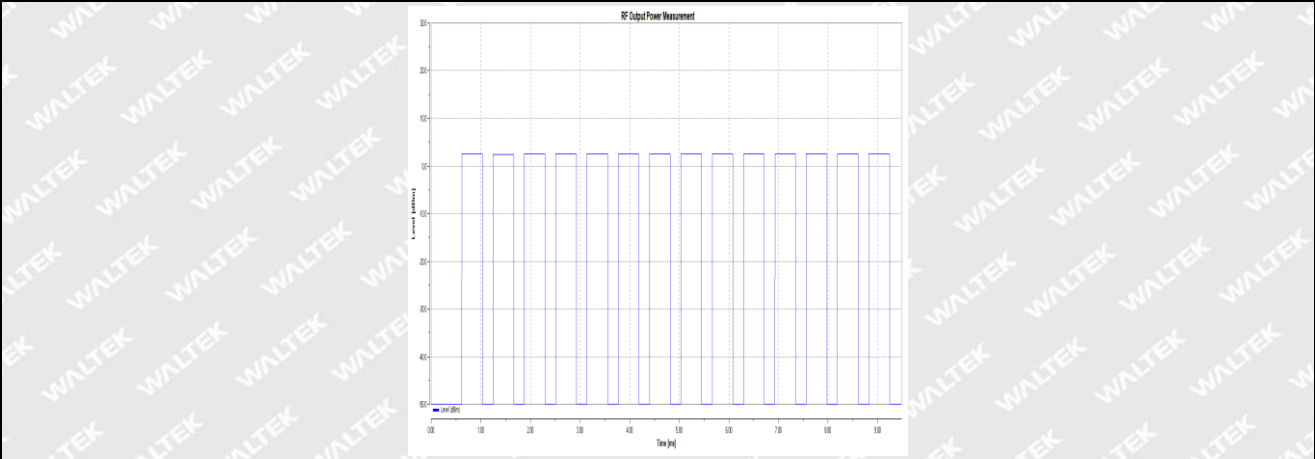


HTNV-LE_1M-Ant1-2402-PASS

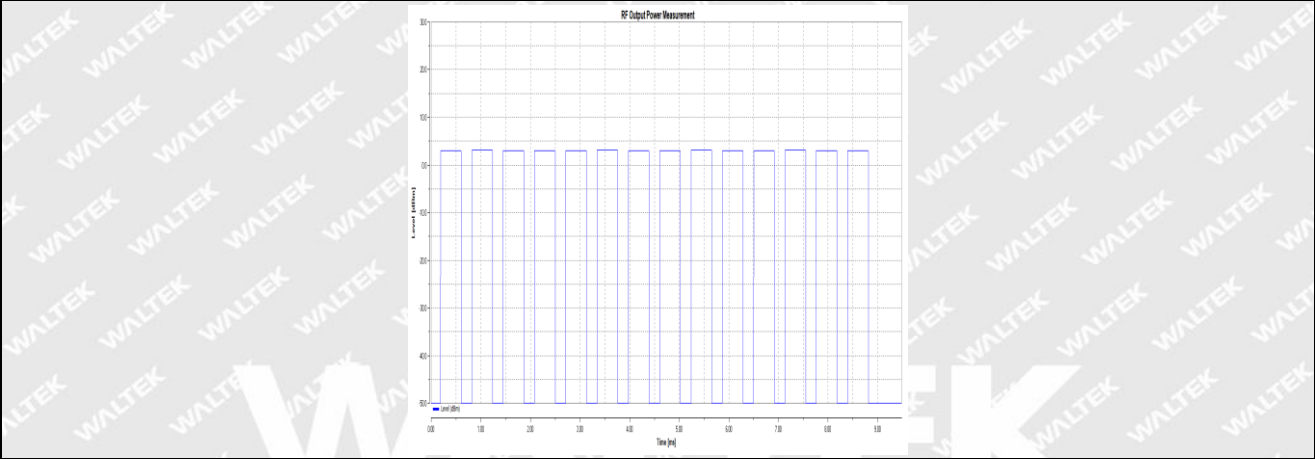


HTNV-LE_1M-Ant1-2440-PASS

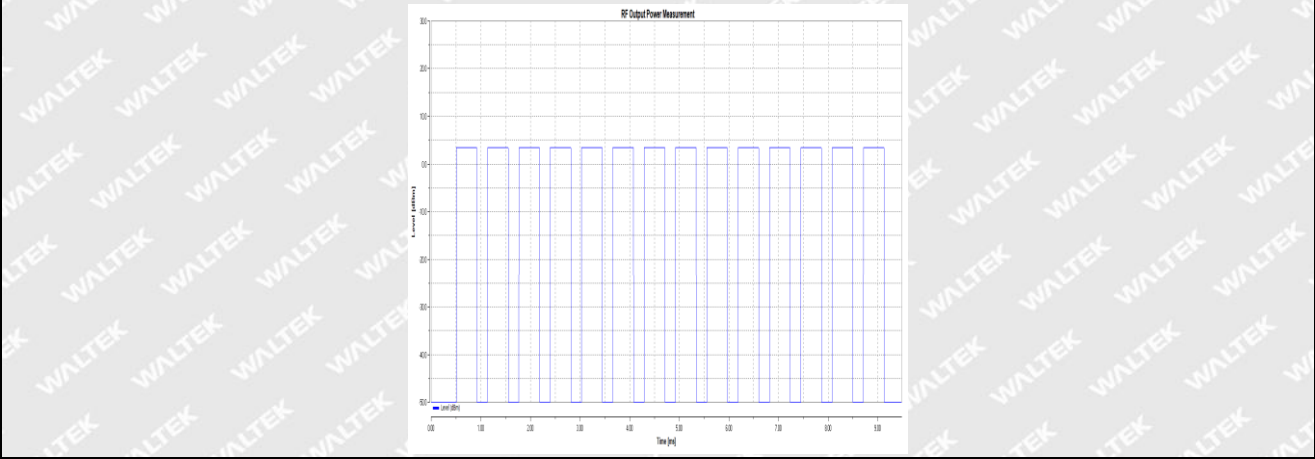


HTNV-LE_1M-Ant1-2480-PASS

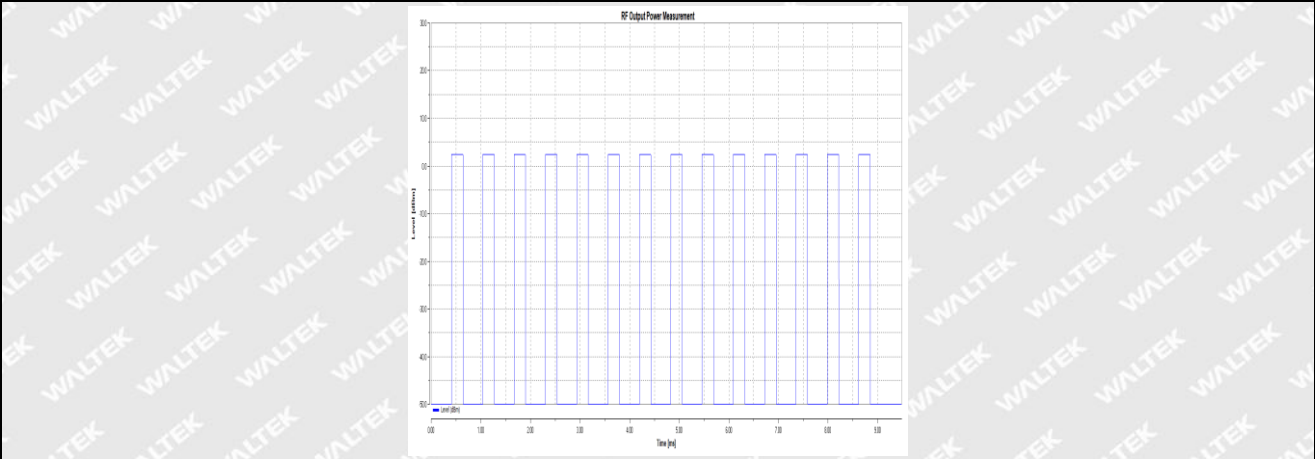


LTNV-LE_2M-Ant1-2402-PASS

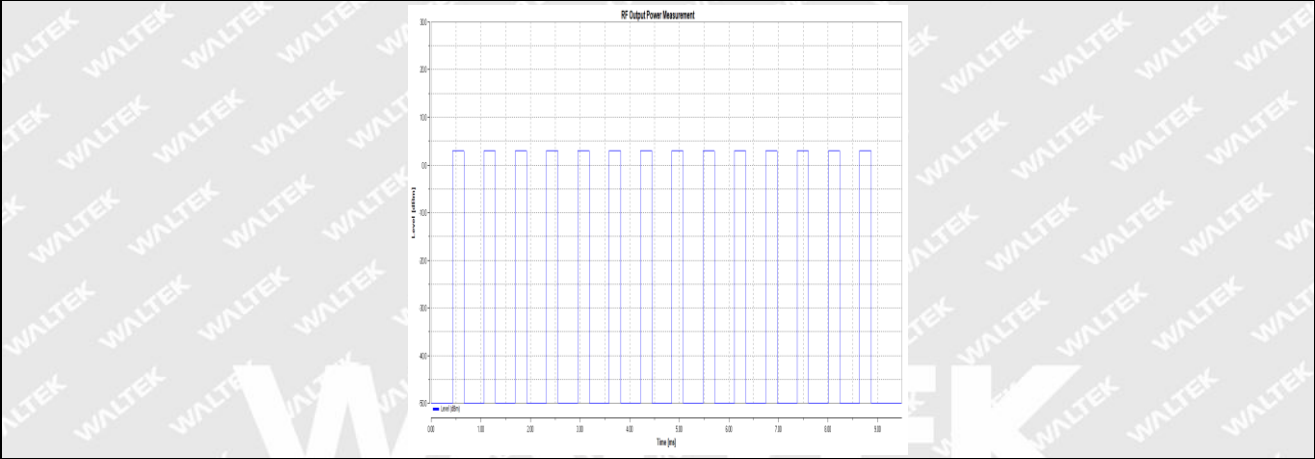


LTNV-LE_2M-Ant1-2440-PASS

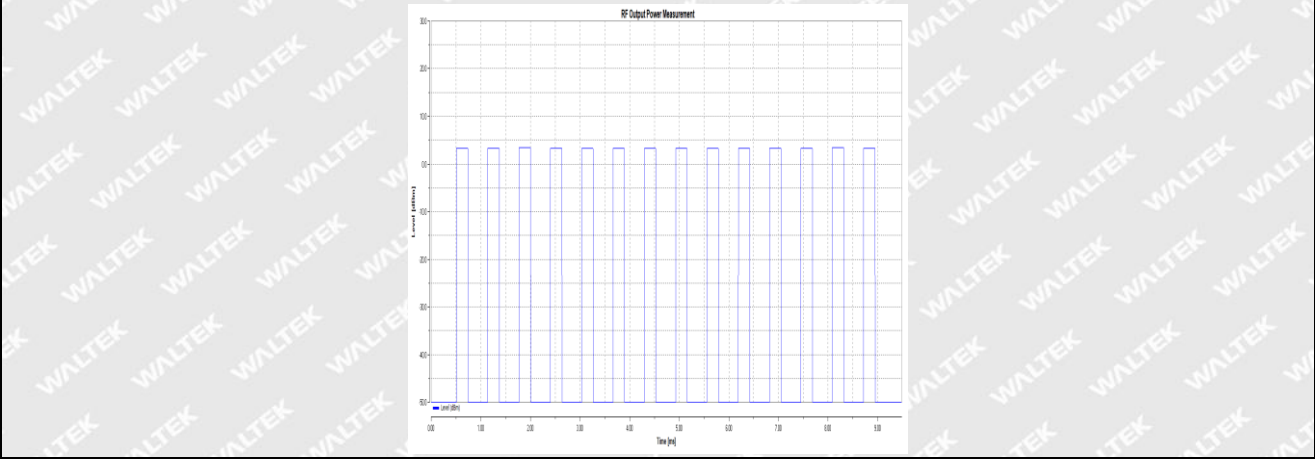


LTNV-LE_2M-Ant1-2480-PASS

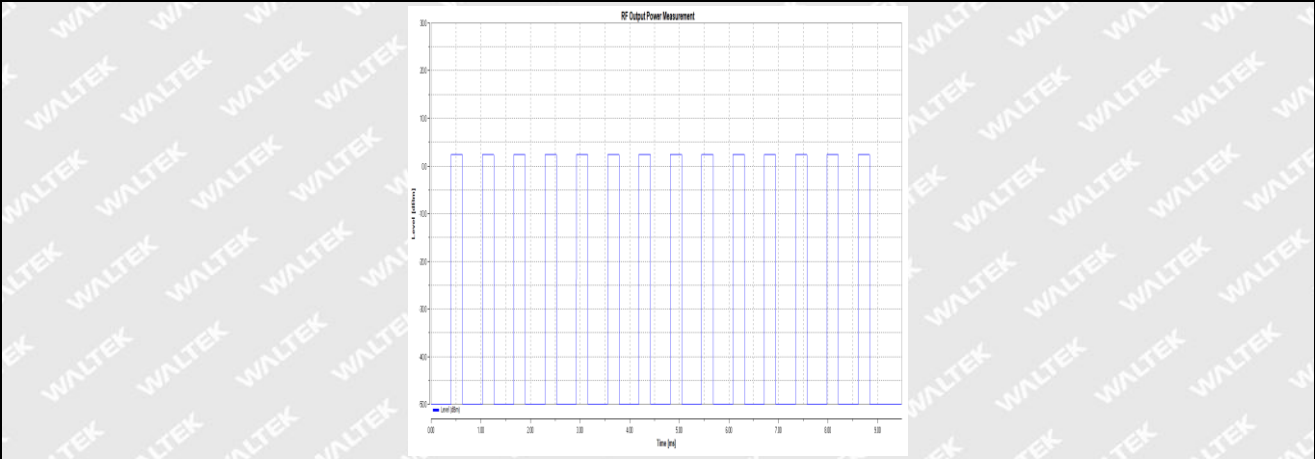


NTNV-LE_2M-Ant1-2402-PASS

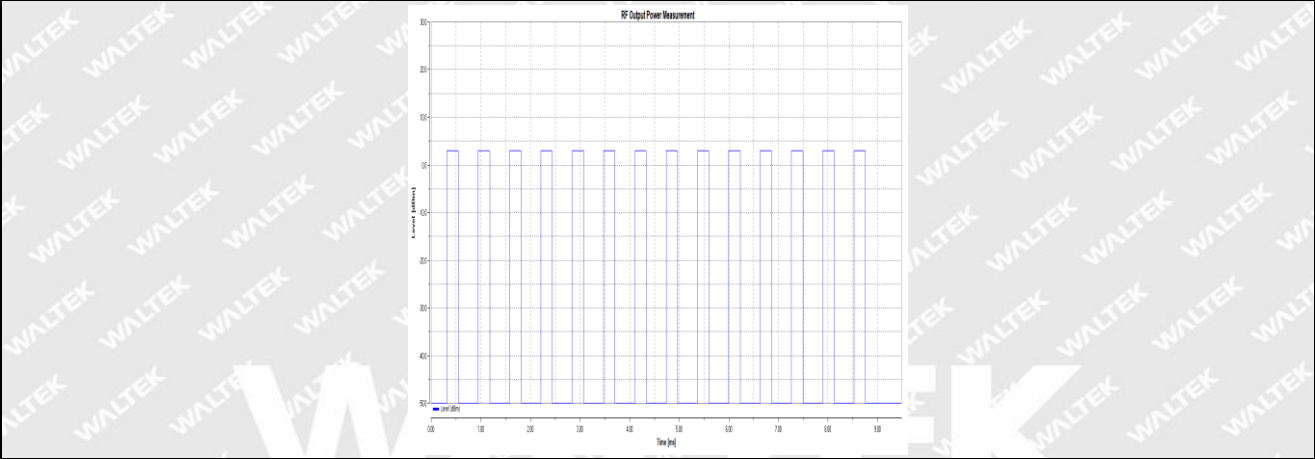


NTNV-LE_2M-Ant1-2440-PASS

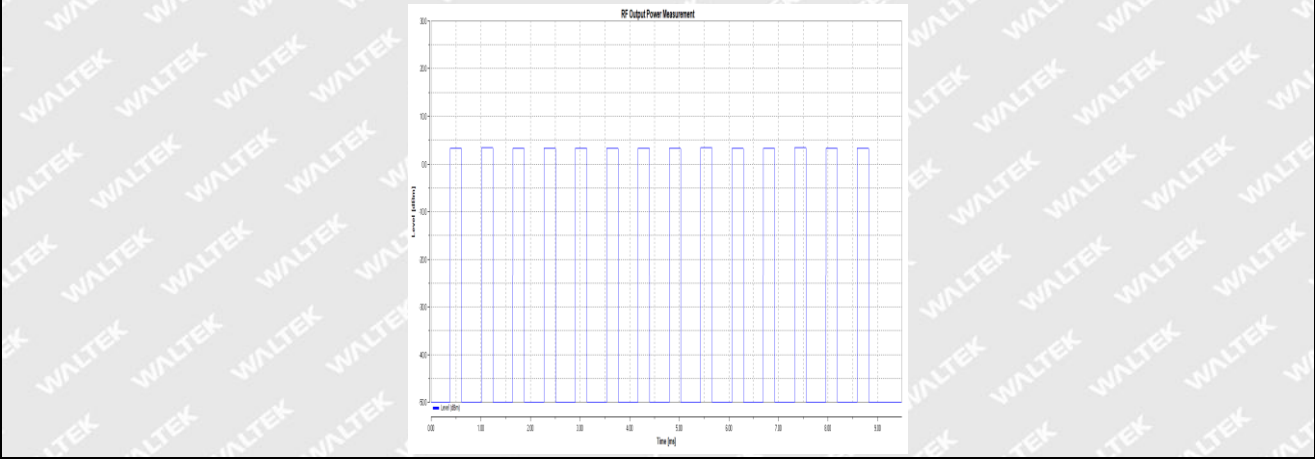


NTNV-LE_2M-Ant1-2480-PASS

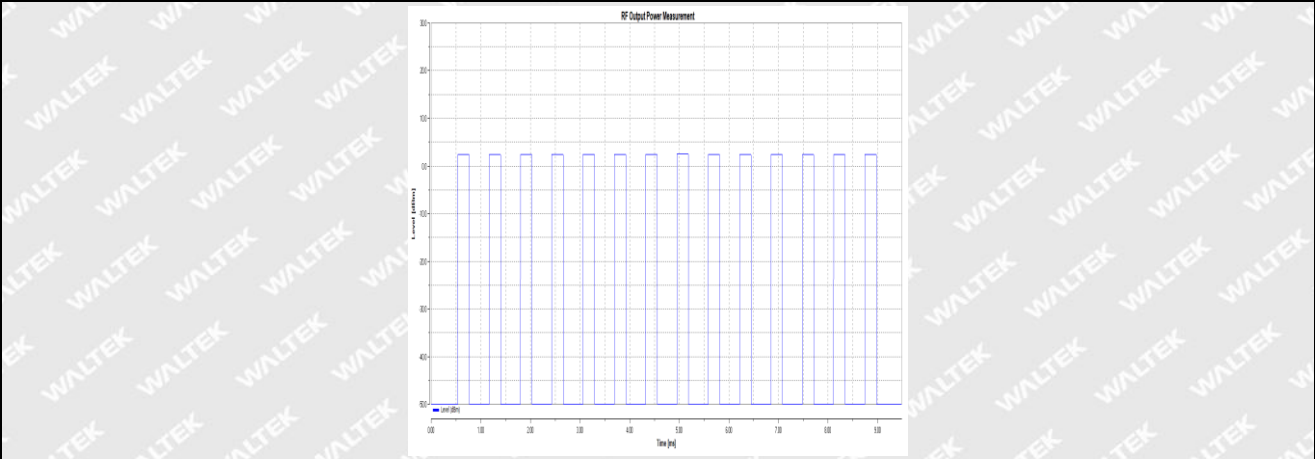


HTNV-LE_2M-Ant1-2402-PASS

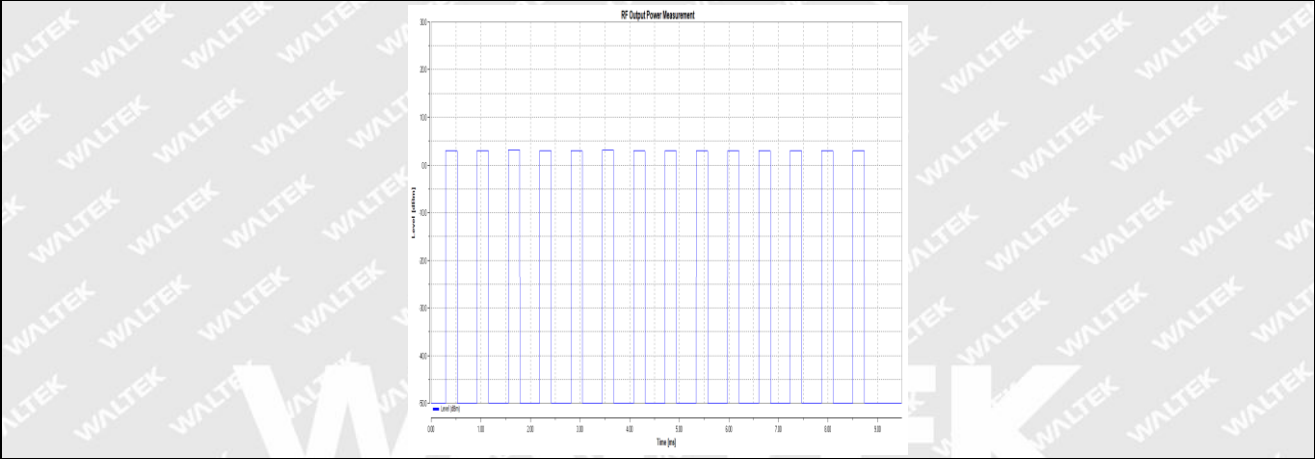


HTNV-LE_2M-Ant1-2440-PASS

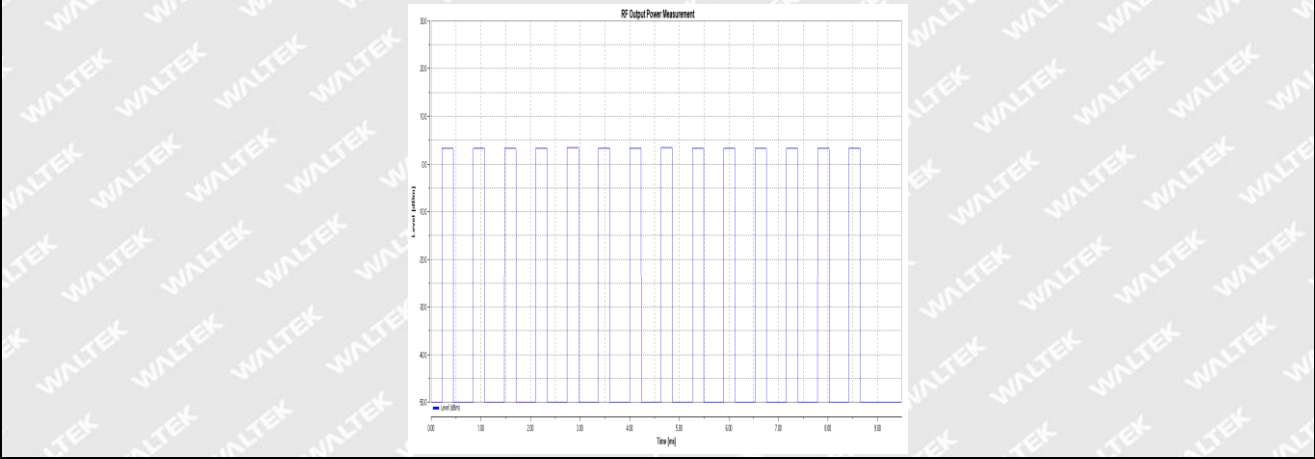


HTNV-LE_2M-Ant1-2480-PASS

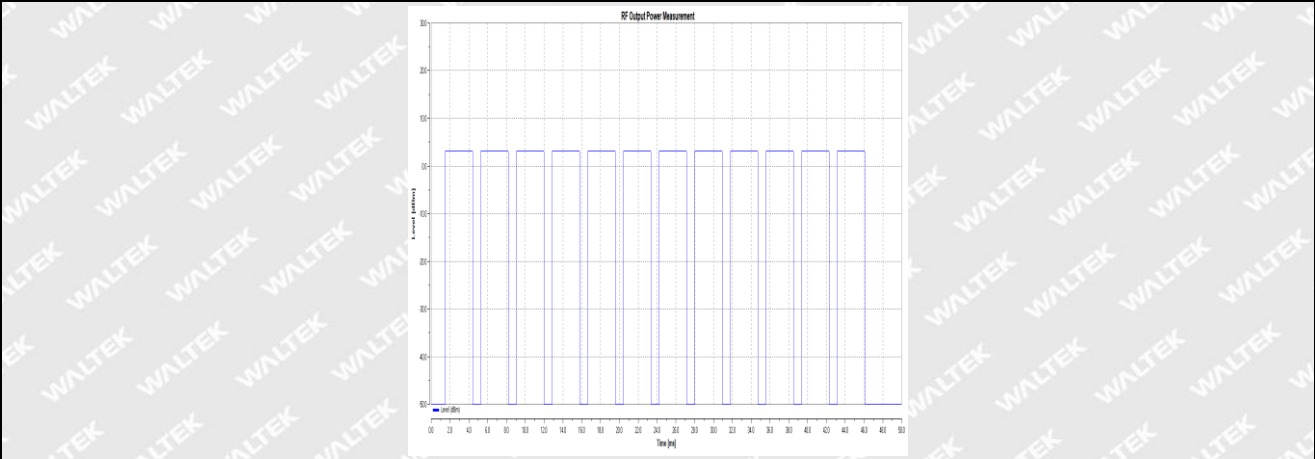


LTNV-DH5-Ant1-2402-PASS

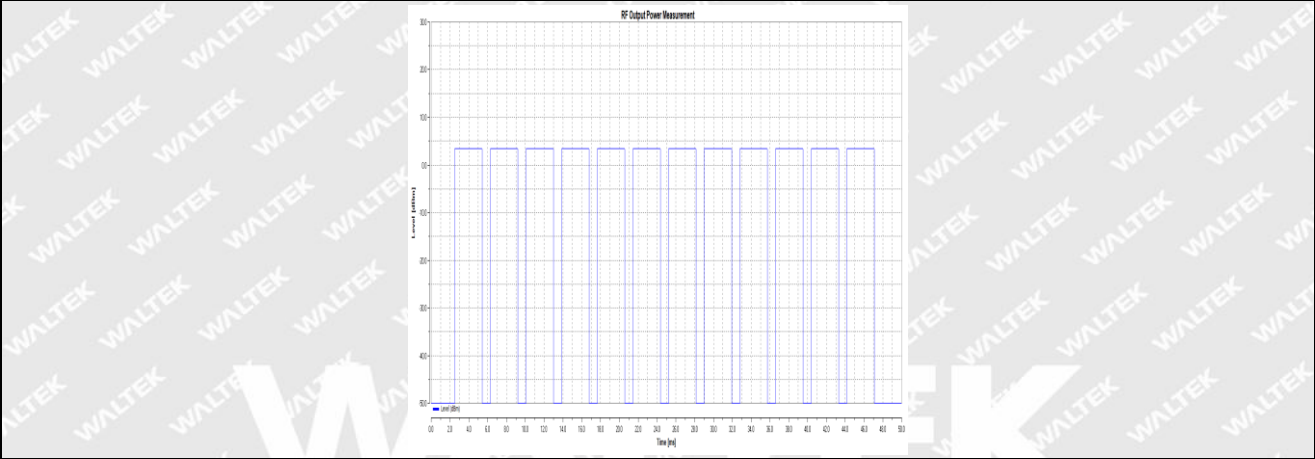


LTNV-DH5-Ant1-2441-PASS

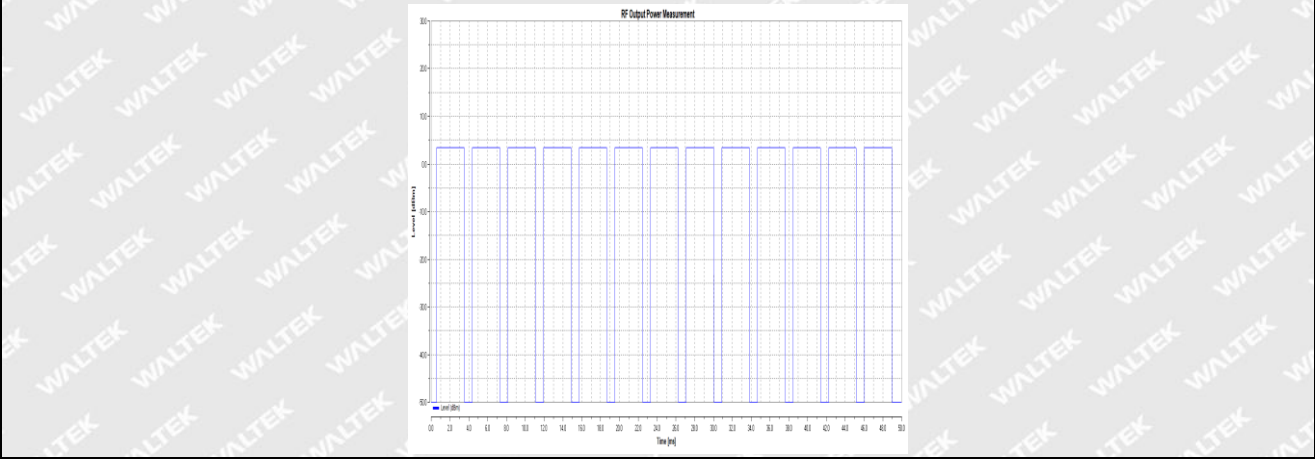


LTNV-DH5-Ant1-2480-PASS

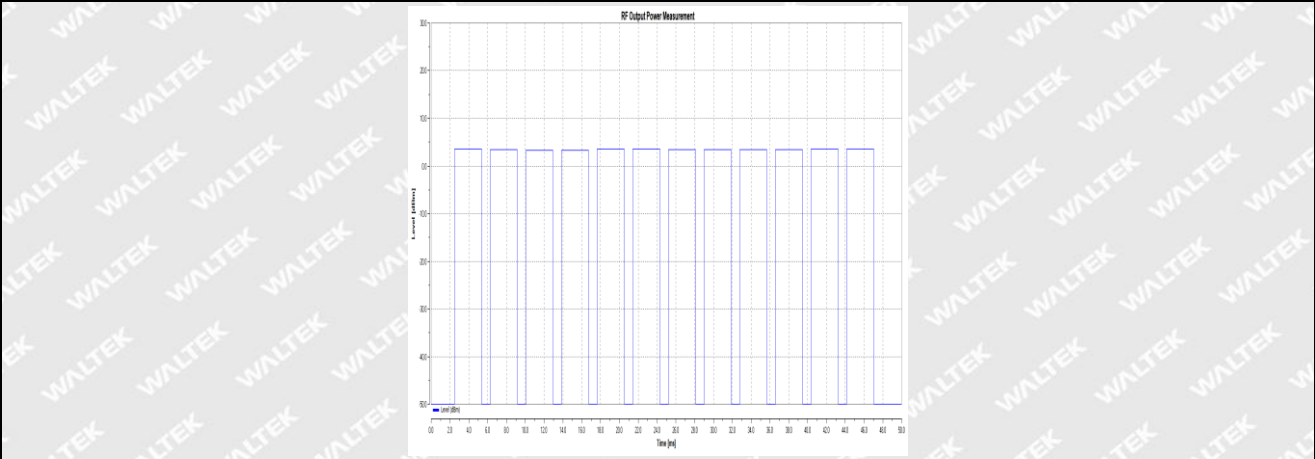


LTNV-DH5-Ant1-Hop-PASS

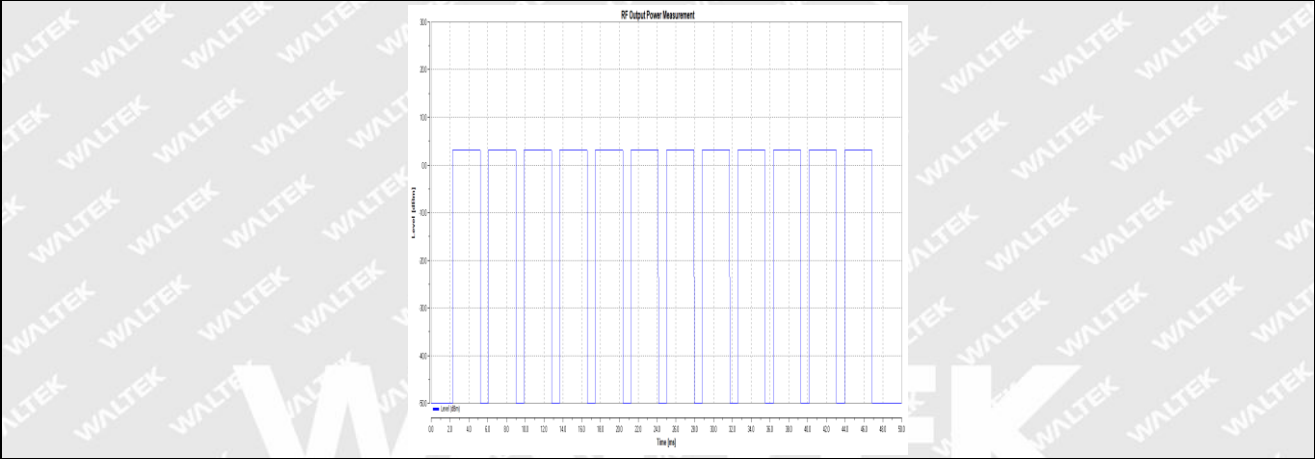


NTNV-DH5-Ant1-2402-PASS

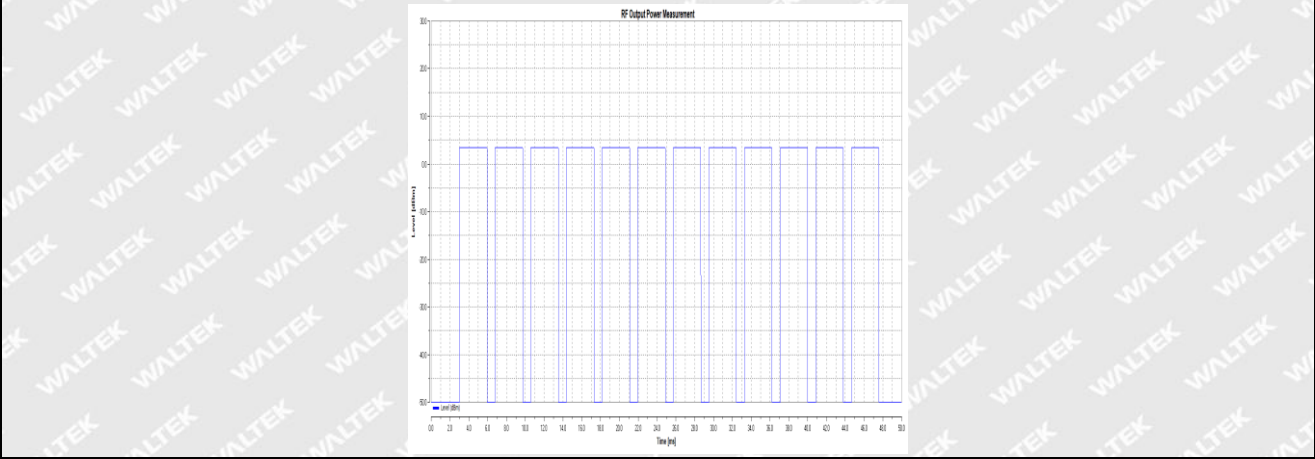


NTNV-DH5-Ant1-2441-PASS

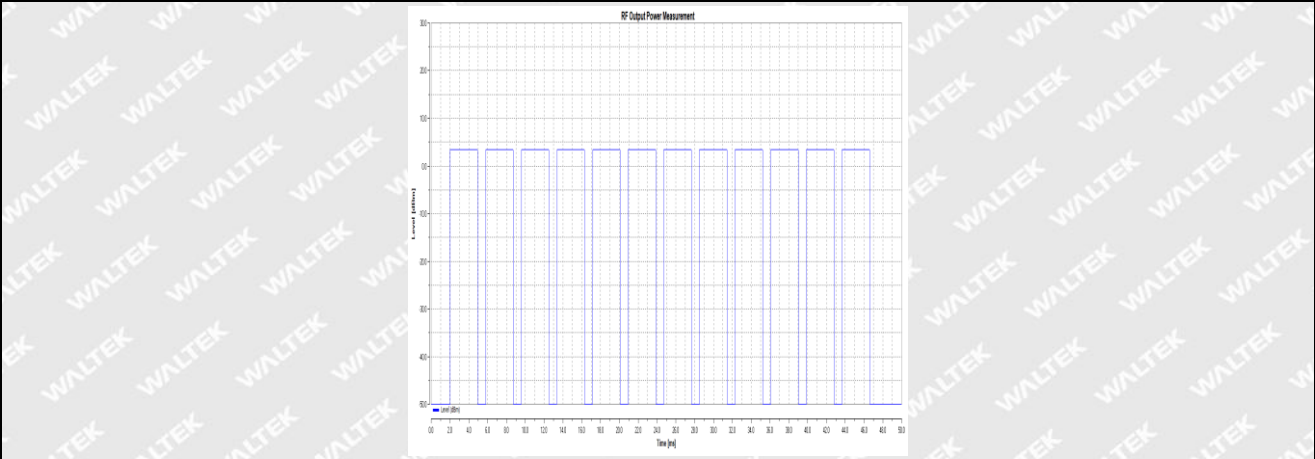


NTNV-DH5-Ant1-2480-PASS

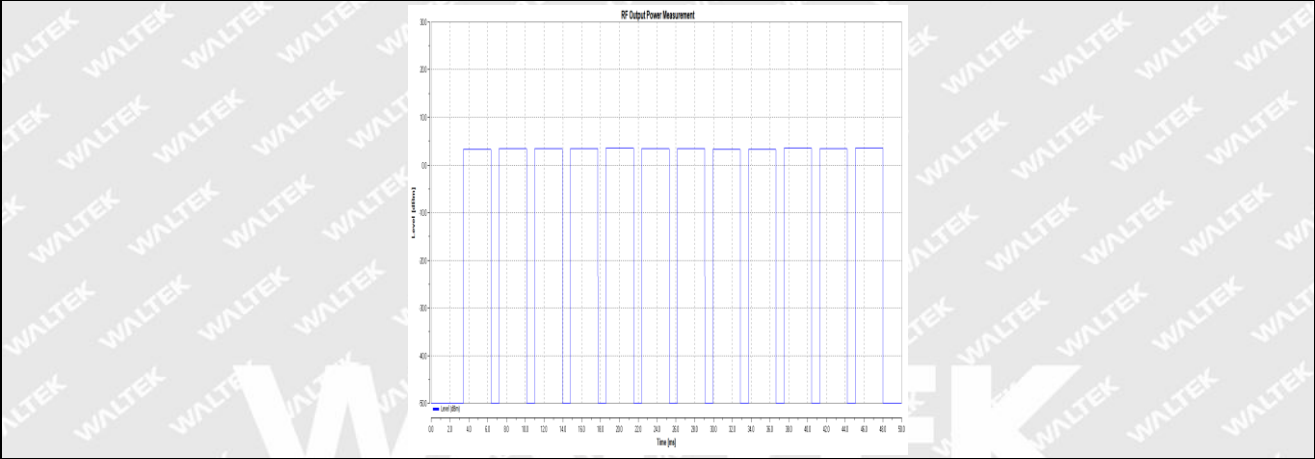


NTNV-DH5-Ant1-Hop-PASS

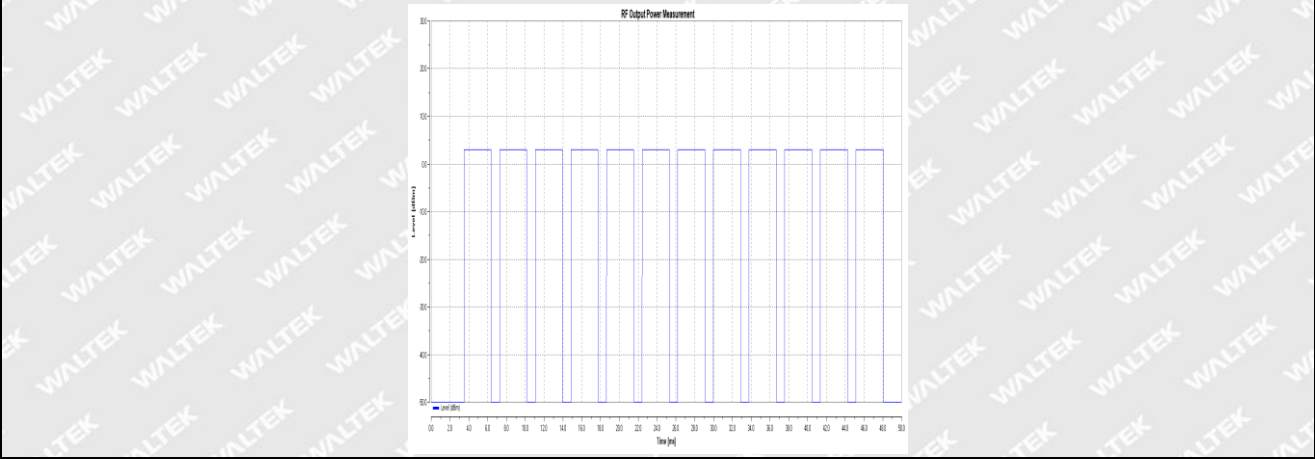


HTNV-DH5-Ant1-2402-PASS

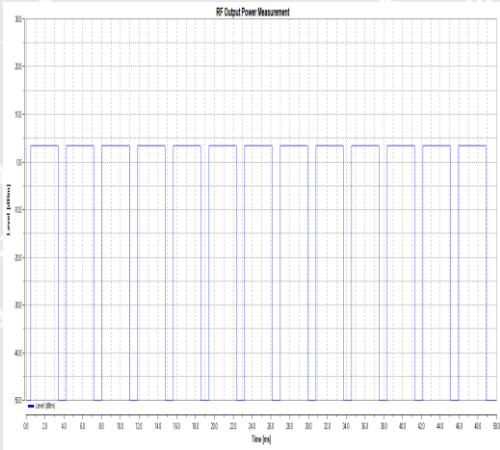


HTNV-DH5-Ant1-2441-PASS

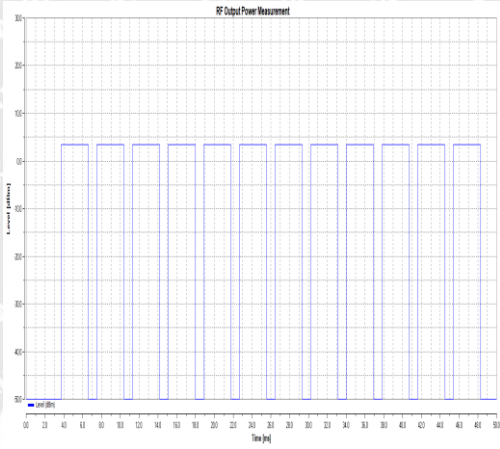


HTNV-DH5-Ant1-2480-PASS

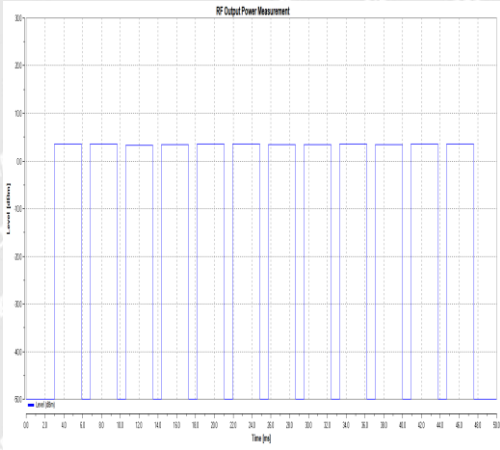


HTNV-DH5-Ant1-Hop-PASS

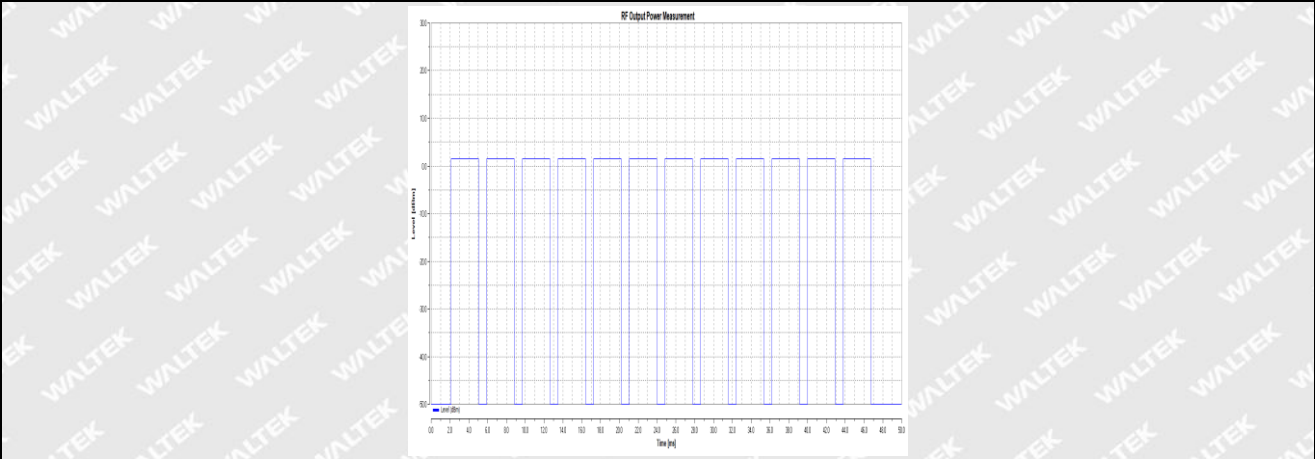


LTNV-2DH5-Ant1-2402-PASS

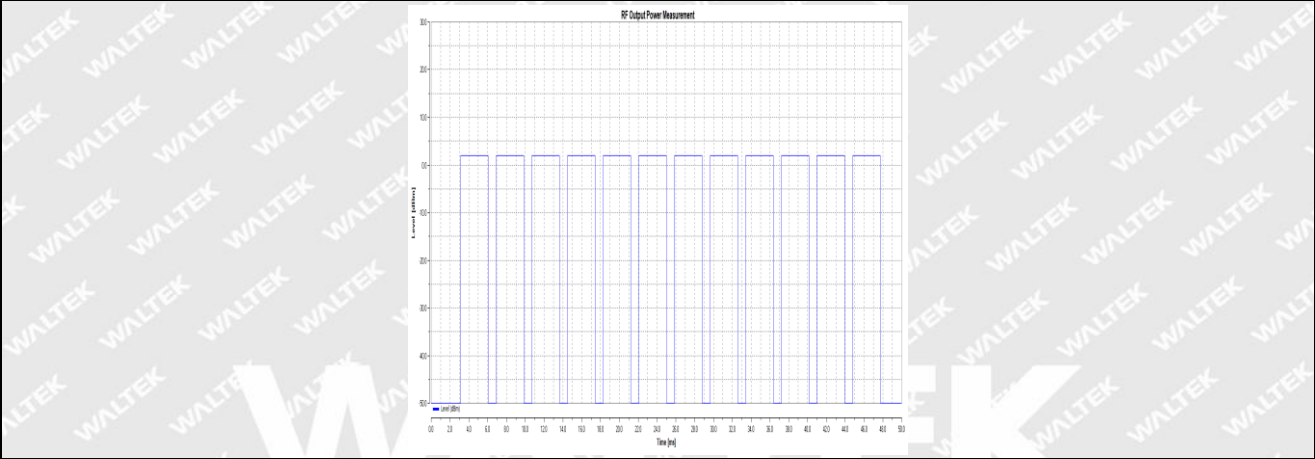


LTNV-2DH5-Ant1-2441-PASS

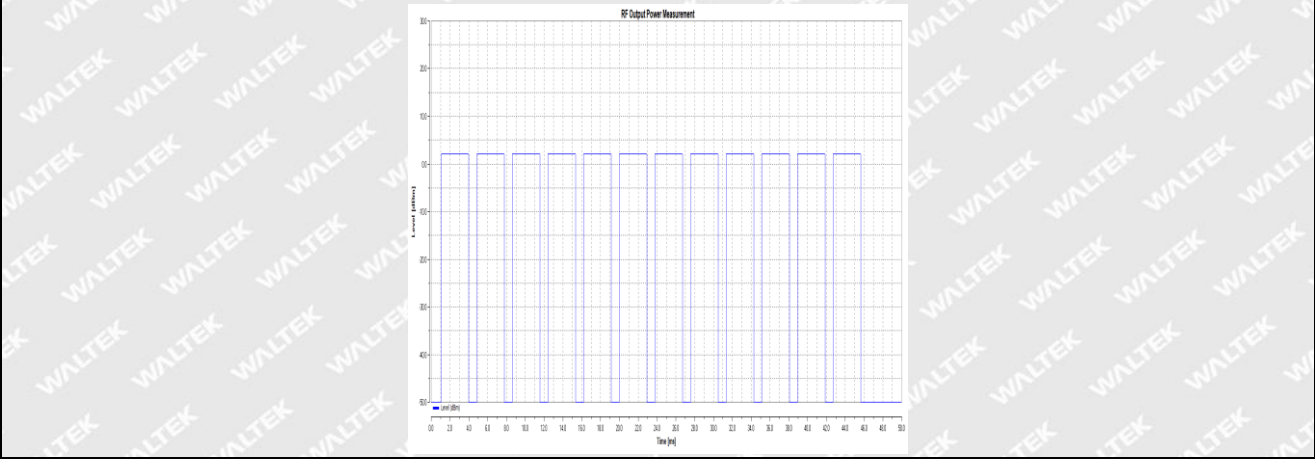


LTNV-2DH5-Ant1-2480-PASS

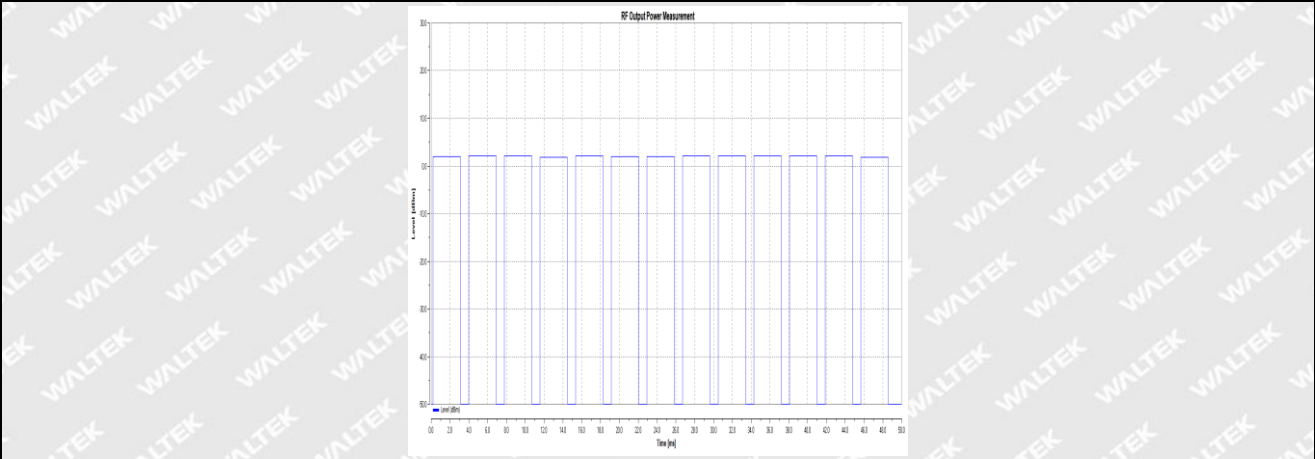


LTNV-2DH5-Ant1-Hop-PASS

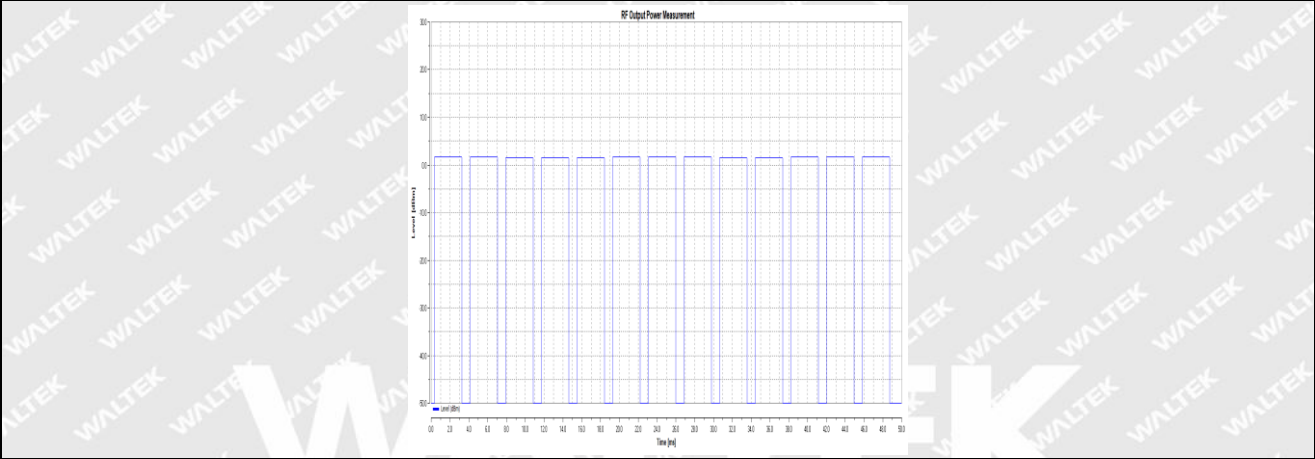


NTNV-2DH5-Ant1-2402-PASS

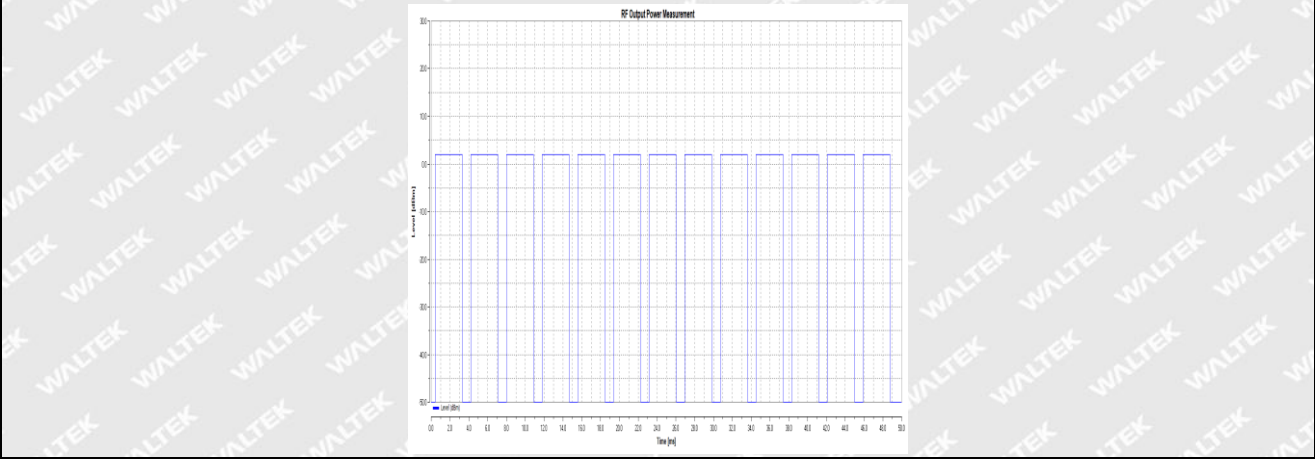


NTNV-2DH5-Ant1-2441-PASS

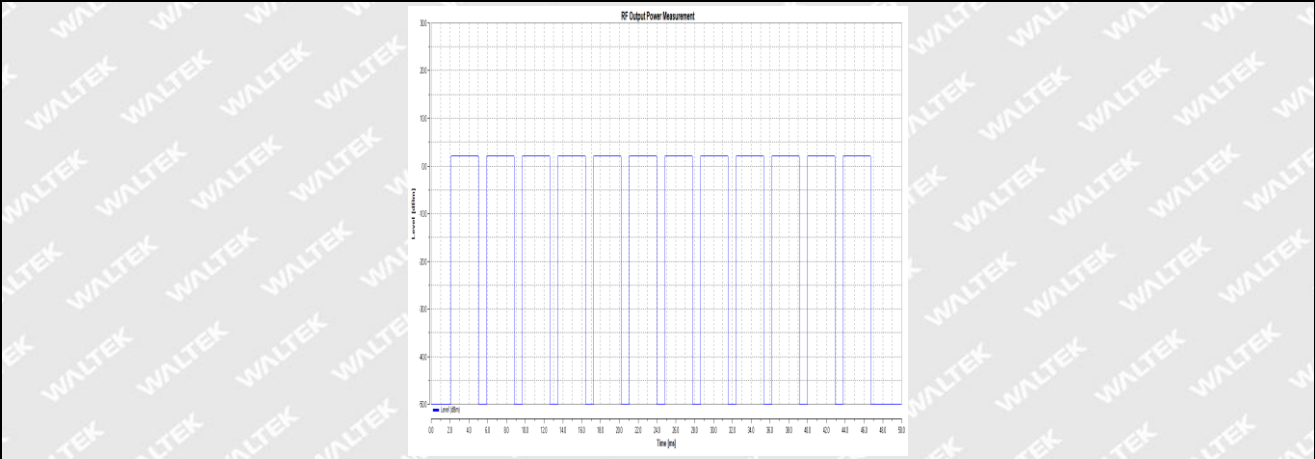


NTNV-2DH5-Ant1-2480-PASS

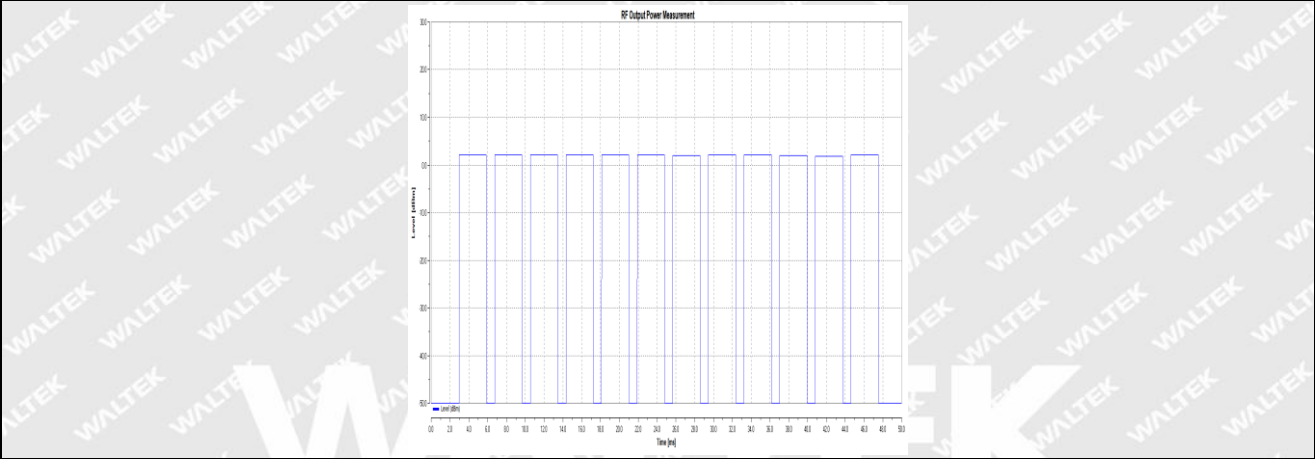


NTNV-2DH5-Ant1-Hop-PASS

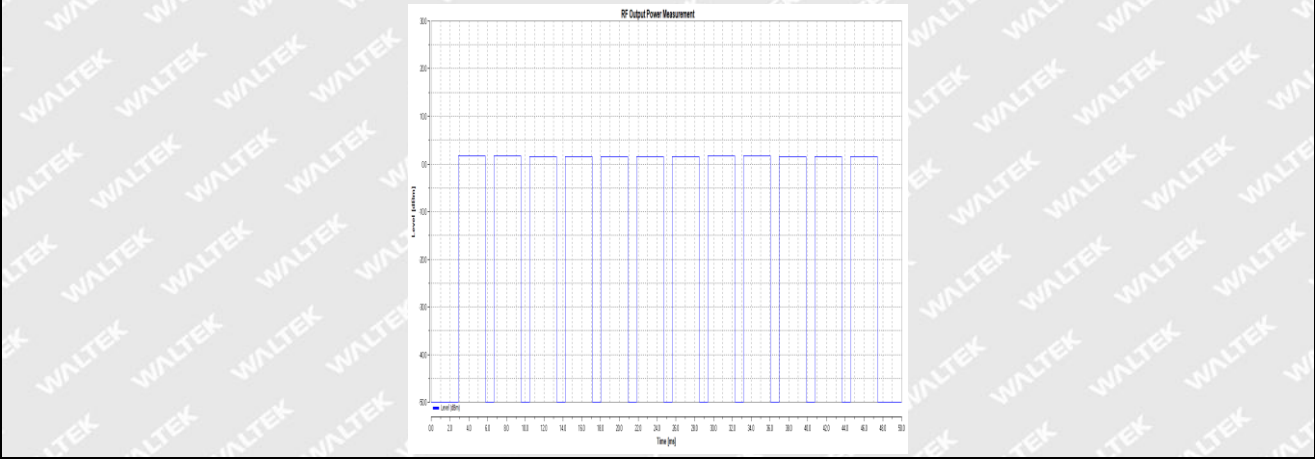


HTNV-2DH5-Ant1-2402-PASS

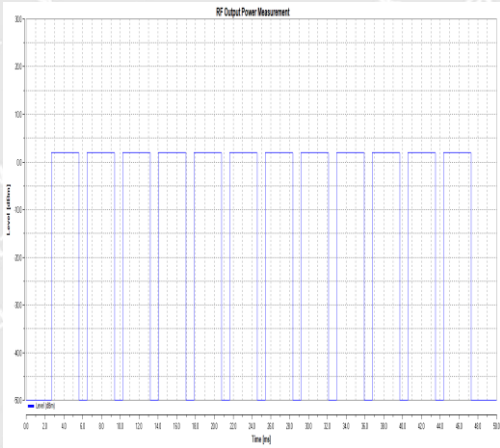

HTNV-2DH5-Ant1-2441-PASS

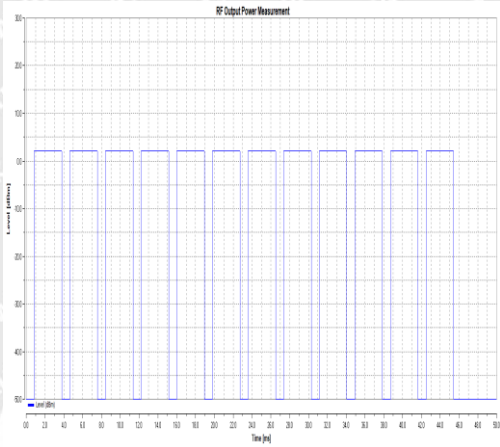

HTNV-2DH5-Ant1-2480-PASS

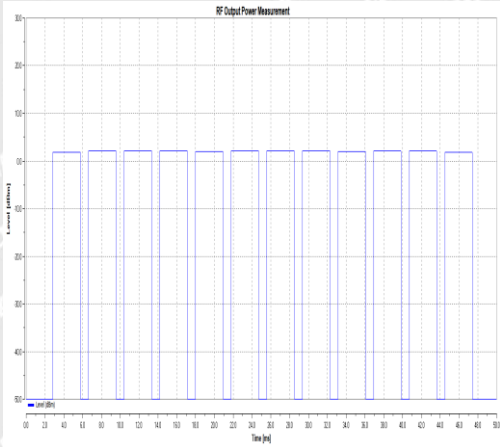

HTNV-2DH5-Ant1-Hop-PASS

**Appendix B: Power Spectral Density****Test Result**


TestMode	Antenna	Frequency[MHz]	EIRP PSD[dBm/MHz]	Limit[dBm/MHz]	Verdict
LE_1M	Ant1	2402	4.45	10	PASS
LE_1M	Ant1	2440	4.99	10	PASS
LE_1M	Ant1	2480	5.32	10	PASS
LE_2M	Ant1	2402	3.43	10	PASS
LE_2M	Ant1	2440	4.03	10	PASS
LE_2M	Ant1	2480	4.37	10	PASS

WALTEK




Test Graphs




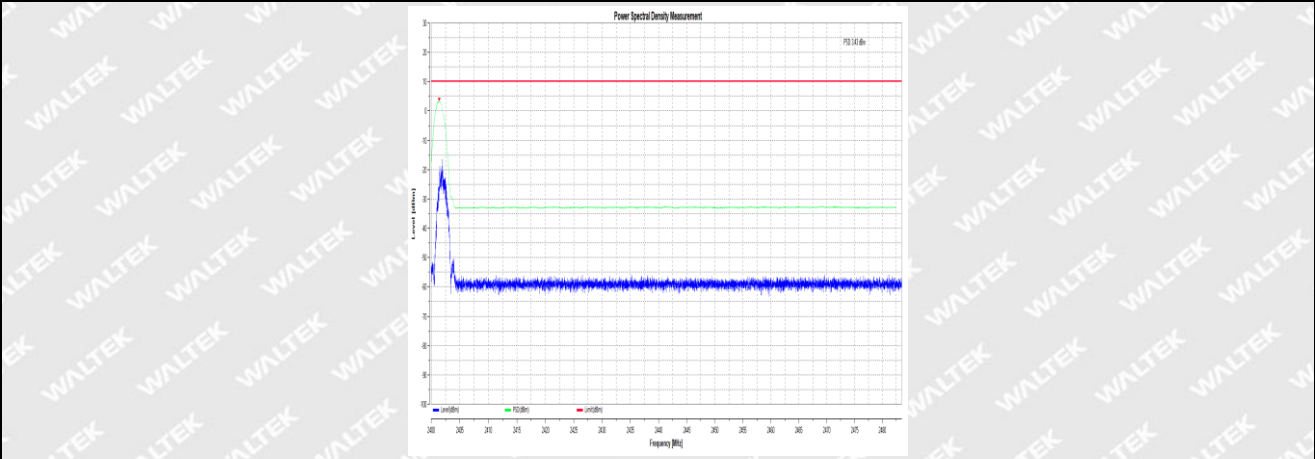

LE_2M-Ant1-2402-PASS

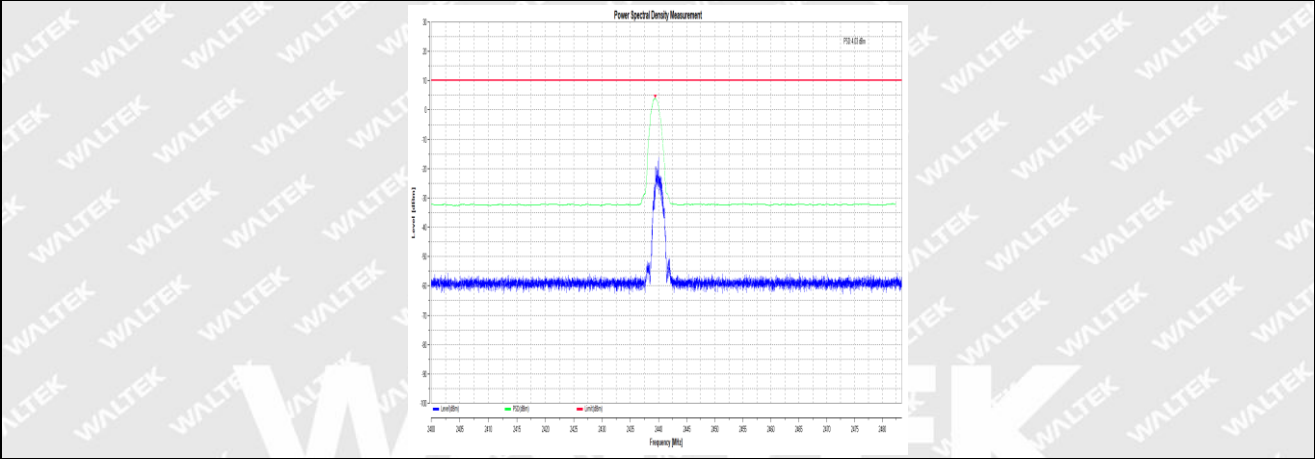

LE_2M-Ant1-2440-PASS

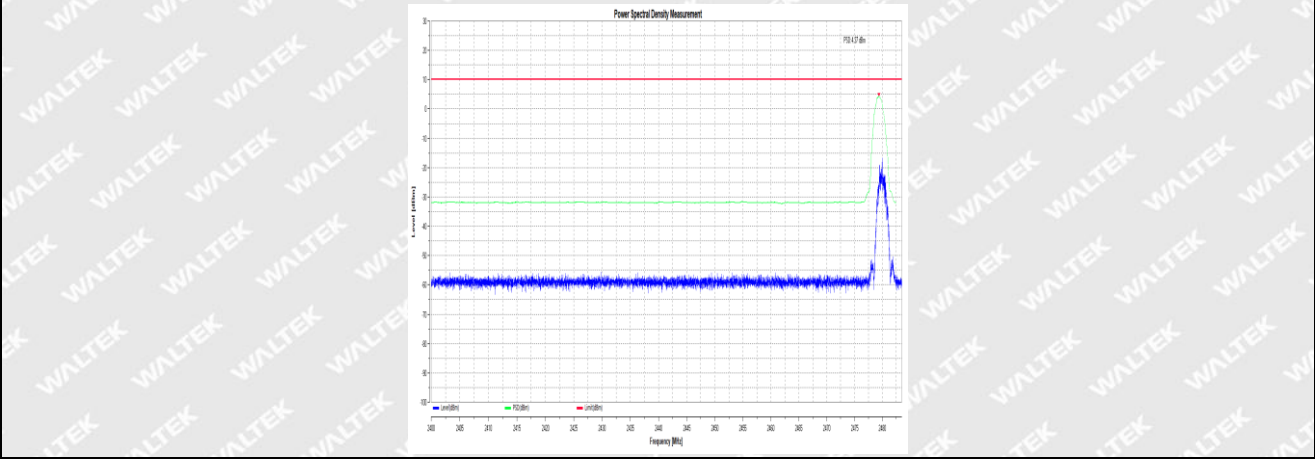

LE_2M-Ant1-2480-PASS



Appendix C: Occupied Channel Bandwidth


Test Result

TestMode	Antenna	Frequency[MHz]	OCB[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
LE_1M	Ant1	2402	1.0207	2401.4826	2402.5033	2400 to 2483.5	PASS
LE_1M	Ant1	2440	1.0226	2439.4814	2440.5040	2400 to 2483.5	PASS
LE_1M	Ant1	2480	1.0199	2479.4824	2480.5023	2400 to 2483.5	PASS
LE_2M	Ant1	2402	2.0147	2400.9973	2403.0120	2400 to 2483.5	PASS
LE_2M	Ant1	2440	2.0138	2438.9970	2441.0108	2400 to 2483.5	PASS
LE_2M	Ant1	2480	2.0135	2478.9974	2481.0109	2400 to 2483.5	PASS

TestMode	Antenna	Frequency[MHz]	OCB[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.89051	2401.5428	2402.4333	2400 to 2483.5	PASS
DH5	Ant1	2441	0.90190	2440.5366	2441.4385	2400 to 2483.5	PASS
DH5	Ant1	2480	0.91943	2479.5275	2480.4469	2400 to 2483.5	PASS
2DH5	Ant1	2402	1.2018	2401.3888	2402.5906	2400 to 2483.5	PASS
2DH5	Ant1	2441	1.2053	2440.3871	2441.5924	2400 to 2483.5	PASS
2DH5	Ant1	2480	1.2124	2479.3845	2480.5969	2400 to 2483.5	PASS



Test Graphs

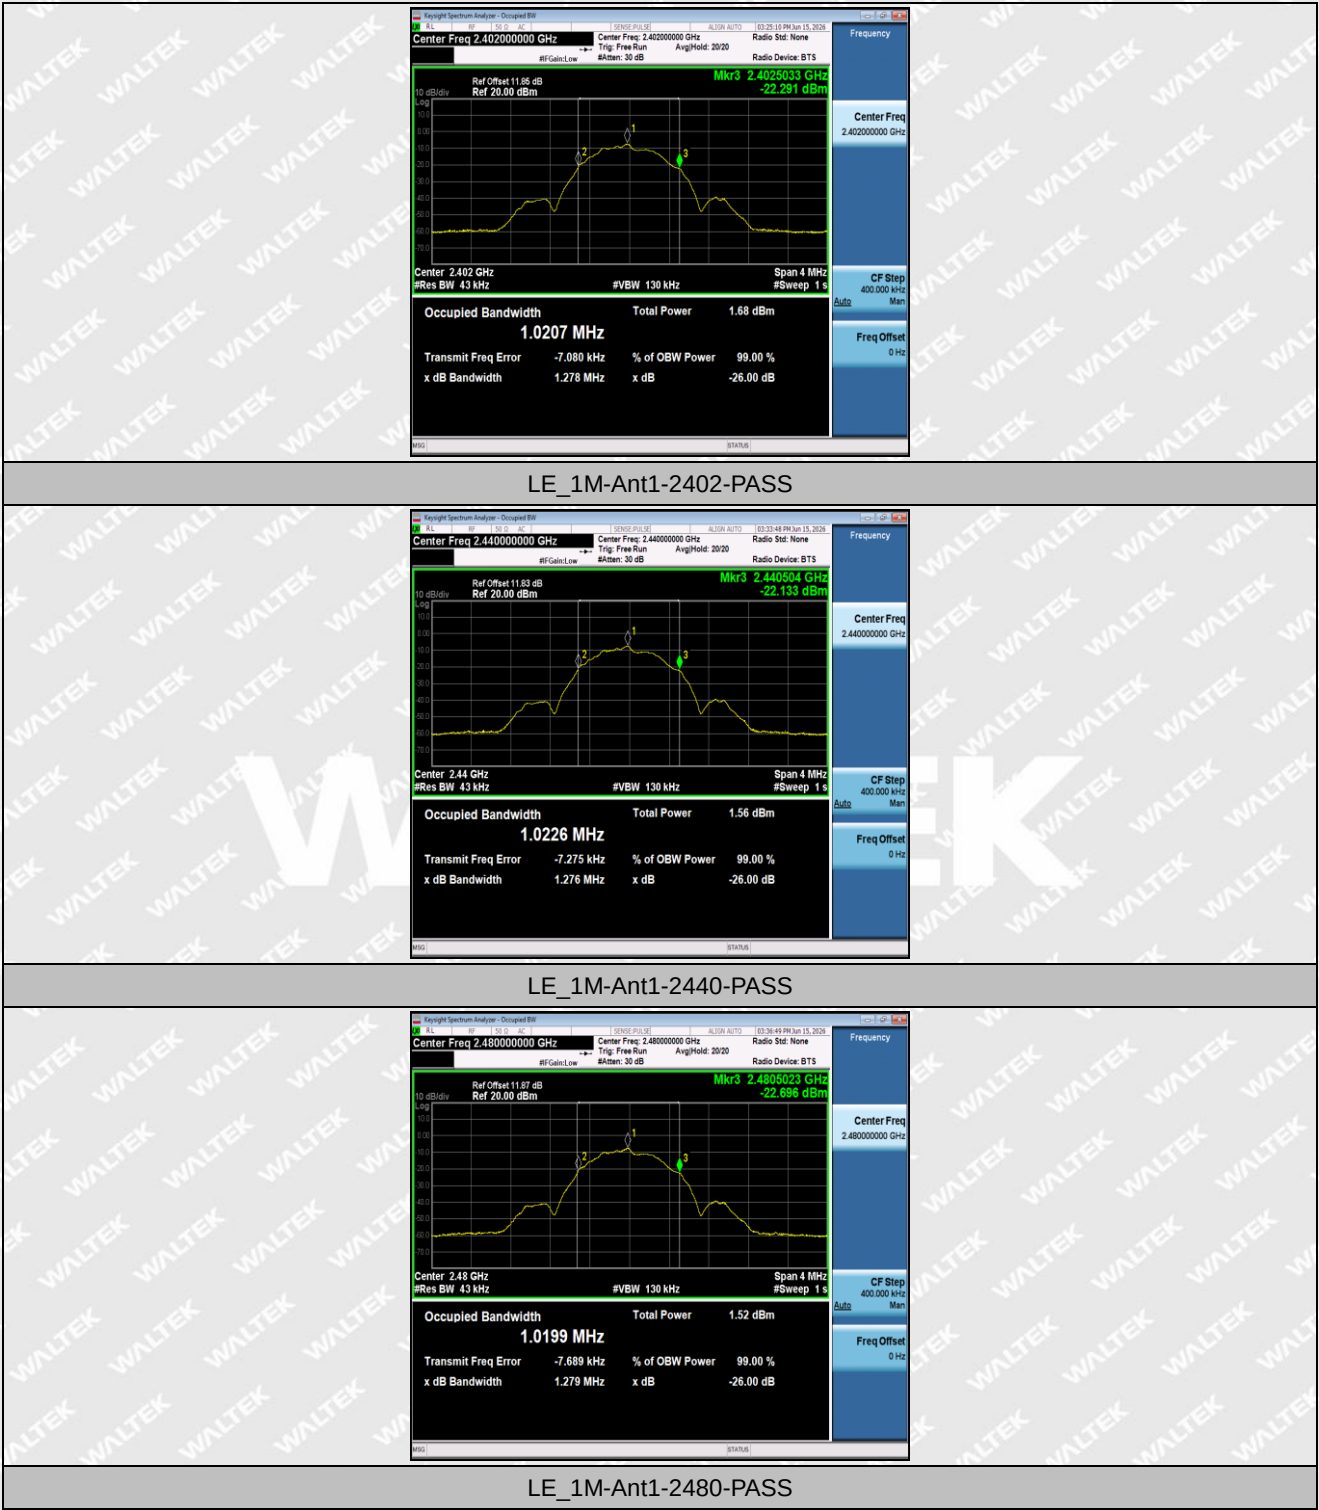




LE_2M-Ant1-2402-PASS




LE_2M-Ant1-2440-PASS

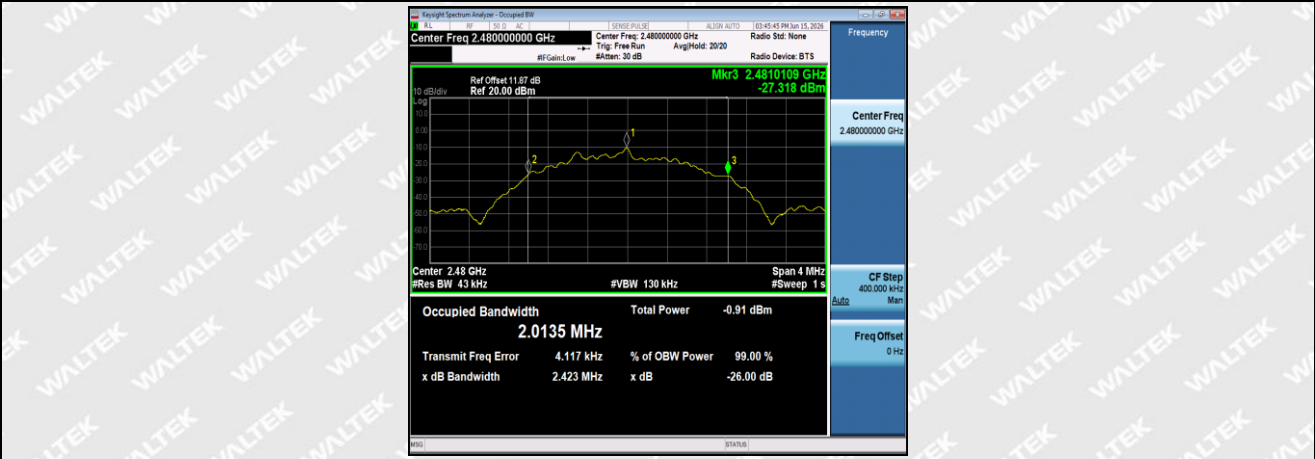

LE_2M-Ant1-2480-PASS




DH5-Ant1-2402-PASS

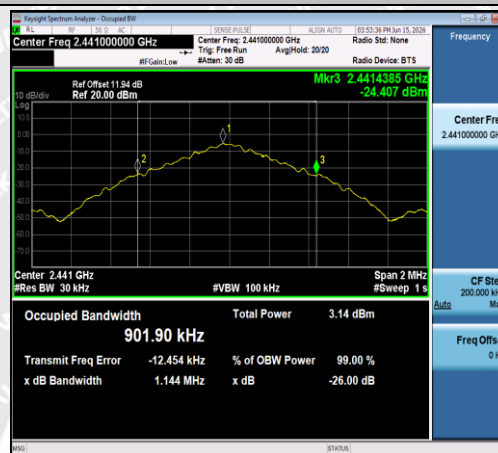

DH5-Ant1-2441-PASS



DH5-Ant1-2480-PASS

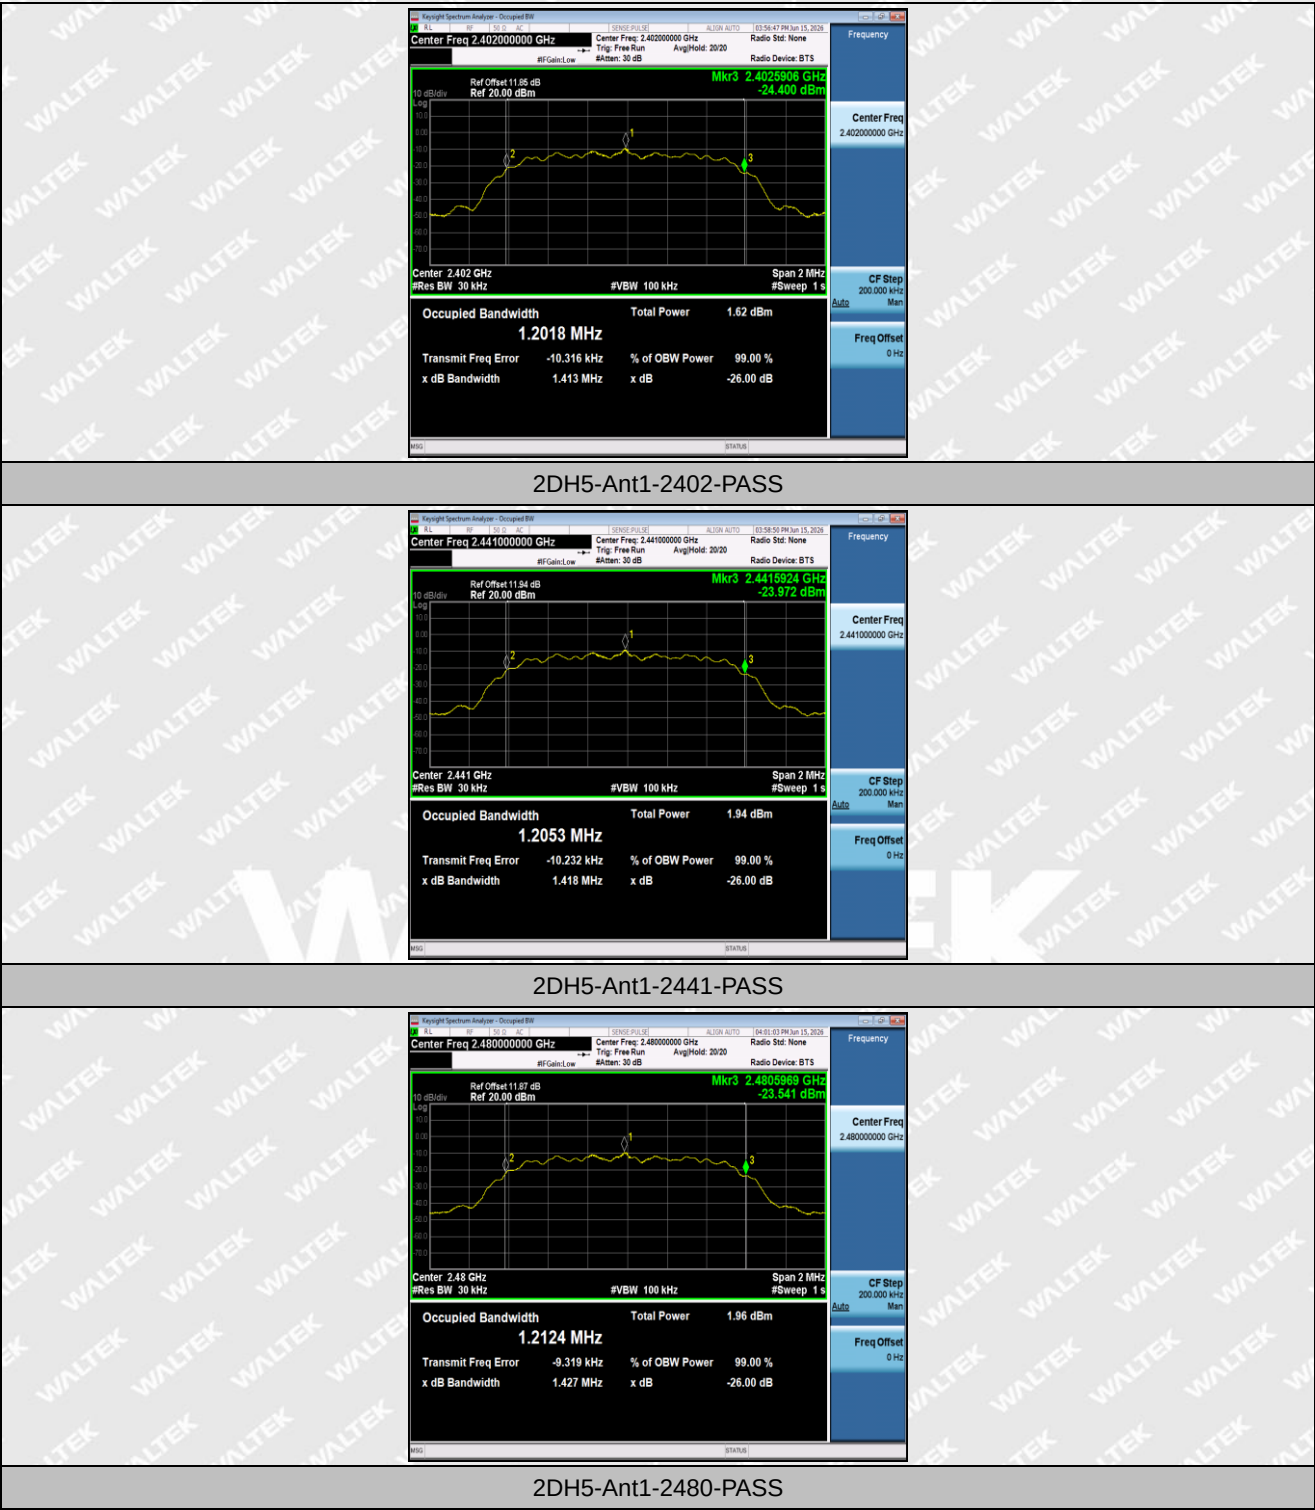



Appendix D: Accumulated Transmit Time, Frequency Occupation and Hopping Sequence

Test Result

Accumulated Transmit Time

TestMode	Antenna	Frequency[MHz]	Result [ms]	Limit[ms]	Verdict
DH5	Ant1	Hop_2402	320.234	400	PASS
DH5	Ant1	Hop_2480	280.204	400	PASS
2DH5	Ant1	Hop_2402	319.180	400	PASS
2DH5	Ant1	Hop_2480	313.913	400	PASS

Frequency Occupation


TestMode	Antenna	Frequency[MHz]	Result [Num.]	Limit [Num.]	Verdict
DH5	Ant1	Hop_2402	2	1	PASS
DH5	Ant1	Hop_2480	3	1	PASS
2DH5	Ant1	Hop_2402	4	1	PASS
2DH5	Ant1	Hop_2480	2	1	PASS


Hopping Sequence

TestMode	Antenna	Channel	Hop. [Num.]	Limit[Num.]	Band Use [%]	Limit [%]	Verdict
DH5	Ant1	Hop_2402	79	15	95.60	70	PASS
DH5	Ant1	Hop_2480	79	15	95.70	70	PASS
2DH5	Ant1	Hop_2402	79	15	96.20	70	PASS
2DH5	Ant1	Hop_2480	79	15	96.20	70	PASS




Test Graphs

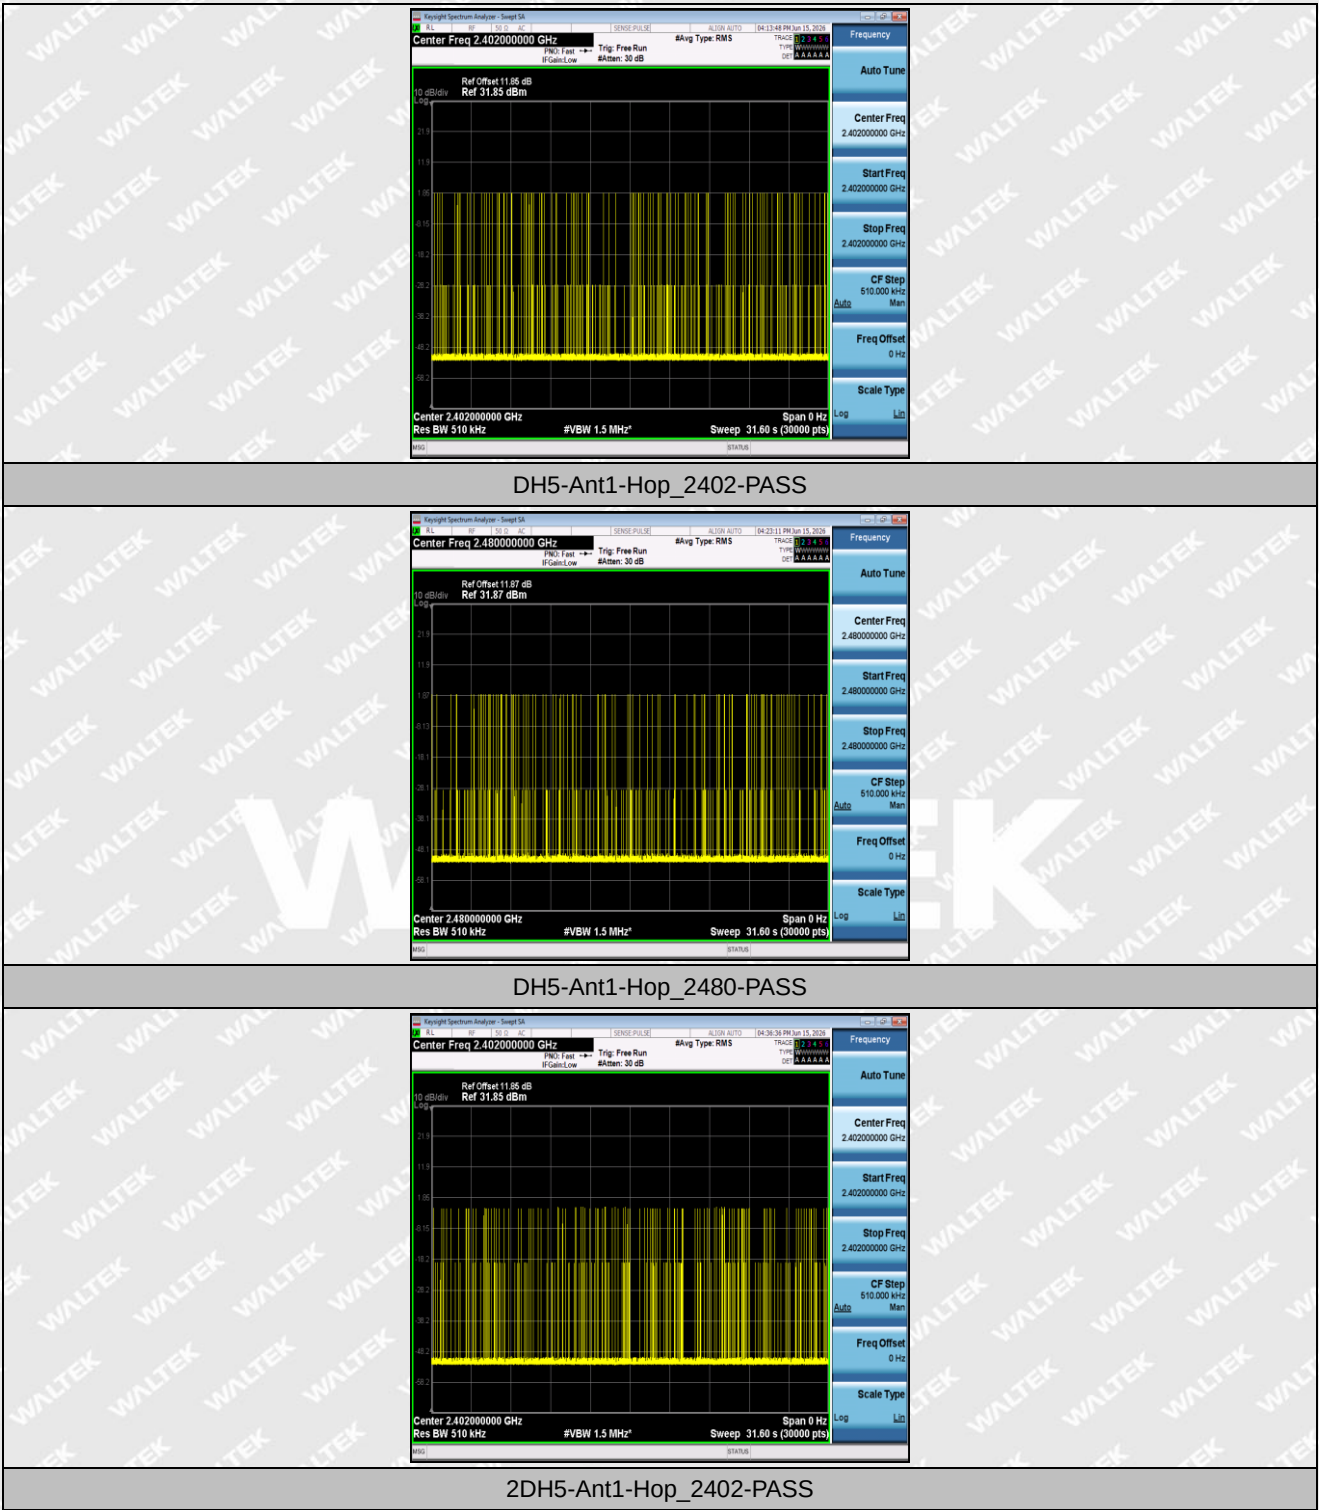

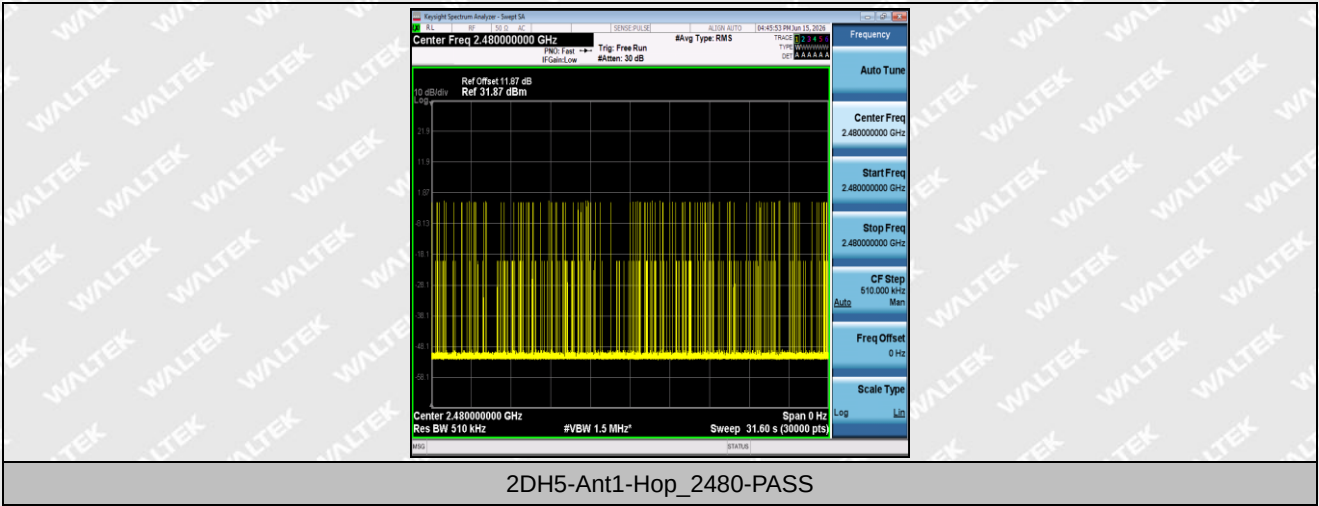


2DH5-Ant1-Hop_2480-PASS


WALTEK

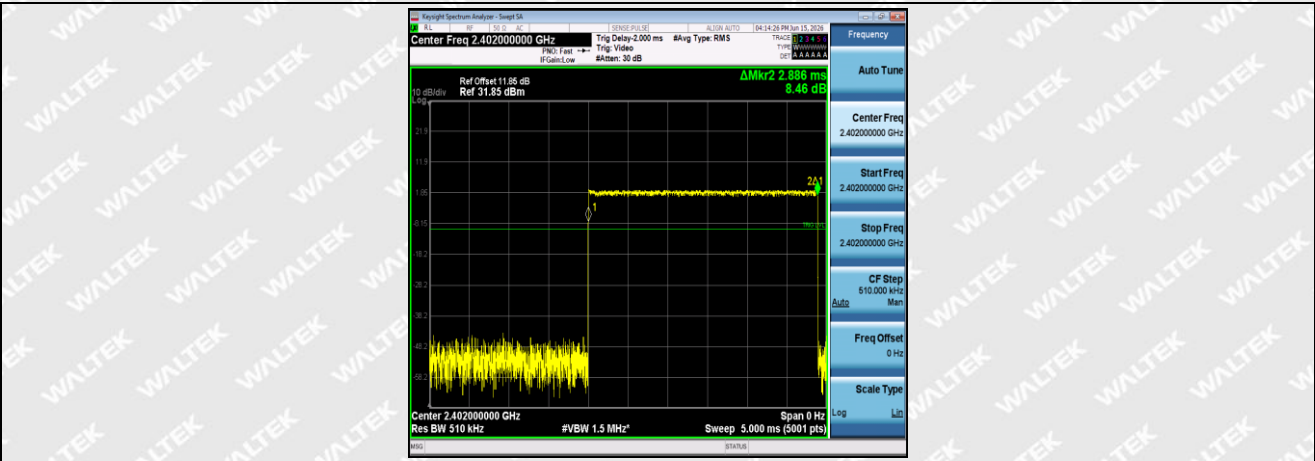



DH5-Ant1-Hop_2402-PASS

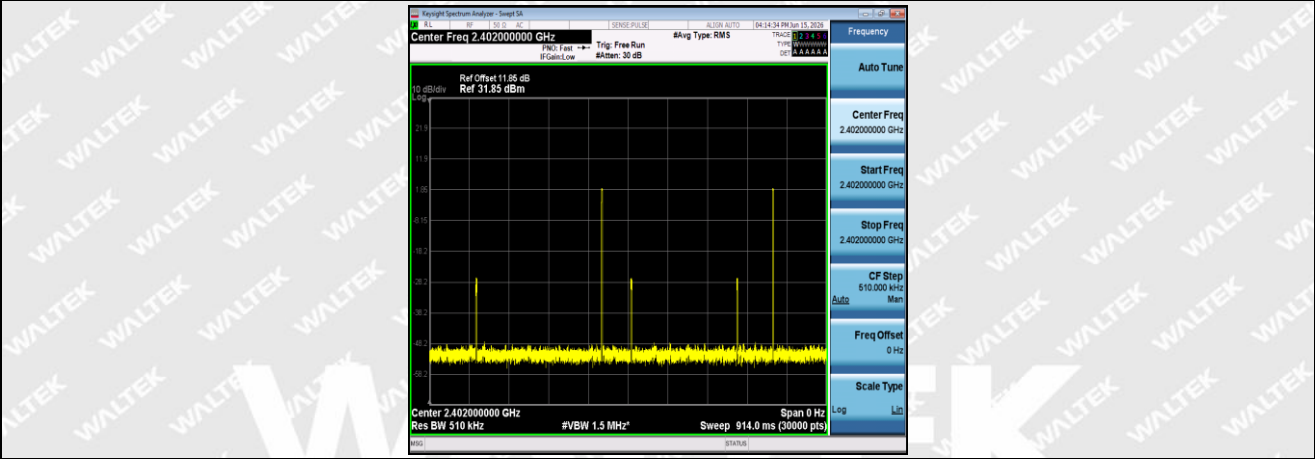


DH5-Ant1-Hop_2480-PASS

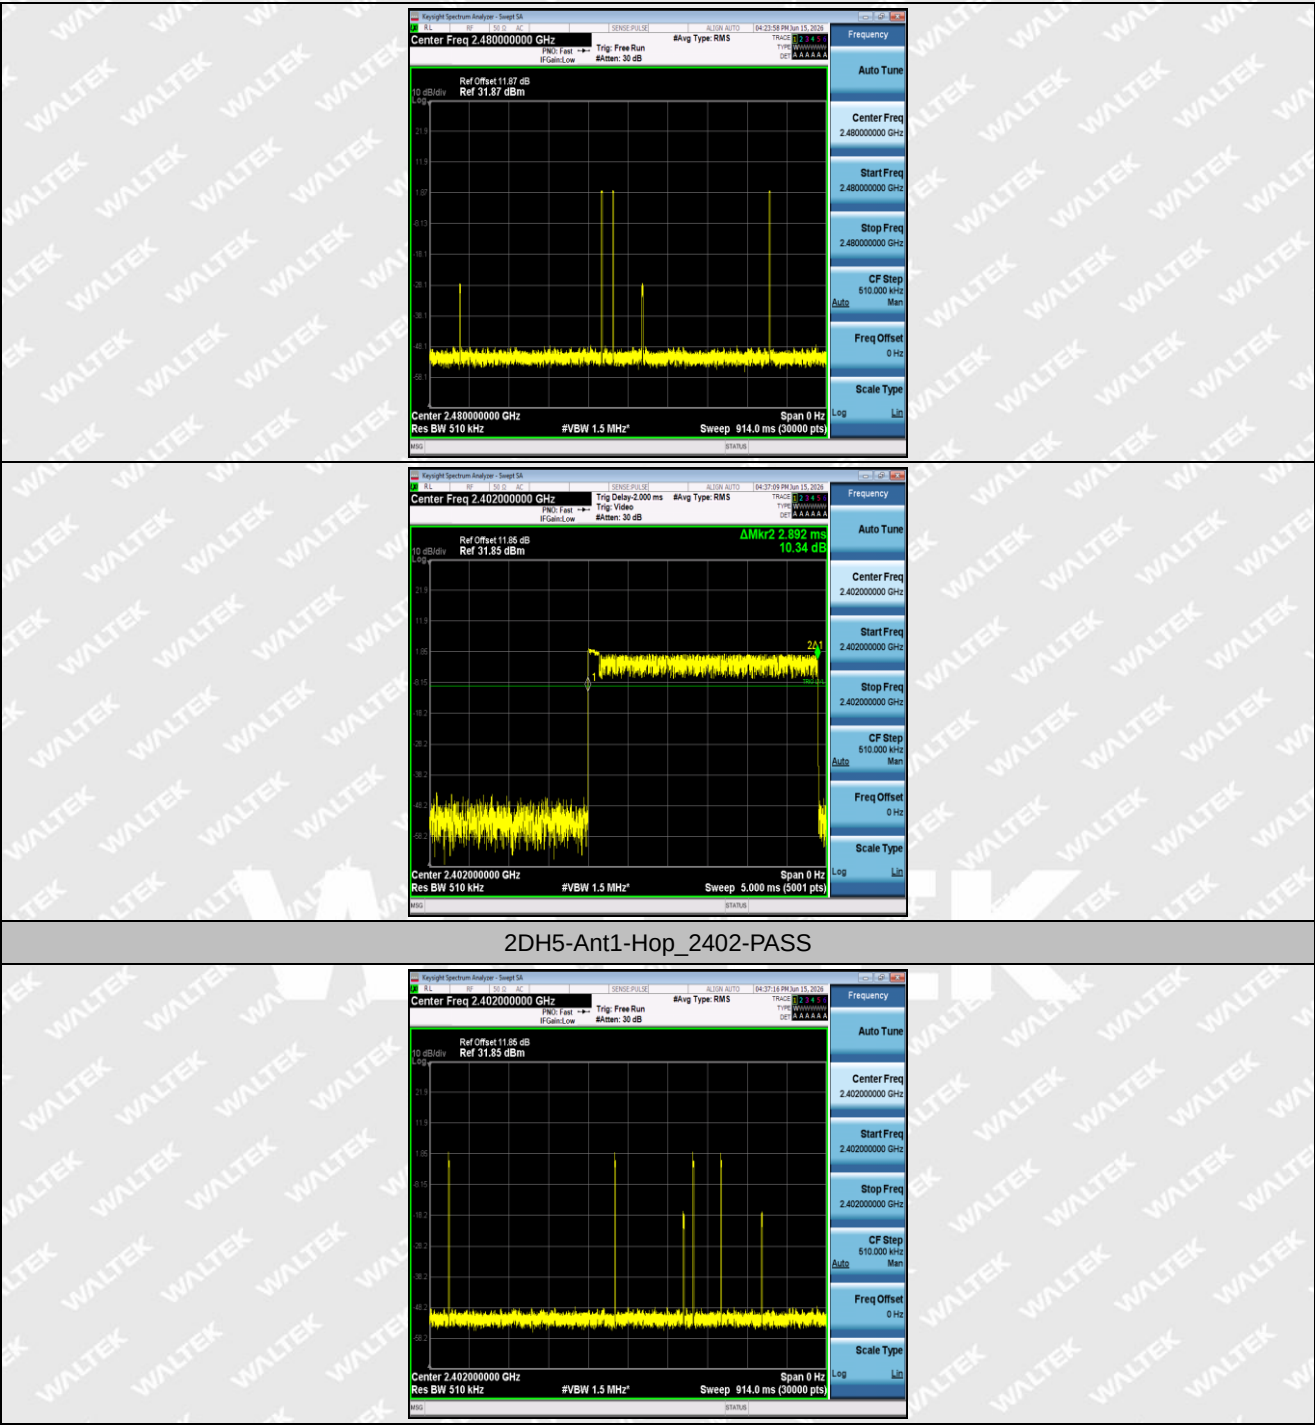

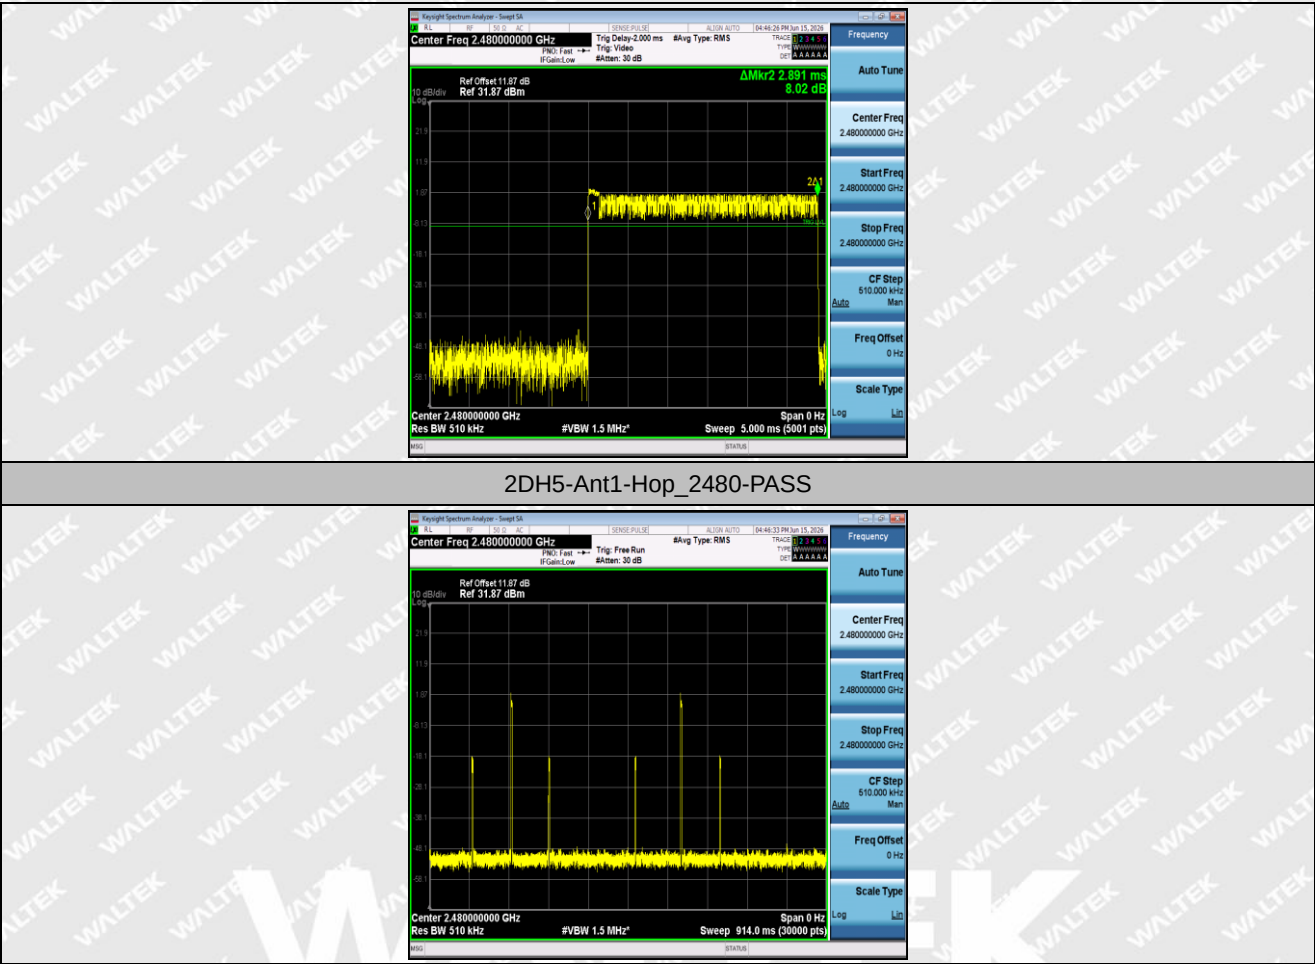


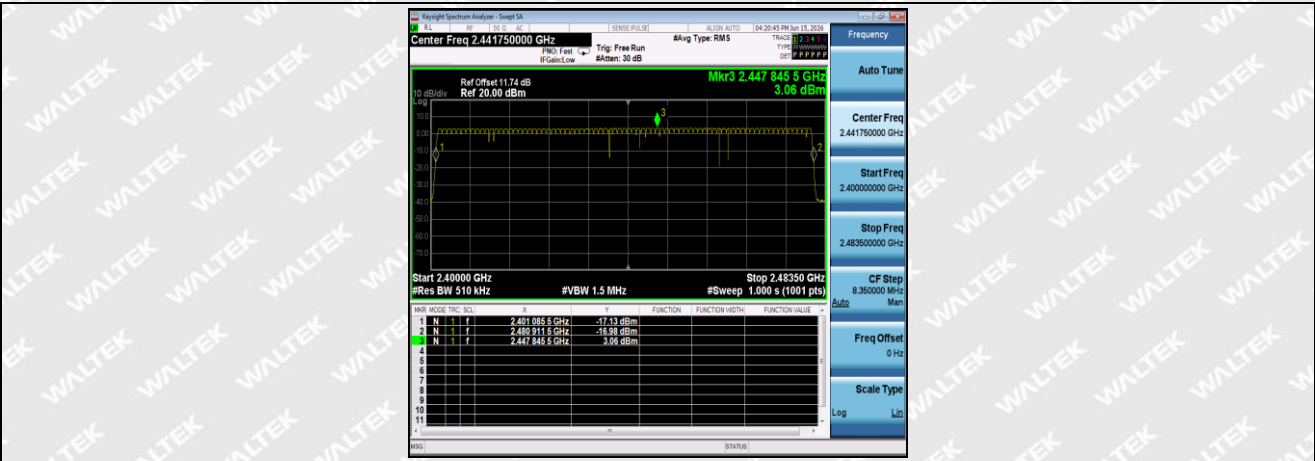


DH5-Ant1-Hop_2402-PASS

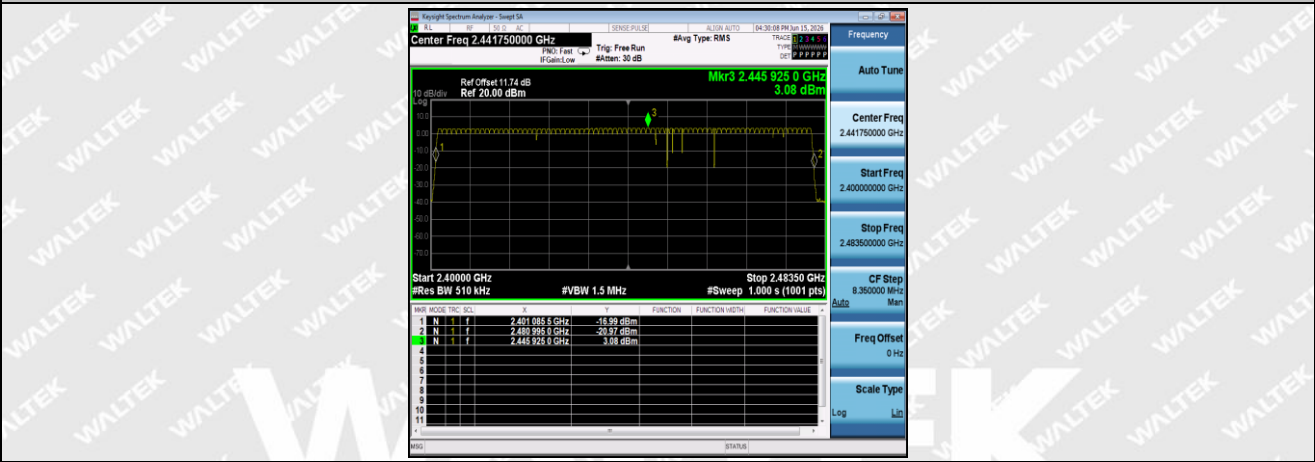

DH5-Ant1-Hop_2480-PASS

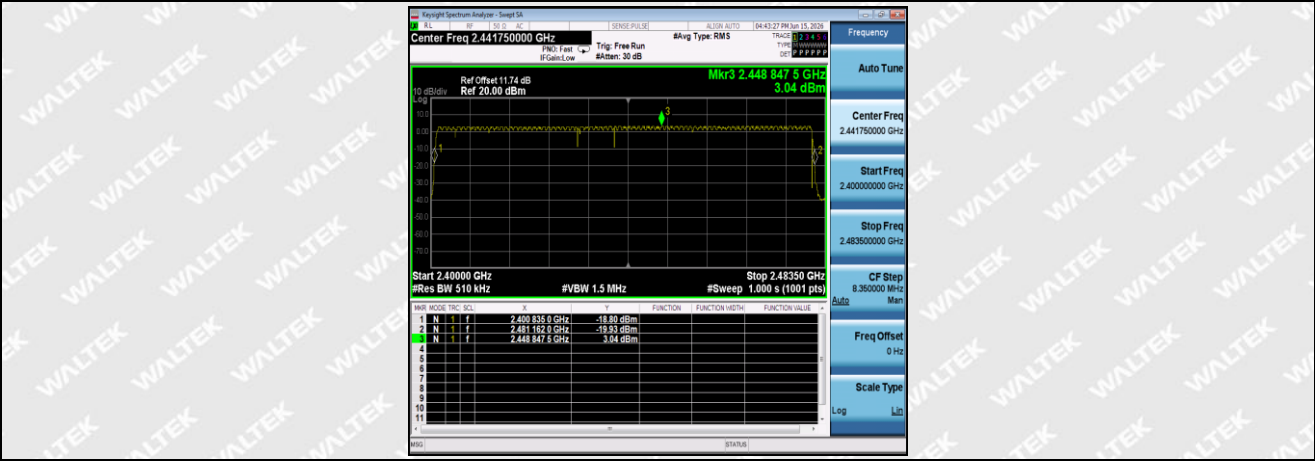

2DH5-Ant1-Hop_2402-PASS

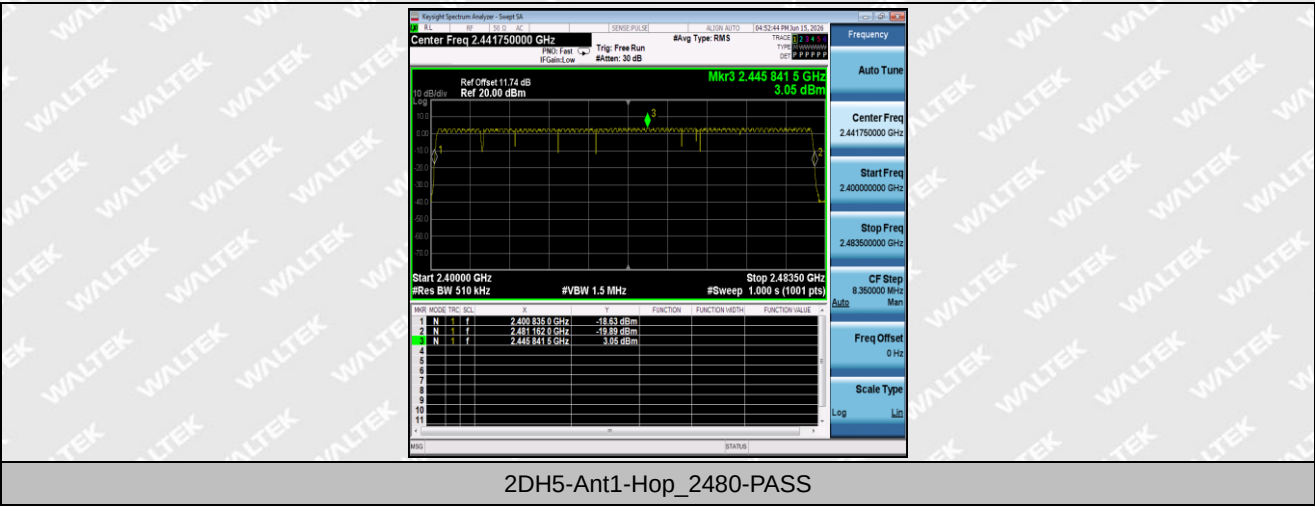

WALTEK



Appendix E: Hopping Frequency Separation

Test Result

TestMode	Antenna	Frequency[MHz]	Result [MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.951	0.100	PASS
2DH5	Ant1	Hop	0.999	0.100	PASS

WALTEK



Test Graphs





Appendix F: Transmitter Unwanted Emissions In The Out-Of-BandDomain

Test Result

TestMode	Antenna	Frequency[MHz]	Freq. [MHz]	Level[dBm]	Limit[dBm]	Verdict
LE_1M	Ant1	2402	2398.4586	-50.04	-20.00	PASS
LE_1M	Ant1	2402	2398.4793	-50.08	-20.00	PASS
LE_1M	Ant1	2402	2399.4793	-47.33	-10.00	PASS
LE_1M	Ant1	2402	2399.5	-47.26	-10.00	PASS
LE_1M	Ant1	2402	2484	-54.14	-10.00	PASS
LE_1M	Ant1	2402	2484.0207	-54.14	-10.00	PASS
LE_1M	Ant1	2402	2485.0207	-54.10	-20.00	PASS
LE_1M	Ant1	2402	2485.0414	-54.11	-20.00	PASS
LE_1M	Ant1	2480	2398.4602	-54.40	-20.00	PASS
LE_1M	Ant1	2480	2398.4801	-54.43	-20.00	PASS
LE_1M	Ant1	2480	2399.4801	-54.44	-10.00	PASS
LE_1M	Ant1	2480	2399.5	-54.41	-10.00	PASS
LE_1M	Ant1	2480	2484	-51.23	-10.00	PASS
LE_1M	Ant1	2480	2484.0199	-51.20	-10.00	PASS
LE_1M	Ant1	2480	2485.0199	-52.90	-20.00	PASS
LE_1M	Ant1	2480	2485.0398	-52.90	-20.00	PASS
LE_2M	Ant1	2402	2396.4706	-53.61	-20.00	PASS
LE_2M	Ant1	2402	2396.4853	-53.59	-20.00	PASS
LE_2M	Ant1	2402	2397.4853	-51.97	-20.00	PASS
LE_2M	Ant1	2402	2398.4853	-50.50	-10.00	PASS
LE_2M	Ant1	2402	2398.5	-50.51	-10.00	PASS
LE_2M	Ant1	2402	2399.5	-32.25	-10.00	PASS
LE_2M	Ant1	2402	2484	-54.17	-10.00	PASS
LE_2M	Ant1	2402	2485	-54.14	-10.00	PASS
LE_2M	Ant1	2402	2485.0147	-54.14	-10.00	PASS
LE_2M	Ant1	2402	2486.0147	-54.12	-20.00	PASS
LE_2M	Ant1	2402	2487.0147	-54.17	-20.00	PASS
LE_2M	Ant1	2402	2487.0294	-54.19	-20.00	PASS
LE_2M	Ant1	2480	2396.473	-54.41	-20.00	PASS
LE_2M	Ant1	2480	2396.4865	-54.41	-20.00	PASS
LE_2M	Ant1	2480	2397.4865	-54.44	-20.00	PASS
LE_2M	Ant1	2480	2398.4865	-54.44	-10.00	PASS
LE_2M	Ant1	2480	2398.5	-54.44	-10.00	PASS
LE_2M	Ant1	2480	2399.5	-54.41	-10.00	PASS
LE_2M	Ant1	2480	2484	-51.99	-10.00	PASS
LE_2M	Ant1	2480	2485	-53.15	-10.00	PASS
LE_2M	Ant1	2480	2485.0135	-53.15	-10.00	PASS



Reference No.: WTX26X05150609W001

LE_2M	Ant1	2480	2486.0135	-53.71	-20.00	PASS
LE_2M	Ant1	2480	2487.0135	-53.87	-20.00	PASS
LE_2M	Ant1	2480	2487.027	-53.89	-20.00	PASS


TestMode	Antenna	Frequency[MHz]	Freq. [MHz]	Level[dBm]	Limit[dBm]	Verdict
DH5	Ant1	Hop	2398.5	-58.85	-20.00	PASS
DH5	Ant1	Hop	2399.5	-60.97	-10.00	PASS
DH5	Ant1	Hop	2484	-56.54	-10.00	PASS
DH5	Ant1	Hop	2485	-57.17	-20.00	PASS
2DH5	Ant1	Hop	2398.08	-56.51	-20.00	PASS
2DH5	Ant1	Hop	2399.29	-55.21	-10.00	PASS
2DH5	Ant1	Hop	2484	-55.06	-10.00	PASS
2DH5	Ant1	Hop	2485.42	-57.27	-20.00	PASS

WALTEK




Test Graphs




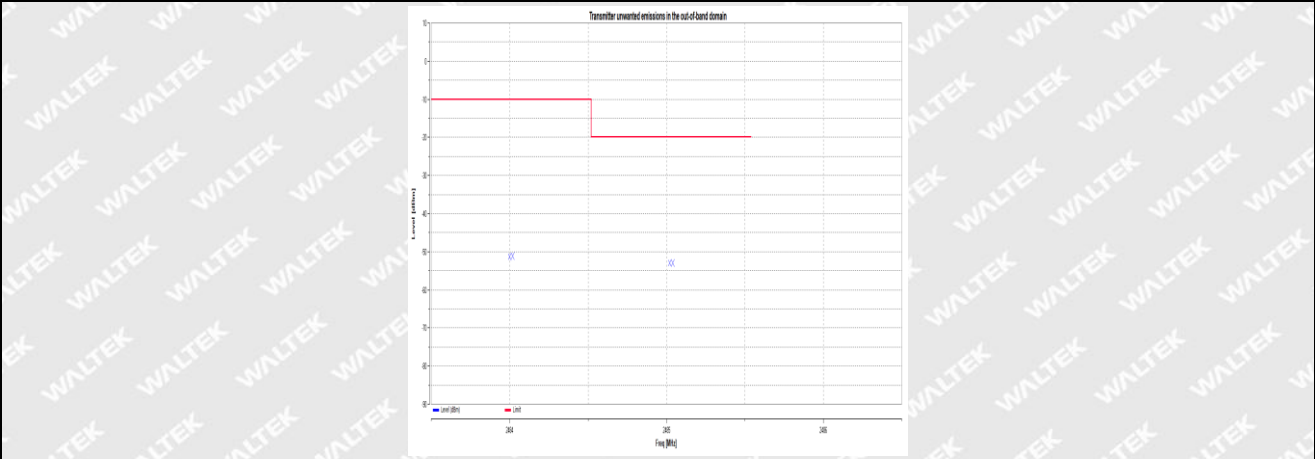


LE_1M-Ant1-2480-PASS

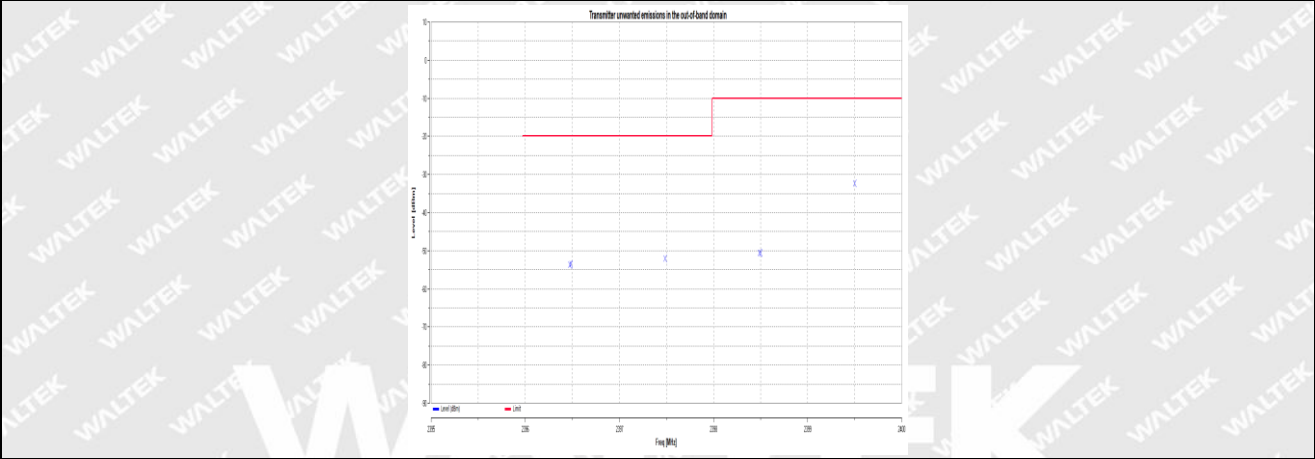


LE_2M-Ant1-2402-PASS

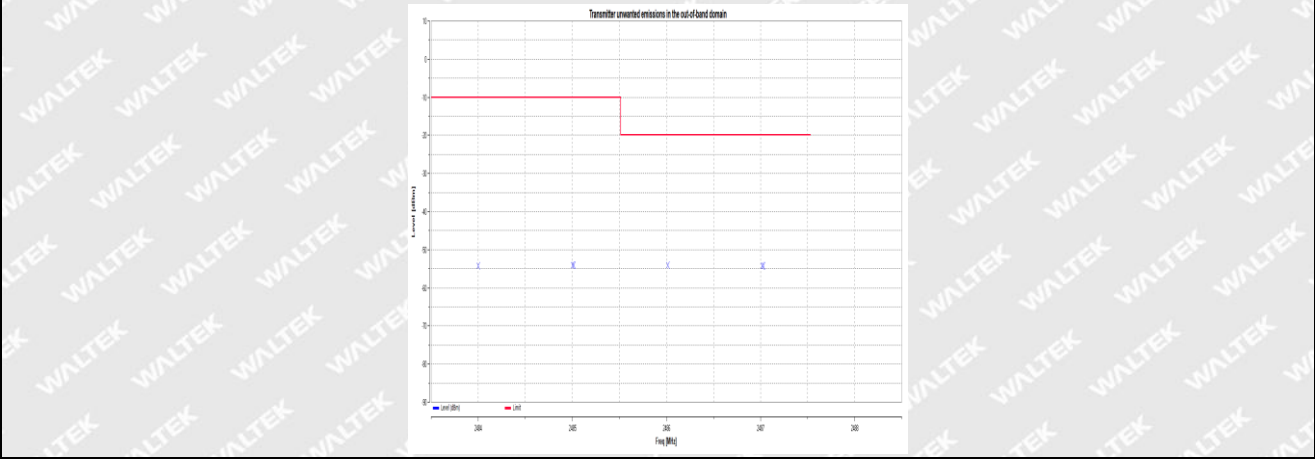


LE_2M-Ant1-2402-PASS

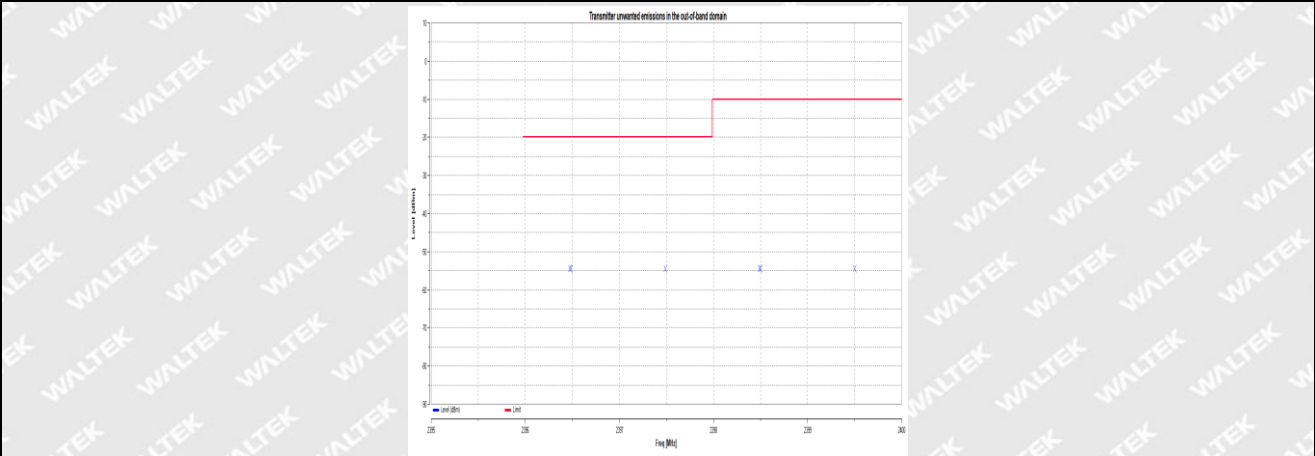


LE_2M-Ant1-2480-PASS

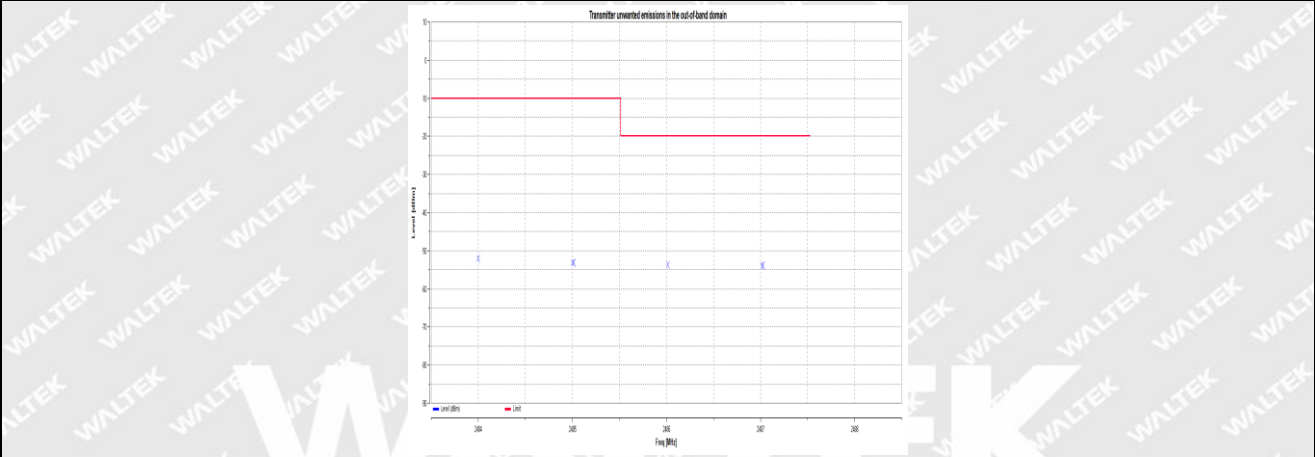


LE_2M-Ant1-2480-PASS

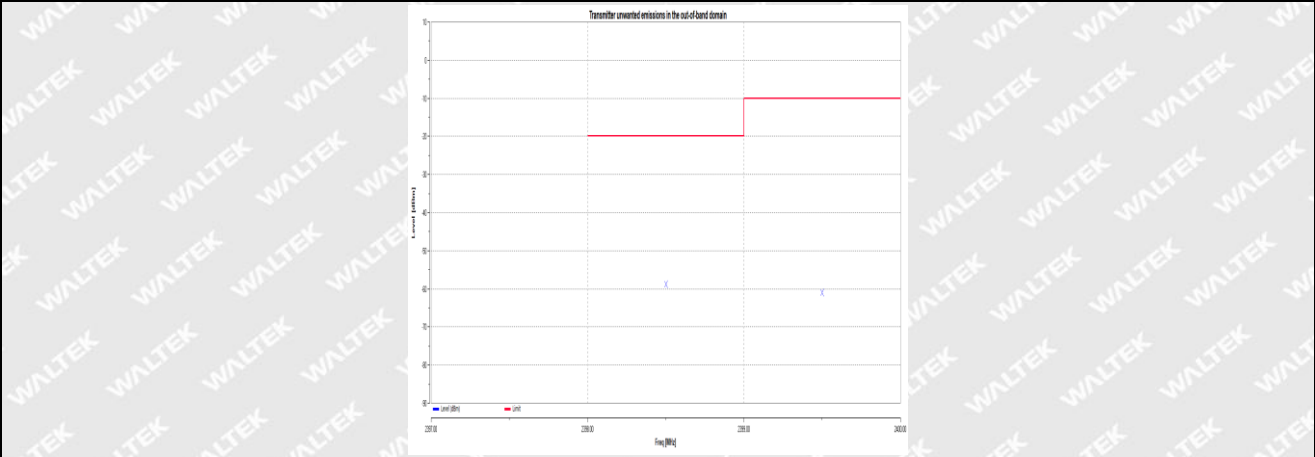


DH5-Ant1-Hop-PASS

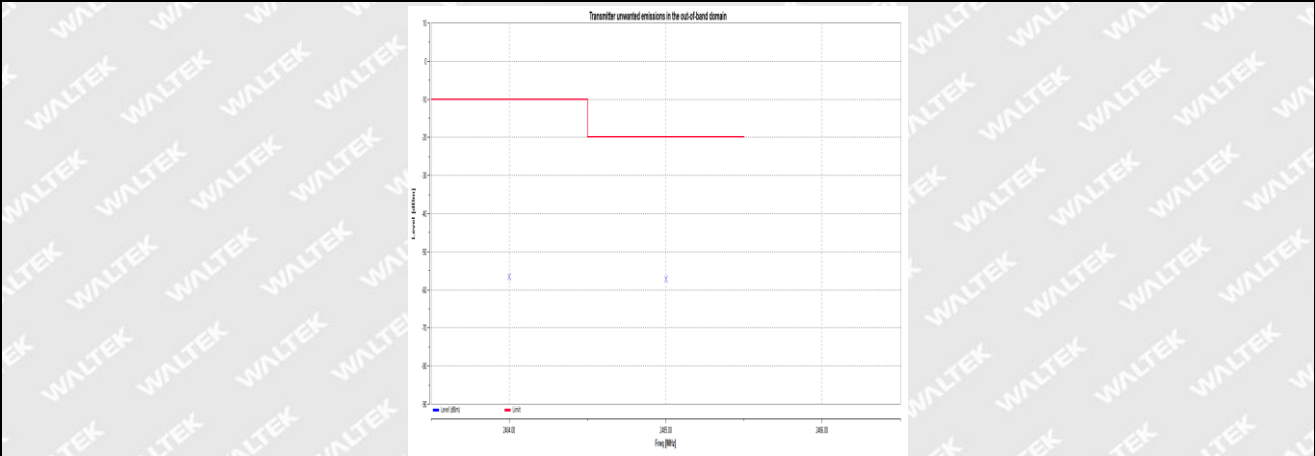

DH5-Ant1-Hop-PASS

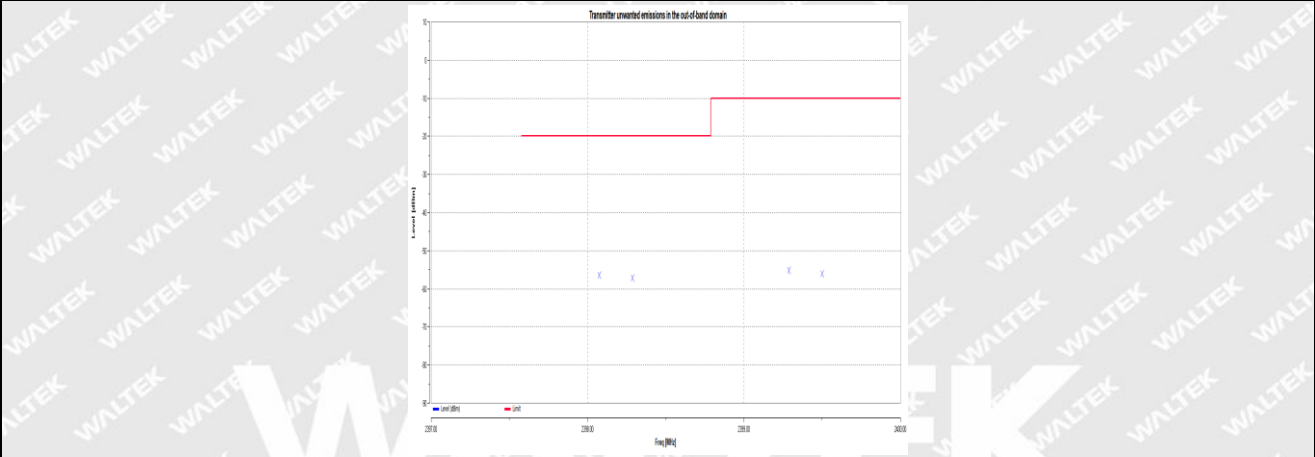

2DH5-Ant1-Hop-PASS

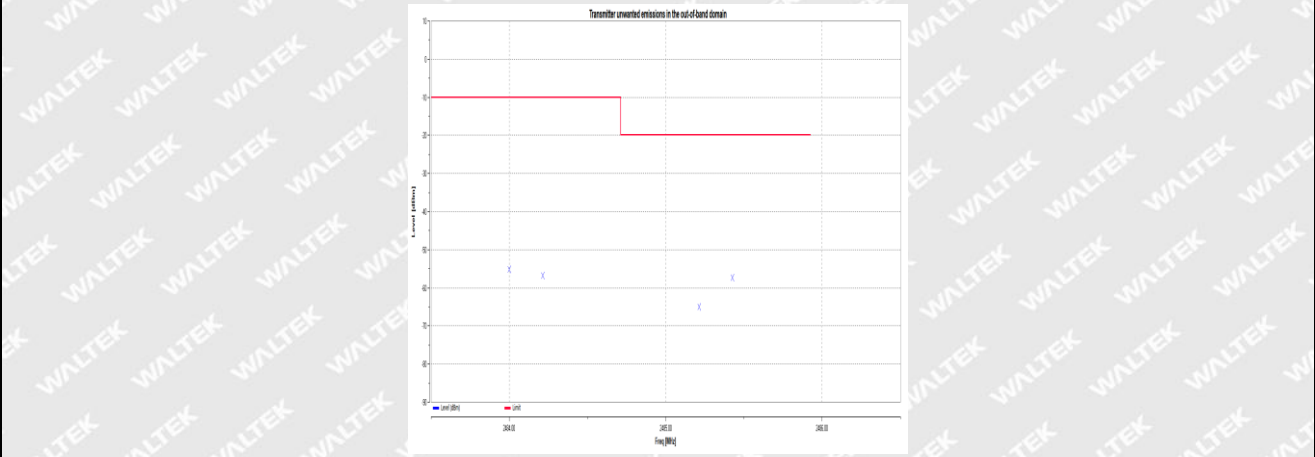

2DH5-Ant1-Hop-PASS



Appendix G: Transmitter unwanted emissions in the spurious domain

Test Result-Pre-scan

TestMode	Antenna	Frequency[MHz]	Freq. [MHz]	Level[dBm]	Limit[dBm]	Verdict
LE_1M	Ant1	2402	4804.20	-33.50	-30	See table below
LE_1M	Ant1	2402	829.60	-62.58	-36	PASS
LE_1M	Ant1	2402	2397.67	-46.08	-30	PASS
LE_1M	Ant1	2402	12052.11	-55.53	-30	PASS
LE_1M	Ant1	2480	902.03	-62.07	-36	PASS
LE_1M	Ant1	2480	2488.67	-51.46	-30	PASS
LE_1M	Ant1	2480	4959.3	-36.03	-30	PASS
LE_1M	Ant1	2480	12224.38	-55.02	-30	PASS
LE_2M	Ant1	2402	4803.00	-33.73	-30	See table below
LE_2M	Ant1	2402	155.78	-68.76	-36	PASS
LE_2M	Ant1	2402	2395.33	-49.62	-30	PASS
LE_2M	Ant1	2402	4803.90	-33.73	-30	PASS
LE_2M	Ant1	2402	12180.95	-54.66	-30	PASS
LE_2M	Ant1	2480	155.45	-68.3	-36	PASS
LE_2M	Ant1	2480	2488.67	-51.16	-30	PASS
LE_2M	Ant1	2480	4959	-36.13	-30	PASS
LE_2M	Ant1	2480	11472.78	-54.91	-30	PASS

TestMode	Antenna	Frequency[MHz]	Freq. [MHz]	Level[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	757.82	-70.09	-36	PASS
DH5	Ant1	2402	2381	-42.18	-30	PASS
DH5	Ant1	2402	4803.9	-44.63	-30	PASS
DH5	Ant1	2402	7205.9	-42.35	-30	PASS
DH5	Ant1	2480	900.09	-69.53	-36	PASS
DH5	Ant1	2480	2502	-42.77	-30	PASS
DH5	Ant1	2480	4959.6	-43.06	-30	PASS
DH5	Ant1	2480	9919.99	-41.42	-30	PASS
2DH5	Ant1	2402	848.03	-68.99	-36	PASS
2DH5	Ant1	2402	2381.67	-42.81	-30	PASS
2DH5	Ant1	2402	4803.6	-46.32	-30	PASS
2DH5	Ant1	2402	7205.9	-43.16	-30	PASS
2DH5	Ant1	2480	957.97	-70.12	-36	PASS
2DH5	Ant1	2480	2501.67	-41.38	-30	PASS
2DH5	Ant1	2480	4960.2	-42.85	-30	PASS



2DH5	Ant1	2480	9919.99	-41.46	-30	PASS
------	------	------	---------	--------	-----	------

Test Result- Emissions identified during the pre-scan


Note: This test case only applicable the test result fall within the 6 dB range below the limit during the Pre-scan.




TestMode	Antenna	Frequency[MHz]	Freq. [MHz]	Level[dBm]	Limit[dBm]	Verdict
LE_1M	Ant1	2402	4803.42	-36.58	-30	PASS
LE_2M	Ant1	2402	4802.89	-38.17	-30	PASS


WALTEK




Test Graphs-Pre-scan

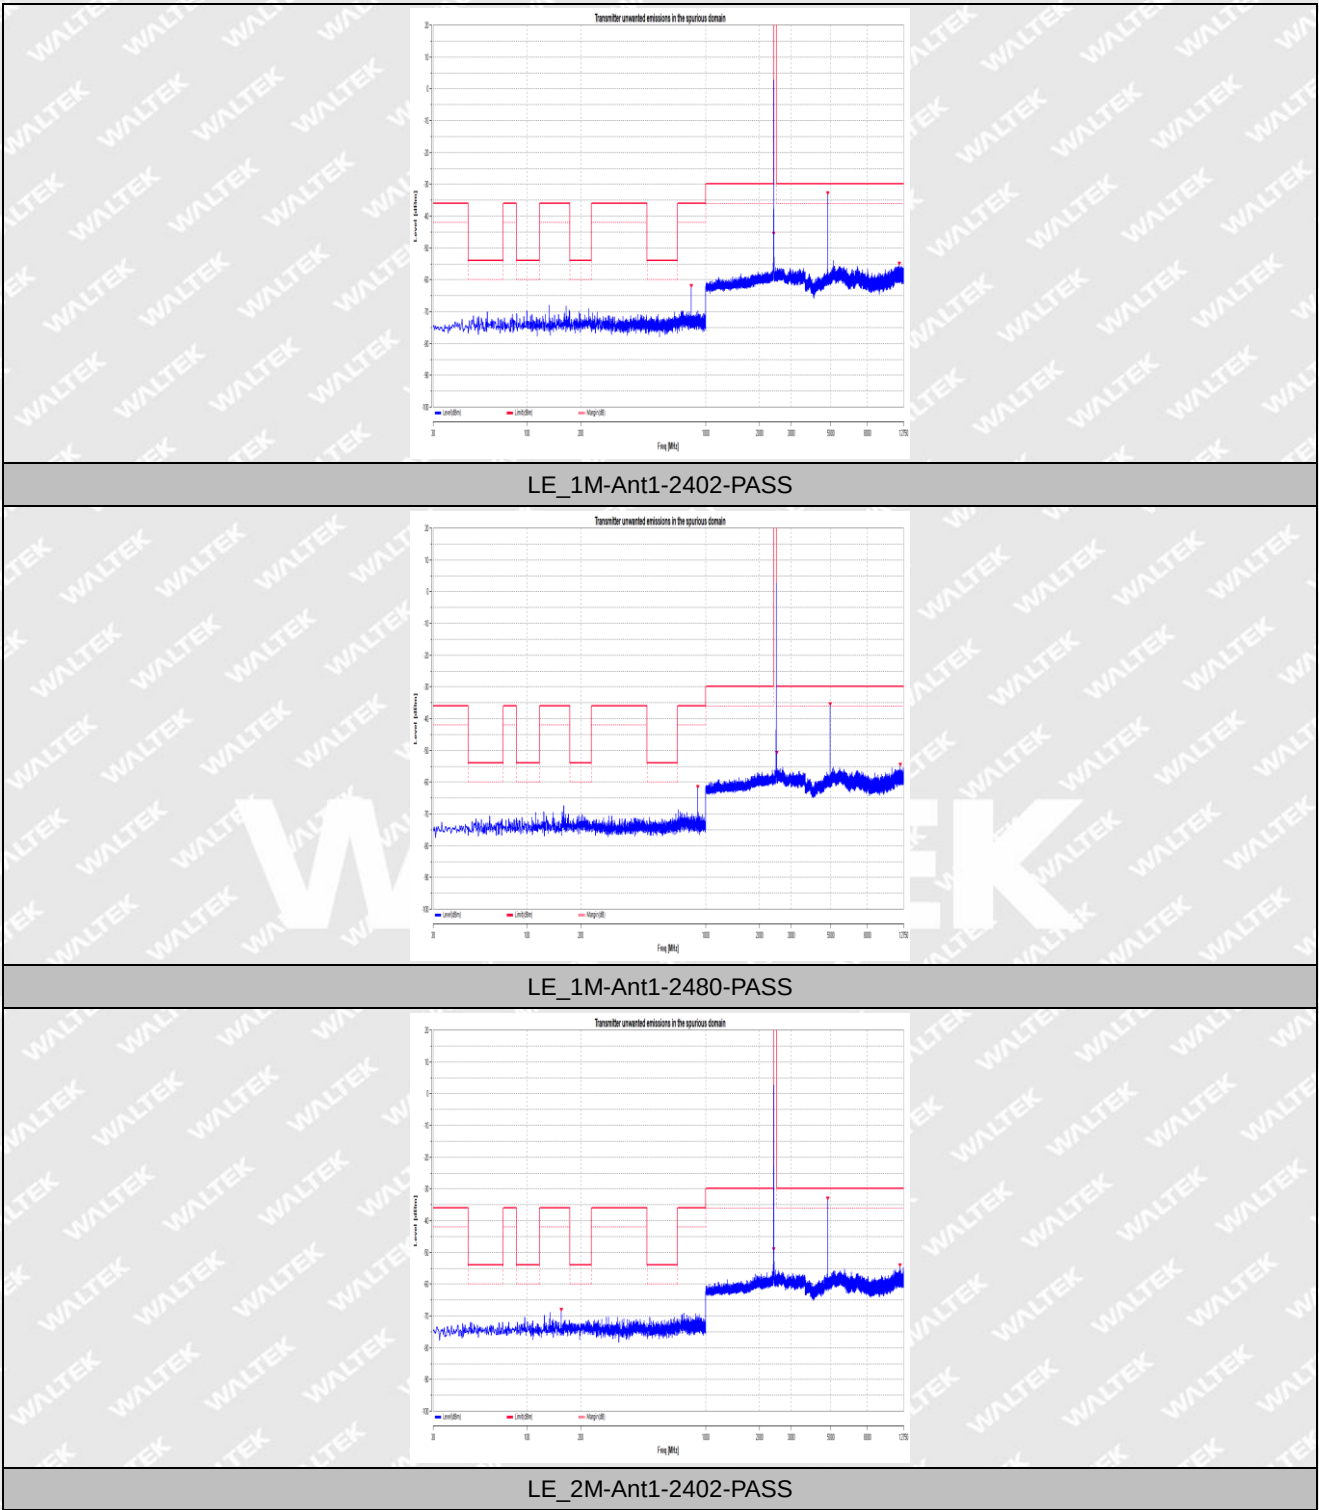

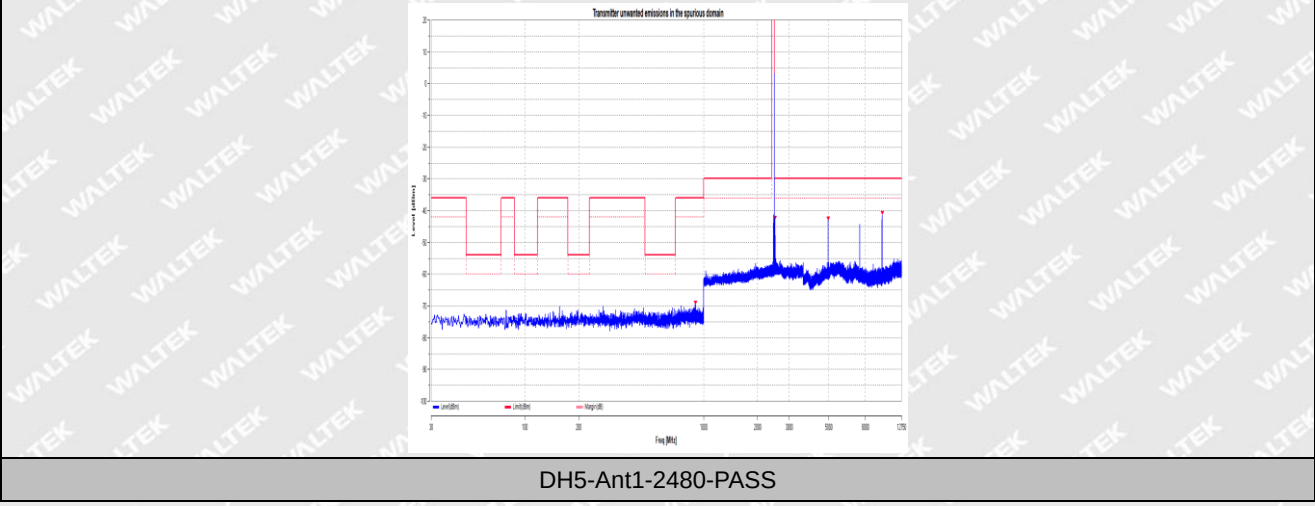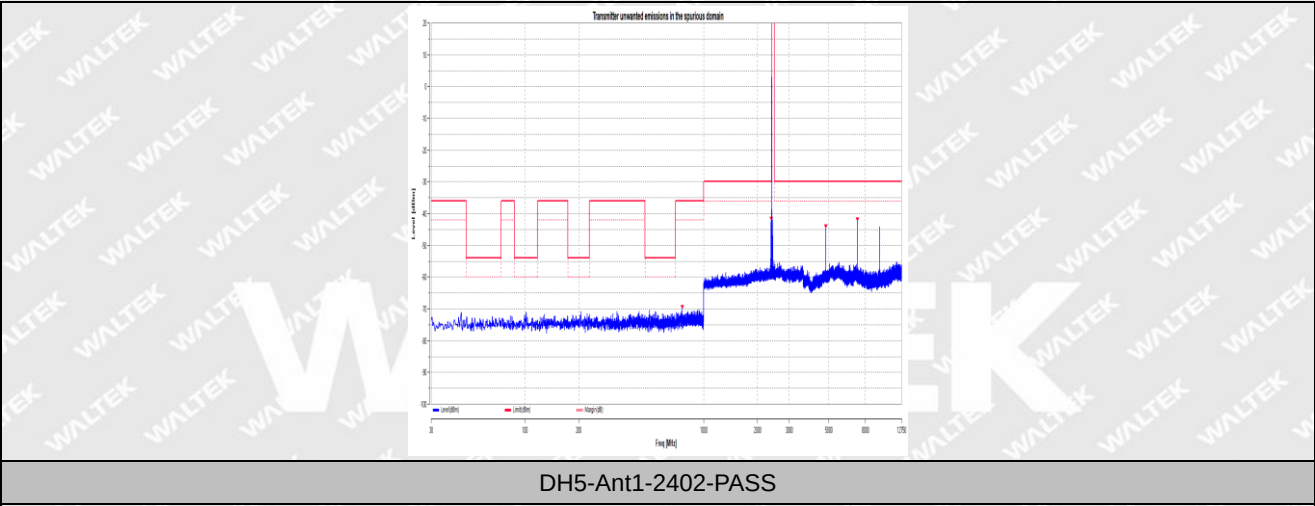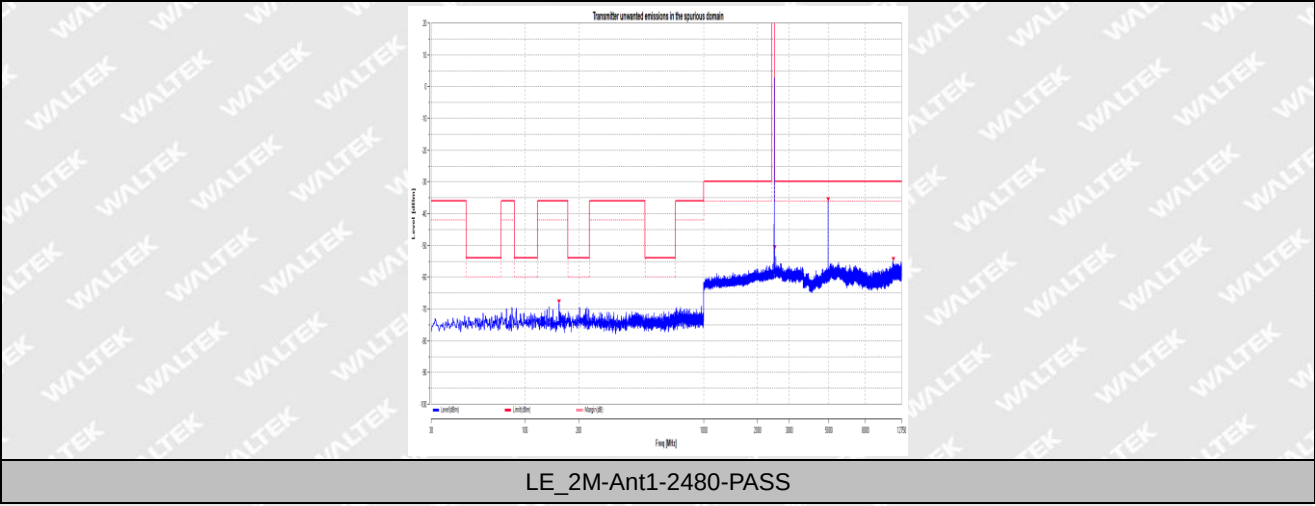

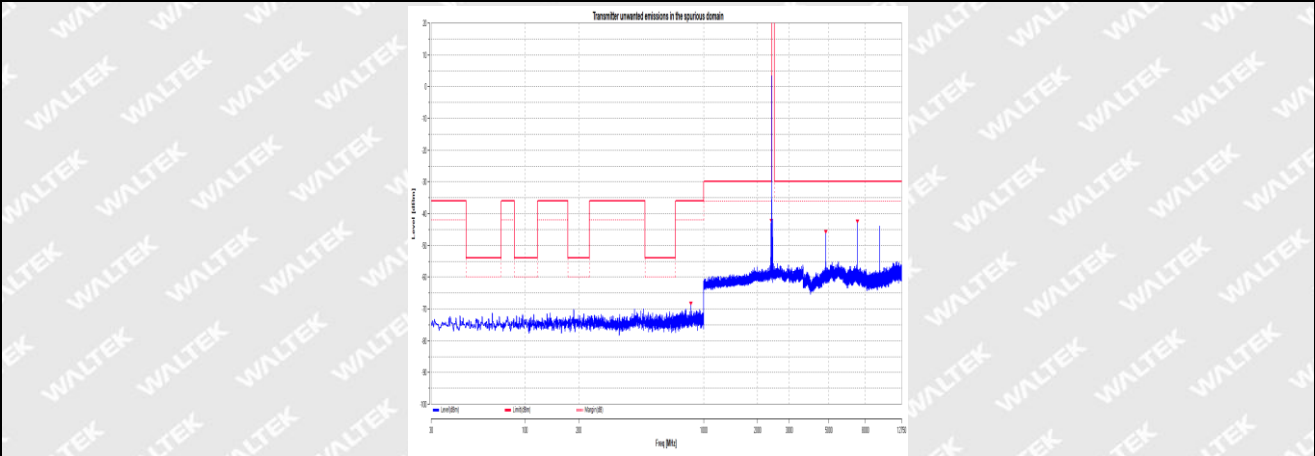

2DH5-Ant1-2402-PASS

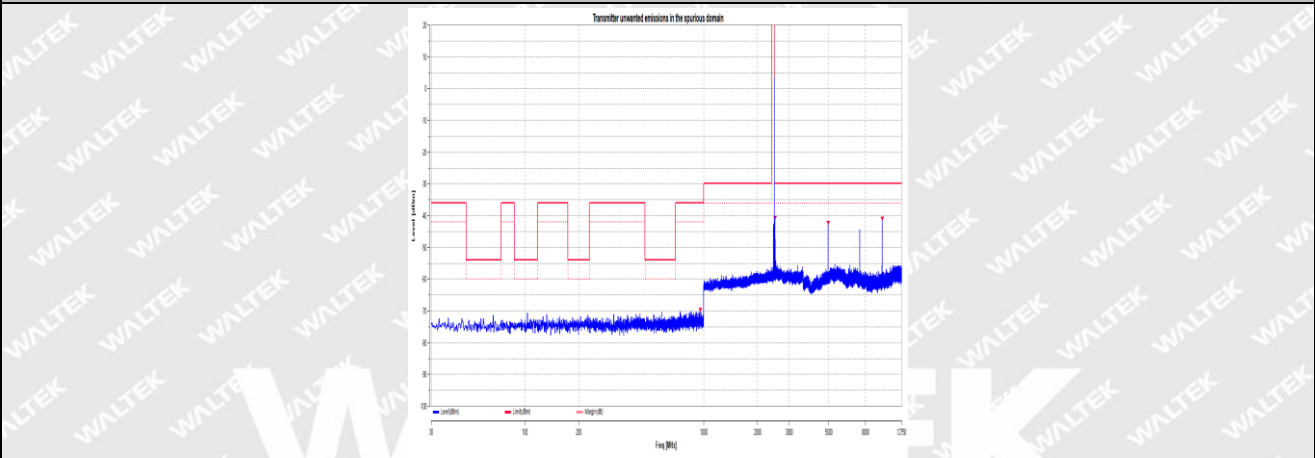


2DH5-Ant1-2480-PASS




Test Graphs- Emissions identified during the pre-scan

Note: This test case only applicable the test result fall within the 6 dB range below the limit during the Pre-scan.

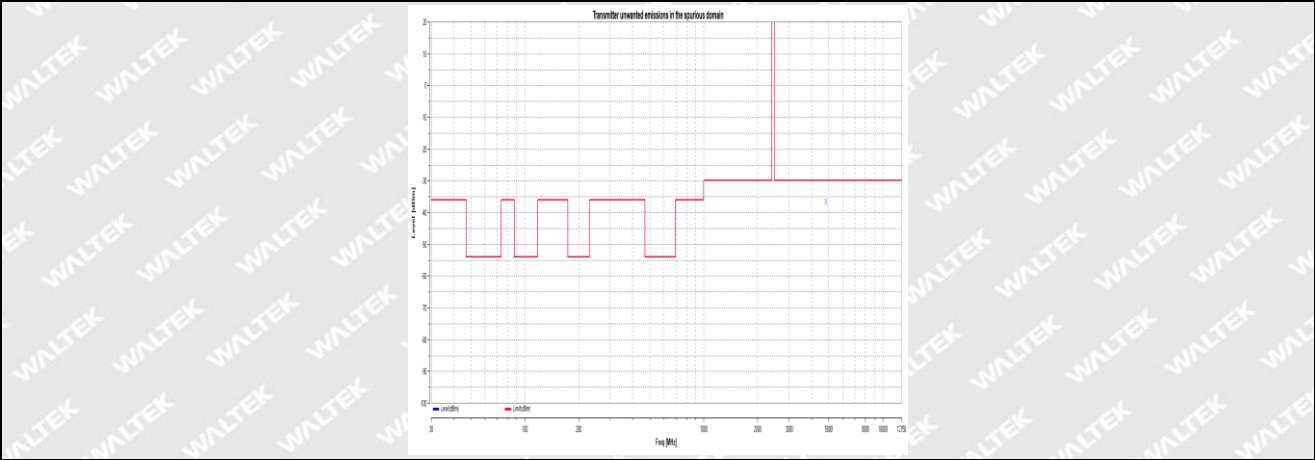

LE_1M-Ant1-2402-PASS

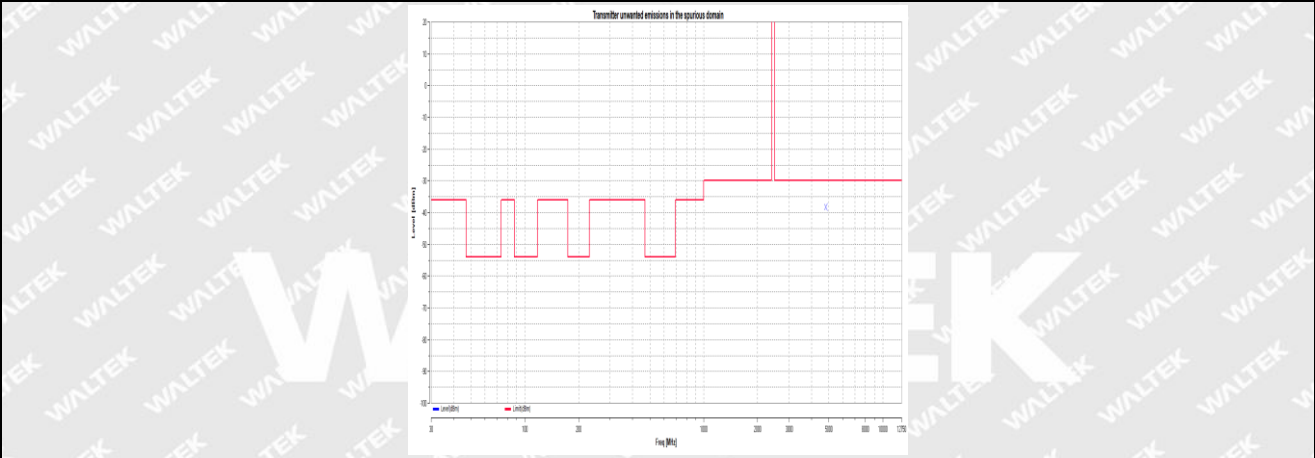

LE_2M-Ant1-2402-PASS



Appendix H: Receiver spurious emissions


Test Result-Pre-scan




TestMode	Antenna	Frequency[MHz]	Freq. [MHz]	Level[dBm]	Limit[dBm]	Verdict
LE_1M	Ant1	2402	144.07	-77.58	-57.00	PASS
LE_1M	Ant1	2402	12000.74	-66.68	-47.00	PASS
LE_1M	Ant1	2480	144.02	-76.5	-57.00	PASS
LE_1M	Ant1	2480	11842.9	-66.38	-47.00	PASS
LE_2M	Ant1	2402	144.02	-78.87	-57.00	PASS
LE_2M	Ant1	2402	11940.82	-67.09	-47.00	PASS
LE_2M	Ant1	2480	144.07	-77.65	-57.00	PASS
LE_2M	Ant1	2480	11951	-66.63	-47.00	PASS


TestMode	Antenna	Frequency[MHz]	Freq. [MHz]	Level[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	800.08	-80.1	-57.00	PASS
DH5	Ant1	2402	7006.6	-66.35	-47.00	PASS
DH5	Ant1	2480	433.96	-77.49	-57.00	PASS
DH5	Ant1	2480	3116.57	-67.39	-47.00	PASS
2DH5	Ant1	2402	144.02	-77.48	-57.00	PASS
2DH5	Ant1	2402	6576.55	-67	-47.00	PASS
2DH5	Ant1	2480	433.91	-75.98	-57.00	PASS
2DH5	Ant1	2480	6055.63	-66.97	-47.00	PASS




Test Graphs-Pre-scan

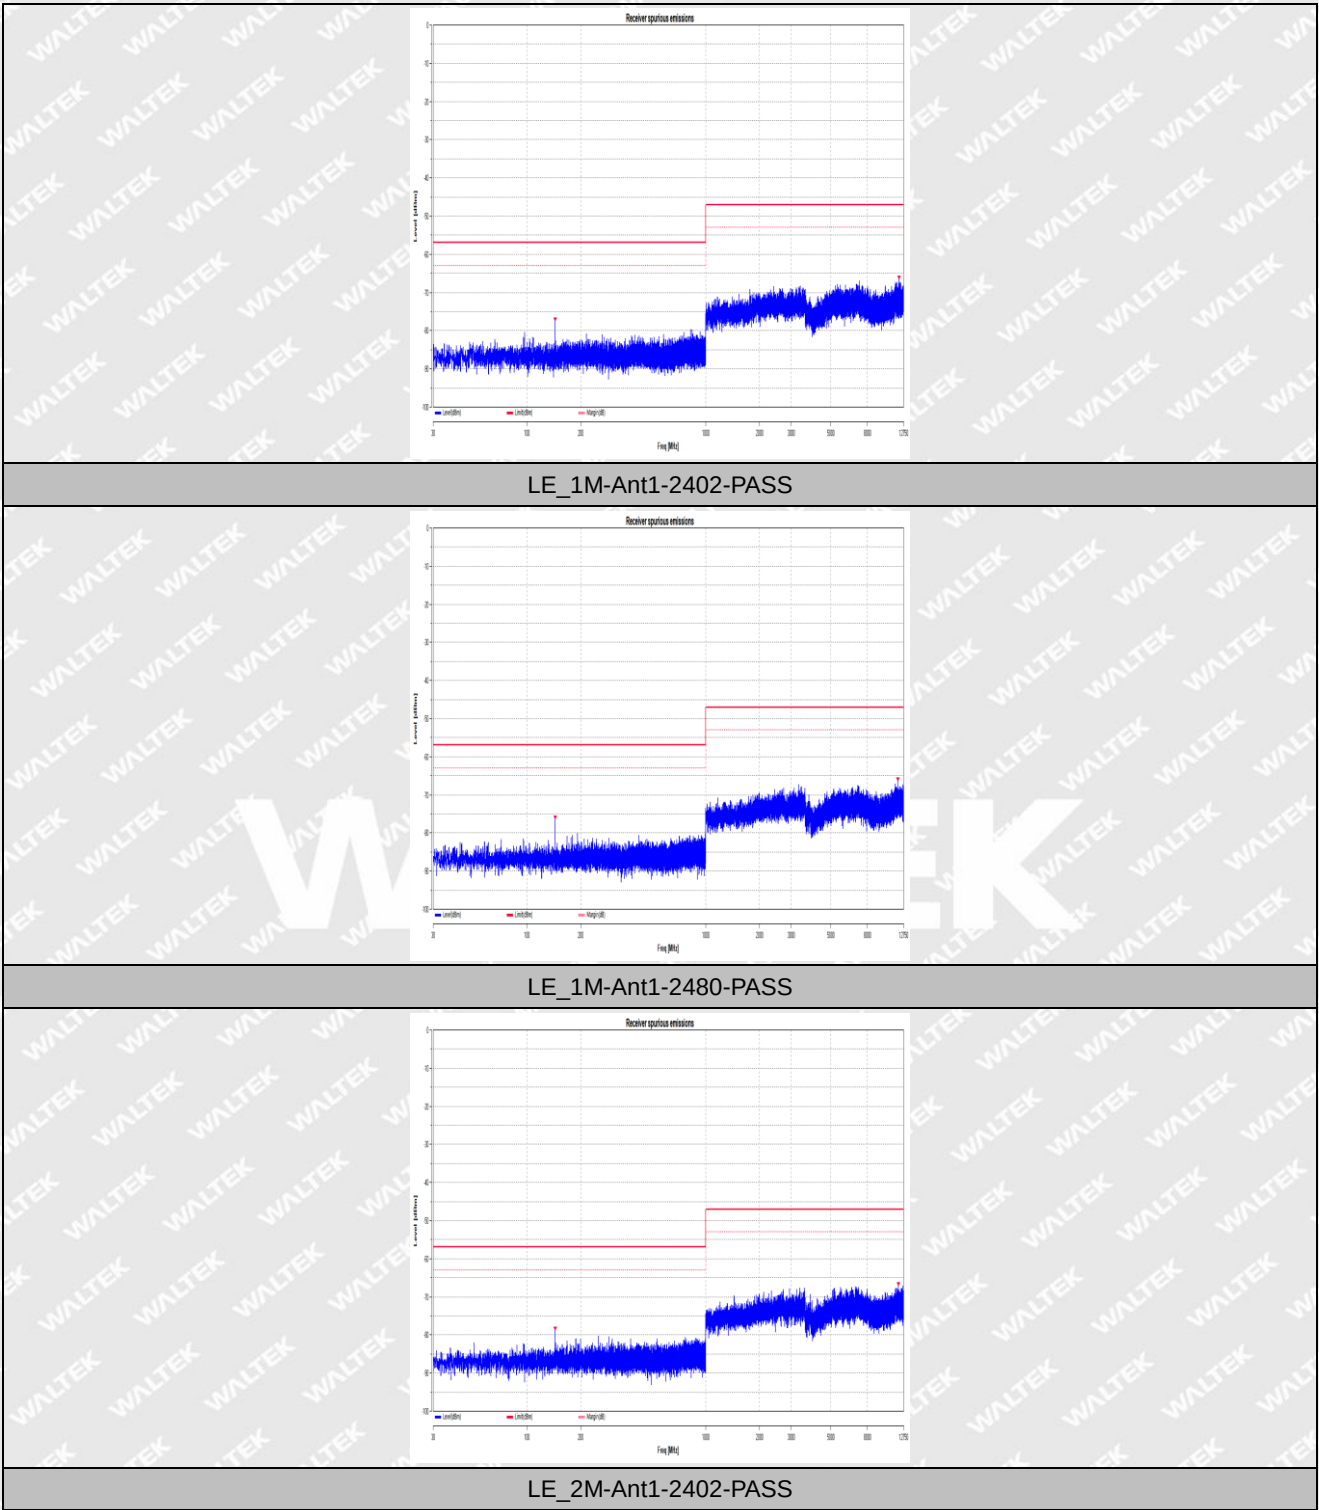

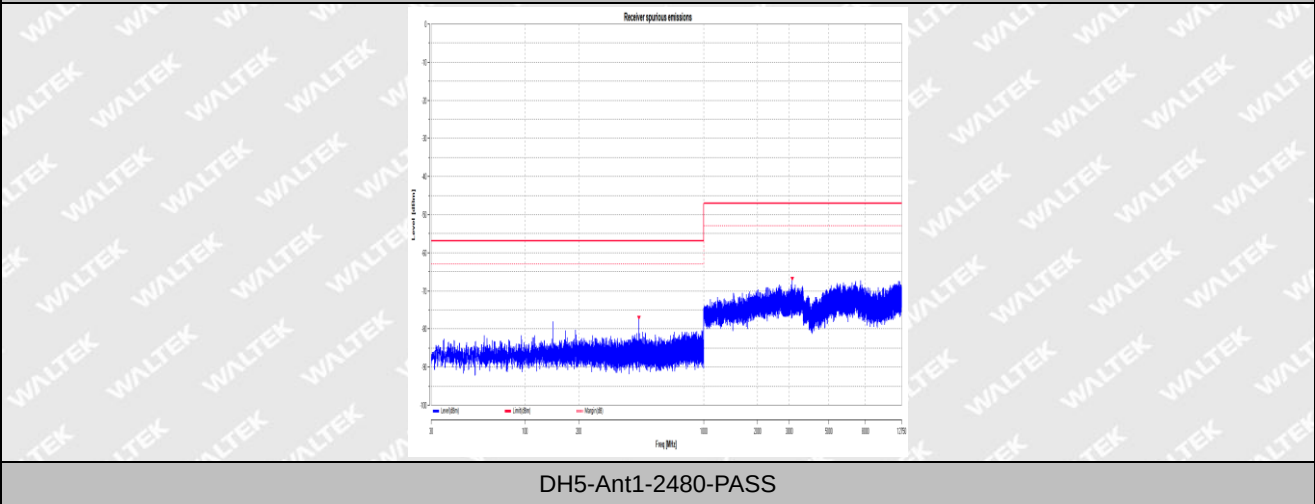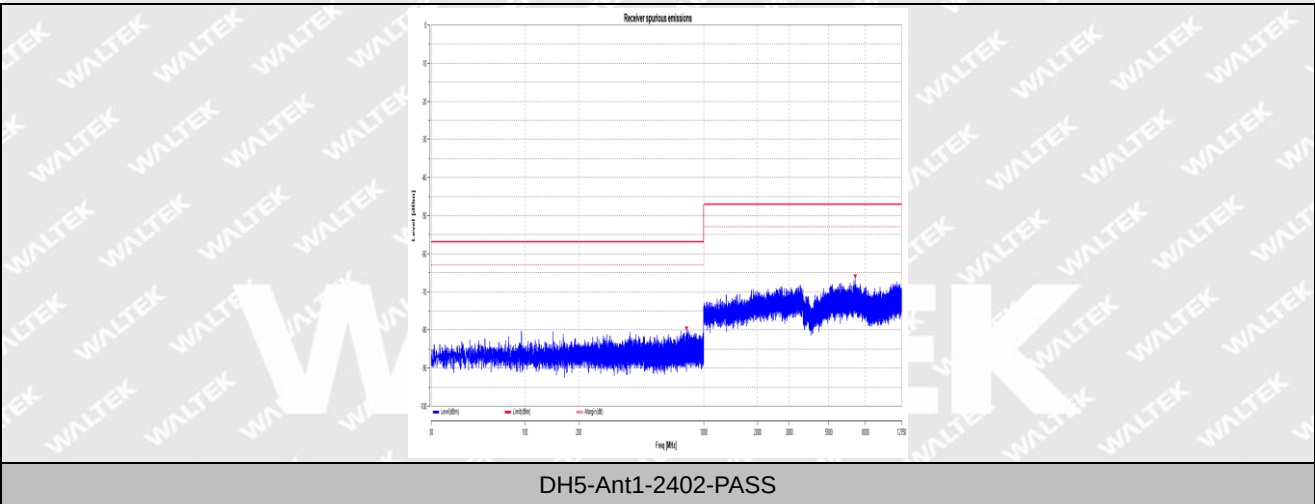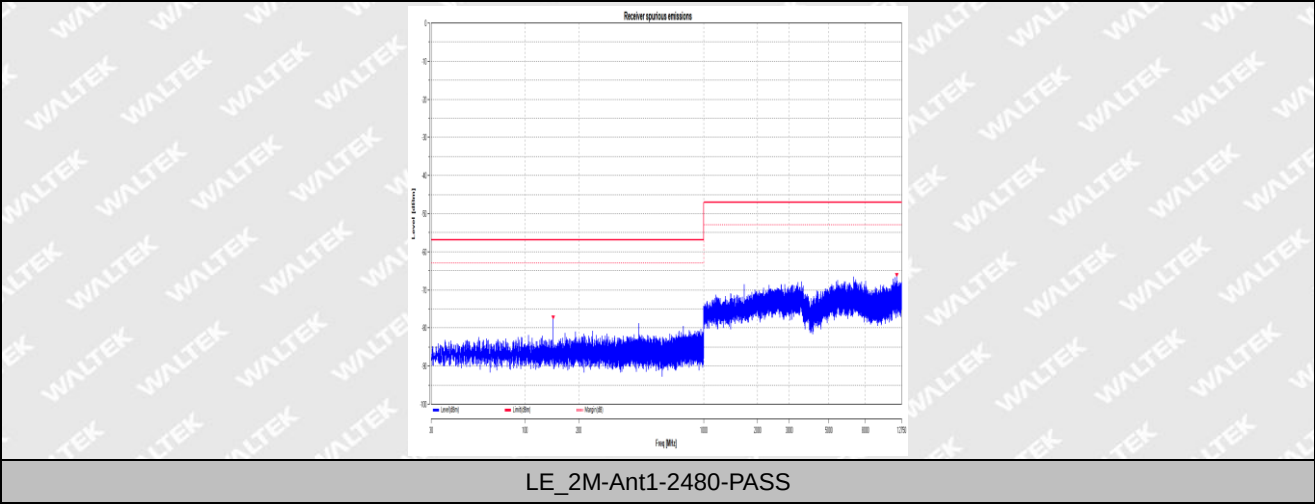

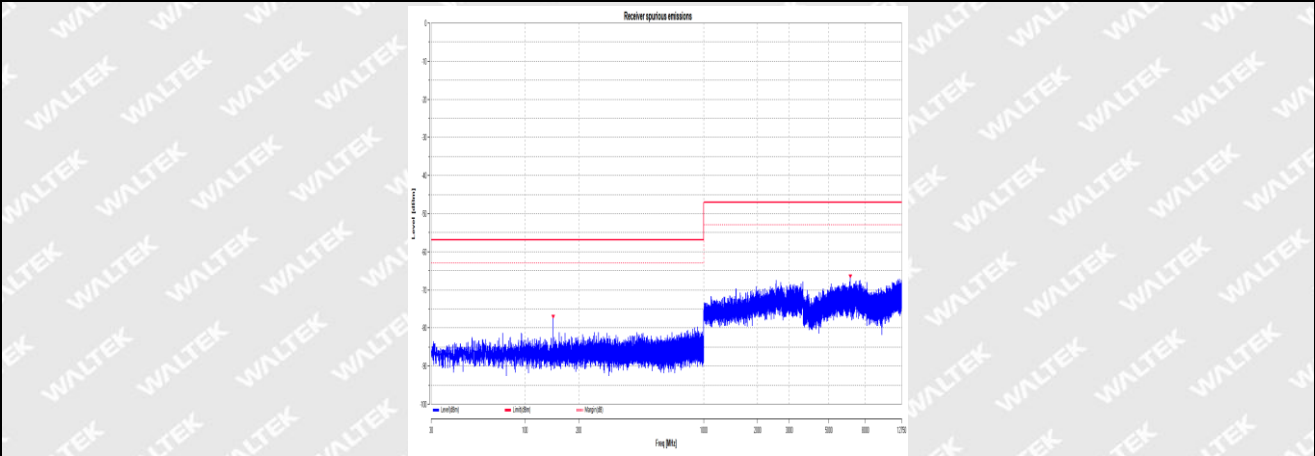

2DH5-Ant1-2402-PASS

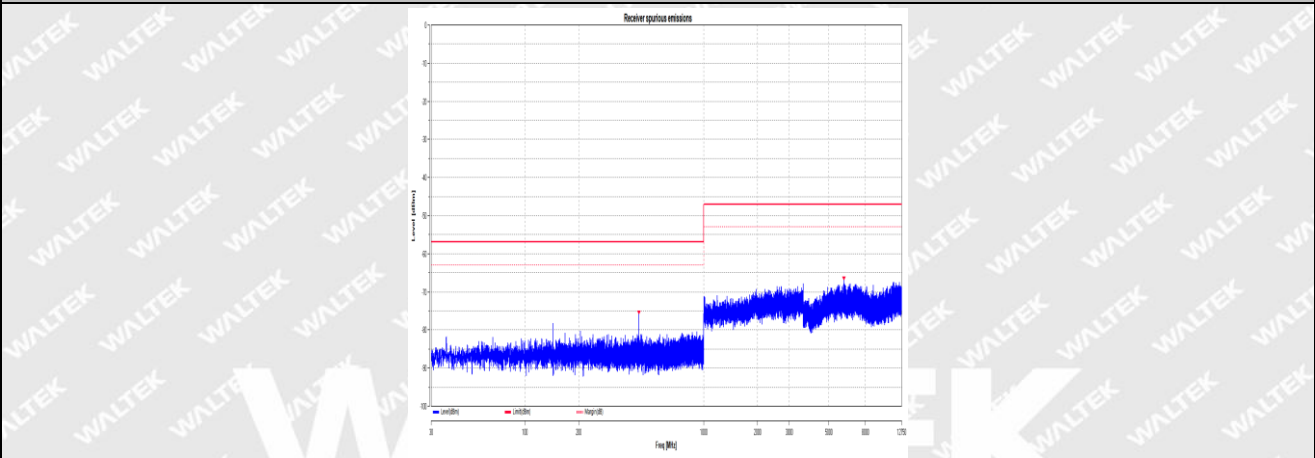

2DH5-Ant1-2480-PASS



EXHIBIT 1 - EUT PHOTOGRAPHS

Please refer to “ANNEX”.

WALTEK




EXHIBIT 2 - Test setup photo

EDR

**Spurious Emission
Test Setup
(Below 1GHz)**



**Spurious Emission
Test Setup (Above
1GHz)**

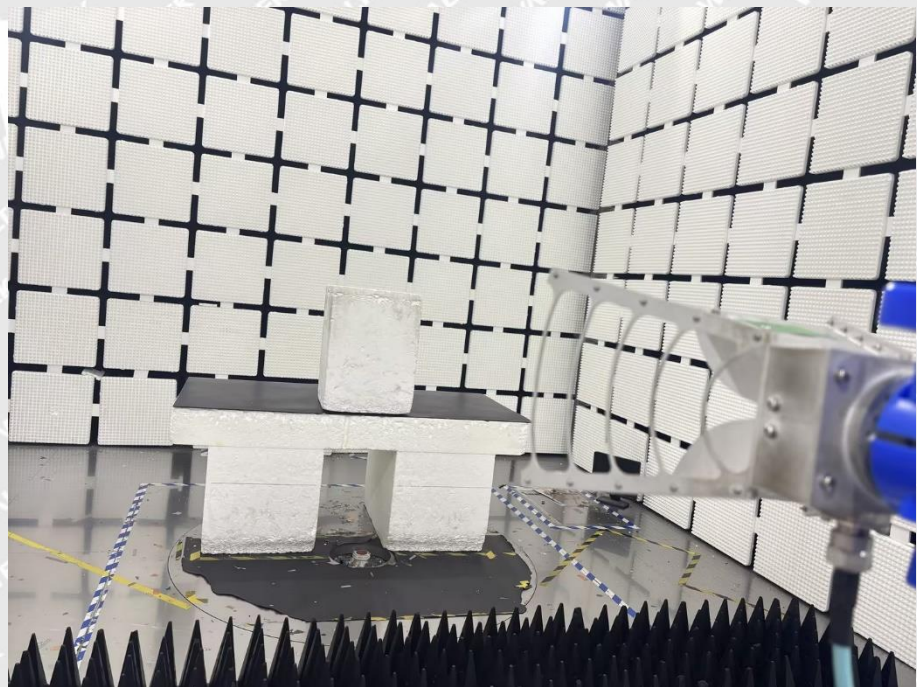




LE

**Spurious Emission
Test Setup
(Below 1GHz)**



**Spurious Emission
Test Setup (Above
1GHz)**

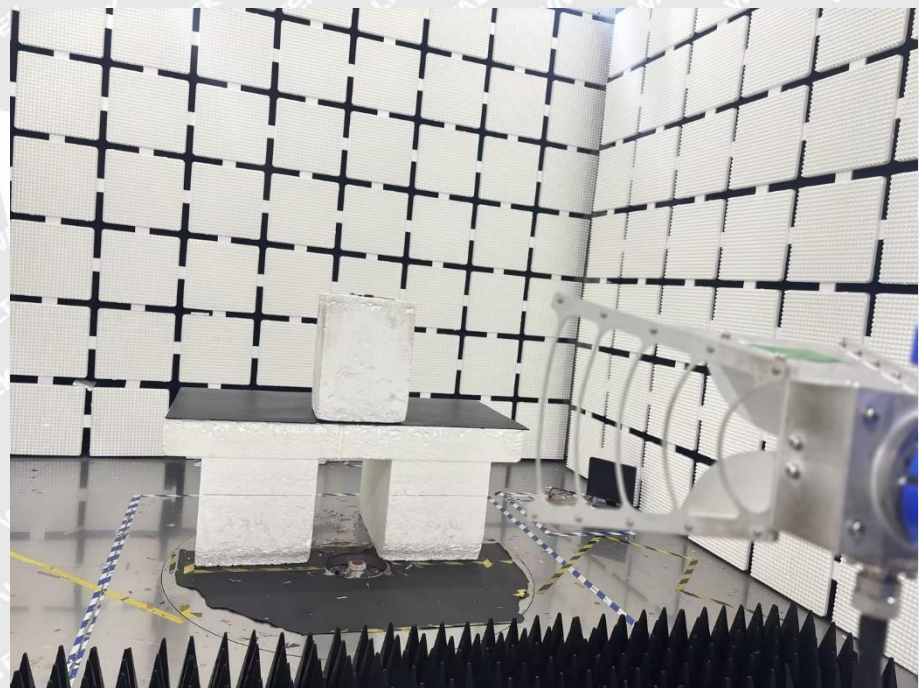

***** END OF REPORT *****