


GPS locator operation guide



功能简介：
IGPS+WIFI+LBS+AGPS定位，远程拾音，远程录音，声控回拨，声控录音，实时追踪，历史轨迹，震动防盗报警，电子围栏，内置强磁，多种省电模式，低电报警，远程开关机，AAP+电脑端+短信操作。等等。注：根据设备型号版本略有差别。

1.产品及APP简介:
1.支持多地图选择: 谷歌地图, 高德地图, 微软地图, OSM地图, 等。支持多国地区语言选择: 英语, 法语, 德语, 俄语, 阿拉伯语, 中文, 等104种语言。电量显示, 设备状态, 卫星地图, 街景地图, 导航, 行驶轨迹回放, 多设备管理操作, 公司及企业批量操作管理, 等等。

1. 选择GSM网络卡或物联网NANO SIM卡(不支持CDMA电信卡)。GSM卡需要开通GPRS功能。短信功能和来电显示功能。
2. 开机：无按键的设备插上SIM卡通电自动开机，红灯慢闪30秒后上线。有开关机按键的设备长按开关机键3秒开机。
3. 关机：有开关机按键的设备长按开关机键6秒关机。无按键的拔掉SIM卡30秒自动关机红色熄灭。

圖置式卡槽 下壓卡式卡槽 直插卡式卡槽

[illegible]

6. 故障自检:

(单灯设备：插卡、

（双灯设备：指：本、开机后第一指示灯亮长亮灯，然后第二指示灯亮红灯，第二指示灯亮起后保持该设备GSM信号，搜索成功后第三指示灯亮红灯GSM信号搜索成功，网络连接成功，设备准备就绪已接入正常操作状态，1秒钟后指示灯熄灭）

（多灯设备：指：本、开机后第一指示灯亮长亮灯，然后第二指示灯亮红灯保持该设备GSM信号，搜索成功后第一第二指示灯亮长，第三指示灯亮红灯GSM信号搜索成功，网络连接成功，设备准备就绪已接入正常操作状态，1秒钟后第二第三指示灯自动熄灭。

第一指示灯亮长

2. 异常处理方法.

1. 设备插卡开机后指示灯亮不能工作：（设备无电，需充电后再次使用或设备故障请联系系统商）

2. 设备插卡开机后指示灯亮但不能正常工作：（请检查你的SIM卡是否正确插入，确保SIM卡没有设置密码）（GSM卡是否开通GPRS功能、短信功能和来电显示功能）（本地地区是否有2G通讯为基础的通讯基站）（设备APN是否与本地区APN一致）（设备所在地通讯信号是否正常，是否在通讯盲区）

3. 更多异常问题处理方法请联系系统商。

Please read the operation guide carefully before installation and use so that you can obtain the correct installation method and use method for fast and accurate operation.

1. Function introduction;
1GPS+WiFi+LBS+AGPS positioning, remote sound pickup, remote recording, vocalized call, voice recording, real-time tracking, historical track, vibration anti-theft alarm, electronic fence, built-in strong magnetic, a variety of power saving modes, low power alarm, remote switching, AAP+ computer terminal + SMS operation. And so on. Note: Slightly different according to the device model and version.

7. Support multiple map options. Google map, AutoNavi map, Microsoft map, Com map, etc. Support multi-national regional language selection: English, French, German, Russian, Arabic, Chinese, 104 languages. Power display, equipment status, satellite map, street View map, navigation, driving track playback, multi-equipment management operation, batch operation management of companies and enterprises. And so on.

1. Select a GSM network card or NANO SIM card of the Internet of Things (CDMA card is not supported). The GSM card must be enabled with the GPRS function, SMS function and caller id display function. 2. Power on: the device without buttons will automatically power on after plugging in the SIM card electricity, and the red light will flash slowly for 30 seconds. Press the on/off button for 3 seconds to start the device. 3. Shutdown: The device with the on/off button long press the on/off button for 6 seconds to shut down, and the device without the button unplug the SIM card for 30 seconds to automatically shut down red and go out.




4.APP platform login operation:

The 15-digit bar code pasted on the device is the account number and IMEI number, and the original password is 123456.



4. Functions of the main page of APP:

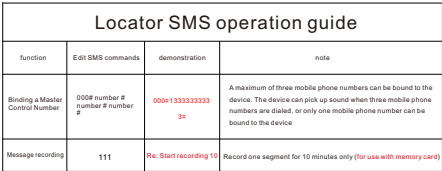[illegible]

6. Fault self-test:

(Single-indicator de

GSM signals. After the search succeeds, the indicator blinks at short intervals. It goes off automatically after 1 minute.)
 (Dual-indicator device: insert the card, and the first indicator turns on after the device is powered on, and then the first indicator turns off and the second indicator turns on and blinks slowly read the card search for GSM signal, and the second indicator turns off after the search succeeds. GSM signal search succeeds, the second indicator continues to blink, and the device is ready. 1 minute later, the indicator automatically goes off.)
 (Multi-indicator device: insert the card, and the first indicator keeps on when the card is powered on. Then the second and third indicators blink slowly read the card to search for GSM signals. After the search succeeds, the first and second indicators keep on, and the third indicator blinks slowly. After 1 minute, the second and third indicators will automatically turn off, and the first indicator will keep on.)

2. Exception handling methods.

1. After the device card is turned on, the indicator light is not on and cannot work : (the device has no power, so please contact the dealer after recharging or if the device is faulty)
2. The indicator lights up after the device is powered on and cannot work normally: (Please check whether your SIM card is properly inserted and no password is set on the SIM card) (Whether the GSM card is enabled with GPRS function, SMS function and caller id display function) (Whether there is 2G communication base station in the area) (whether the APN of the device is consistent with that of the local area) (Whether the communication signal of the area where the device is located is normal. Is it in the dead zone?)
3. For more troubleshooting methods, contact the dealer.