



SAR Test Report

For

Applicant Name: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO., LTD
202, Building A2, Silicon Valley Power Intelligent Terminal
Address: Industrial Park, No. 20, Dafu Industrial Zone, Kukeng Community,
Guanlan Street, Longhua District, Shenzhen, China
EUT Name: Smart Phone
Brand Name: OUKITEL
Model Number: WP32
Series Model Number: Refer to section 2

Issued By

Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park,
Address: Tantou Community, Songgang Street, Bao'an District, Shenzhen,
China

Report Number: BTF230913R01201
Test Standards: EN 50566: 2017 EN 50360: 2017 EN 62479: 2010
EN 50663: 2017 IEC/IEEE 62209-1528: 2020

Test Conclusion: Pass
Test Date: 2023-09-20 to 2023-09-22
Date of Issue: 2023-09-25

Prepared By: *Monica Zhou*
Monica Zhou / Project Engineer
Date: 2023-09-25

Approved By: *Ryan.CJ*
Ryan.CJ / EMC Manager
Date: 2023-09-25



Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2023-09-25	Original
<i>Note:</i>		<i>Once the revision has been made, then previous versions reports are invalid.</i>

Table of Contents

1. Introduction	4
1.1 Identification of Testing Laboratory	4
1.2 Identification of the Responsible Testing Location	4
1.3 Laboratory Condition	4
1.4 Announcement	4
2. Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Equipment under Test Ancillary Equipment	5
2.6 Technical Information	5
3. Summary of Test Results	7
3.1 Test Standards	7
3.2 Device Category and SAR Limit	7
3.3 Test Result Summary	8
3.4 Test Uncertainty	9
4. Measurement System	11
4.1 Specific Absorption Rate (SAR) Definition	11
4.2 MVG SAR System	11
5. System Verification	16
5.1 Purpose of System Check	16
5.2 System Check Setup	16
6. Test Position Configurations	16
6.1 Head Position	16
6.2 Body Position	18
6.3 Limb-worn device	18
7. Measurement Procedure	19
7.1 Measurement Process Diagram	19
8. Conducted RF Output Power	23
8.1 GSM	23
8.2 WCDMA	24
8.3 LTE	25
8.4 Wifi	32
8.5 Bluetooth	33
9. Test Result	34
2G	34
3G	35
4G	36
WIFI	38
10. Simultaneous Transmission	40
10.1 Sum SAR of Simultaneous Transmission	41
11. Test Equipment List	42
ANNEX A Simulating Liquid Verification Result	43
ANNEX B System Check Result	43
ANNEX C Test Data	58
ANNEX D SAR Test Setup Photos	130
ANNEX E EUT External and Internal Photos	131
ANNEX F Calibration Information	131

1. Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Test Location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Description:	All measurement facilities used to collect the measurement data are located at F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

1.3 Laboratory Condition

Ambient Temperature:	21°C to 25°C
Ambient Relative Humidity:	48% to 59%
Ambient Pressure:	100 kPa to 102 kPa

1.4 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2. Product Information

2.1 Application Information

Company Name:	SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO., LTD
Address:	202, Building A2, Silicon Valley Power Intelligent Terminal Industrial Park, No. 20, Dafu Industrial Zone, Kukeng Community, Guanlan Street, Longhua District, Shenzhen, China

2.2 Manufacturer Information

Company Name:	SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO., LTD
Address:	202, Building A2, Silicon Valley Power Intelligent Terminal Industrial Park, No. 20, Dafu Industrial Zone, Kukeng Community, Guanlan Street, Longhua District, Shenzhen, China

2.3 Factory Information

Company Name:	SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO., LTD
Address:	202, Building A2, Silicon Valley Power Intelligent Terminal Industrial Park, No. 20, Dafu Industrial Zone, Kukeng Community, Guanlan Street, Longhua District, Shenzhen, China

2.4 General Description of Equipment under Test (EUT)

EUT Name:	Smart Phone
Under Test Model Name:	WP32
Series Model Name	WP32 S, WP32 Pro, WP32 TITAN
Description of Model name differentiation	Only the model name is different, others are the same.
Hardware Version	SC6012_MB_V1.1.0
Software and Firmware Version	OUKITEK_WP32_EEA_V04


2.5 Equipment under Test Ancillary Equipment

Ancillary Equipment 1	Rechargeable Battery	
	Capacity	6300mAh
	Rated Voltage	3.87V

2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EGPRS 900/1800 MHz 3G Network WCDMA/HSDPA/HSUPA Band 1/8 4G Network FDD LTE Band 1/3/7/8/20 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80) BT (EDR+BLE)
-----------------------------------	---

Antenna Information:

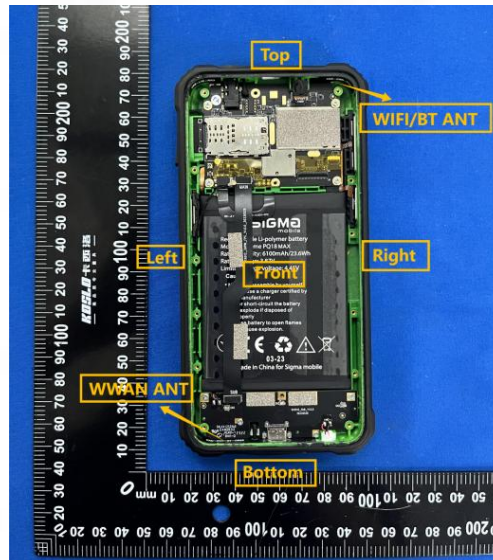

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	GSM, WCDMA, LTE, WLAN, Bluetooth		
Frequency Range	GSM 900	Tx: 880 MHz ~ 915 MHz	Rx: 925 MHz ~ 960 MHz
	GSM 1800	Tx: 1710 MHz ~ 1785 MHz	Rx: 1805 MHz ~ 1880 MHz
	WCDMA band 1	Tx: 1920 MHz ~ 1980 MHz	Rx: 2110 MHz ~ 2170 MHz
	WCDMA band 8	Tx: 880 MHz ~ 915 MHz	Rx: 925 MHz ~ 960 MHz
	LTE Band 1	Tx: 1920 MHz ~ 1980 MHz	Rx: 2110 MHz ~ 2170 MHz
	LTE Band 3	Tx: 1710 MHz ~ 1785 MHz	Rx: 1805 MHz ~ 1880 MHz
	LTE Band 7	Tx: 2500 MHz ~ 2570 MHz	Rx: 2620 MHz ~ 2690 MHz
	LTE Band 8	Tx: 880 MHz ~ 915 MHz	Rx: 925 MHz ~ 960 MHz
	LTE Band 20	Tx: 832 MHz ~ 862 MHz	Rx: 791 MHz ~ 821 MHz
	802.11b/g/n(HT20)	2412 MHz ~ 2472 MHz	
	802.11n(HT40)	2422 MHz ~ 2462 MHz	
	802.11a 802.11n(HT20/40) 802.11ac(VHT20/40/80)	5150 MHz ~ 5250 MHz 5470 MHz ~ 5725 MHz	
	Bluetooth	2402 MHz ~ 2480 MHz	
Antenna Type	WWAN: FPC Antenna WLAN: FPC Antenna BT: FPC Antenna		
Hotspot Function	Support		
Power Reduction	Not Support		
Exposure Category	General Population/Uncontrolled exposure		
EUT Stage	Portable Device		
Product	Type		
	☐ Production unit	☒ Identical prototype	

3. Summary of Test Results

3.1 Test Standards

No.	Identity	Document Title
1	EN 50566: 2017	Product standard to demonstrate the compliance of wireless communication devices with the basic restrictions and exposure limit values related to human exposure to electromagnetic fields in the frequency range from 30 MHz to 6 GHz: hand-held and body mounted devices in close proximity to the human body (30 MHz - 6 GHz)
2	EN 50360: 2017	Product standard to demonstrate the compliance of wireless communication devices, with the basic restrictions and exposure limit values related to human exposure to electromagnetic fields in the frequency range from 300 MHz to 6 GHz: devices used next to the ear
3	EN 62479: 2010	Assessment of the compliance of low power electronic and electrical equipment with the basic restrictions related to human exposure to electromagnetic fields (10 MHz to 300 GHz)
4	EN 50663: 2017	Generic standard for assessment of low power electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (10 MHz- 300 GHz)
5	IEC/IEEE 62209-1528: 2020	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
6	1999/519/EC	Council Recommendation of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user

According to 1999/519/EC the limit for General Population/ Uncontrolled exposure should be applied for this device, it is 2.0 W/kg as averaged over any 10 gram of tissue.

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	2.0	10.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment- related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

<Highest Scaled Standalone SAR>

Frequency Band		Maximum Scaled SAR (W/kg) -10 g		
		Head SAR (0mm gap)	Body SAR (5mm gap)	Limbs SAR (0mm gap)
WWAN	GSM 900	0.114	0.232	0.516
	GSM 1800	0.130	0.349	0.620
	WCDMA Band 1	0.134	0.304	0.421
	WCDMA Band 8	0.132	0.287	0.593
	LTE FDD Band 1	0.330	0.495	0.639
	LTE FDD Band 3	0.319	0.574	0.879
	LTE FDD Band 7	0.125	0.126	0.259
	LTE FDD Band 8	0.103	0.292	0.540
	LTE FDD Band 20	0.106	0.243	0.520
WLAN	2.4G Wifi	0.382	0.240	0.326
	5.2G Wifi	0.261	0.133	0.091
	5.6G Wifi	0.402	0.348	0.165
Limits (W/kg)		2.0	2.0	4.0
Test Verdict		Pass	Pass	Pass

<Maximum Scaled Simultaneous SAR>

Exposure Position	Simultaneous Configuration	Maximum Scaled Simultaneous Transmission SAR (W/kg)	Limit (W/kg)	Verdict
Head 10g SAR (0mm Gap)	LTE Band 1 + 2.4G WIFI	0.712	2.0	Pass
Body 10g SAR (5mm Gap)	LTE Band 3 + 2.4G WIFI	0.814	2.0	Pass

3.4 Test Uncertainty

3.4.1 Measurement uncertainty evaluation for SAR test

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEC/IEEE 62209-1528: 2020. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement uncertainty evaluation for SAR test (300MHz to 6GHz)

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Cl (1g)	Cl (10g)	1g Ui (+-%)	10 g Ui (+-%)	Vi veff
Measurement System								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	√3	√0.5	√0.5	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	√3	√0.5	√0.5	2.41	2.41	∞
Boundary effect	1.0	R	√3	1	1	0.58	0.58	∞
Linearity	4.7	R	√3	1	1	2.71	2.71	∞
System detection limits	1.0	R	√3	1	1	0.58	0.58	∞
Modulation response	3.0	R	√3	1	1	1.73	1.73	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	√3	1	1	0.00	0.00	∞
Integration Time	1.4	R	√3	1	1	0.81	0.81	∞
RF ambient Conditions - Noise	3.0	R	√3	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3.0	R	√3	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	√3	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	√3	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	√3	1	1	1.33	1.33	∞
Test sample Related								
Test sample positioning	2.6	N	1	1	1	2.60	2.60	11
Device Holder Uncertainty	3.0	N	1	1	1	3.00	3.00	7
Output power Variation - SAR drift measurement	5.0	R	√3	1	1	2.89	2.89	∞
SAR scaling	2.0	R	√3	1	1	1.15	1.15	∞
Phantom and Tissue Parameters								
Phantom Shell Uncertainty - Shape, Thickness and Permittivity	4	R	√3	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation in permittivity and conductivity	2.0	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity measurement	4.0	N	1	0.78	0.71	3.12	2.84	5
Liquid permittivity measurement	5.0	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity - Temperature Uncertainty	2.5	R	√3	0.78	0.71	1.13	1.02	∞
Liquid permittivity - Temperature Uncertainty	2.5	R	√3	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty		RSS				10.47	10.34	
Expanded Uncertainty (95% Confidence interval)		k				20.95	20.69	

3.4.2 Measurement uncertainty evaluation for system check

This measurement uncertainty budget is suggested by IEC/IEEE 62209-1528: 2020. The breakdown of the individual uncertainties is as follows:

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10 g)	1g Ui (+-%)	10 g Ui (+-%)	Vi veff
Measurement System								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	1	1	2.02	2.02	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
System detection limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	0	N	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient Conditions - Noise	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Dipole								
Deviation of experimental source from numerical source	5	N	1	1	1	5.00	5.00	∞
Input Power and SAR drift measurement	0.5	R	$\sqrt{3}$	1	1	0.29	0.29	∞
Dipole Axis to Liquid Dist.	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and Tissue Parameters								
Phantom Shell Uncertainty - Shape, Thickness and Permittivity	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation in permittivity and conductivity	2.0	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity measurement	4	N	1	0.78	0.71	3.12	2.84	5
Liquid permittivity measurement	5.0	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity - Temperature Uncertainty	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid permittivity - Temperature Uncertainty	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty		RSS				10.16	10.03	
Expanded Uncertainty (95% Confidence interval)		k				20.32	20.06	

4.2.2 Robot



A standard high precision 6-axis robot (Denso) with teaches pendant with Scanning System

- It must be able to scan all the volume of the phantom to evaluate the tridimensional distribution of SAR.
- Must be able to set the probe orthogonal of the surface of the phantom ($\pm 30^\circ$).
- Detects stresses on the probe and stop itself if necessary to keep the integrity of the probe.

4.2.3 E-Field Probe

For the measurements, the Specific Dosimetric SSE2 E-Field Probe with following specifications is used:

- Dynamic range: 0.01-100 W/kg
- Tip diameter: 2mm for SSE2
- Distance between probe tip and sensor centre: 1mm for SSE2
- Distance between sensor centre and the inner phantom surface: 2mm for $f \geq 4\text{GHz}$.
- Probe linearity: $<0.25\text{dB}$.
- Axial Isotropy: $<0.25\text{dB}$.
- Spherical Isotropy: $<0.50\text{dB}$.
- Calibration range: 150 to 6000 MHz for head & body simulating liquid
- Angle between probe axis (evaluation axis) and surface normal line: less than 20° .



4.2.4 Phantoms

SAM Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The probe scanning of the E-Field is done in the 2 halves of the normalized head. The normalized shape of the phantom corresponds to the dimensions of 90% of an adult head size. It enables the dosimetric evaluation of left and right-hand phone usage and includes an additional flat phantom part for the simplified body performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



SAM Phantom

The thickness of the phantom amounts to 2 mm±0.2 mm. The materials for the phantom do not affect the radiation of the device under test (DUT) : $\epsilon_r' < 5$
The head is filled with tissue simulating liquid. The hand do not have to be modeled.

TWIN SAM phantom

	Mechanical	Electrical
Overall thickness	2±0.2 mm(except ear area)	Relative permittivity 3.4
Dimensions	1000 mm(L) x 500 mm(W) x 200 mm(H)	Loss tangent 0.02
Maximum volume	27 L	
Material	Fiberglass based	

ELLIPTICAL Phantom

The phantom is for Body performance check filled with tissue-equivalent liquid to a depth of at least 150 mm, whose shell material is resistant to damage or reaction with tissue-equivalent liquid chemicals.




LI Phantom

The shape of the phantom is an ellipse with length 600mm±5mm and width 400mm±5mm. The phantom shell is made of low-loss and low-permittivity material, having loss tangent $\tan \delta \leq 0.05$ and relative permittivity: $\epsilon_r' \leq 5$ for $f \leq 3$ GHz
 $3 \leq \epsilon_r' \leq 5$ for $f > 3$ GHz
The thickness of the bottom-wall of the flat phantom is 2.0 mm with a tolerance of ± 0.2 mm.

Technical & mechanical characteristics

Shell thickness	2 mm ± 0.2 mm
Filling volume	25 L
Dimensions	600 mm x 400 mm x 200mm
Permittivity	4.4
Loss tangent	0.017

4.2.5 Device Holder

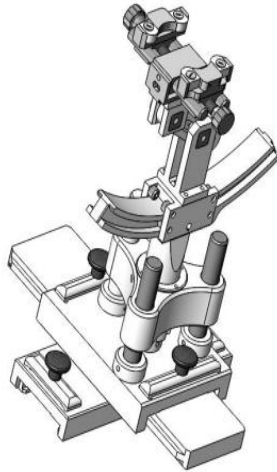

System Material	Permittivity	Loss tangent
Delrin	3.7	0.005

(The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.)

System Material	Permittivity	Loss tangent
PMMA	2.9	0.028


4.2.6 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

Head Liquid Depth



Body Liquid Depth

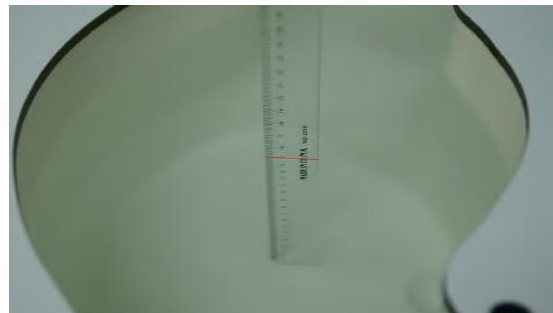

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.


Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water	DGBE (%)			Salt (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40			/		5.30	49.00
5800	78.50	21.40			0.1		6.00	48.20

5. System Verification

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. The setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup

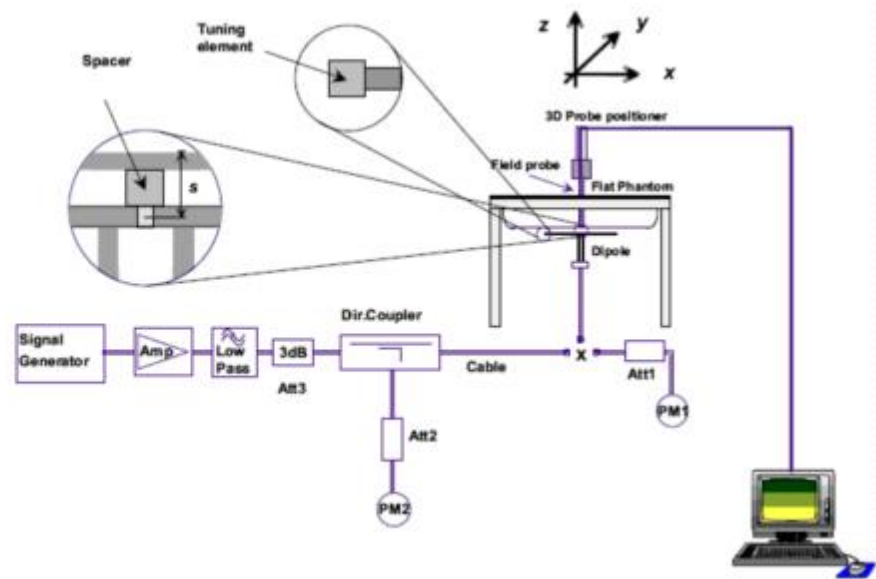

6. Test Position Configurations

According to IEC/IEEE 62209-1528: 2020, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.


6.1 Head Position

The wireless device define two imaginary lines on the handset, the vertical centreline and the horizontal line, for the handset in vertical orientation as shown in Figures 5a and 5b.


The vertical centreline passes through two points on the front side of the handset: the midpoint of the width W_t of the handset at the level of the acoustic output (point A in Figures 5a and 5b), and the midpoint of the width W_b of the bottom of the handset (point B).

The horizontal line is perpendicular to the vertical centreline and passes through the centre of the acoustic output (see Figures 5a and 5b). The two lines intersect at point A.

Note that for many handsets, point A coincides with the centre of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset (see Figure 5b), especially for clam-shell handsets, handsets with flip cover pieces, and other irregularly shaped handsets.

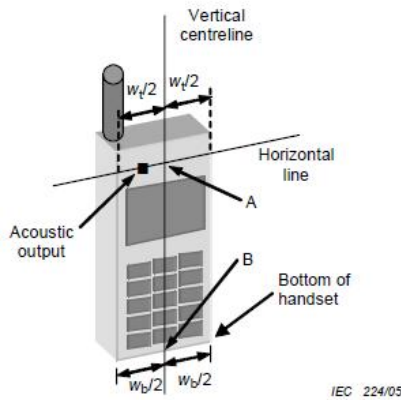


Figures 5a

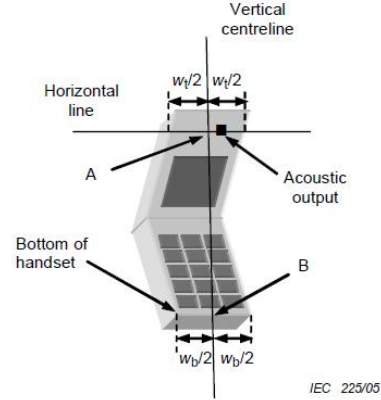

Figures 5b


W_t	Width of the handset at the level of the acoustic
W_b	Width of the bottom of the handset
A	Midpoint of the width w_t of the handset at the level of the acoustic output
B	Midpoint of the width w_b of the bottom of the handset

Cheek position

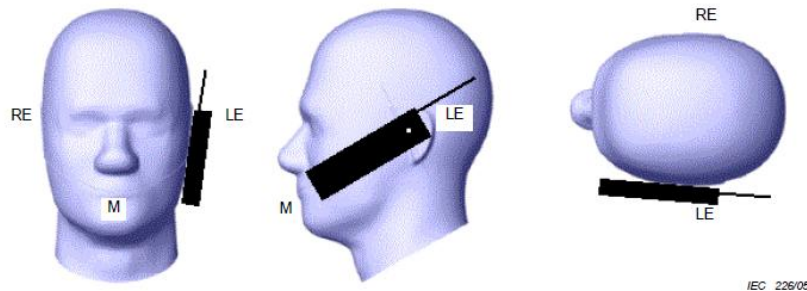

Cheek position of the wireless device on the left side of SAM

Tilt position

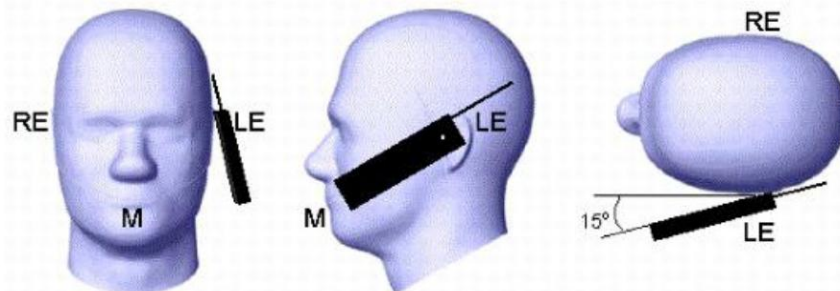


Tilt position of the wireless device on the left side of SAM

6.2 Body Position

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

If the user instructions provided by the manufacturer specify intended use with a carry accessory (belt-clip, holster, carry-case or similar), the device shall be placed as intended in that carry accessory and the carry accessory shall be placed in the intended orientation against the flat phantom.

If the intended use is not specified in the user instructions, the device shall be tested with all its surfaces directly against the flat phantom. The details of the device position, especially contact points to the surface of the phantom, shall be documented in the measurement report. If testing for one or more surfaces is omitted, this shall be documented with an associated rationale in the measurement report.

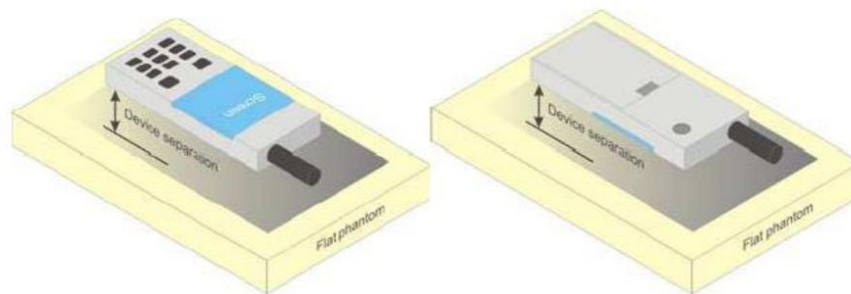

Test positions for body-worn devices

6.3 Limb-worn device

A limb-worn device is a unit whose intended use includes being strapped to the arm or leg of the user while transmitting (except in idle mode). It is similar to a body-worn device. Therefore, the test positions of 6.1.4.4 also apply. The strap shall be opened so that it is divided into two parts as shown in Figure 9. The device shall be positioned directly against the phantom surface with the strap straightened as much as possible and the back of the device towards the phantom.

If the strap cannot normally be opened to allow placing in direct contact with the phantom surface, it may be necessary to break the strap of the device but ensuring to not damage the antenna.


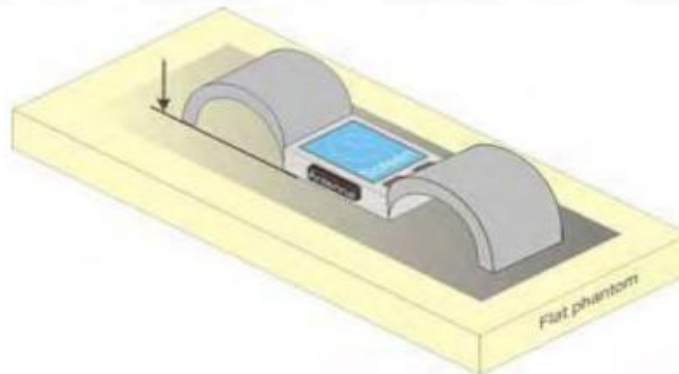


Figure1 Test position for limb-worn devices

7. Measurement Procedure

7.1 Measurement Process Diagram

Body SAR

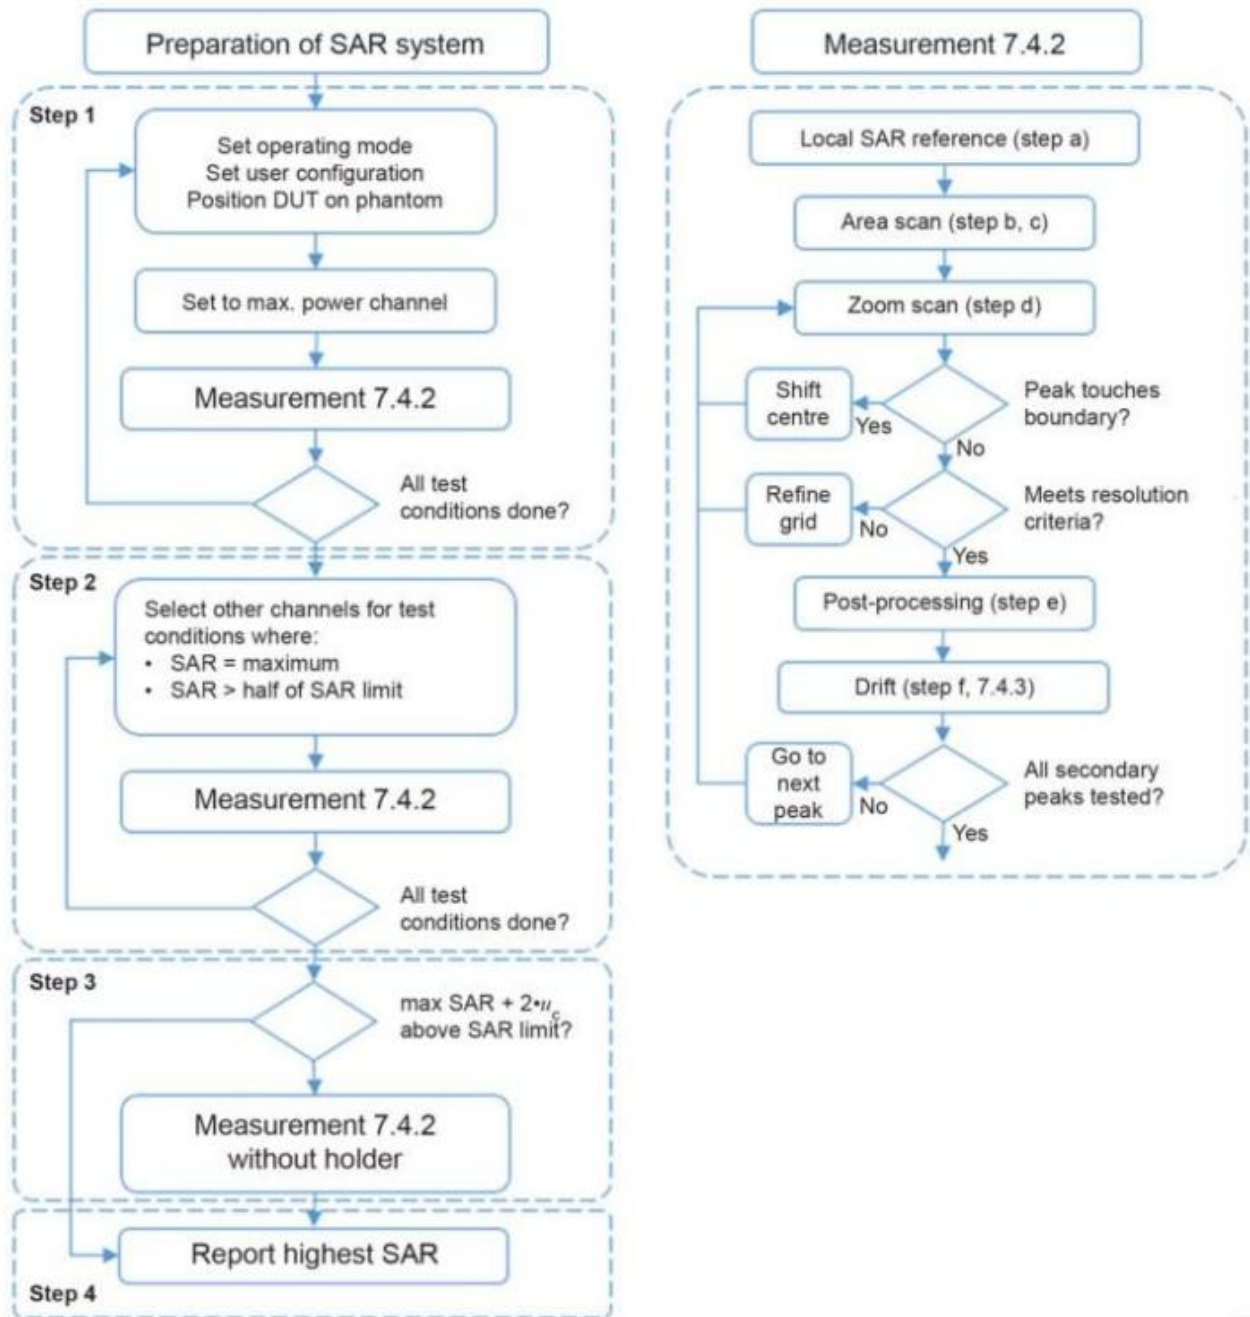

IEC

7.2 Measurement Procedure

The following procedure shall be performed for each of the test conditions:

- a. Measure the local SAR at a test point within 8 mm of the phantom inner surface that is closest to the DUT. The test point can be close to the ear;
- b. Measure the SAR distribution within the phantom (area scan procedure). The SAR distribution is scanned along the inside surface of one side of the phantom head, at least for an area larger than the projection of the handset and antenna. The spatial grid step shall be less than 20 mm. The resolution accuracy can also be tested using the reference functions of 7.2.4. If surface scanning is used, then the distance between the geometrical center of the probe dipoles and the inner surface of the phantom shall be 8,0 mm or less ($\pm 1,0$ mm). At all measurement points, the angle of the probe with respect to the line normal to the surface is recommended but not required to be less than 30° ;
- c. From the scanned SAR distribution, identify the position of the maximum SAR value, as well as the positions of any local maxima with SAR values within 2 dB of the maximum value that are not within the zoom-scan volume; Additional peaks shall be measured only when the primary peak is within 2 dB of the SAR limit (i.e., 1 W/kg for a 1,6 W/kg 1 g limit, or 1,26 W/kg for a 2 W/kg 10 g limit). This is consistent with the 2 dB threshold already stated;
- d. Measure SAR with a grid step of 8 mm or less in a volume with a minimum size of 30 mm by 30 mm and 30 mm in depth (zoom scan procedure). The grid step in the vertical direction shall be 5 mm or less (see C.3.3). Separate grids shall be centred on each of the local SAR maxima found in step c). Uncertainties due to field distortion between the media boundary and the dielectric cover/case of the probe should also be minimized, which is achieved if the distance between the phantom surface and physical tip of the probe is larger than half of the probe tip diameter. Other methods may utilize correction procedures for these boundary effects that enable high precision measurements closer than half the probe diameter. At all measurement points, the angle of the probe with respect to the line normal to the surface is recommended but not required to be less than 30° ;
- e. Use interpolation and extrapolation procedures defined described in IEC/IEEE 62209-1528: 2020, Annex C to determine the local SAR values at the spatial resolution needed for mass averaging;
- f. The local SAR should be measured at exactly the same location as used in a). The absolute value of the measurement drift, i.e., the difference between the SAR measured in f) and a), shall be recorded in the uncertainty budget. It is recommended that the drift be kept within $\pm 5\%$. If this is not possible, even with repeat testing, additional information, e.g., data for local SAR versus time, should be used to demonstrate that the output power applied during the test is appropriate for testing the device. Power reference measurements can be taken after each zoom scan, if more than one zoom scan is needed. However, the drift should always be recorded as the difference between the device initial state with fully charged battery and all subsequent measurements using that battery.

7.3 Area & Zoom Scan Procedure

For handsets operating above 300 MHz evaluated with the homogeneous head model, the SAR distribution is measured on a two-dimensional coarse grid at a fixed separation distance of less than 8 mm from the surface of the phantom shell. The scan region should cover all areas that are exposed and encompassed by the projection of the handset. In order to maintain a fixed distance of less than 8 mm from the surface to within ± 1 mm, as required by the measurement protocol, the exact shape and dimensions of the phantom inner surface shall be known, pre-calibrated, or preferably detected during the SAR measurement with a mechanical or optical surface-detection mechanism that meets the probe positioning requirements. This evaluation technique determines the maximum spacing between the grid points, i.e., it has been found that a 20 mm $\times$ 20 mm grid is usually sufficient to achieve the required precision if two staggered one-dimensional cubic splines [55] are used to locate the maximum SAR location;

The maximum local SAR is evaluated on an interpolated grid at 1 mm to 2 mm resolution during the zoom scan. A zoom-scan volume of 32 mm $\times$ 32 mm $\times$ 30 mm, consisting of 5 $\times$ 5 $\times$ 7 points with the centre at the peak SAR location determined during the area scan, can be chosen. Although a scan resolution of 8 mm is sufficient for directions parallel to the surface, 5 mm is needed in the direction normal to the surface of the phantom to achieve the required extrapolation accuracy.

7.4 Test Reduction Procedure

IEC/IEEE 62209-1528: 2020 provides a reproducible and conservative measurement methodology to measure the SAR of handheld and body-mounted wireless communication devices, which can be used to determine compliance of such equipment with the human exposure basic restrictions. Clearly, there is a point where the power generated by wireless devices is at such a level that it is incapable of exceeding the basic restriction. Measurements following the procedure of IEC/IEEE 62209-1528: 2020 might then not be necessary.

There may be DUTs that generate power at such a level that it is incapable of exceeding the basic restriction of the respective exposure guideline. That level can be determined by a variety of techniques which do not require the actual exposure level measurements. Determining this level would speed up the process without compromising technical accuracy. EN 62479 proposes techniques for such purposes and may be applied.

7.4.1 Example 1

The maximum power level, $P_{\max, m}$, that can be transmitted by a device before the SAR averaged over a mass, m , exceeds a given limit, $SAR_{\lim}$ can be defined. Any device transmitting at power levels below $P_{\max, m}$ can then be excluded from SAR testing. The lowest possible value for $P_{\max, m}$ is:

$$P_{\max, m} = SAR_{\lim} \times m$$

For example, an exposure limit of $SAR_{\lim} = 2$ W/kg and an averaging mass of $m = 10$ g give a total transmitting power of $P_{\max, m} = 20$ mW that would conservatively meet this exposure limit. For an exposure limit of $SAR_{\lim} = 1.6$ W/kg and an averaging mass of $m = 1$ g, a total transmitting power of $P_{\max, m} = 1.6$ mW would conservatively meet the exposure limit.

This assessment is based on the unrealistic assumption that all of the conducted power is radiated by the antenna and then absorbed in the body (i.e. none of the power is transmitted for communication) and all of the absorbed power is concentrated in the averaging mass.

EN 62479 gives less restrictive power thresholds that may be applied in certain cases.

7.4.2 Example 2

Simultaneous multi-band transmission means that the device can transmit multiple transmission modes at the same time, e.g., a WCDMA transmission at 2GHz and a WLAN transmission at 2.45GHz. The time-averaged output power of a secondary transmitter (i.e. the lower power transmitter, e.g. Bluetooth, WLAN) may be much lower than that of the primary transmitter can be excluded from SAR testing when used alone. However, when the primary and secondary transmitter are used together, the SAR limit may still be exceeded. A means of determining the threshold power for the secondary transmitter that allows it to be excluded from SAR testing is needed. One way of determining the threshold power level available to the secondary transmitter ($P_{\text{available}}$) is to calculate it from the measured peak spatial-average SAR of the primary transmitter (SAR_1) according to the equation:

$$P_{\text{available}} = P_{\text{th},m} \times (\text{SAR}_{\text{lim}} - \text{SAR}_1) / \text{SAR}_{\text{lim}}$$

Where:

$P_{\text{th},m}$ is the threshold exclusion power level taken from EN 62479 Annex B for the frequency of the secondary transmitter at the separation distance used in the testing.

If the output power of the secondary transmitter is less than $P_{\text{available}}$, SAR measurement for the secondary transmitter is not necessary.

The above formula can be easily generalized to the case where more than two transmitters are communicating simultaneously. If there are N simultaneous transmitters and the peak spatial-average SAR of the first N-1 transmitter are known (SAR_i), then the threshold power level available to the Nth transmitter can be found from

$$P_{\text{available}} = P_{\text{max},m} \times (\text{SAR}_{\text{lim}} - \sum_{i=1}^{N-1} \text{SAR}_i) / \text{SAR}_{\text{lim}}$$

Alternatively, $P_{\text{th},m}$ can be replaced by $P_{\text{max},m}$, which is an easier approach but leads to more restrictive power threshold.

8. Conducted RF Output Power

8.1 GSM

Mode: GSM900		Maximum Tune-up(dBm)	Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
			CH975	CH62	CH124		CH975	CH62	CH124
			880.2MHz	902.4MHz	914.8MHz		880.2MHz	902.4MHz	914.8MHz
GSM		33.00	32.36	32.85	32.92	-9.03	23.33	23.82	23.89
GPRS (GMSK)	1Tx slot	27.00	26.30	26.44	26.51	-9.03	17.27	17.41	17.48
	2Tx slots	26.50	26.23	26.39	26.46	-6.02	20.21	20.37	20.44
	3Tx slots	24.00	23.71	23.84	23.90	-4.26	19.45	19.58	19.64
	4Tx slots	24.00	23.33	23.45	23.51	-3.01	20.32	20.44	20.50
EGPRS (8PSK)	1Tx slot	25.50	25.38	25.28	25.17	-9.03	16.35	16.25	16.14
	2Tx slots	24.50	24.21	24.17	24.07	-6.02	18.19	18.15	18.05
	3Tx slots	23.00	22.61	22.52	22.42	-4.26	18.35	18.26	18.16
	4Tx slots	22.00	21.87	21.79	21.69	-3.01	18.86	18.78	18.68
Mode: GSM1800		Maximum Tune-up(dBm)	Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
			CH512	CH699	CH885		CH512	CH699	CH885
			1710.2MHz	1747.6MHz	1784.8MHz		1710.2MHz	1747.6MHz	1784.8MHz
GSM		30.00	28.53	29.39	29.80	-9.03	19.50	20.36	20.77
GPRS (GMSK)	1Tx slot	23.50	22.45	23.07	23.01	-9.03	13.42	14.04	13.98
	2Tx slots	23.50	22.37	23.02	22.96	-6.02	16.35	17.00	16.94
	3Tx slots	21.00	20.24	20.80	20.75	-4.26	15.98	16.54	16.49
	4Tx slots	20.50	19.91	20.46	20.41	-3.01	16.90	17.45	17.40
EGPRS (8PSK)	1Tx slot	24.00	23.77	23.48	23.24	-9.03	14.74	14.45	14.21
	2Tx slots	23.50	23.02	22.29	22.22	-6.02	17.00	16.27	16.20
	3Tx slots	21.50	21.41	21.15	20.94	-4.26	17.15	16.89	16.68
	4Tx slots	21.00	20.72	20.47	20.26	-3.01	17.71	17.46	17.25
Note: 1) Division Factors To average the power, the division factor is as follows: 1Tx-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB 2Tx-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB 3Tx-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB 4Tx-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB									

8.2 WCDMA

Mode		Maximum Tune-up(dBm)	WCDMA Band I		
			Conducted Power (dBm)		
			CH9612	CH9750	CH9888
			1922.4MHz	1950.0MHz	1977.6MHz
RMC 12.2K		21.50	20.77	21.08	21.38
HSDPA	Subtest-1	21.50	20.55	20.86	21.15
	Subtest-2	21.50	20.53	20.84	21.13
	Subtest-3	21.50	20.46	20.77	21.06
	Subtest-4	21.50	20.43	20.73	21.03
HSUPA	Subtest-1	21.00	20.30	20.61	20.90
	Subtest-2	21.00	20.26	20.56	20.85
	Subtest-3	21.00	20.23	20.53	20.82
	Subtest-4	21.00	20.17	20.47	20.76
	Subtest-5	21.00	20.14	20.45	20.74
Mode		Maximum Tune-up(dBm)	WCDMA Band VIII		
			Conducted Power (dBm)		
			CH2712	CH2788	CH2863
			882.4MHz	897.6MHz	912.6MHz
RMC 12.2K		22.00	21.59	21.66	21.67
HSDPA	Subtest-1	21.50	21.36	21.09	21.10
	Subtest-2	21.50	21.34	21.08	21.09
	Subtest-3	21.50	21.27	21.12	21.13
	Subtest-4	21.50	21.24	20.97	20.98
HSUPA	Subtest-1	21.50	21.11	20.84	20.85
	Subtest-2	21.50	21.06	20.79	20.80
	Subtest-3	21.50	21.03	20.76	20.77
	Subtest-4	21.00	20.96	20.69	20.70
	Subtest-5	21.00	20.94	20.67	20.68

8.3 LTE

Band 1

LTE-FDD Band 1				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		18025	18300	19575
					1922.5MHz	1950MHz	1977.5MHz
5MHz	QPSK	1	0	22.50	21.46	21.85	22.17
			12	22.50	21.38	21.77	22.08
			24	22.50	21.42	21.81	22.13
		12	0	21.50	20.80	21.18	21.49
			6	21.50	20.65	21.02	21.33
			13	21.50	20.58	20.96	21.26
		25	0	21.50	20.72	21.10	21.41
	16QAM	1	0	22.00	20.91	21.29	21.60
			12	22.00	20.83	21.21	21.52
			24	22.00	20.87	21.25	21.56
		12	0	21.00	20.27	20.63	20.93
			6	21.00	20.12	20.48	20.78
			13	21.00	20.06	20.42	20.72
		25	0	21.00	20.19	20.56	20.86
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18050	18300	18550
					1925MHz	1950MHz	1975MHz
10MHz	QPSK	1	0	22.50	21.41	21.80	22.12
			24	22.50	21.32	21.71	22.03
			49	22.50	21.36	21.75	22.07
		25	0	21.50	20.75	21.12	21.43
			12	21.50	20.59	20.97	21.27
			25	21.50	20.53	20.90	21.21
		50	0	21.50	20.67	21.05	21.35
	16QAM	1	0	22.00	20.86	21.24	21.55
			24	21.50	20.78	21.15	21.46
			49	22.00	20.82	21.19	21.50
		25	0	21.00	20.21	20.58	20.88
			12	21.00	20.07	20.43	20.73
			25	21.00	20.01	20.37	20.67
		50	0	21.00	20.14	20.51	20.81

LTE-FDD Band 1				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		18075	18300	18525
					1927.5MHz	1950MHz	1972.5MHz
15MHz	QPSK	1	0	22.50	21.43	21.82	22.14
			38	22.50	21.35	21.73	22.05
			74	22.50	21.39	21.77	22.09
		38	0	21.50	20.77	21.14	21.45
			18	21.50	20.62	20.99	21.30
			37	21.50	20.55	20.93	21.23
		75	0	21.50	20.69	21.07	21.38
	16QAM	1	0	22.00	20.88	21.26	21.57
			38	21.50	20.80	21.18	21.49
			74	22.00	20.84	21.22	21.53
		38	0	21.00	20.24	20.60	20.90
			18	21.00	20.09	20.45	20.75
			37	21.00	20.03	20.39	20.69
		75	0	21.00	20.16	20.53	20.83

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18100	18300	18500
					1930MHz	1950MHz	1970MHz
20MHz	QPSK	1	0	22.50	21.51	21.90	22.22
			49	22.50	21.42	21.81	22.13
			99	22.50	21.46	21.85	22.17
		50	0	22.00	20.84	21.22	21.53
			25	21.50	20.69	21.07	21.37
			50	21.50	20.63	21.00	21.31
		100	0	21.50	20.77	21.14	21.45
	16QAM	1	0	22.00	20.96	21.34	21.65
			49	22.00	20.87	21.25	21.56
			99	22.00	20.91	21.29	21.60
		50	0	21.00	20.31	20.68	20.98
			25	21.00	20.16	20.53	20.83
			50	21.00	20.10	20.46	20.76
		100	0	21.00	20.24	20.60	20.90

Band 3

LTE-FDD Band 3				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		19207	19575	19943
					1710.7MHz	1747.5MHz	1784.3MHz
1.4MHz	QPSK	1	0	23.00	22.72	22.71	22.35
			2	23.00	22.63	22.62	22.26
			5	23.00	22.68	22.67	22.30
		3	0	22.50	22.02	22.01	21.65
			1	22.00	21.86	21.85	21.49
			3	22.00	21.79	21.78	21.43
		6	0	22.00	21.94	21.93	21.57
	16QAM	1	0	22.50	22.14	22.13	21.77
			2	22.50	22.05	22.04	21.69
			5	22.50	22.09	22.09	21.73
		3	0	21.50	21.46	21.45	21.10
			1	21.50	21.30	21.29	20.94
			3	21.50	21.23	21.22	20.88
		6	0	21.50	21.38	21.37	21.02
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19215	19575	19935
					1711.5MHz	1747.5MHz	1783.5MHz
3MHz	QPSK	1	0	23.00	22.74	22.73	22.37
			8	23.00	22.65	22.64	22.28
			14	23.00	22.70	22.69	22.32
		8	0	22.50	22.04	22.03	21.67
			4	22.00	21.88	21.87	21.51
			7	22.00	21.81	21.80	21.45
		15	0	22.00	21.96	21.95	21.59
	16QAM	1	0	22.50	22.16	22.15	21.79
			8	22.50	22.07	22.06	21.71
			14	22.50	22.11	22.10	21.75
		8	0	21.50	21.47	21.46	21.12
			4	21.50	21.32	21.31	20.96
			7	21.50	21.25	21.24	20.90
		15	0	21.50	21.40	21.39	21.04

LTE-FDD Band 3				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		19225	19575	19925
					1712.5MHz	1747.5MHz	1782.5MHz
5MHz	QPSK	1	0	23.00	22.76	22.75	22.38
			12	23.00	22.67	22.66	22.29
			24	23.00	22.71	22.70	22.33
		12	0	22.50	22.05	22.04	21.69
			6	22.00	21.89	21.88	21.53
			13	22.00	21.83	21.82	21.46
		25	0	22.00	21.97	21.96	21.61
	16QAM	1	0	22.50	22.18	22.17	21.81
			12	22.50	22.09	22.08	21.72
			24	22.50	22.13	22.12	21.76
		12	0	21.50	21.49	21.48	21.13
			6	21.50	21.33	21.32	20.98
			13	21.50	21.27	21.26	20.91
		25	0	21.50	21.41	21.40	21.05
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19250	19575	19900
					1715MHz	1747.5MHz	1780MHz
10MHz	QPSK	1	0	23.00	22.77	22.76	22.39
			24	23.00	22.68	22.67	22.30
			49	23.00	22.72	22.71	22.34
		25	0	22.50	22.06	22.05	21.70
			12	22.00	21.90	21.89	21.54
			25	22.00	21.84	21.83	21.47
		50	0	22.00	21.98	21.97	21.62
	16QAM	1	0	22.50	22.19	22.18	21.82
			24	22.50	22.10	22.09	21.73
			49	22.50	22.14	22.13	21.77
		25	0	21.50	21.50	21.49	21.14
			12	21.50	21.34	21.33	20.99
			25	21.50	21.28	21.27	20.92
		50	0	21.50	21.42	21.41	21.06

LTE-FDD Band 3				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		19275	19575	19875
					1717.5MHz	1747.5MHz	1777.5MHz
15MHz	QPSK	1	0	23.00	22.73	22.72	22.35
			38	23.00	22.64	22.63	22.26
			74	23.00	22.68	22.67	22.30
		38	0	22.50	22.03	22.02	21.66
			18	22.00	21.86	21.85	21.50
			37	22.00	21.80	21.79	21.43
		75	0	22.00	21.95	21.94	21.58
	16QAM	1	0	22.50	22.15	22.14	21.78
			38	22.50	22.06	22.05	21.69
			74	22.50	22.10	22.09	21.73
		38	0	21.50	21.46	21.45	21.10
			18	21.50	21.30	21.29	20.95
			37	21.50	21.24	21.23	20.89
		75	0	21.50	21.38	21.37	21.03

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19300	19575	19850
					1720MHz	1747.5MHz	1775MHz
20MHz	QPSK	1	0	23.00	22.80	22.79	22.42
			49	23.00	22.71	22.70	22.33
			99	23.00	22.83	22.59	22.33
		50	0	22.50	22.09	22.08	21.72
			25	22.00	21.93	21.92	21.57
			50	22.00	21.86	21.85	21.50
		100	0	22.50	22.01	22.00	21.65
	16QAM	1	0	22.50	22.22	22.21	21.85
			49	22.50	22.13	22.12	21.76
			99	22.50	22.17	22.16	21.80
		50	0	22.00	21.53	21.52	21.17
			25	21.50	21.37	21.36	21.01
			50	21.50	21.30	21.29	20.95
		100	0	21.50	21.45	21.44	21.09

Band 7

LTE-FDD Band 7				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20775	21100	21425
					2502.5MHz	2535MHz	2567.5MHz
5MHz	QPSK	1	0	21.00	20.41	20.46	20.61
			12	21.00	20.33	20.37	20.52
			24	21.00	20.36	20.41	20.56
		12	0	20.00	19.77	19.82	19.97
			6	20.00	19.63	19.68	19.82
			13	20.00	19.57	19.62	19.76
		25	0	20.00	19.70	19.75	19.89
	16QAM	1	0	20.50	19.88	19.93	20.08
			12	20.00	19.80	19.85	20.00
			24	20.50	19.84	19.89	20.04
		12	0	19.50	19.27	19.31	19.46
			6	19.50	19.13	19.17	19.31
			13	19.50	19.07	19.11	19.25
		25	0	19.50	19.20	19.24	19.39
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20800	21100	21400
					2505MHz	2535MHz	2565MHz
10MHz	QPSK	1	0	21.00	20.36	20.40	20.55
			24	20.50	20.27	20.32	20.47
			49	21.00	20.31	20.36	20.51
		25	0	20.00	19.72	19.77	19.92
			12	20.00	19.58	19.63	19.77
			25	20.00	19.52	19.57	19.71
		50	0	20.00	19.65	19.70	19.84
	16QAM	1	0	20.50	19.83	19.88	20.03
			24	20.00	19.75	19.80	19.95
			49	20.00	19.79	19.84	19.98
		25	0	19.50	19.22	19.26	19.41
			12	19.50	19.08	19.12	19.26
			25	19.50	19.02	19.07	19.21
		50	0	19.50	19.15	19.20	19.34

LTE-FDD Band 7				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20825	21100	21375
					2507.5MHz	2535MHz	2562.5MHz
15MHz	QPSK	1	0	21.00	20.38	20.43	20.58
			38	20.50	20.29	20.34	20.49
			74	21.00	20.33	20.38	20.53
		38	0	20.00	19.74	19.79	19.94
			18	20.00	19.60	19.65	19.79
			37	20.00	19.54	19.59	19.73
		75	0	20.00	19.67	19.72	19.87
	16QAM	1	0	20.50	19.85	19.90	20.05
			38	20.00	19.77	19.82	19.97
			74	20.50	19.81	19.86	20.01
		38	0	19.50	19.24	19.28	19.43
			18	19.50	19.10	19.14	19.28
			37	19.50	19.04	19.09	19.23
		75	0	19.50	19.17	19.22	19.36
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20850	21100	21350
					2510MHz	2535MHz	2560MHz
20MHz	QPSK	1	0	21.00	20.45	20.50	20.65
			49	21.00	20.37	20.42	20.57
			99	21.00	20.35	20.55	20.59
		50	0	20.50	19.82	19.86	20.01
			25	20.00	19.67	19.72	19.86
			50	20.00	19.61	19.66	19.80
		100	0	20.00	19.74	19.79	19.94
	16QAM	1	0	20.50	19.93	19.97	20.12
			49	20.50	19.85	19.89	20.04
			99	20.50	19.88	19.93	20.08
		50	0	19.50	19.31	19.35	19.50
			25	19.50	19.17	19.21	19.35
			50	19.50	19.11	19.16	19.30
		100	0	19.50	19.24	19.28	19.43

Band 8

LTE-FDD Band 8				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		21457	21625	21793
					880.7MHz	897.5MHz	914.3MHz
1.4MHz	QPSK	1	0	23.00	22.41	22.69	22.83
			2	23.00	22.32	22.60	22.74
			5	23.00	22.36	22.64	22.78
		3	0	22.50	21.72	21.99	22.12
			1	22.00	21.56	21.83	21.96
			3	22.00	21.49	21.76	21.89
		6	0	22.50	21.64	21.91	22.04
	16QAM	1	0	22.50	21.84	22.11	22.25
			2	22.50	21.75	22.02	22.16
			5	22.50	21.79	22.06	22.20
		3	0	22.00	21.16	21.42	21.56
			1	21.50	21.01	21.27	21.40
			3	21.50	20.94	21.20	21.33
		6	0	21.50	21.08	21.35	21.48

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	21465	21625	21785
					881.5MHz	897.5MHz	913.5MHz
3MHz	QPSK	1	0	23.00	22.36	22.63	22.77
			8	23.00	22.27	22.54	22.68
			14	23.00	22.31	22.59	22.73
		8	0	22.50	21.66	21.93	22.07
			4	22.00	21.50	21.77	21.91
			7	22.00	21.44	21.71	21.84
		15	0	22.00	21.58	21.85	21.99
	16QAM	1	0	22.50	21.78	22.05	22.19
			8	22.50	21.70	21.97	22.10
			14	22.50	21.74	22.01	22.14
		8	0	22.00	21.11	21.37	21.50
			4	21.50	20.95	21.21	21.34
			7	21.50	20.89	21.15	21.28
		15	0	21.50	21.03	21.29	21.42

LTE-FDD Band 8				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		21475	21625	21775
					882.5MHz	897.5MHz	912.5MHz
5MHz	QPSK	1	0	23.00	22.38	22.66	22.80
			12	23.00	22.29	22.57	22.71
			24	23.00	22.33	22.61	22.75
		12	0	22.50	21.68	21.95	22.09
			6	22.00	21.53	21.79	21.93
			13	22.00	21.46	21.73	21.86
		25	0	22.50	21.61	21.88	22.01
	16QAM	1	0	22.50	21.81	22.08	22.21
			12	22.50	21.72	21.99	22.12
			24	22.50	21.76	22.03	22.17
		12	0	22.00	21.13	21.39	21.52
			6	21.50	20.97	21.24	21.37
			13	21.50	20.91	21.17	21.30
		25	0	21.50	21.05	21.31	21.45
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	21500	21625	21750
					885MHz	897.5MHz	910MHz
10MHz	QPSK	1	0	23.00	22.46	22.74	22.88
			24	23.00	22.37	22.65	22.79
			49	23.00	22.54	22.82	22.11
		25	0	22.50	21.76	22.03	22.17
			12	22.50	21.60	21.87	22.01
			25	22.00	21.54	21.81	21.94
		50	0	22.50	21.68	21.95	22.09
	16QAM	1	0	22.50	21.88	22.16	22.29
			24	22.50	21.80	22.07	22.20
			49	22.50	21.84	22.11	22.25
		25	0	22.00	21.21	21.47	21.60
			12	21.50	21.05	21.31	21.44
			25	21.50	20.99	21.25	21.38
		50	0	22.00	21.13	21.39	21.52

Band 20

LTE-FDD Band 20				Maximum Tune-up(dBm)	Conducted Power(dBm)					
Bandwidth	Modulation	RB allocation	RB offset		24175	24300	24425			
					834.5MHz	847MHz	859.5MHz			
5MHz	QPSK	1	0	22.50	22.29	22.41	22.37			
			12	22.50	22.20	22.32	22.28			
			24	22.50	22.25	22.36	22.32			
		12	0	22.00	21.60	21.72	21.68			
			6	22.00	21.44	21.56	21.52			
			13	21.50	21.38	21.49	21.45			
		25	0	22.00	21.52	21.64	21.60			
			16QAM	1	0	22.00	21.72	21.84	21.80	
					12	22.00	21.63	21.75	21.71	
	24	22.00			21.68	21.79	21.75			
	12	0		21.50	21.05	21.16	21.12			
		6		21.50	20.89	21.01	20.97			
		13		21.00	20.83	20.94	20.90			
	25	0		21.50	20.97	21.08	21.05			
		Bandwidth		Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	24200	24300	24400
								837MHz	847MHz	857MHz
10MHz	QPSK	1	0	22.50	22.24	22.36	22.32			
			24	22.50	22.15	22.27	22.23			
			49	22.50	22.19	22.31	22.27			
		25	0	22.00	21.55	21.66	21.62			
			12	22.00	21.39	21.50	21.47			
			25	21.50	21.32	21.44	21.40			
		50	0	22.00	21.47	21.58	21.55			
			16QAM	1	0	22.00	21.67	21.78	21.74	
					24	22.00	21.58	21.70	21.66	
	49	22.00			21.62	21.74	21.70			
	25	0		21.50	20.99	21.11	21.07			
		12		21.00	20.84	20.95	20.92			
		25		21.00	20.78	20.89	20.85			
	50	0		21.50	20.92	21.03	20.99			

LTE-FDD Band 20				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		24225	24300	24375
					839.5MHz	847MHz	854.5MHz
15MHz	QPSK	1	0	22.50	22.26	22.38	22.34
			38	22.50	22.17	22.29	22.25
			74	22.50	22.21	22.33	22.29
		38	0	22.00	21.57	21.68	21.65
			18	22.00	21.41	21.53	21.49
			37	21.50	21.35	21.46	21.42
		75	0	22.00	21.49	21.61	21.57
	16QAM	1	0	22.00	21.69	21.81	21.77
			38	22.00	21.60	21.72	21.68
			74	22.00	21.64	21.76	21.72
		38	0	21.50	21.02	21.13	21.09
			18	21.00	20.86	20.97	20.94
			37	21.00	20.80	20.91	20.87
		75	0	21.50	20.94	21.05	21.01

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	24250	24300	24350
					842MHz	847MHz	852MHz
20MHz	QPSK	1	0	22.50	22.34	22.46	22.42
			49	22.50	22.25	22.37	22.33
			99	23.00	22.22	22.53	22.48
		50	0	22.00	21.65	21.76	21.72
			25	22.00	21.49	21.60	21.57
			50	22.00	21.42	21.54	21.50
		100	0	22.00	21.57	21.68	21.65
		16QAM	1	0	22.00	21.77	21.88
				49	22.00	21.68	21.80
				99	22.00	21.72	21.84
		50	0	21.50	21.09	21.21	21.17
			25	21.50	20.94	21.05	21.01
			50	21.00	20.87	20.99	20.95
		100	0	21.50	21.02	21.13	21.09

8.4 Wifi

Band (GHz)	Mode	Channel	Freq. (MHz)	EIRP(dBm)	Maximum Tune-up(dBm)	SAR Test Required.
2.4g (2.4~2.4835)	802.11b	1	2412	15.70	16.00	Yes
		7	2442	15.36	15.50	No
		13	2472	14.85	15.00	No
	802.11g	1	2412	12.72	13.00	No
		7	2442	12.56	13.00	No
		13	2472	12.18	12.50	No
	802.11n(HT20)	1	2412	12.82	13.00	No
		7	2442	12.41	12.50	No
		13	2472	12.12	12.50	No
	802.11n(HT40)	3	2422	12.04	12.50	No
		7	2442	11.65	12.00	No
		11	2462	11.22	11.50	No

Notes:

1) For WiFi 2.4GHz, SAR tests at higher order modulations (including 802.11g/n) were not required since the maximum average output power for each of these configurations is not more than 1/4dB higher than the tested channel for the lowest data rate of 802.11b mode; When 802.11g/n SAR test is required, 802.11g/n SAR was evaluated based on the highest 802.11b SAR configuration in each exposure condition.

Band (GHz)	Mode	Channel	Freq. (MHz)	EIRP(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-1 (5.150~5.250)	802.11a	36	5180	13.16	13.50	No
		40	5200	13.35	13.50	No
		48	5240	13.45	13.50	No
	802.11n(HT20)	36	5180	13.05	13.50	No
		40	5200	13.27	13.50	No
		48	5240	13.28	13.50	No
	802.11ac(VHT20)	36	5180	13.05	13.50	No
		40	5200	12.71	13.00	No
		48	5240	12.82	13.00	No
	802.11n(HT40)	38	5190	13.39	13.50	No
		46	5230	13.00	13.00	No
	802.11ac(VHT40)	38	5190	13.41	13.50	Yes
		46	5230	13.05	13.50	No
	802.11ac(VHT80)	42	5210	12.98	13.00	No

Band (GHz)	Mode	Channel	Freq. (MHz)	EIRP(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2c (5.470~5.725)	802.11a	100	5500	13.76	14.00	No
		116	5580	13.23	13.50	No
		140	5700	12.22	12.50	No
	802.11n(HT20)	100	5500	13.57	14.00	No
		116	5580	13.54	14.00	No
		140	5700	12.07	12.50	No
	802.11ac(VHT20)	100	5500	13.60	14.00	No
		116	5580	13.56	14.00	No
		140	5700	12.18	12.50	No
	802.11n(HT40)	102	5510	13.25	13.50	No
		110	5550	13.40	13.50	No
		134	5670	12.23	12.50	No
	802.11ac(VHT40)	102	5510	13.64	14.00	No
		110	5550	13.40	13.50	No
		134	5670	12.68	13.00	No
	802.11ac(VHT80)	106	5530	13.85	14.00	Yes
		122	5610	12.92	13.00	No

Note:

1) For WiFi 5G 802.11a/n/ac SAR tests, a communication link is set up with the test mode software for WiFi mode test. The EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate.

2) When multiple channel bandwidth configurations in a frequency band have the same maximum tune-up output power, the test configuration is determined by applying the following steps sequentially.

a. The largest channel bandwidth configuration is selected among the multiple configurations in a frequency band with the same maximum tune-up output power.

b. When multiple transmission modes (802.11a/g/n/ac) have the same maximum tune-up output power, largest channel bandwidth, lowest order modulation, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac.

8.5 Bluetooth

EDR	Mode	Maximum Tune-up(dBm)	EIRP(dBm)		
			0	39	78
			2402MHz	2441MHz	2480MHz
	GFSK	6.50	6.31	6.30	6.30
	π/4QPSK	5.00	4.72	4.11	4.01
	8DPSK	5.00	4.54	3.93	3.83
BLE	Mode	Maximum Tune-up(dBm)	EIRP(dBm)		
			0	19	39
			2402MHz	2440MHz	2480MHz
	BLE_1M	-2.00	-2.14	-2.18	-2.50
	BLE_2M	2.00	-2.05	-2.11	-2.44
Note: Because the output power(eirp) of Bluetooth of the EUT is less than 20mW(13dBm), standalone SAR is exempt according to EN62479.					

Note: Because the output power(eirp) of Bluetooth of the EUT is less than 20mW(13dBm), standalone SAR is exempt according to EN62479.

9. Test Result

General Notes:

The maximum SAR Value of each test band is marked bold.

The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (<1.0 W/kg), testing at the high and low channels is optional apart for the worst case configuration.

SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.

2G

Head(0mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
GSM 900	Left Cheek	0	124	914.8	1.050	0.107	100.00	1.000	32.92	33.00	1.019	0.109	/
	Left Tilt	0	124	914.8	0.990	0.090	100.00	1.000	32.92	33.00	1.019	0.092	/
	Right Cheek	0	124	914.8	-2.300	0.112	100.00	1.000	32.92	33.00	1.019	0.114	1#
	Right Tilt	0	124	914.8	-1.120	0.092	100.00	1.000	32.92	33.00	1.019	0.094	/
Body(5mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
GPRS 900 + 4slots	Front	5	124	914.8	-4.680	0.227	100.00	1.000	32.92	33.00	1.019	0.231	/
	Back	5	124	914.8	-3.530	0.228	100.00	1.000	32.92	33.00	1.019	0.232	2#
Limbs(0mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
GPRS 900 + 4slots	Back	0	124	914.8	-1.490	0.506	100.00	1.000	32.92	33.00	1.019	0.516	3#

Note:

1. The distance of the Head/Limb test is 0mm, and the Body test is 5mm respectively.
2. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 1 W/kg), testing at the high and low channels is optional, apart from the worst case configuration.
3. Refer to ANNEX C for the detailed test data for each test configuration.

Head(0mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
GSM1800	Left Cheek	0	885	1784.8	0.900	0.115	100.00	1.000	29.80	30.00	1.047	0.120	/
	Left Tilt	0	885	1784.8	-1.250	0.091	100.00	1.000	29.80	30.00	1.047	0.095	/
	Right Cheek	0	885	1784.8	-2.850	0.124	100.00	1.000	29.80	30.00	1.047	0.130	4#
	Right Tilt	0	885	1784.8	0.580	0.094	100.00	1.000	29.80	30.00	1.047	0.098	/
Body(5mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
GPRS 1800 + 4slots	Front	5	699	1747.6	-4.020	0.344	100.00	1.000	20.46	20.50	1.009	0.347	/
	Back	5	699	1747.6	2.670	0.346	100.00	1.000	20.46	20.50	1.009	0.349	5#
Limbs(0mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
GPRS 1800 + 4slots	Back	0	699	1747.6	-1.960	0.614	100.00	1.000	20.46	20.50	1.009	0.620	6#

Note:

1. The distance of the Head/Limb test is 0mm, and the Body test is 5mm respectively.
2. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 1 W/kg), testing at the high and low channels is optional, apart from the worst case configuration.
3. Refer to ANNEX C for the detailed test data for each test configuration.

3G

Head(0mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 1 RMC 12.2Kbps	Left Cheek	0	9888	1977.6	4.870	0.123	100.00	1.000	21.38	21.50	1.028	0.126	/
	Left Tilt	0	9888	1977.6	2.110	0.093	100.00	1.000	21.38	21.50	1.028	0.096	/
	Right Cheek	0	9888	1977.6	3.680	0.130	100.00	1.000	21.38	21.50	1.028	0.134	7#
	Right Tilt	0	9888	1977.6	-2.970	0.098	100.00	1.000	21.38	21.50	1.028	0.101	/

Body(5mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 1 RMC 12.2Kbps	Front	5	9888	1977.6	-2.480	0.296	100.00	1.000	21.38	21.50	1.028	0.304	8#
	Back	5	9888	1977.6	0.040	0.241	100.00	1.000	21.38	21.50	1.028	0.248	/

Limbs(0mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 1 RMC 12.2Kbps	Back	0	9888	1977.6	-3.100	0.410	100.00	1.000	21.38	21.50	1.028	0.421	9#

Note:

- The distance of the Head/Limb test is 0mm, and the Body test is 5mm respectively.
- If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 1 W/kg), testing at the high and low channels is optional, apart from the worst case configuration.
- Refer to ANNEX C for the detailed test data for each test configuration.

Head(0mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 8 RMC 12.2Kbps	Left Cheek	0	2863	912.6	-1.450	0.115	100.00	1.000	21.67	22.00	1.079	0.124	/
	Left Tilt	0	2863	912.6	0.320	0.092	100.00	1.000	21.67	22.00	1.079	0.099	/
	Right Cheek	0	2863	912.6	-2.040	0.122	100.00	1.000	21.67	22.00	1.079	0.132	10#
	Right Tilt	0	2863	912.6	2.600	0.096	100.00	1.000	21.67	22.00	1.079	0.104	/

Body(5mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 8 RMC 12.2Kbps	Front	5	2863	912.6	-1.340	0.266	100.00	1.000	21.67	22.00	1.079	0.287	11#
	Back	5	2863	912.6	-2.380	0.265	100.00	1.000	21.67	22.00	1.079	0.286	/

Limbs(0mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 8 RMC 12.2Kbps	Back	0	2863	912.6	-0.850	0.550	100.00	1.000	21.67	22.00	1.079	0.593	12#

Note:

- The distance of the Head/Limb test is 0mm, and the Body test is 5mm respectively.
- If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 1 W/kg), testing at the high and low channels is optional, apart from the worst case configuration.
- Refer to ANNEX C for the detailed test data for each test configuration.

4G

Head(0mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Band 1 (RB allocation/offset 1#0 BW: 20MHz)	Left Cheek	0	18500	1970	-1.010	0.295	100.00	1.000	22.22	22.50	1.067	0.315	/
	Left Tilt	0	18500	1970	0.080	0.196	100.00	1.000	22.22	22.50	1.067	0.209	/
	Right Cheek	0	18500	1970	2.370	0.309	100.00	1.000	22.22	22.50	1.067	0.330	13#
	Right Tilt	0	18500	1970	1.290	0.204	100.00	1.000	22.22	22.50	1.067	0.218	/

Body(5mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Band 1 (RB allocation/offset 1#0 BW: 20MHz)	Front	5	18500	1970	-1.820	0.464	100.00	1.000	22.22	22.50	1.067	0.495	14#
	Back	5	18500	1970	-3.900	0.461	100.00	1.000	22.22	22.50	1.067	0.492	/

Limbs(0mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Band 1 (RB allocation/offset 1#0 BW: 20MHz)	Back	0	18500	1970	-2.900	0.599	100.00	1.000	22.22	22.50	1.067	0.639	15#

Note:

- The distance of the Head/Limb test is 0mm, and the Body test is 5mm respectively.
- If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 1 W/kg), testing at the high and low channels is optional, apart from the worst case configuration.
- Refer to ANNEX C for the detailed test data for each test configuration.

Head(0mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Band 3 (RB allocation/offset 1#99 BW: 20MHz)	Left Cheek	0	19300	1720	0.050	0.291	100.00	1.000	22.83	23.00	1.040	0.303	/
	Left Tilt	0	19300	1720	1.160	0.194	100.00	1.000	22.83	23.00	1.040	0.202	/
	Right Cheek	0	19300	1720	-2.360	0.307	100.00	1.000	22.83	23.00	1.040	0.319	16#
	Right Tilt	0	19300	1720	-4.200	0.201	100.00	1.000	22.83	23.00	1.040	0.209	/

Body(5mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Band 3 (RB allocation/offset 1#99 BW: 20MHz)	Front	5	19300	1720	-0.890	0.552	100.00	1.000	22.83	23.00	1.040	0.574	17#
	Back	5	19300	1720	2.280	0.547	100.00	1.000	22.83	23.00	1.040	0.569	/

Limbs(0mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Band 3 (RB allocation/offset 1#99 BW: 20MHz)	Back	0	19300	1720	-0.490	0.845	100.00	1.000	22.83	23.00	1.040	0.879	18#

Note:

- The distance of the Head/Limb test is 0mm, and the Body test is 5mm respectively.
- If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 1 W/kg), testing at the high and low channels is optional, apart from the worst case configuration.
- Refer to ANNEX C for the detailed test data for each test configuration.

Head(0mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Band 7 (RB allocation/offset 1#0 BW: 20MHz)	Left Cheek	0	21350	2560	2.560	0.107	100.00	1.000	20.65	21.00	1.084	0.116	/
	Left Tilt	0	21350	2560	3.980	0.095	100.00	1.000	20.65	21.00	1.084	0.103	/
	Right Cheek	0	21350	2560	-1.240	0.115	100.00	1.000	20.65	21.00	1.084	0.125	19#
	Right Tilt	0	21350	2560	0.660	0.099	100.00	1.000	20.65	21.00	1.084	0.107	/
Body(5mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Band 7 (RB allocation/offset 1#0 BW: 20MHz)	Front	5	21350	2560	-1.340	0.116	100.00	1.000	20.65	21.00	1.084	0.126	20#
	Back	5	21350	2560	2.280	0.103	100.00	1.000	20.65	21.00	1.084	0.112	/
Limbs(0mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Band 7 (RB allocation/offset 1#0 BW: 20MHz)	Back	0	21350	2560	-4.820	0.239	100.00	1.000	20.65	21.00	1.084	0.259	21#
Note: 1. The distance of the Head/Limb test is 0mm, and the Body test is 5mm respectively. 2. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 1 W/kg), testing at the high and low channels is optional, apart from the worst case configuration. 3. Refer to ANNEX C for the detailed test data for each test configuration.													

Head(0mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Band 8 (RB allocation/offset 1#0 BW: 10MHz)	Left Cheek	0	21750	910	2.990	0.096	100.00	1.000	22.88	23.00	1.028	0.099	/
	Left Tilt	0	21750	910	-0.860	0.077	100.00	1.000	22.88	23.00	1.028	0.079	/
	Right Cheek	0	21750	910	-1.450	0.100	100.00	1.000	22.88	23.00	1.028	0.103	22#
	Right Tilt	0	21750	910	3.320	0.082	100.00	1.000	22.88	23.00	1.028	0.084	/
Body(5mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Band 8 (RB allocation/offset 1#0 BW: 10MHz)	Front	5	21750	910	-1.360	0.284	100.00	1.000	22.88	23.00	1.028	0.292	23#
	Back	5	21750	910	2.460	0.280	100.00	1.000	22.88	23.00	1.028	0.288	/
Limbs(0mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Band 8 (RB allocation/offset 1#0 BW: 10MHz)	Back	0	21750	910	-4.050	0.525	100.00	1.000	22.88	23.00	1.028	0.540	24#
Note: 1. The distance of the Head/Limb test is 0mm, and the Body test is 5mm respectively. 2. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 1 W/kg), testing at the high and low channels is optional, apart from the worst case configuration. 3. Refer to ANNEX C for the detailed test data for each test configuration.													

Head(0mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Band 20 (RB allocation/offset 1#99 BW: 20MHz)	Left Cheek	0	24300	847	3.370	0.092	100.00	1.000	22.53	23.00	1.114	0.102	/
	Left Tilt	0	24300	847	-1.680	0.070	100.00	1.000	22.53	23.00	1.114	0.078	/
	Right Cheek	0	24300	847	-1.070	0.095	100.00	1.000	22.53	23.00	1.114	0.106	25#
	Right Tilt	0	24300	847	4.370	0.079	100.00	1.000	22.53	23.00	1.114	0.088	/

Body(5mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Band 20 (RB allocation/offset 1#99 BW: 20MHz)	Front	5	24300	847	0.650	0.211	100.00	1.000	22.53	23.00	1.114	0.235	/
	Back	5	24300	847	-2.210	0.218	100.00	1.000	22.53	23.00	1.114	0.243	26#
Limbs(0mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
Band 20 (RB allocation/offset 1#99 BW: 20MHz)	Back	0	24300	847	-1.790	0.467	100.00	1.000	22.53	23.00	1.114	0.520	27#

Note:

- The distance of the Head/Limb test is 0mm, and the Body test is 5mm respectively.
- If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 1 W/kg), testing at the high and low channels is optional, apart from the worst case configuration.
- Refer to ANNEX C for the detailed test data for each test configuration.

WIFI

Head(0mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
2.4g Wifi 802.11b	Left Cheek	0	1	2412	1.120	0.348	100.00	1.000	15.70	16.00	1.072	0.373	/
	Left Tilt	0	1	2412	-3.300	0.194	100.00	1.000	15.70	16.00	1.072	0.208	/
	Right Cheek	0	1	2412	4.360	0.356	100.00	1.000	15.70	16.00	1.072	0.382	28#
	Right Tilt	0	1	2412	-0.400	0.200	100.00	1.000	15.70	16.00	1.072	0.214	/
Body(5mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
2.4g Wifi 802.11b	Front	5	1	2412	-3.220	0.224	100.00	1.000	15.70	16.00	1.072	0.240	29#
	Back	5	1	2412	-1.640	0.200	100.00	1.000	15.70	16.00	1.072	0.214	/
Limbs(0mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
2.4g Wifi 802.11b	Back	0	1	2412	1.400	0.304	100.00	1.000	15.70	16.00	1.072	0.326	30#

Note:

- The distance of the Head/Limb test is 0mm, and the Body test is 5mm respectively.
- If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 1 W/kg), testing at the high and low channels is optional, apart from the worst case configuration.
- Refer to ANNEX C for the detailed test data for each test configuration.

Head(0mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
5.2g Wifi 802.11ac(VHT40)	Left Cheek	0	38	5190	-2.010	0.248	100.00	1.000	13.41	13.50	1.021	0.253	/
	Left Tilt	0	38	5190	3.710	0.188	100.00	1.000	13.41	13.50	1.021	0.192	/
	Right Cheek	0	38	5190	2.060	0.256	100.00	1.000	13.41	13.50	1.021	0.261	31#
	Right Tilt	0	38	5190	0.230	0.193	100.00	1.000	13.41	13.50	1.021	0.197	/
Body(5mm gap)													
Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
5.2g Wifi 802.11ac(VHT40)	Front	5	38	5190	-2.280	0.130	100.00	1.000	13.41	13.50	1.021	0.133	32#
	Back	5	38	5190	1.900	0.078	100.00	1.000	13.41	13.50	1.021	0.080	/

Limbs(0mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
5.2g Wifi 802.11ac(VHT40)	Back	0	38	5190	-1.010	0.089	100.00	1.000	13.41	13.50	1.021	0.091	33#

Note:

1. The distance of the Head/Limb test is 0mm, and the Body test is 5mm respectively.
2. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 1 W/kg), testing at the high and low channels is optional, apart from the worst case configuration.
3. Refer to ANNEX C for the detailed test data for each test configuration.

Head(0mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
5.6g Wifi 802.11ac(VHT80)	Left Cheek	0	106	5530	1.460	0.227	100.00	1.000	13.85	14.00	1.733	0.393	/
	Left Tilt	0	106	5530	-2.250	0.178	100.00	1.000	13.85	14.00	1.733	0.308	/
	Right Cheek	0	106	5530	-3.690	0.232	100.00	1.000	13.85	14.00	1.733	0.402	34#
	Right Tilt	0	106	5530	0.090	0.186	100.00	1.000	13.85	14.00	1.733	0.322	/

Body(5mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
5.6g Wifi 802.11ac(VHT80)	Front	0	106	5530	2.110	0.201	100.00	1.000	13.85	14.00	1.733	0.348	35#
	Back	0	106	5530	3.210	0.052	100.00	1.000	13.85	14.00	1.733	0.090	/

Limbs(0mm gap)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Scaled SAR (W/kg)	Meas. No.
5.6g Wifi 802.11ac(VHT80)	Back	0	106	5530	-3.020	0.095	100.00	1.000	13.85	14.00	1.733	0.165	36#

Note:

1. The distance of the Head/Limb test is 0mm, and the Body test is 5mm respectively.
2. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 1 W/kg), testing at the high and low channels is optional, apart from the worst case configuration.
3. Refer to ANNEX C for the detailed test data for each test configuration.

10. Simultaneous Transmission

The device contains transmitters (GSM/WCDMA/LTE & Bluetooth/Wifi) can transmit multiple transmission modes at the same time, determining the threshold power level available to the secondary transmitter ($P_{available}$) is to calculate it from the measured peak spatial-average SAR of the primary transmitter (SAR_1) according to the equation:

$$P_{available} = P_{th,m} \cdot (SAR_{lim} - SAR_1) / SAR_{lim}$$

where $P_{th,m}$ is the threshold exclusion power level taken from Annex B of IEC 62479 for the frequency of the secondary transmitter at the separation distance used in the testing.

f GHz	BW %	Exemple d'interface air	P_{max} mW			
			s = 5 mm		s = 25 mm	
			m = 1 g	m = 10 g	m = 1 g	m = 10 g
2,442	3,4	802.11b	7,3	32	130	328
5,250	3,8	WiMAX	6,8	53	258	845
5,788	1,3	WiMAX	6,2	52	164	564

According to the test result, we could know the maximum SAR of Head is 0.356 W/Kg, so

$$P_{available1} = 32 \text{ mW} \times (2.0 - 0.356) / 2.0 = 26.30 \text{ mW}$$

$$P_{available2} = 53 \text{ mW} \times (2.0 - 0.356) / 2.0 = 43.57 \text{ mW}$$

$$P_{available3} = 52 \text{ mW} \times (2.0 - 0.356) / 2.0 = 42.74 \text{ mW}$$

According to the test result, we could know the maximum SAR of body-supported is 0.552 W/Kg, so

$$P_{available1'} = 32 \text{ mW} \times (2.0 - 0.552) / 2.0 = 23.17 \text{ mW}$$

$$P_{available2'} = 53 \text{ mW} \times (2.0 - 0.552) / 2.0 = 38.37 \text{ mW}$$

$$P_{available3'} = 52 \text{ mW} \times (2.0 - 0.552) / 2.0 = 37.65 \text{ mW}$$

According to the test result, we could know the maximum SAR of Limbs is 0.845 W/Kg, so

$$P_{available1''} = 32 \text{ mW} \times (4.0 - 0.845) / 4.0 = 50.48 \text{ mW}$$

$$P_{available2''} = 53 \text{ mW} \times (4.0 - 0.845) / 4.0 = 83.61 \text{ mW}$$

$$P_{available3''} = 52 \text{ mW} \times (4.0 - 0.845) / 4.0 = 82.03 \text{ mW}$$

The maximum power of BT is 6.50 dBm = 4.47 mW < $P_{available1}$ & $P_{available1'}$ & $P_{available1''}$

So the SAR measurement for the secondary transmitter of BT is not necessary;

The maximum power of 2.4g Wifi is 16.00 dBm = 39.81 mW < $P_{available1'}$ but > $P_{available1}$ & $P_{available1''}$

So only the SAR measurement of head and body-supported for the secondary transmitter of 2.4g Wifi is necessary; the SAR measurements of head and limbs for the secondary transmitter of 2.4g Wifi are not necessary.

The maximum power of 5.2g is 13.50 dBm = 22.39 mW < $P_{available2}$ & $P_{available2'}$ & $P_{available2''}$

So the SAR measurement for the secondary transmitter of 5.2g is not necessary;

The maximum power of 5.6g is 14.00 dBm = 25.12 mW < $P_{available3}$ & $P_{available3'}$ & $P_{available3''}$

So the SAR measurement for the secondary transmitter of 5.6g is not necessary;

Therefore we only need consider the SAR measurement of head and body-supported for the secondary transmitter of 2.4g Wifi.

10.1 Sum SAR of Simultaneous Transmission

10.1.1 Head Simultaneous Transmission SAR Evaluation for WWAN Antenna and WLAN antenna

Band	Position	Standalone SAR(Scaled SAR 10-g (W/Kg))		Sum SAR10-g (W/Kg) WWAN+WALN-2.4g	SAR10-g Limit (W/Kg)	Simultaneous Meas. Required
		WWAN	WLAN-2.4g			
GSM 900	Left Cheek	0.109	0.373	0.482	2.0	no
	Left Tilt	0.092	0.208	0.300	2.0	no
	Right Cheek	0.114	0.382	0.496	2.0	no
	Right Tilt	0.094	0.214	0.308	2.0	no
GSM 1800	Left Cheek	0.120	0.373	0.493	2.0	no
	Left Tilt	0.095	0.208	0.303	2.0	no
	Right Cheek	0.130	0.382	0.512	2.0	no
	Right Tilt	0.098	0.214	0.312	2.0	no
WCDMA Band 1	Left Cheek	0.126	0.373	0.499	2.0	no
	Left Tilt	0.096	0.208	0.304	2.0	no
	Right Cheek	0.134	0.382	0.516	2.0	no
	Right Tilt	0.101	0.214	0.315	2.0	no
WCDMA Band 8	Left Cheek	0.124	0.373	0.497	2.0	no
	Left Tilt	0.099	0.208	0.307	2.0	no
	Right Cheek	0.132	0.382	0.514	2.0	no
	Right Tilt	0.104	0.214	0.318	2.0	no
LTE band 1	Left Cheek	0.315	0.373	0.688	2.0	no
	Left Tilt	0.209	0.208	0.417	2.0	no
	Right Cheek	0.330	0.382	0.712	2.0	no
	Right Tilt	0.218	0.214	0.432	2.0	no
LTE band 3	Left Cheek	0.303	0.373	0.676	2.0	no
	Left Tilt	0.202	0.208	0.410	2.0	no
	Right Cheek	0.319	0.382	0.701	2.0	no
	Right Tilt	0.209	0.214	0.423	2.0	no
LTE band 7	Left Cheek	0.116	0.373	0.489	2.0	no
	Left Tilt	0.103	0.208	0.311	2.0	no
	Right Cheek	0.125	0.382	0.507	2.0	no
	Right Tilt	0.107	0.214	0.321	2.0	no
LTE band 8	Left Cheek	0.099	0.373	0.472	2.0	no
	Left Tilt	0.079	0.208	0.287	2.0	no
	Right Cheek	0.103	0.382	0.485	2.0	no
	Right Tilt	0.084	0.214	0.298	2.0	no
LTE band 20	Left Cheek	0.102	0.373	0.475	2.0	no
	Left Tilt	0.078	0.208	0.286	2.0	no
	Right Cheek	0.106	0.382	0.488	2.0	no
	Right Tilt	0.088	0.214	0.302	2.0	no

10.1.2 Body Simultaneous Transmission SAR Evaluation for WWAN Antenna and WLAN antenna

Band	Position	Standalone SAR(Scaled SAR 10-g (W/Kg))		Sum SAR10-g (W/Kg) WWAN+WALN-2.4g	SAR10-g Limit (W/Kg)	Simultaneous Meas. Required
		WWAN	WLAN-2.4g			
GSM 900	Front	0.231	0.240	0.471	2.0	no
	Back	0.232	0.214	0.446	2.0	no
GSM 1800	Front	0.347	0.240	0.587	2.0	no
	Back	0.349	0.214	0.563	2.0	no
WCDMA Band 1	Front	0.304	0.240	0.544	2.0	no
	Back	0.248	0.214	0.462	2.0	no
WCDMA Band 8	Front	0.287	0.240	0.527	2.0	no
	Back	0.286	0.214	0.500	2.0	no
LTE band 1	Front	0.495	0.240	0.735	2.0	no
	Back	0.492	0.214	0.706	2.0	no
LTE band 3	Front	0.574	0.240	0.814	2.0	no
	Back	0.569	0.214	0.783	2.0	no
LTE band 7	Front	0.126	0.240	0.366	2.0	no
	Back	0.112	0.214	0.326	2.0	no
LTE band 8	Front	0.292	0.240	0.532	2.0	no
	Back	0.288	0.214	0.502	2.0	no
LTE band 20	Front	0.235	0.240	0.475	2.0	no
	Back	0.243	0.214	0.457	2.0	no

11. Test Equipment List

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
E-Field Probe	MVG	SSE2	04/22 EPG0365	2023/02/06	2024/02/05
6 1/2 Digital Multimeter	Keithley	DMM6500	4527164	2022/11/24	2023/11/23
Wideband Radio Communication Tester	ROHDE & SCHWARZ	CMW500	161997	2022/11/24	2023/11/23
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2022/11/24	2023/11/23
E-Series Avg. Power Sensor	KEYSIGHT	E9300A	MY55050017	2023/03/24	2024/03/23
EPM Series Power Meter	KEYSIGHT	E4418B	MY41293435	2023/03/24	2024/03/23
10dB Attenuator	MIDWEST MICROWAVE	263-10dB	/	2023/03/24	2024/03/23
Coupler	MERRIMAC	CWM-10R-10.8G	LOT-83391	2023/03/24	2024/03/23
835MHz Validation Dipole	MVG	SID835	07/22 DIP 0G835-656	2023/02/06	2024/02/05
1800MHz Validation Dipole	MVG	SID1800	07/22 DIP 1G800-657	2023/02/06	2024/02/05
1900MHz Validation Dipole	MVG	SID1900	07/22 DIP 1G900-658	2023/02/06	2024/02/05
2450MHz Validation Dipole	MVG	SID2450	07/22 DIP 2G450-662	2023/02/06	2024/02/05
2600MHz Validation Dipole	MVG	SID2600	07/22 DIP 2G600-663	2023/02/06	2024/02/05
5200MHz-5800MHz Validation Dipole	MVG	SID5000	07/22 DIP5G000-670	2023/02/06	2024/02/05
LIMESAR Dielectric Probe	MVG	SCLMP	06/22 OCPG88	/	/
ENA Series Network Analyzer	Agilent	E5071B	MY42301221	2022/11/24	2023/11/23
Thermometer	Riters	DT-232	21A11	2023/03/24	2024/03/23
Antenna network emulator	MVG	ANTA 74	07/22 ANTA 74	/	/
SAM Phantom	MVG	SAM	07/22 SAM149	/	/
Mobile Phone Positioning System	MVG	MSH 118	07/22 MSH 118	/	/
Mechanical Calibration Kit	PNA	/	/	/	/
Open SAR test software	MVG	/	V5.3.5	/	/

Note: For dipole antennas, BTF has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.

ANNEX A Simulating Liquid Verification Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Dielectric performance of tissue simulating liquid									
Frequency (MHz)	ϵ_r		σ (s/m)		Delta (ϵ_r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
835	41.50	41.41	0.90	0.87	4.22%	-3.33%	±10%	20.5	20/9/2023
1800	40.00	39.91	1.40	1.37	3.83%	-2.14%	±10%	20.5	20/9/2023
1900	40.00	39.88	1.40	1.41	-0.30%	0.71%	±10%	20.5	20/9/2023
2450	39.20	39.08	1.80	1.81	5.59%	0.56%	±10%	20.5	21/9/2023
2600	39.00	38.88	1.96	1.97	-0.31%	0.51%	±10%	20.5	21/9/2023
5200	36.00	35.88	4.66	4.70	-0.33%	0.86%	±10%	20.5	22/9/2023
5600	35.50	35.38	5.07	5.11	-0.34%	0.79%	±10%	20.5	22/9/2023

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

ANNEX B System Check Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %(for 10 g).

Frequency (MHz)	Input Power (mW)	10g SAR (W/Kg)	1g SAR (W/Kg)	10g SAR 1W input power normalized (W/Kg)	1g SAR 1W input power normalized (W/Kg)	10g SAR Standard target (1W) (W/Kg)	1g SAR Standard target (1W) (W/Kg)	10g SAR Deviation	1g SAR Deviation
835	16	0.106	0.163	6.68	10.28	6.22	9.56	-7.40%	-7.53%
1800	16	0.312	0.588	19.68	37.10	20.10	38.40	2.09%	3.39%
1900	16	0.322	0.630	20.32	39.75	20.50	39.70	0.88%	-0.13%
2450	16	0.352	0.793	22.21	50.03	24.00	52.40	7.46%	4.52%
2600	16	0.421	0.866	26.56	54.64	24.60	55.30	-0.08%	0.01%
5200	13	0.294	0.998	23.35	79.27	21.60	76.50	-7.97%	1.19%
5600	13	1.084	0.314	83.38	24.15	78.71	22.64	5.94%	6.69%

System Performance Check Data (835 MHz)

System check at 835 MHz

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	835.000
Relative permittivity (real part)	43.250
Relative permittivity (imaginary part)	19.490
Conductivity (S/m)	0.870

C. SAR Surface and Volume

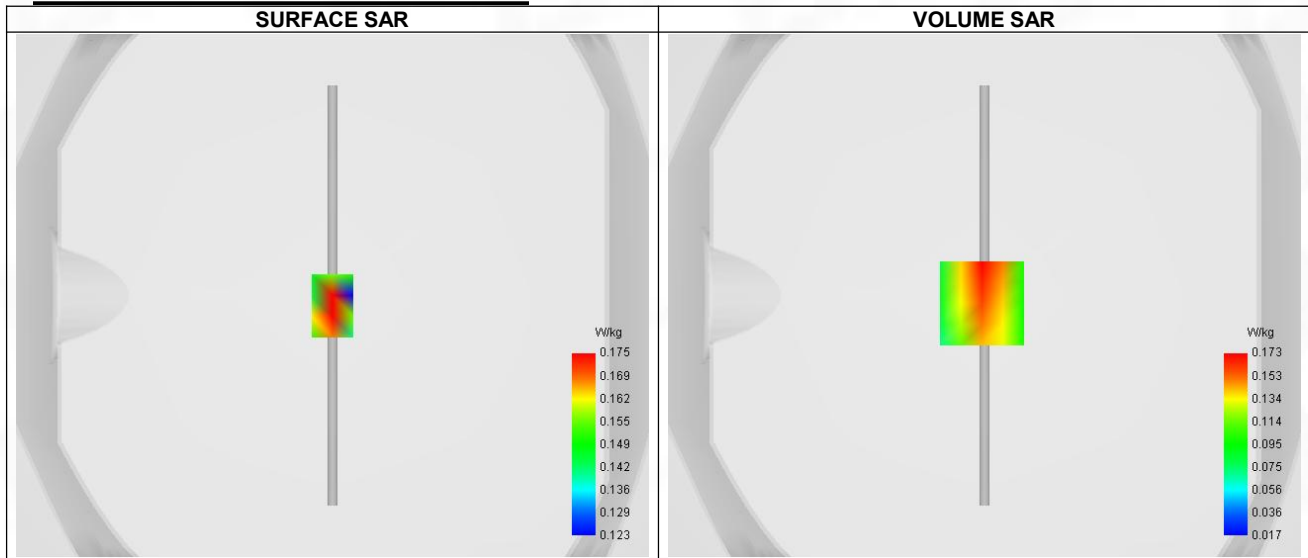


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.106
SAR 1g (W/Kg)	0.163
Variation (%)	-3.390
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.059	0.173	0.115	0.061	0.072

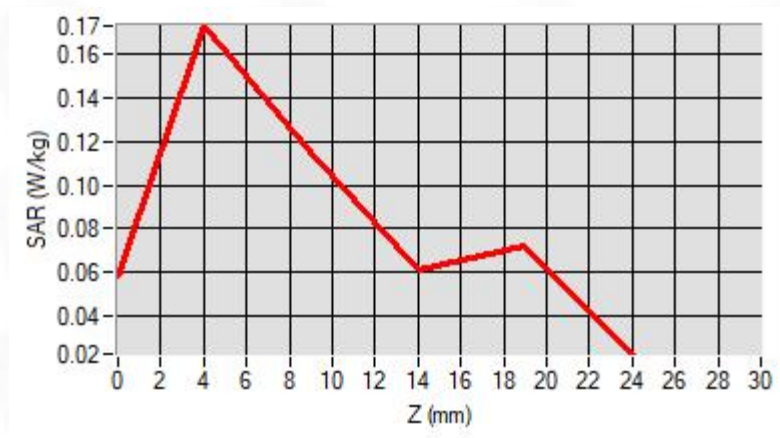

F. 3D Image

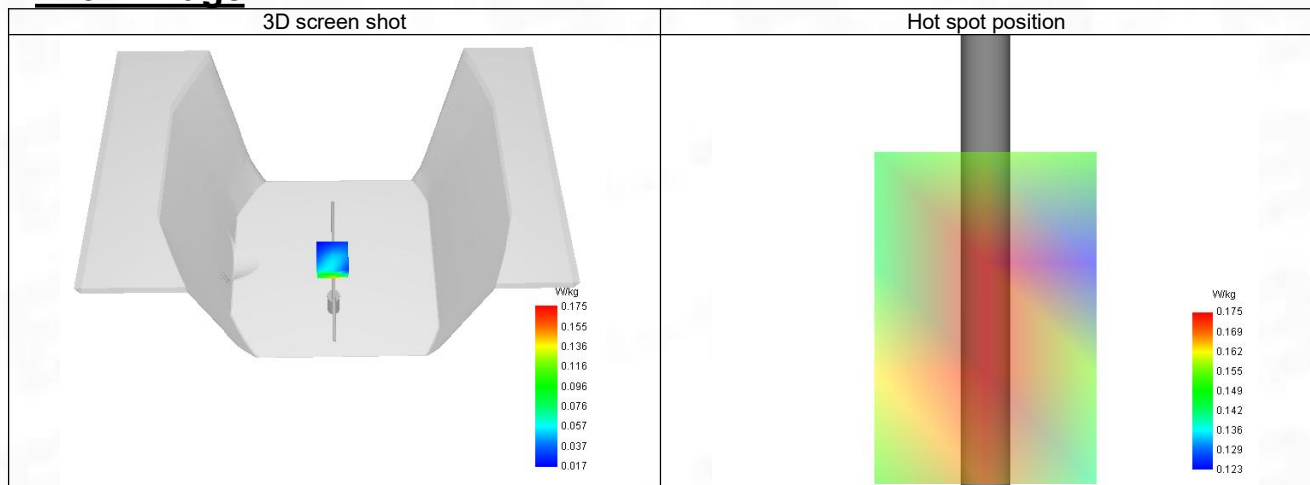

System Performance Check Data (1800 MHz)

System check at 1800 MHz

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	1800.000
Relative permittivity (real part)	41.530
Relative permittivity (imaginary part)	14.090
Conductivity (S/m)	1.370

C. SAR Surface and Volume

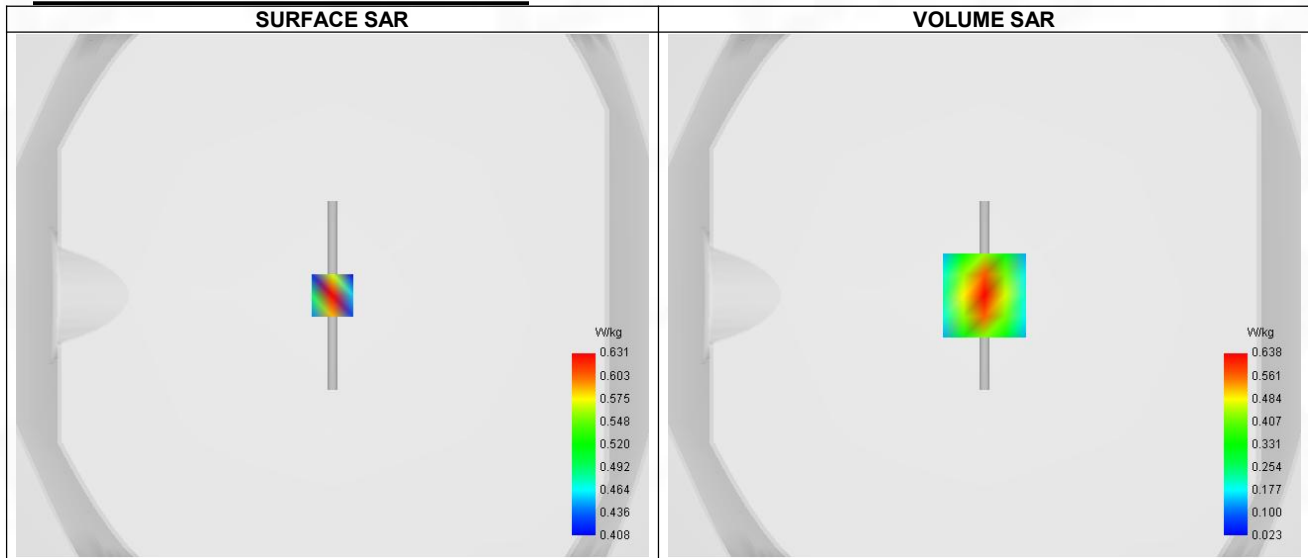


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.00 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.312
SAR 1g (W/Kg)	0.588
Variation (%)	-0.250
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.003	0.638	0.356	0.204	0.127

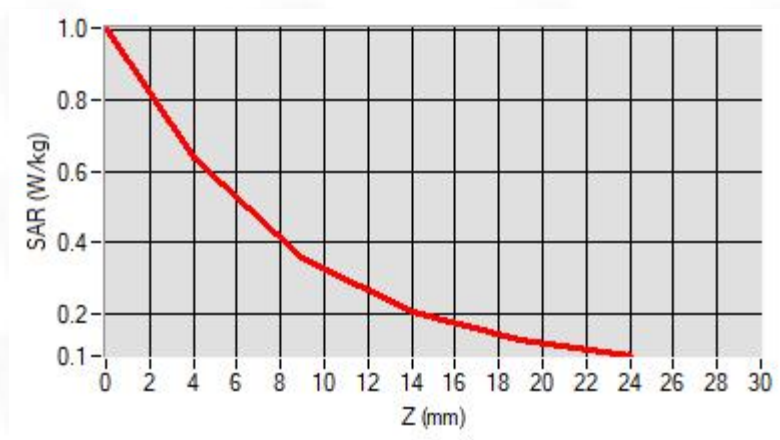

F. 3D Image

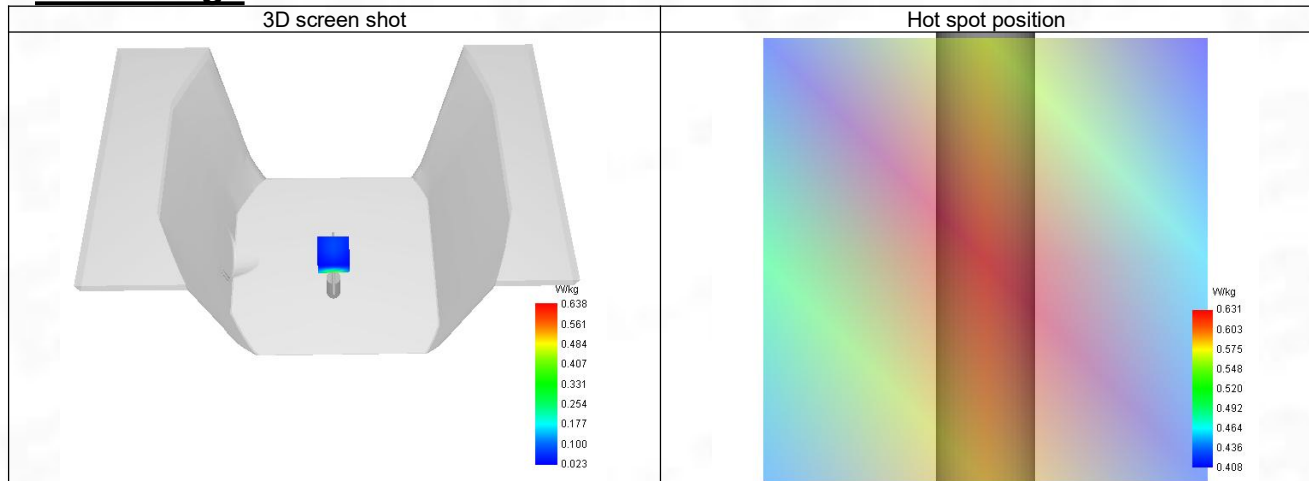

System Performance Check Data (1900 MHz)

System check at 1900 MHz

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	1900.000
Relative permittivity (real part)	39.880
Relative permittivity (imaginary part)	13.380
Conductivity (S/m)	1.410

C. SAR Surface and Volume

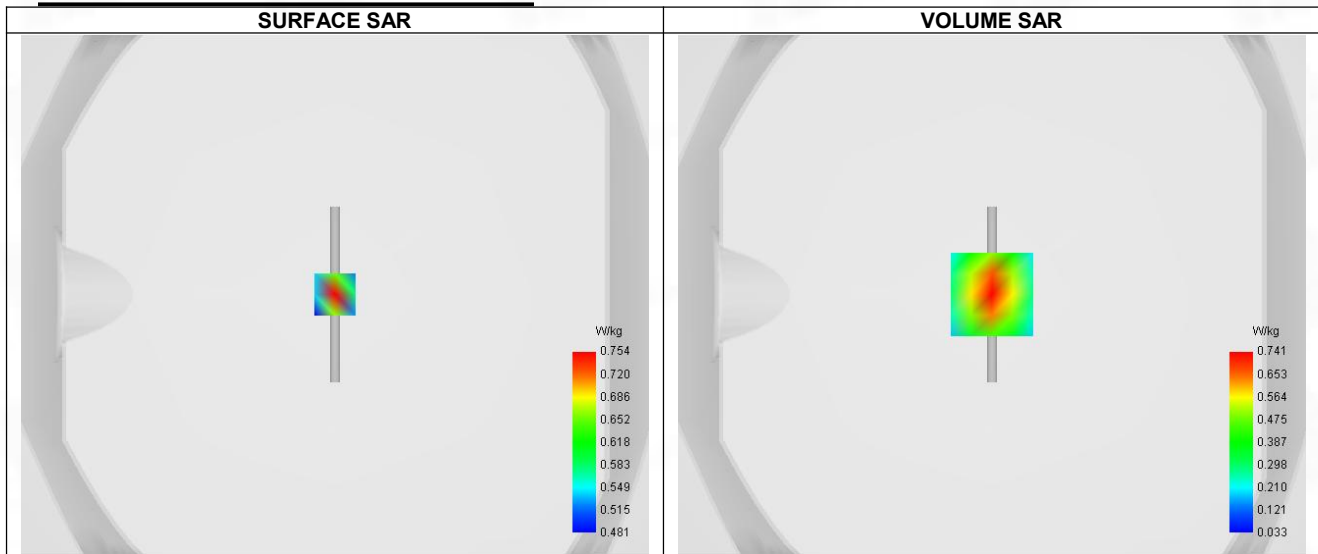


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.18 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.322
SAR 1g (W/Kg)	0.630
Variation (%)	-2.080
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.201	0.759	0.402	0.239	0.156

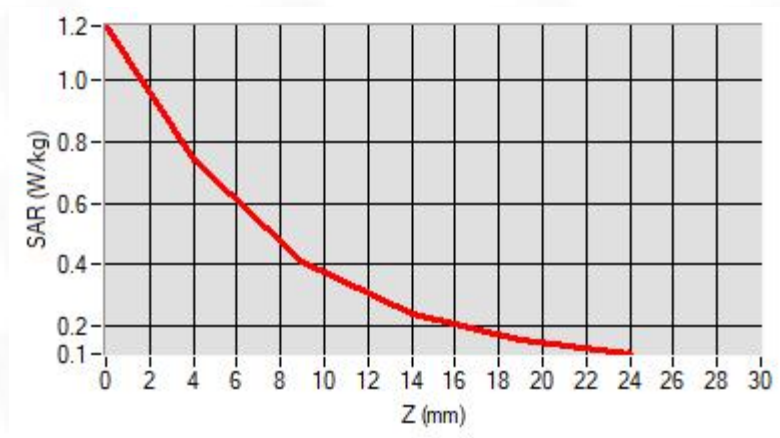

F. 3D Image

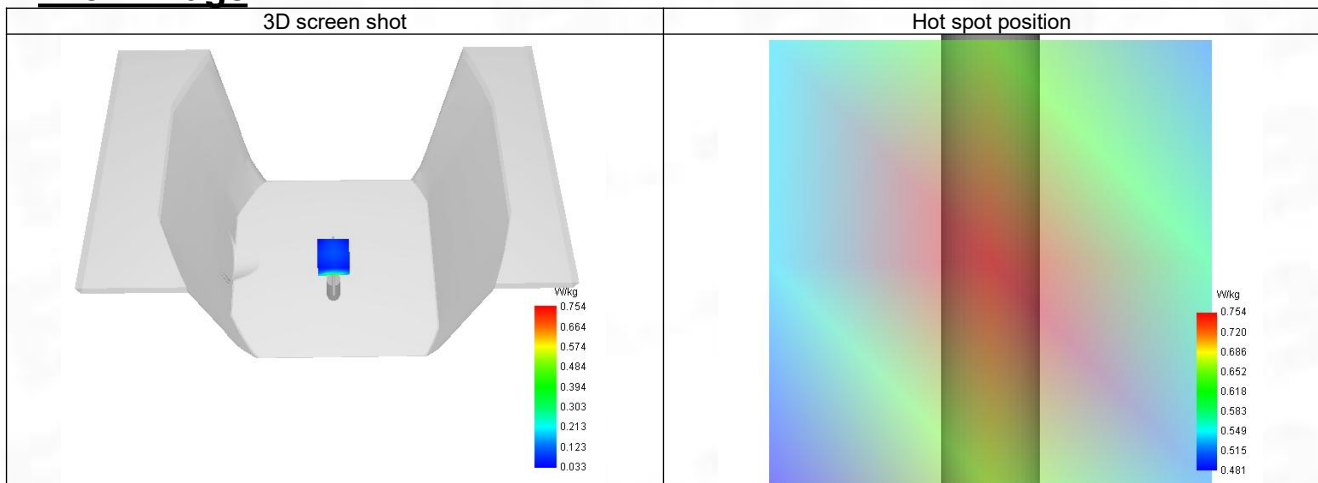

System Performance Check Data (2450 MHz)

System check at 2450 MHz

Date of measurement: 21/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	2450.000
Relative permittivity (real part)	41.390
Relative permittivity (imaginary part)	13.340
Conductivity (S/m)	1.810

C. SAR Surface and Volume

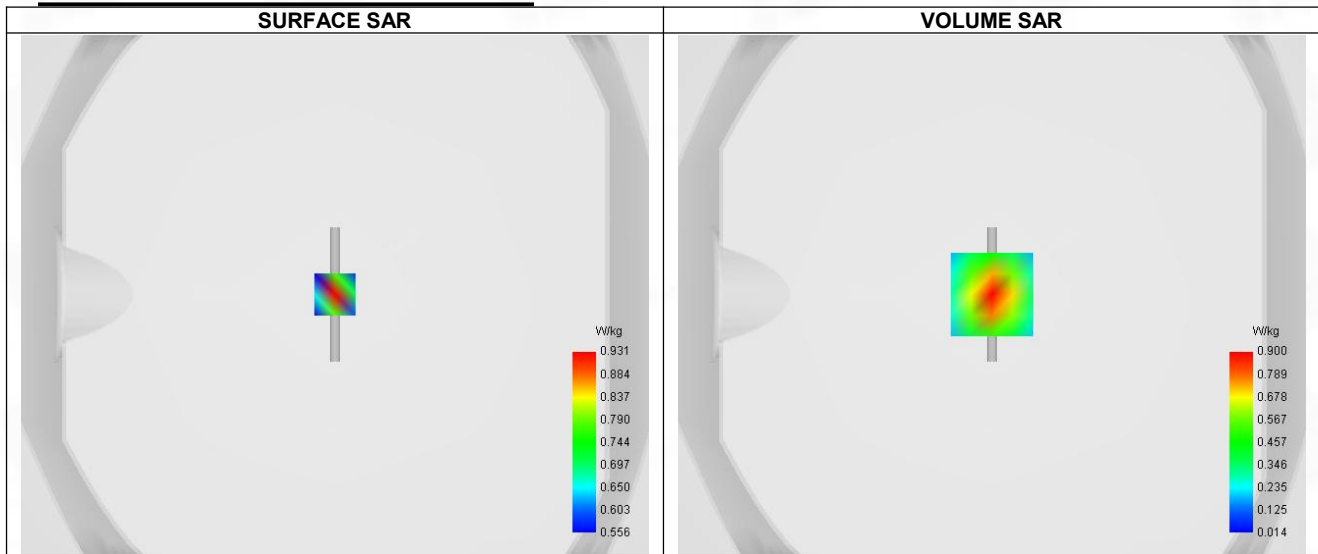


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.47 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.352
SAR 1g (W/Kg)	0.793
Variation (%)	-2.570
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.466	0.900	0.477	0.261	0.158

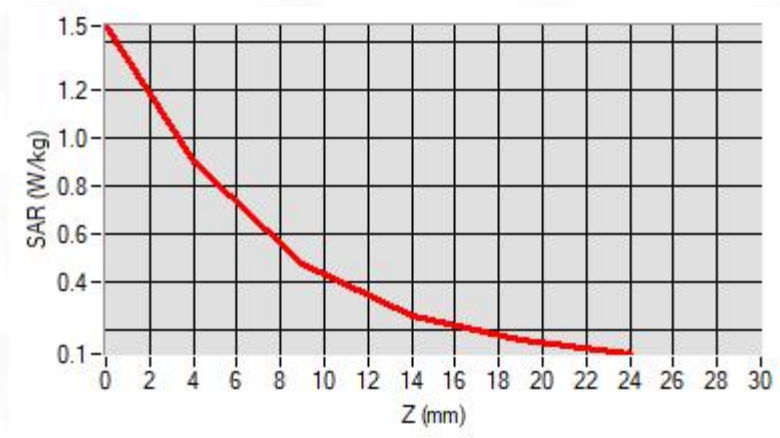

F. 3D Image

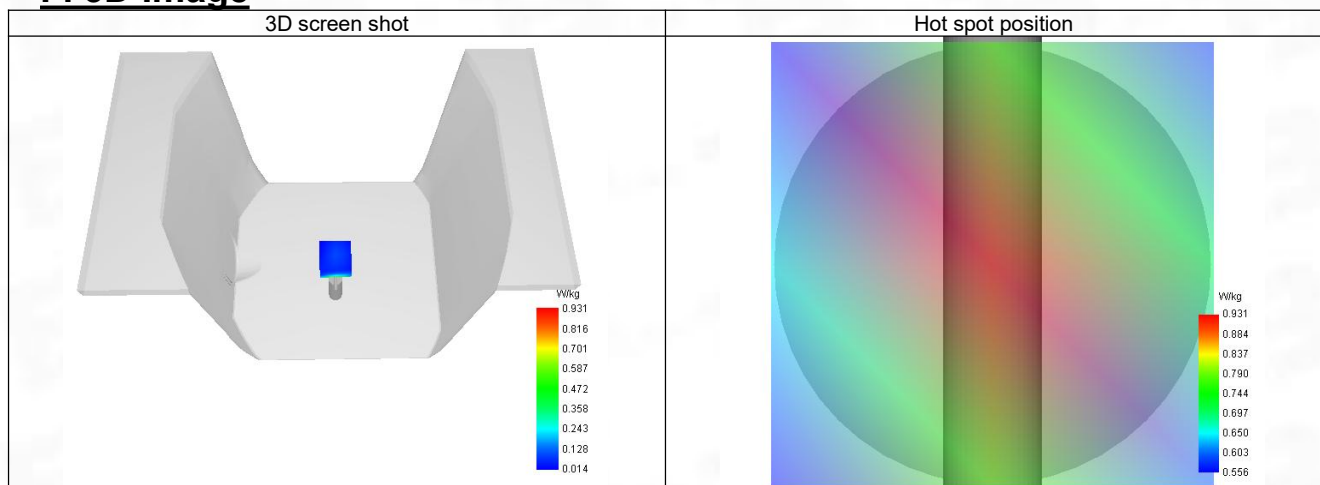

System Performance Check Data (2600 MHz)

System check at 2600 MHz

Date of measurement: 21/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.40
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	2600.000
Relative permittivity (real part)	38.880
Relative permittivity (imaginary part)	12.690
Conductivity (S/m)	1.970

C. SAR Surface and Volume

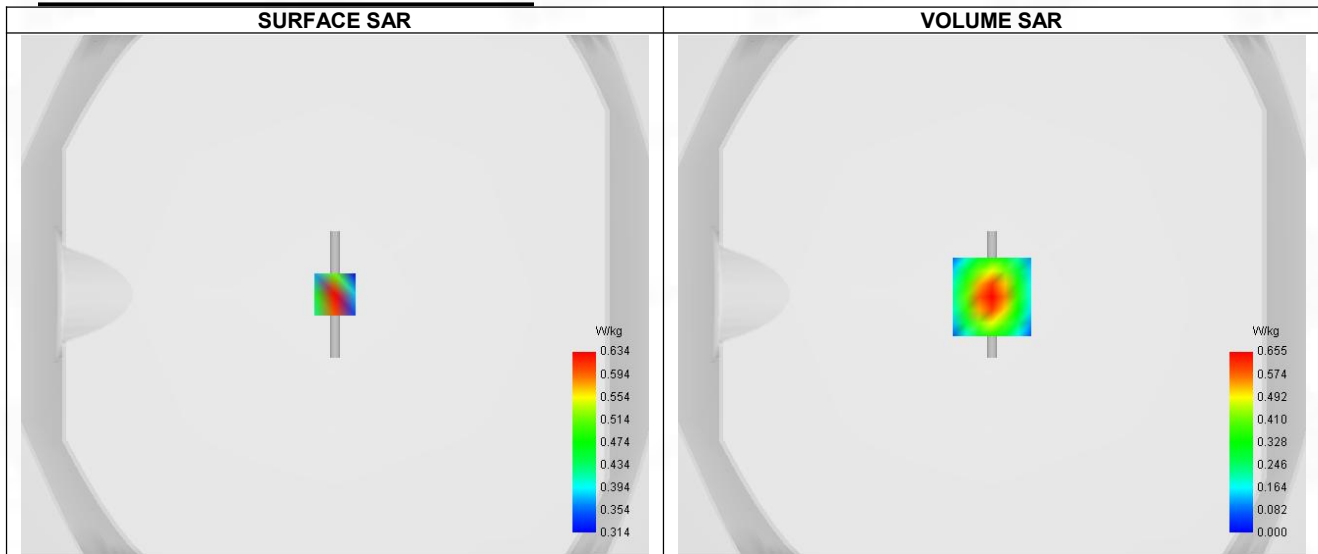


Maximum location: X=0.00, Y=-1.00 ; SAR Peak: 1.02 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.421
SAR 1g (W/Kg)	0.866
Variation (%)	2.980
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.020	0.655	0.359	0.187	0.091

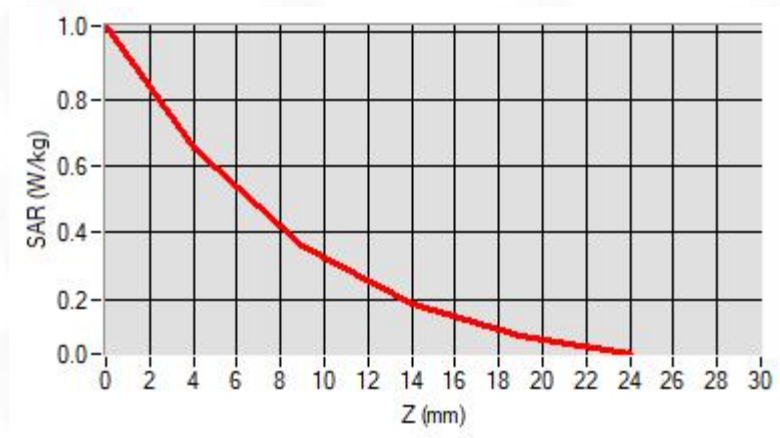

F. 3D Image

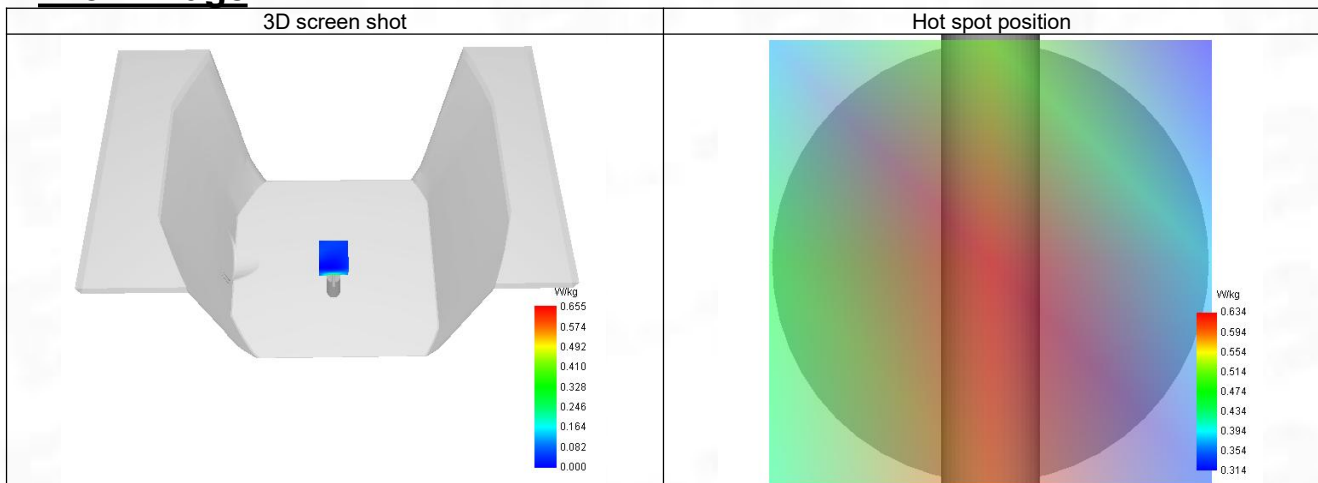

System Performance Check Data (5200 MHz)

System check at 5200 MHz

Date of measurement: 22/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	5200.000
Relative permittivity (real part)	35.880
Relative permittivity (imaginary part)	16.250
Conductivity (S/m)	4.700

C. SAR Surface and Volume

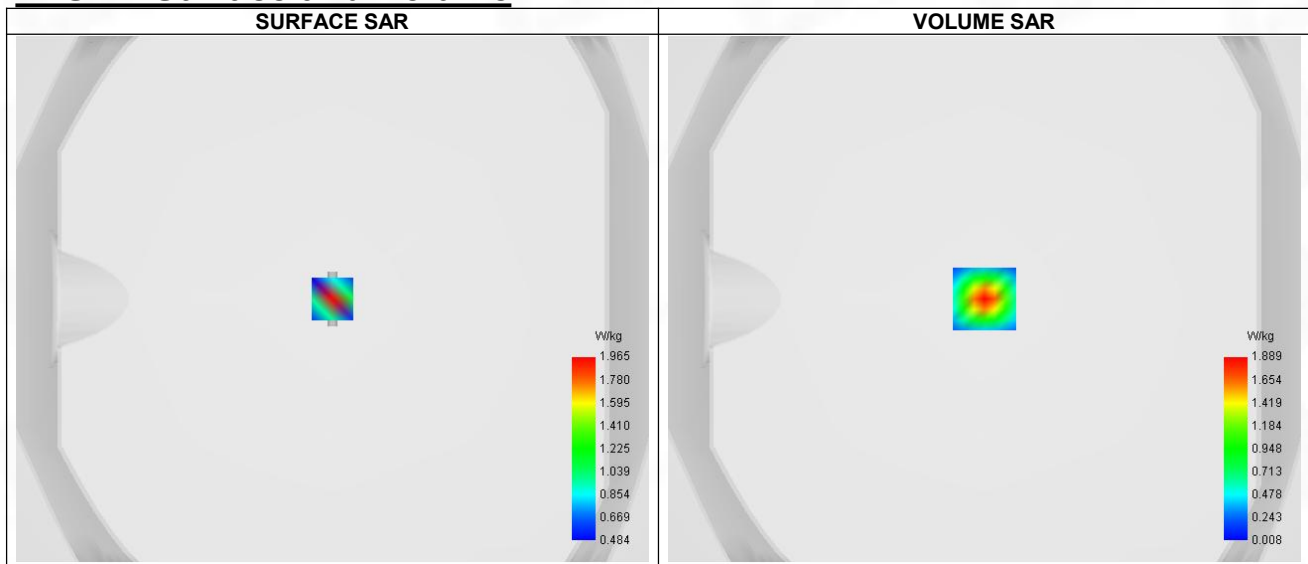


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 3.38 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.294
SAR 1g (W/Kg)	0.998
Variation (%)	-3.400
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.268	1.889	1.021	0.523	0.266	0.142	0.085	0.060	0.052

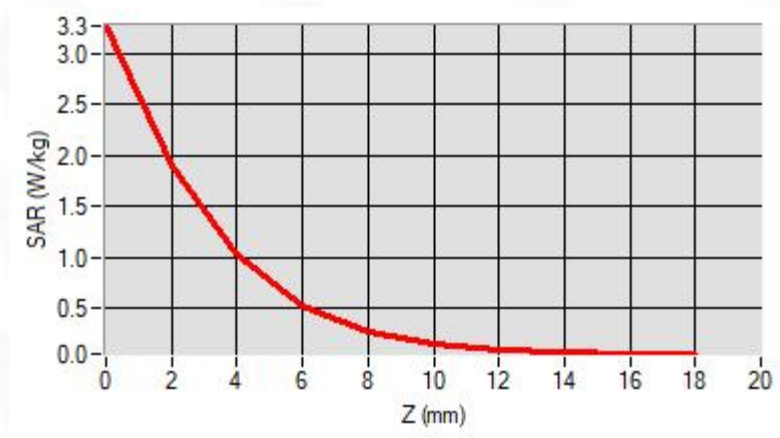

F. 3D Image

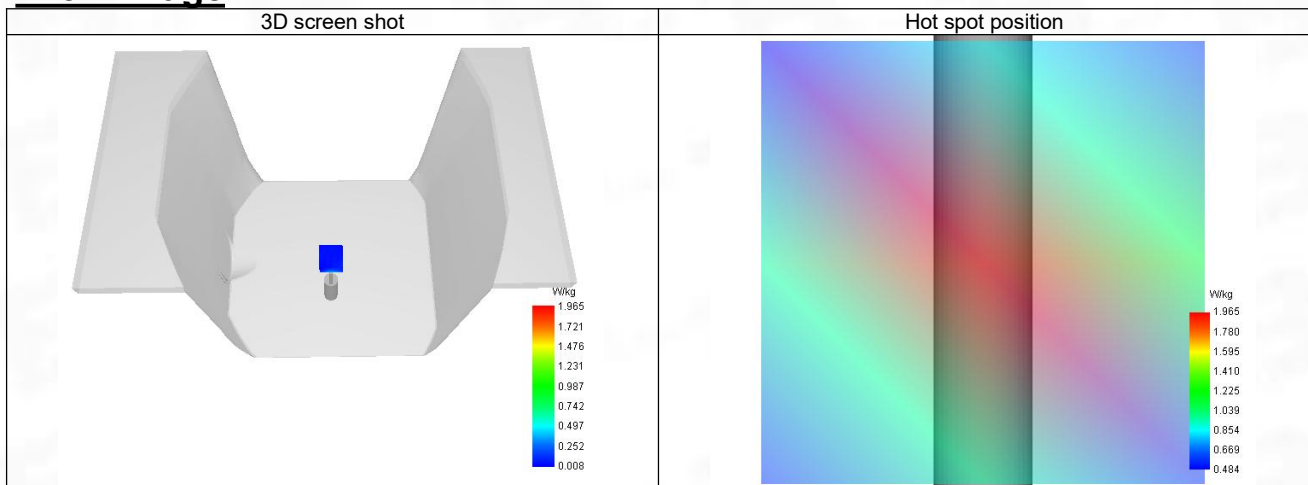

System Performance Check Data (5600 MHz)

System check at 5600 MHz

Date of measurement: 22/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.18
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5600
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	5600.000
Relative permittivity (real part)	35.380
Relative permittivity (imaginary part)	16.420
Conductivity (S/m)	5.110

C. SAR Surface and Volume

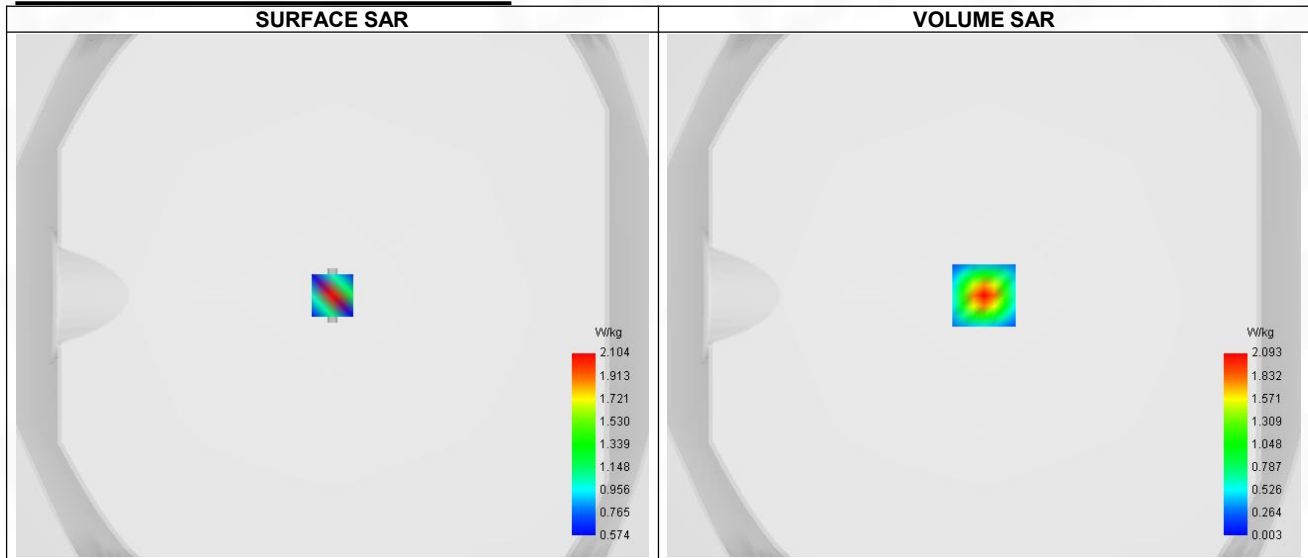


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 3.90 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.314
SAR 1g (W/Kg)	1.084
Variation (%)	-0.190
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.748	2.093	1.074	0.514	0.243	0.122	0.072	0.056	0.056

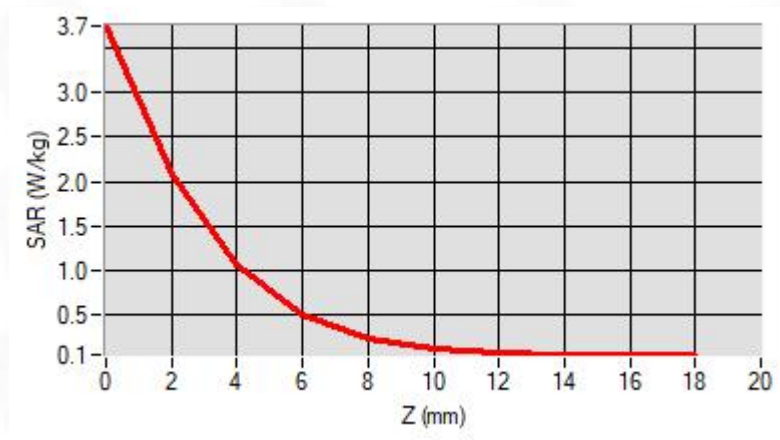

F. 3D Image

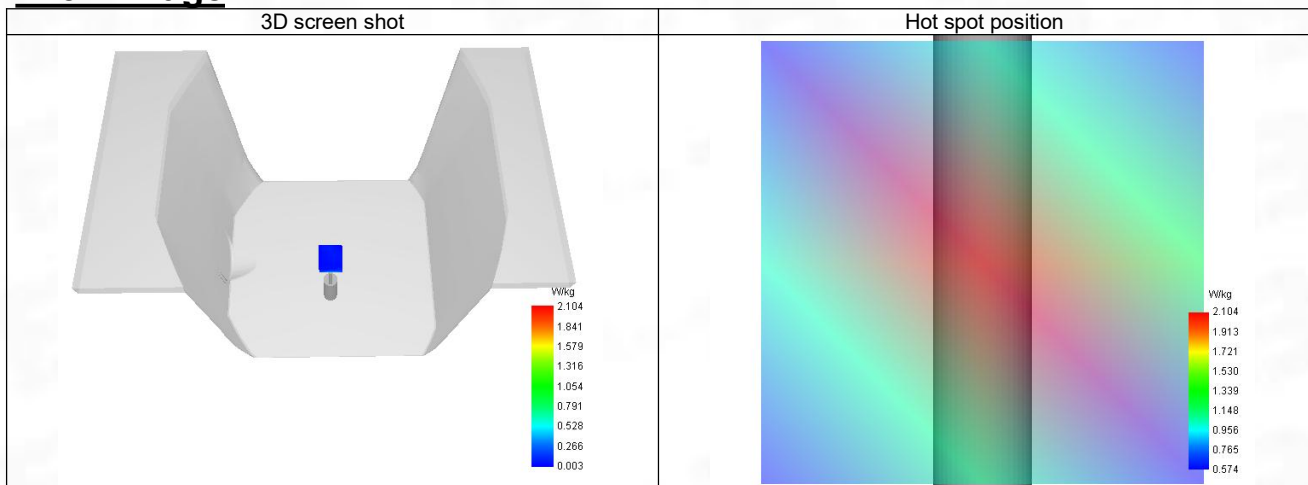

ANNEX C Test Data

1-Head with front position in dist. 0mm on Channel 124 in GSM900 voice

SAR Measurement at GSM900 (Cheek, Right)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	GSM900
Channels	Higher (124)
Signal	TDMA (GSM)
Modulation	GMSK

B. Permittivity

Frequency (MHz)	914.800
Relative permittivity (real part)	43.108
Relative permittivity (imaginary part)	19.043
Conductivity (S/m)	0.911

C. SAR Surface and Volume

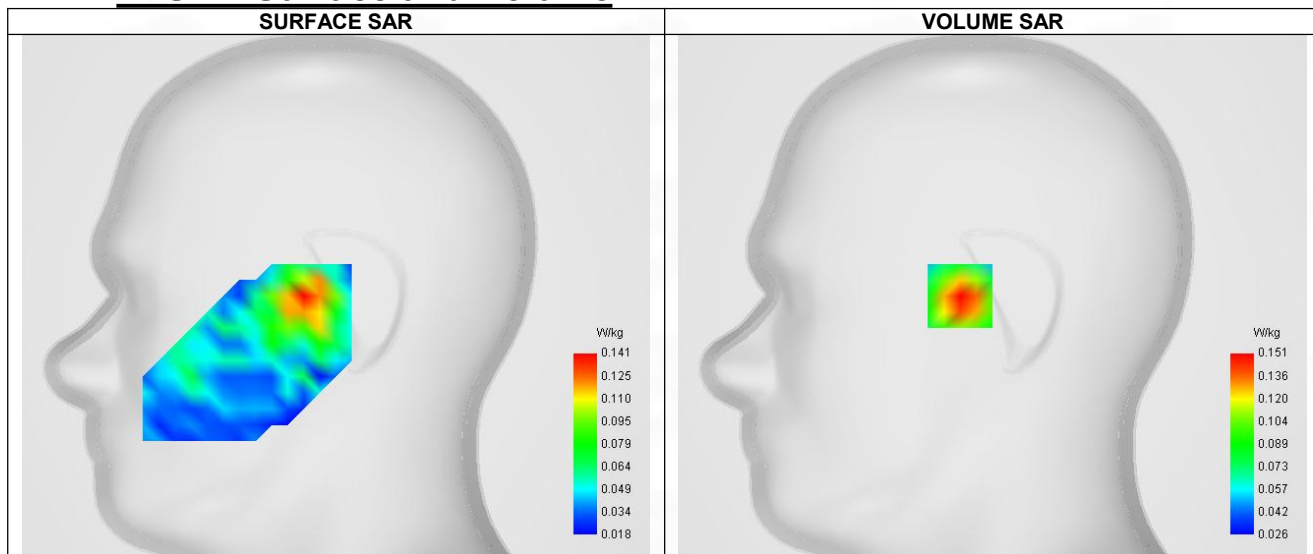

Maximum location: X=-33.00, Y=-1.00 ; SAR Peak: 0.08 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.112
SAR 1g (W/Kg)	0.171
Variation (%)	-2.300
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000


E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	-0.086	0.052	0.044	0.022	0.045


Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

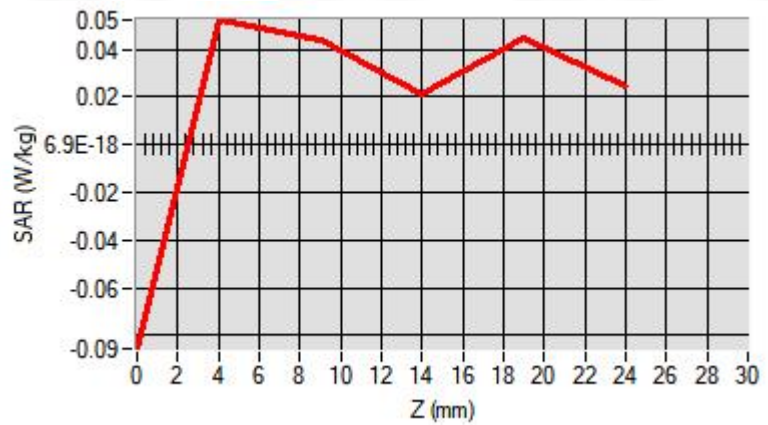

F. 3D Image

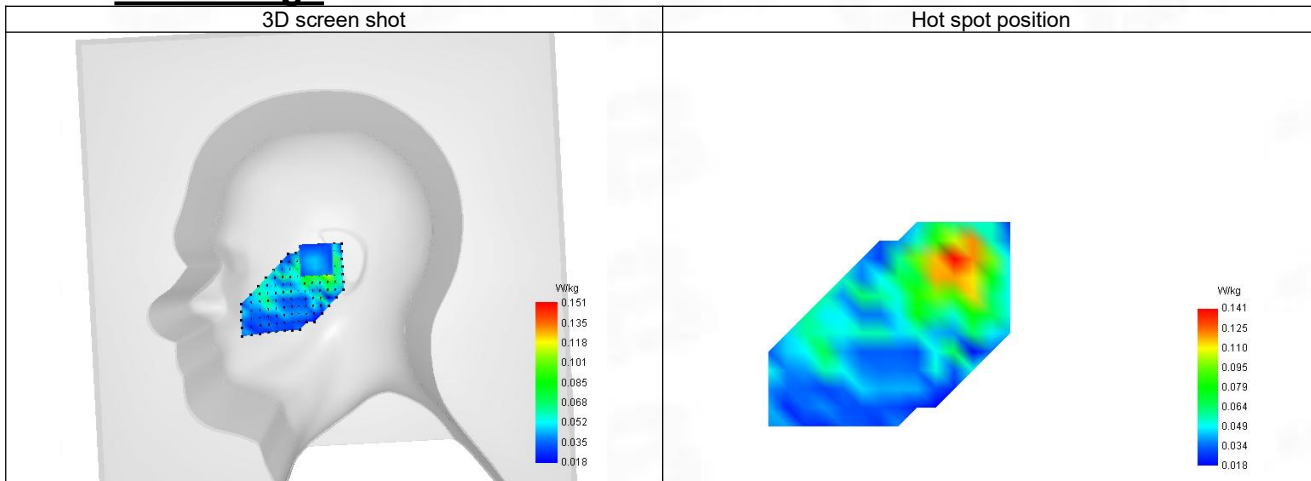

2-Body with back position in dist. 5mm on Channel 124 in GPRS900

SAR Measurement at GPRS900 (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS900
Channels	Higher (124)
Signal	TDMA (GPRS)
Modulation	GMSK (CS-1)
TX-slots	4

B. Permittivity

Frequency (MHz)	914.800
Relative permittivity (real part)	43.108
Relative permittivity (imaginary part)	19.043
Conductivity (S/m)	0.911

C. SAR Surface and Volume

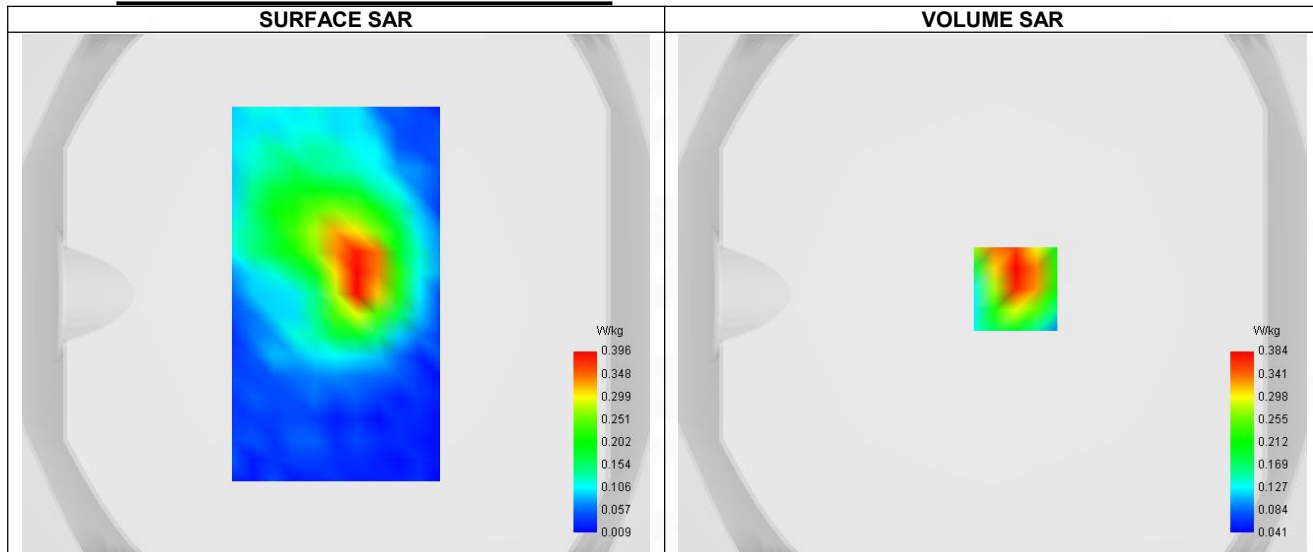


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.228
SAR 1g (W/Kg)	0.375
Variation (%)	-3.530
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.925	0.384	0.197	0.160	0.095

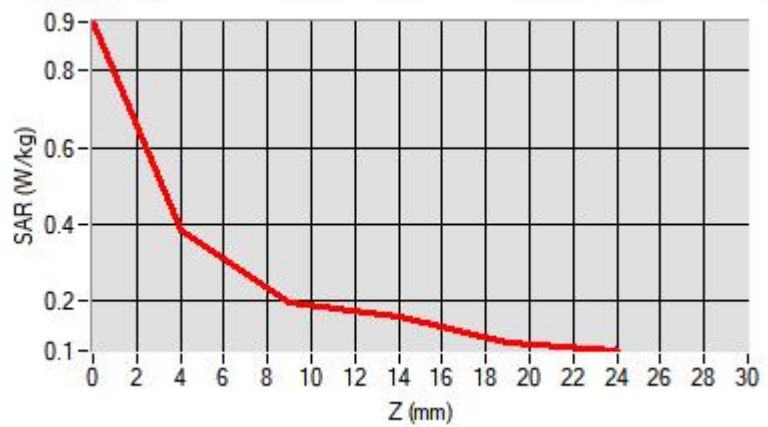

F. 3D Image

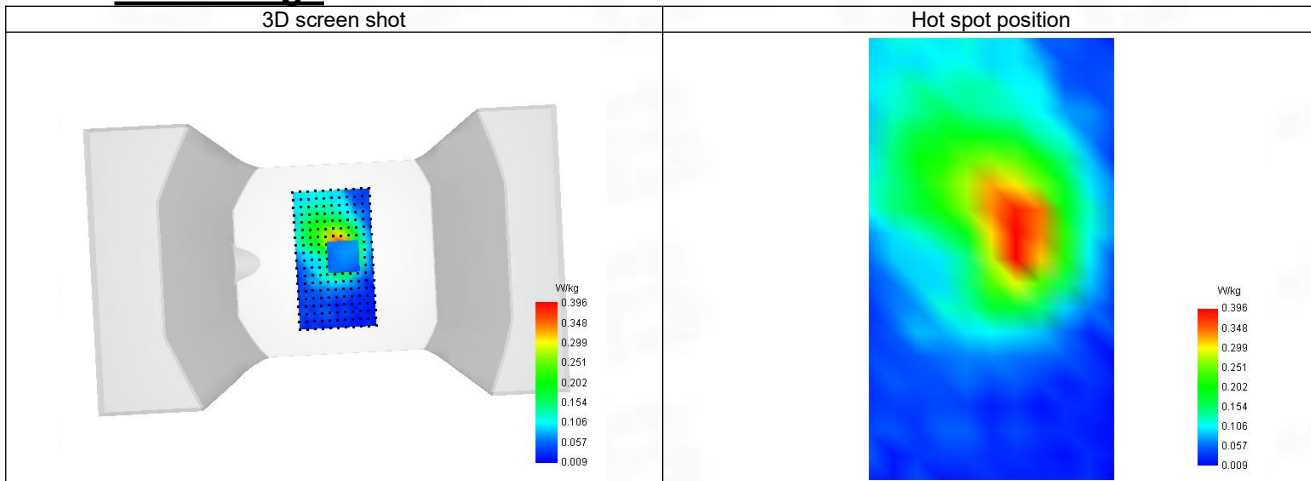

3-Body with back position in dist. 0mm on Channel 124 in GPRS900

SAR Measurement at GPRS900 (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS900
Channels	Higher (124)
Signal	TDMA (GPRS)
Modulation	GMSK (CS-1)
TX-slots	4

B. Permittivity

Frequency (MHz)	914.800
Relative permittivity (real part)	43.108
Relative permittivity (imaginary part)	19.043
Conductivity (S/m)	0.911

C. SAR Surface and Volume

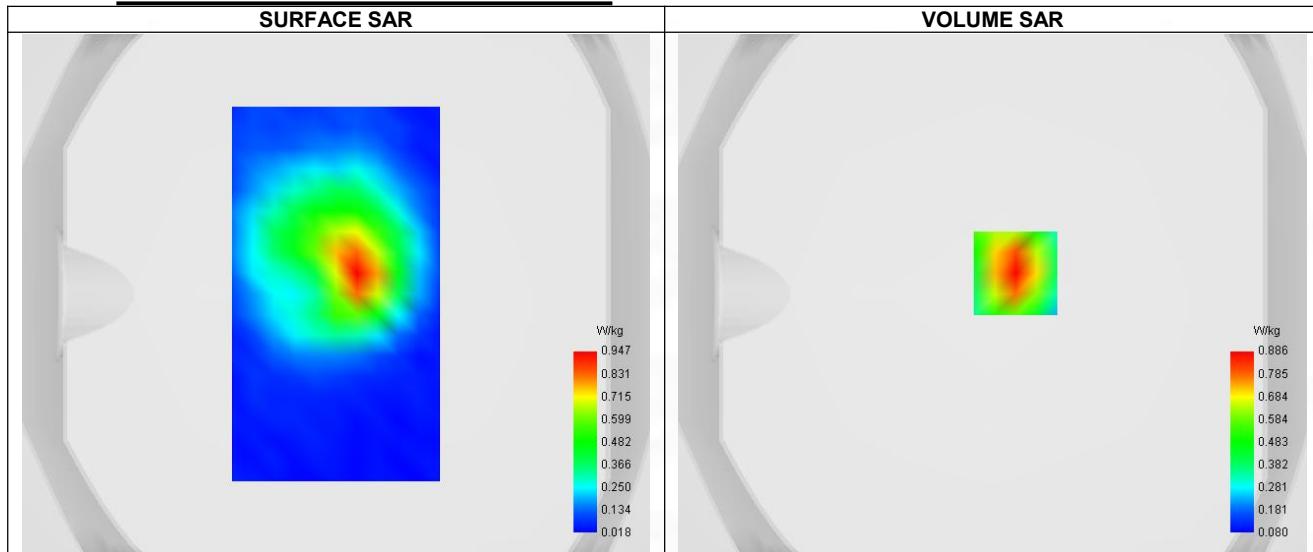


Maximum location: X=9.00, Y=8.00 ; SAR Peak: 1.30 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.506
SAR 1g (W/Kg)	0.858
Variation (%)	-1.490
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.295	0.886	0.547	0.346	0.230

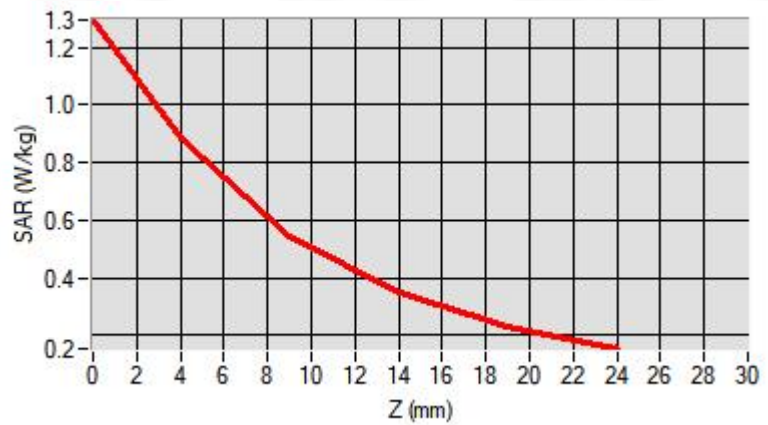

F. 3D Image

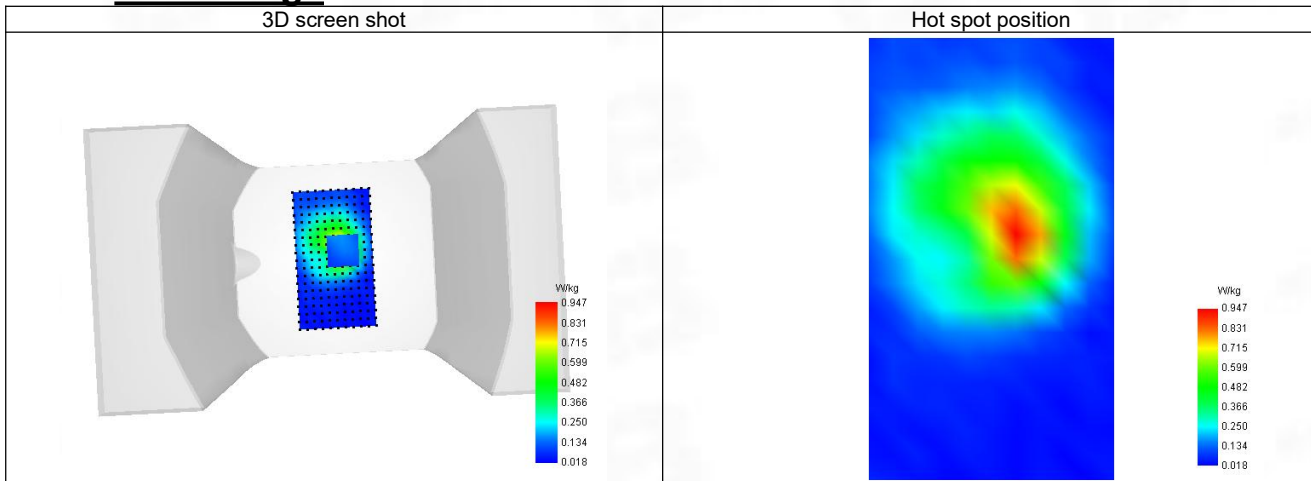

4-Head with front position in dist. 0mm on Channel 885 in GSM1800 voice

SAR Measurement at GSM1800 (Cheek, Right)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	GSM1800
Channels	Higher (885)
Signal	TDMA (GSM)
Modulation	GMSK

B. Permittivity

Frequency (MHz)	1784.800
Relative permittivity (real part)	41.557
Relative permittivity (imaginary part)	14.175
Conductivity (S/m)	1.362

C. SAR Surface and Volume

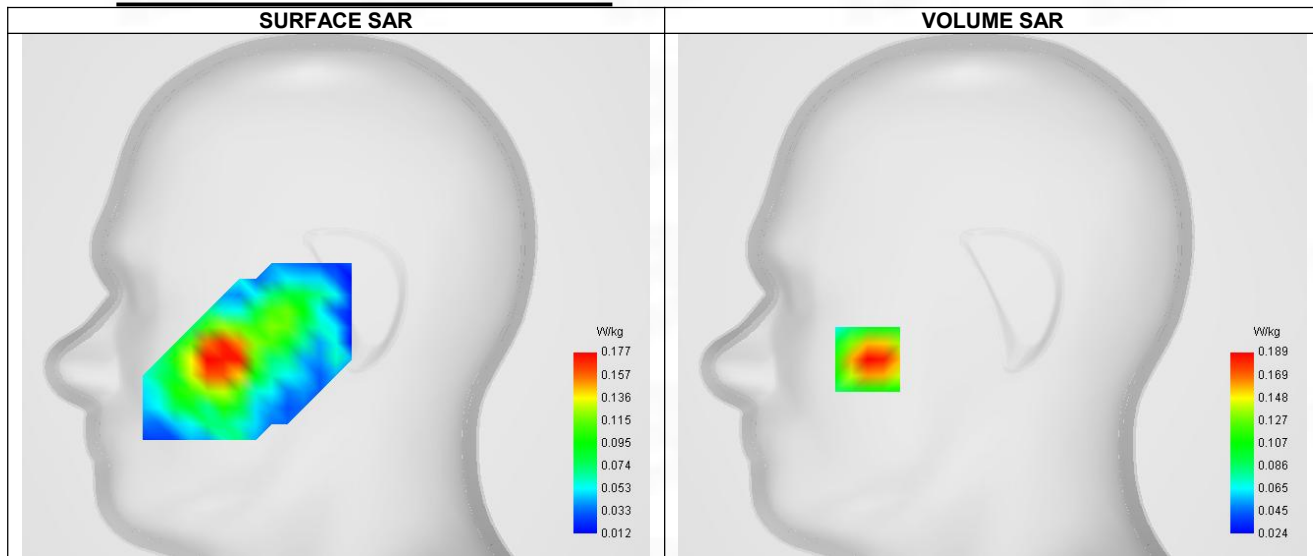


Maximum location: X=-62.00, Y=-32.00 ; SAR Peak: 0.26 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.124
SAR 1g (W/Kg)	0.187
Variation (%)	-2.850
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.258	0.189	0.132	0.098	0.080

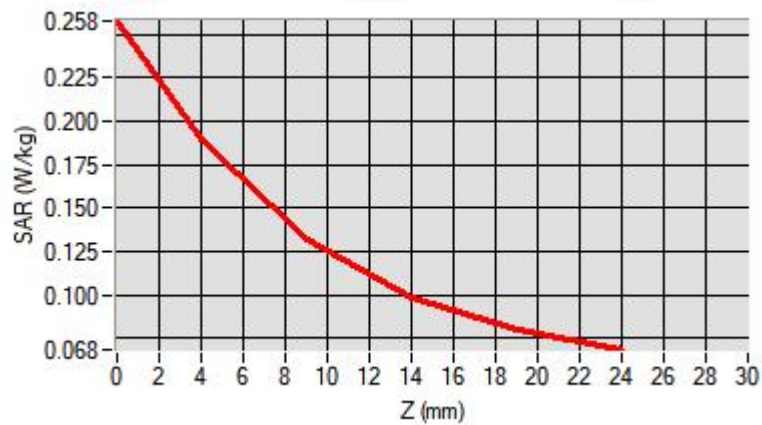

F. 3D Image

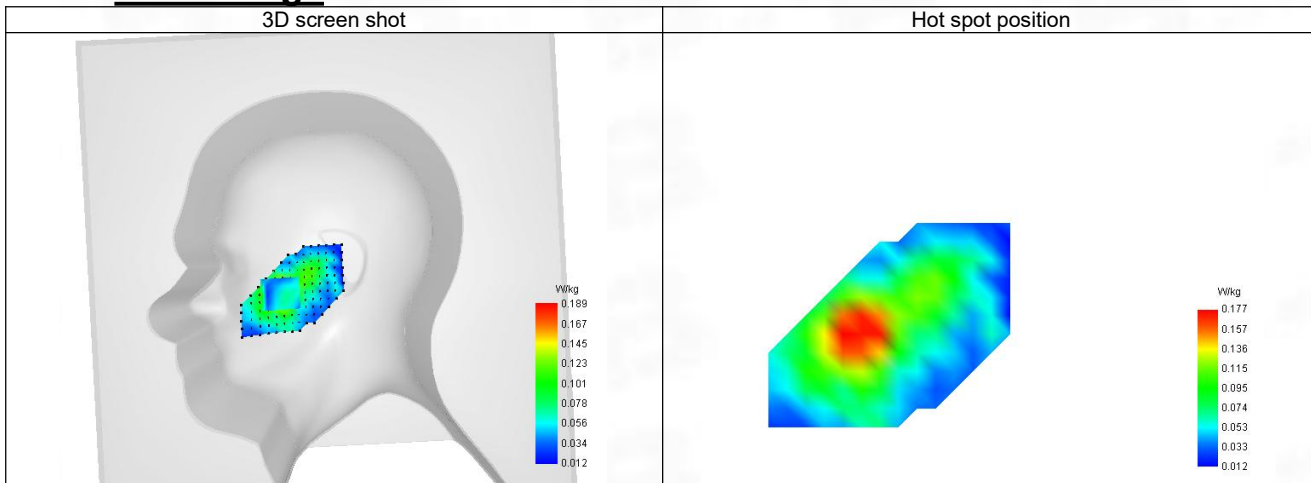

5-Body with back position in dist. 5mm on Channel 699 in GPRS1800

SAR Measurement at GPRS1800 (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS1800
Channels	Middle (699)
Signal	TDMA (GPRS)
Modulation	GMSK (CS-1)
TX-slots	4

B. Permittivity

Frequency (MHz)	1747.600
Relative permittivity (real part)	41.623
Relative permittivity (imaginary part)	14.383
Conductivity (S/m)	1.343

C. SAR Surface and Volume

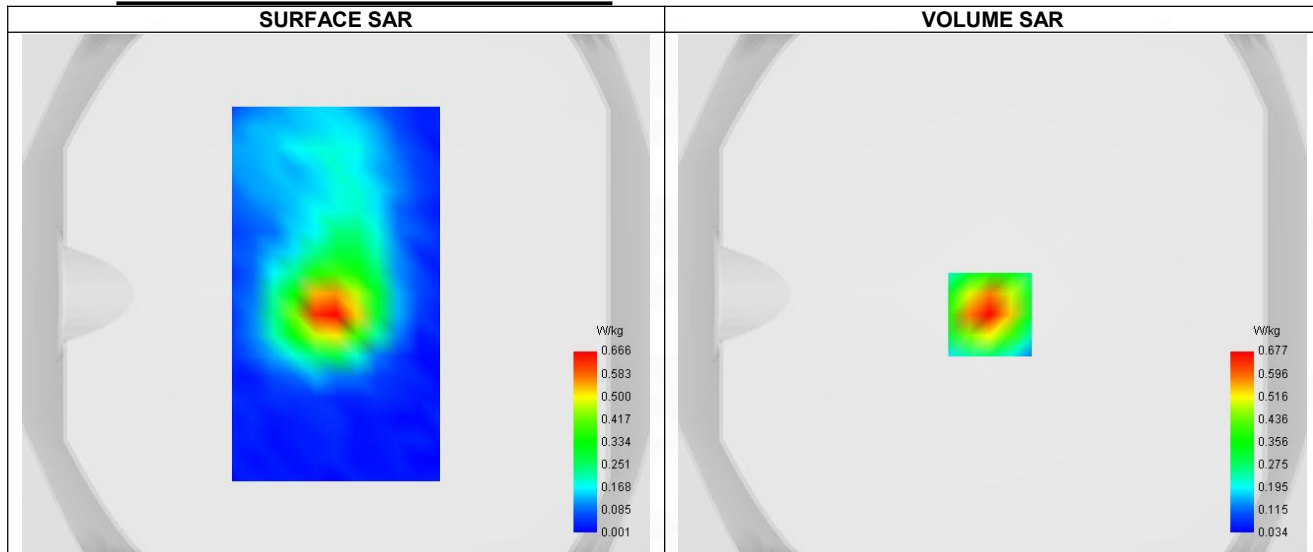


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.346
SAR 1g (W/Kg)	0.658
Variation (%)	2.670
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.056	0.677	0.381	0.220	0.137

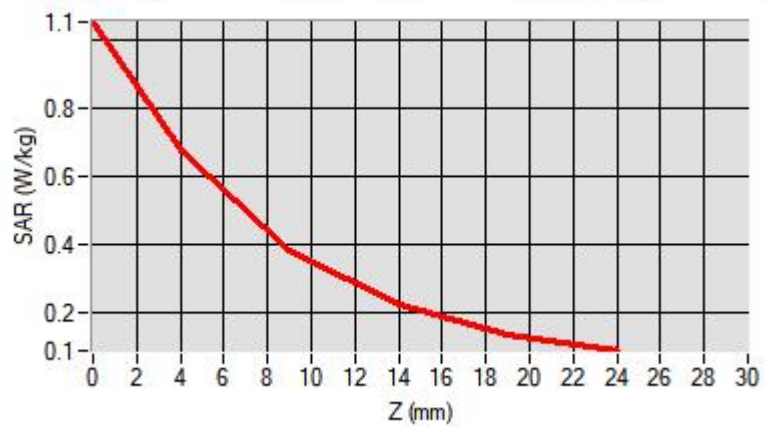

F. 3D Image

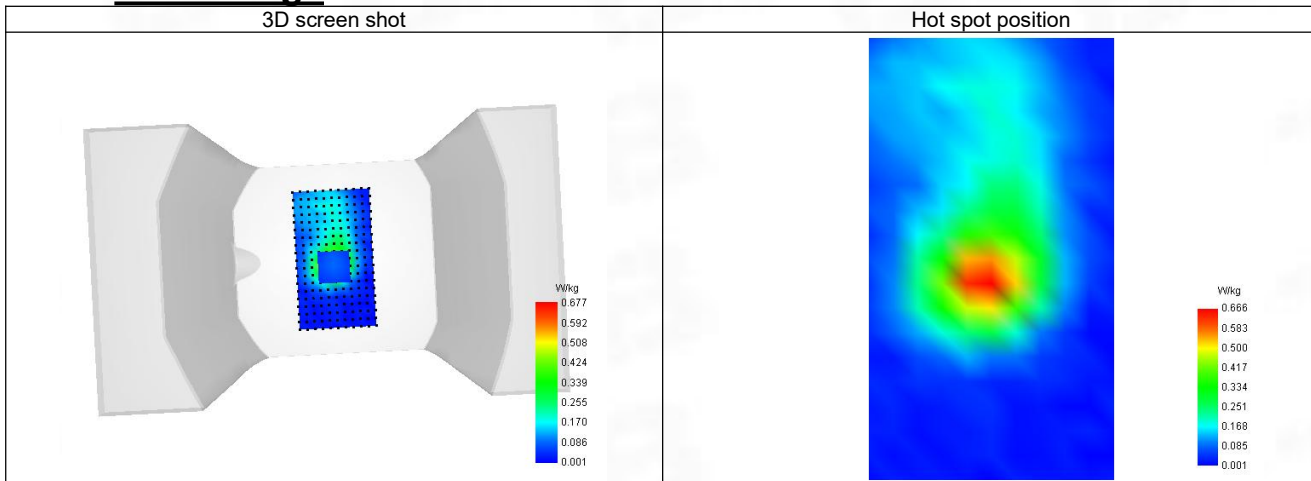

6-Body with back position in dist. 0mm on Channel 699 in GPRS1800

SAR Measurement at GPRS1800 (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS1800
Channels	Middle (699)
Signal	TDMA (GPRS)
Modulation	GMSK (CS-1)
TX-slots	4

B. Permittivity

Frequency (MHz)	1747.600
Relative permittivity (real part)	41.623
Relative permittivity (imaginary part)	14.383
Conductivity (S/m)	1.343

C. SAR Surface and Volume

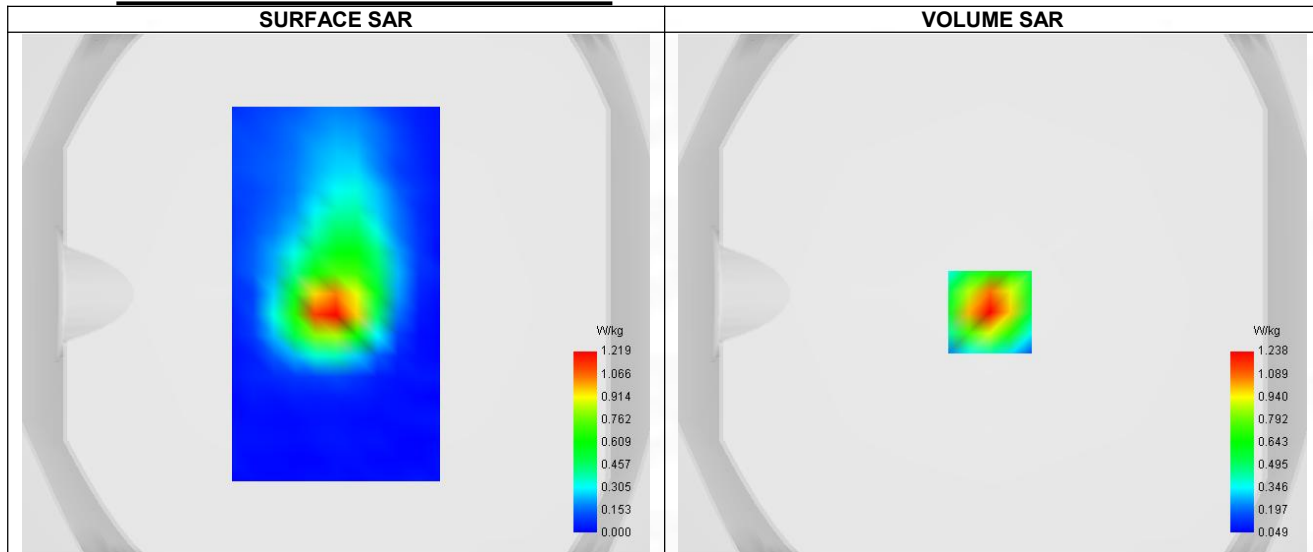


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.614
SAR 1g (W/Kg)	1.196
Variation (%)	-1.960
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.958	1.238	0.684	0.388	0.238

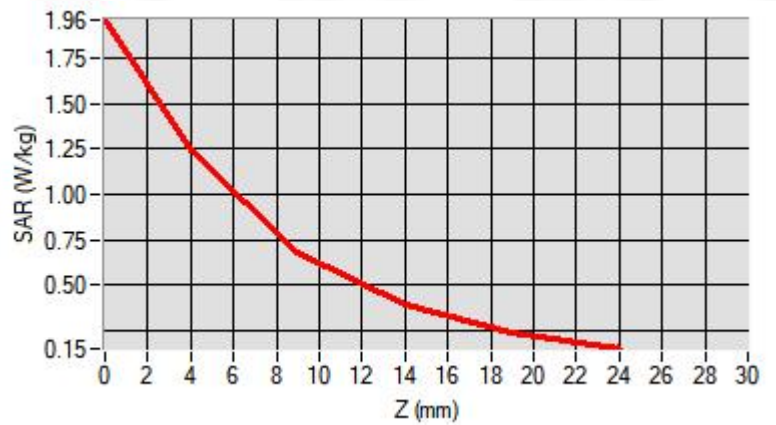

F. 3D Image

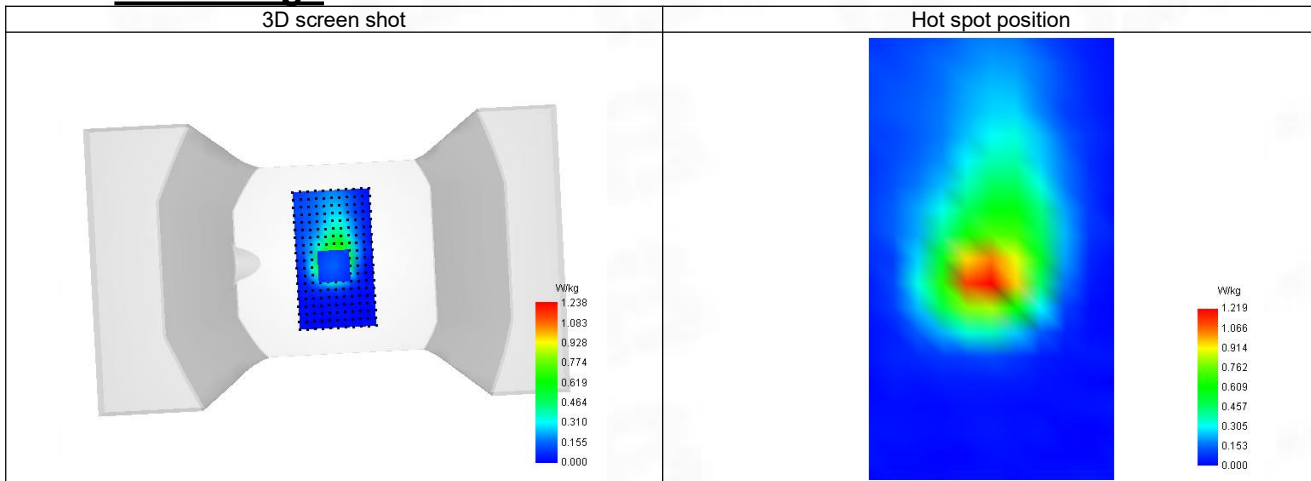

7-Head with front position in dist. 0mm on Channel 9888 in WCDMA Band 1

SAR Measurement at Band 1 (UMTS) (Cheek, Right)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.33
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	Band 1 (UMTS)
Channels	Higher (9888)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	1977.600
Relative permittivity (real part)	40.093
Relative permittivity (imaginary part)	13.374
Conductivity (S/m)	1.466

C. SAR Surface and Volume

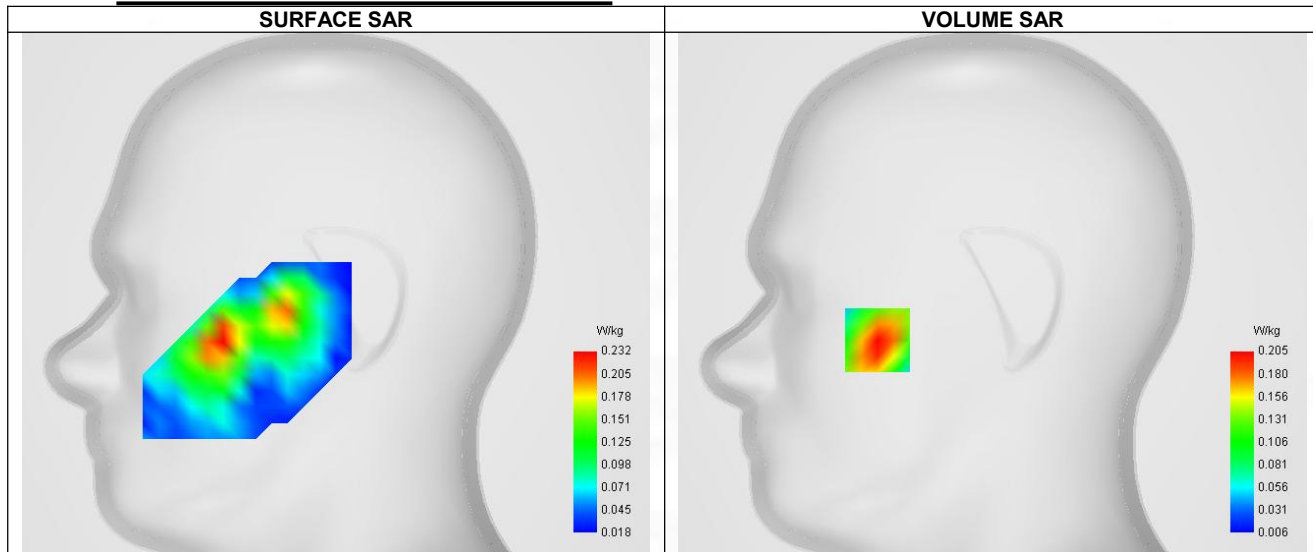


Maximum location: X=-57.00, Y=-23.00 ; SAR Peak: 0.28 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.130
SAR 1g (W/Kg)	0.208
Variation (%)	3.680
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.247	0.205	0.158	0.115	0.079

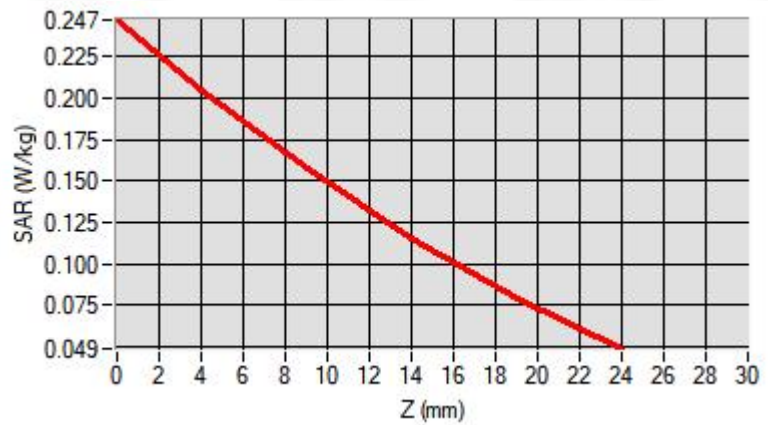

F. 3D Image

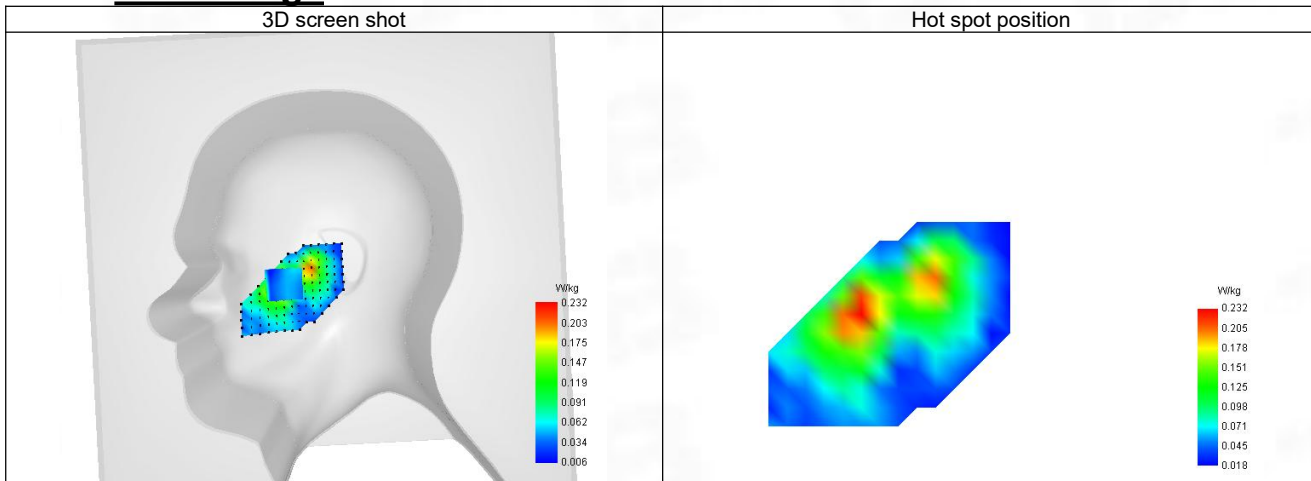

8-Body with front position in dist. 5mm on Channel 9888 in WCDMA Band 1

SAR Measurement at Band 1 (UMTS) (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.33
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 1 (UMTS)
Channels	Higher (9888)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	1977.600
Relative permittivity (real part)	40.093
Relative permittivity (imaginary part)	13.374
Conductivity (S/m)	1.466

C. SAR Surface and Volume

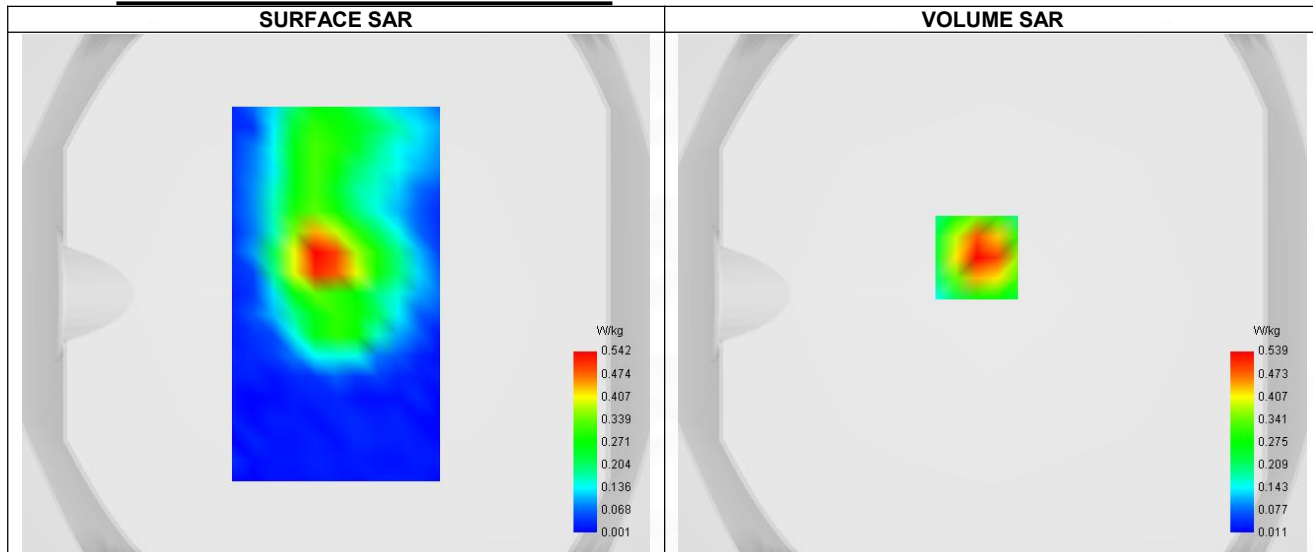


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.296
SAR 1g (W/Kg)	0.537
Variation (%)	-2.480
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.750	0.539	0.343	0.207	0.115

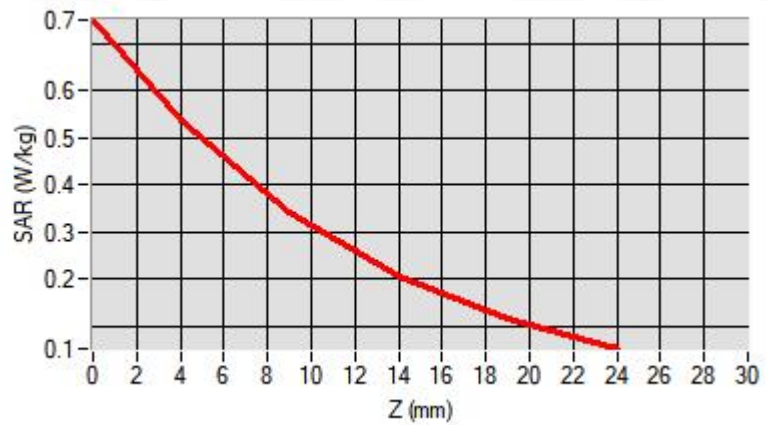

F. 3D Image

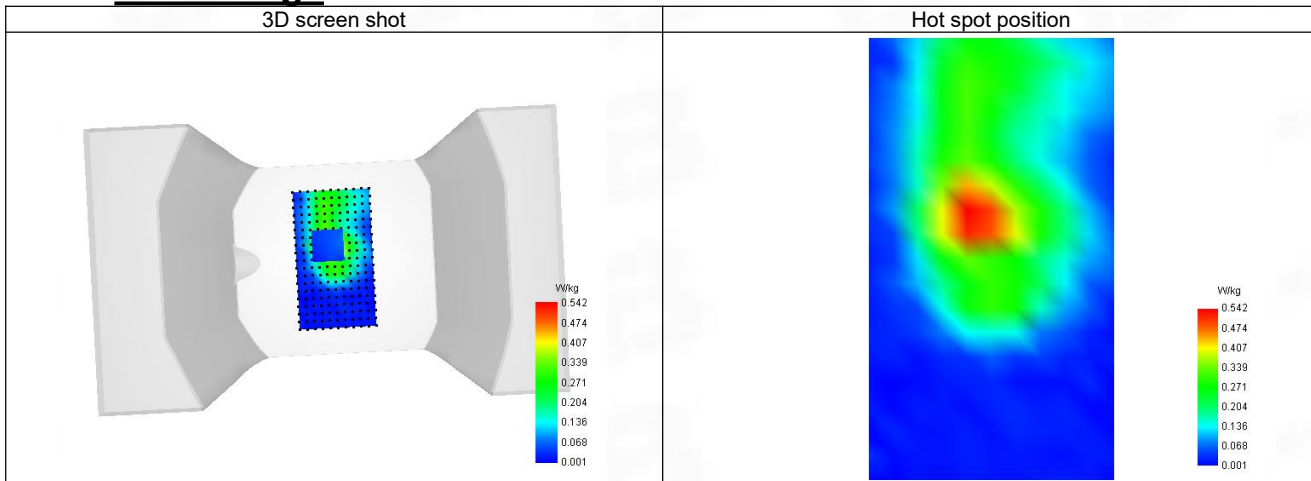

9-Body with back position in dist. 0mm on Channel 9888 in WCDMA Band 1

SAR Measurement at Band 1 (UMTS) (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.33
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 1 (UMTS)
Channels	Higher (9888)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	1977.600
Relative permittivity (real part)	40.093
Relative permittivity (imaginary part)	13.374
Conductivity (S/m)	1.466

C. SAR Surface and Volume

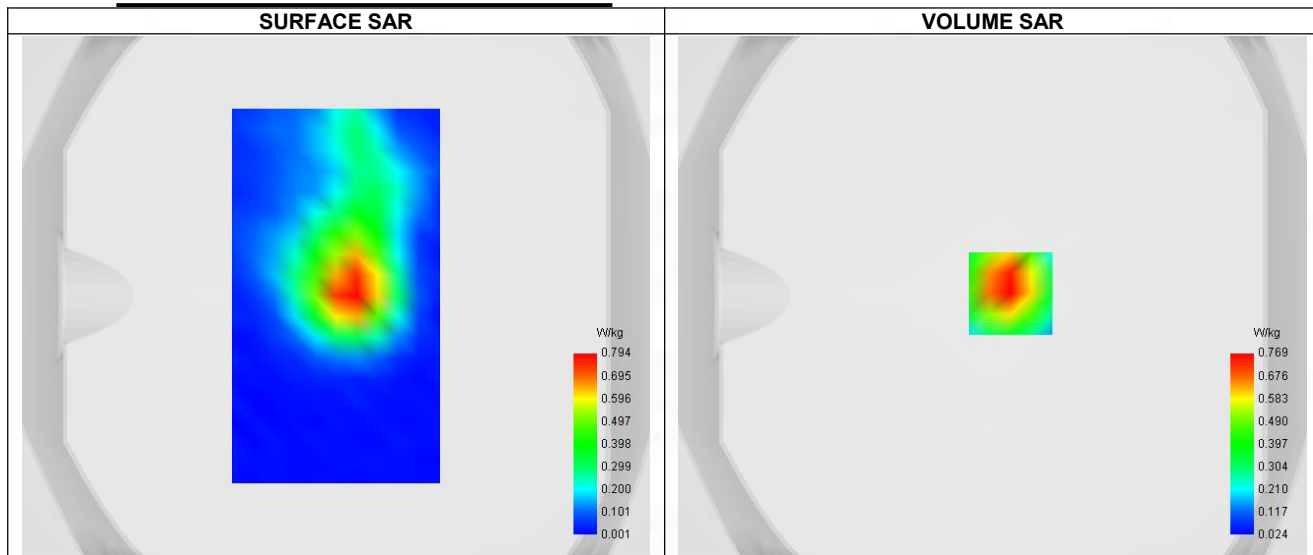


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.410
SAR 1g (W/Kg)	0.777
Variation (%)	-3.100
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.203	0.769	0.428	0.238	0.137

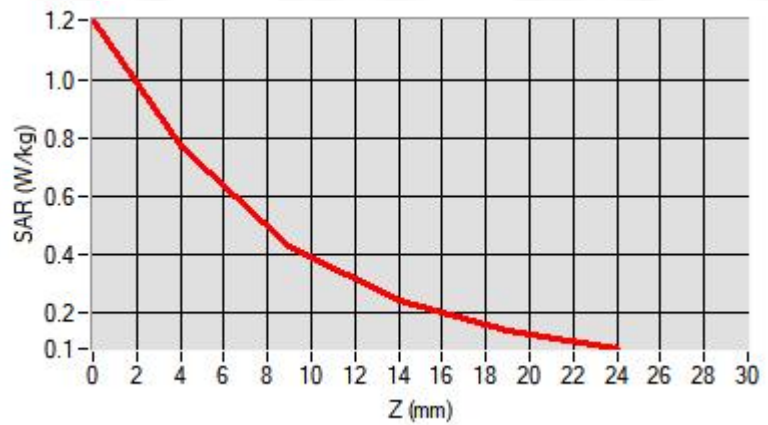

F. 3D Image

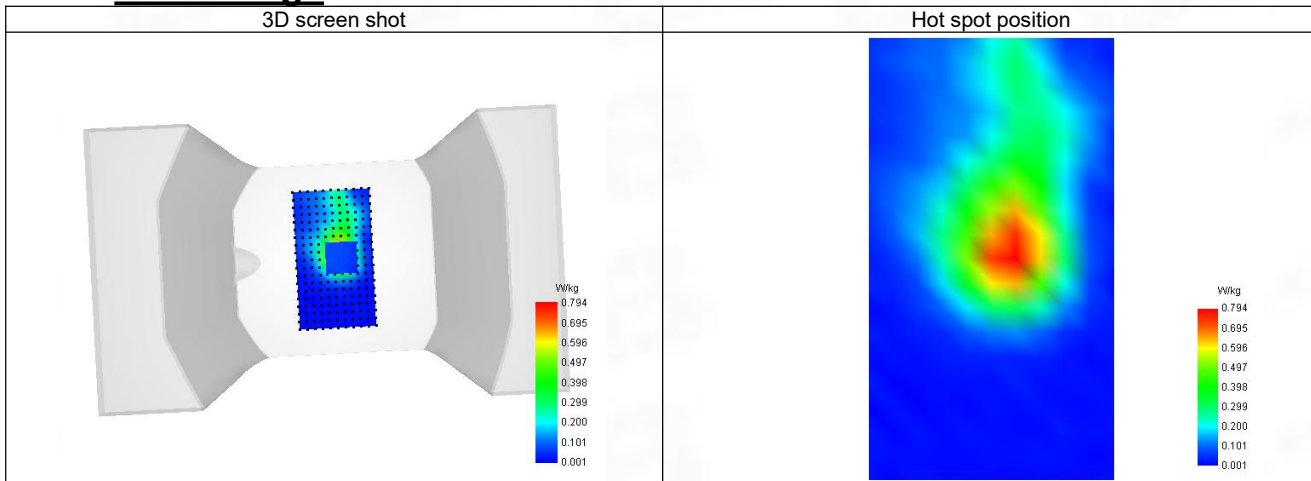

10-Head with front position in dist. 0mm on Channel 2863 in WCDMA Band 8

SAR Measurement at Band 8 (900) (Cheek, Right)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	Band 8 (900)
Channels	Higher (2863)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	912.600
Relative permittivity (real part)	43.112
Relative permittivity (imaginary part)	19.056
Conductivity (S/m)	0.910

C. SAR Surface and Volume

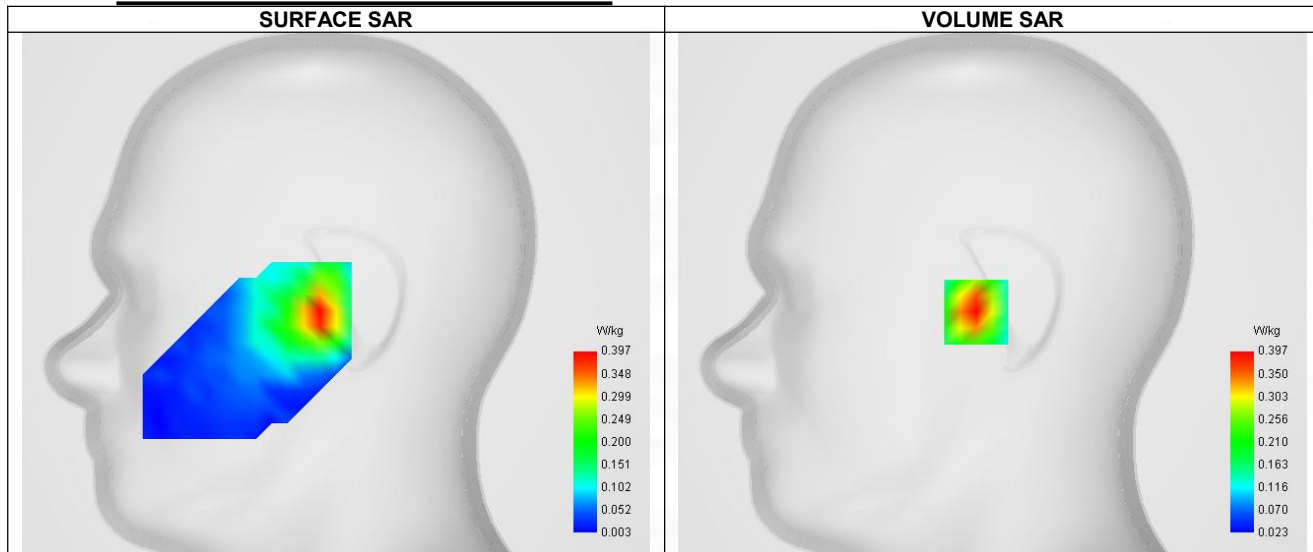


Maximum location: X=-72.00, Y=-40.00 ; SAR Peak: 0.05 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.122
SAR 1g (W/Kg)	0.211
Variation (%)	-2.040
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	-0.024	0.023	0.016	0.004	0.012

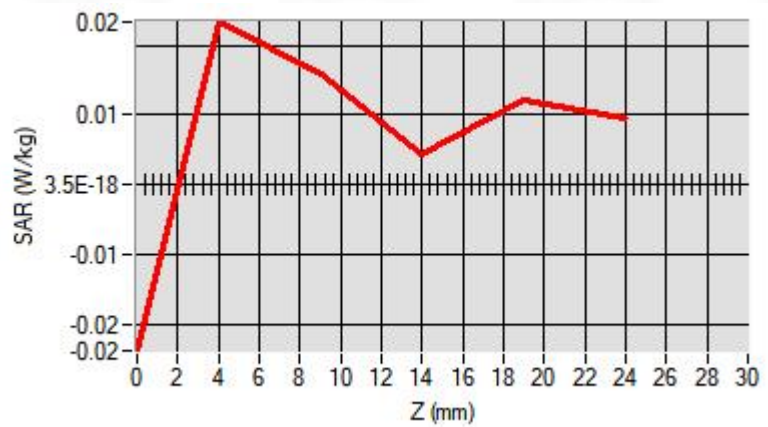

F. 3D Image

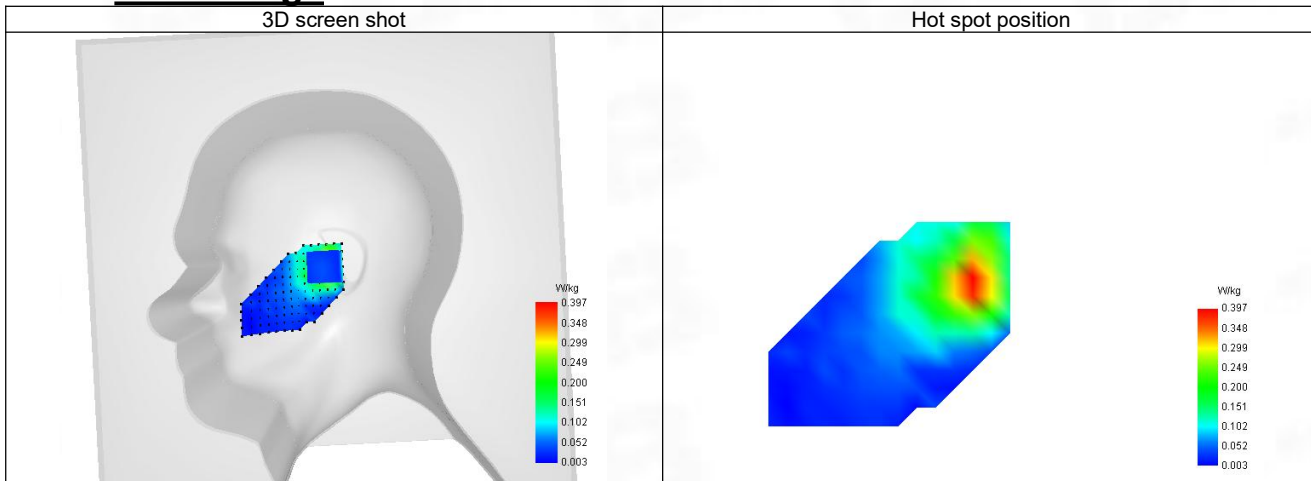

11-Body with front position in dist. 5mm on Channel 2863 in WCDMA Band 8

SAR Measurement at Band 8 (900) (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 8 (900)
Channels	Higher (2863)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	912.600
Relative permittivity (real part)	43.112
Relative permittivity (imaginary part)	19.056
Conductivity (S/m)	0.910

C. SAR Surface and Volume

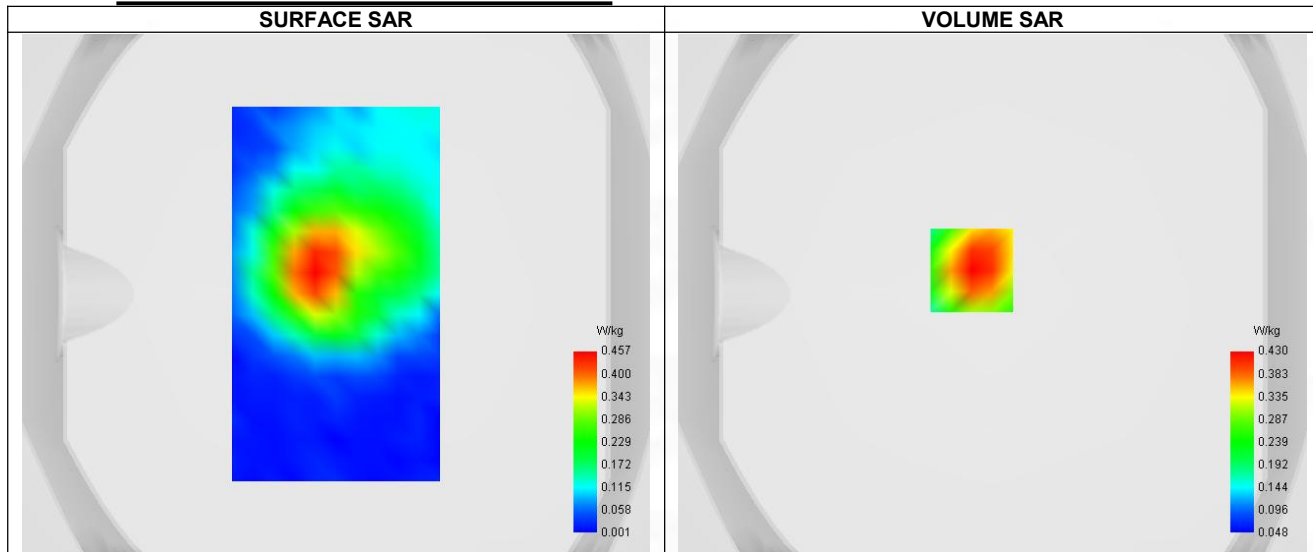


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.266
SAR 1g (W/Kg)	0.422
Variation (%)	-1.340
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.607	0.430	0.279	0.185	0.128

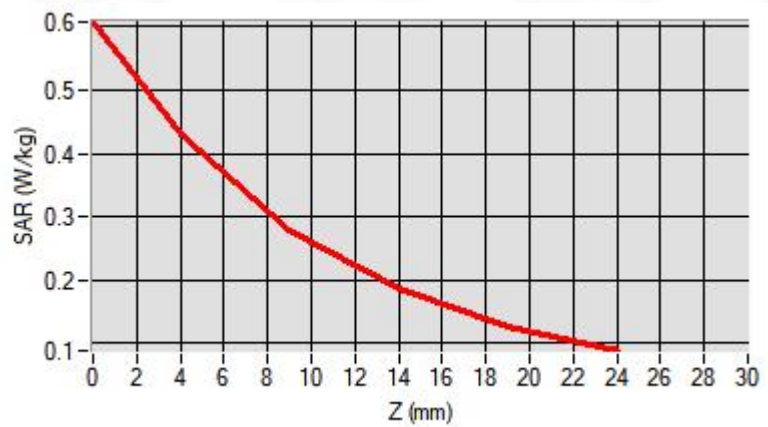

F. 3D Image

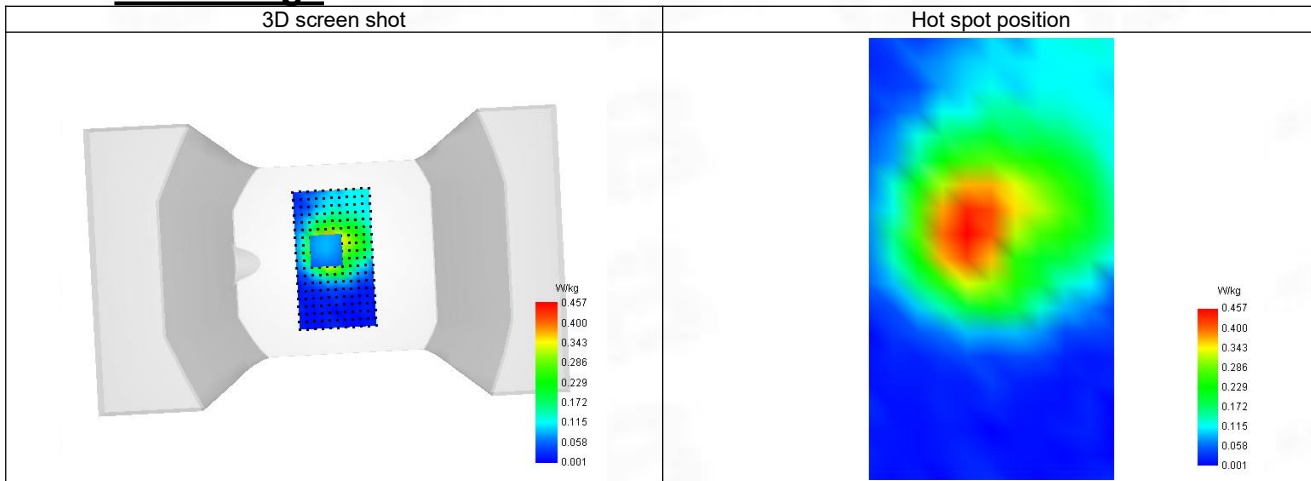

12-Body with back position in dist. 0mm on Channel 2863 in WCDMA Band 8

SAR Measurement at Band 8 (900) (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 8 (900)
Channels	Higher (2863)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Frequency (MHz)	912.600
Relative permittivity (real part)	43.112
Relative permittivity (imaginary part)	19.056
Conductivity (S/m)	0.910

C. SAR Surface and Volume

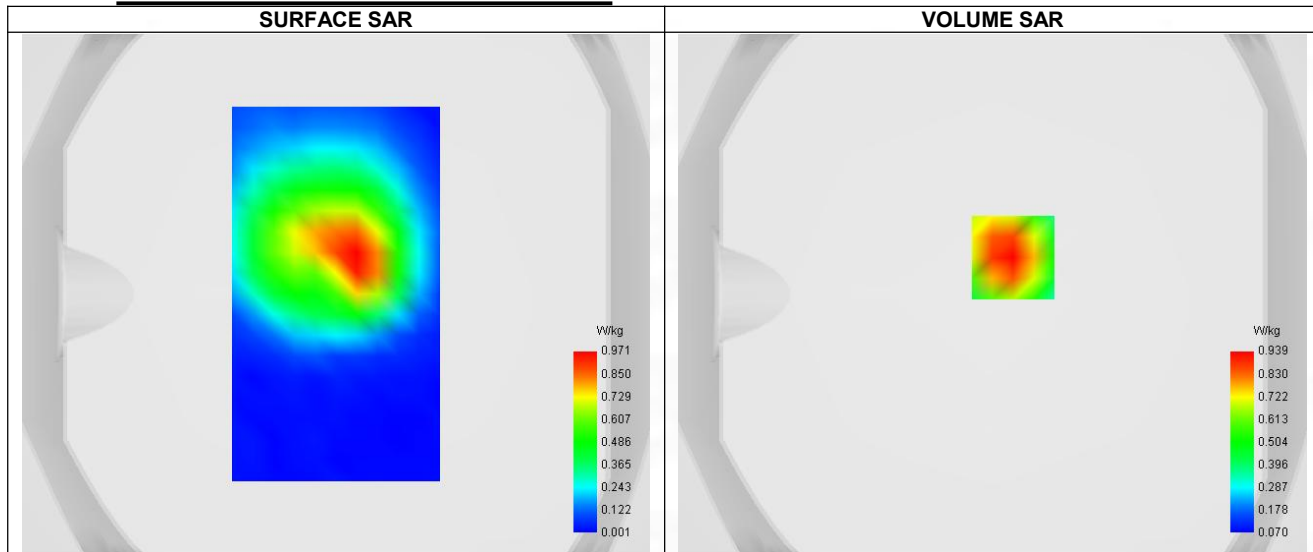


Maximum location: X=8.00, Y=14.00 ; SAR Peak: 1.41 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.550
SAR 1g (W/Kg)	0.918
Variation (%)	-0.850
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.397	0.939	0.564	0.343	0.218

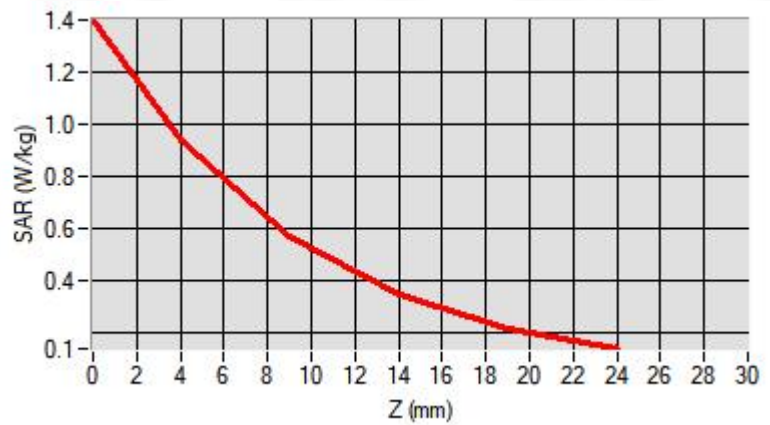

F. 3D Image

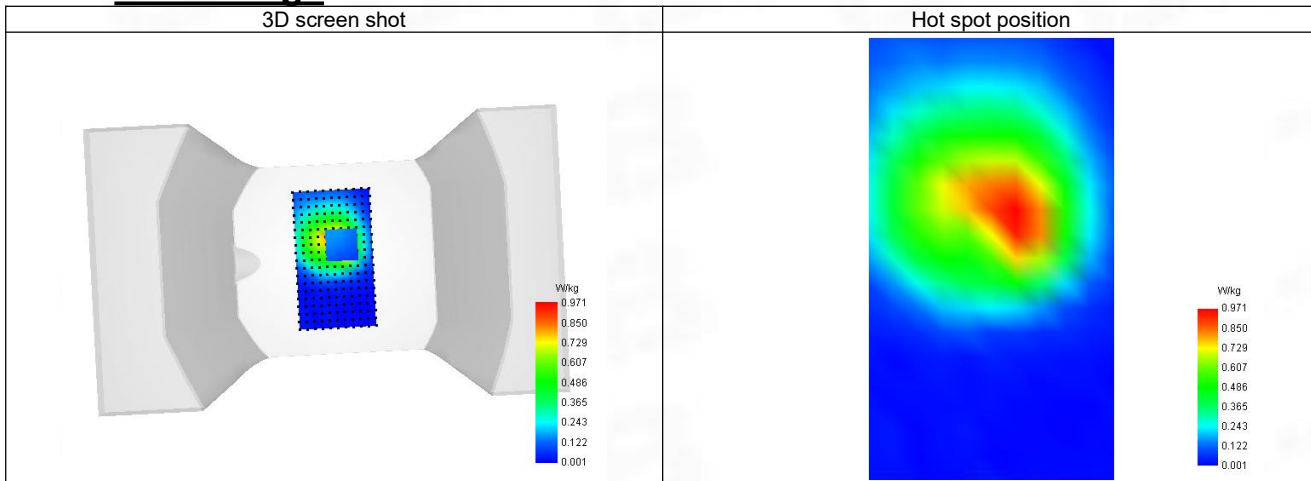

13-Head with front position in dist. 0mm on Channel 18500 in LTE band 1

SAR Measurement at LTE band 1 (Cheek, Right)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.33
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 1
Channels	Higher (18500)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

B. Permittivity

Frequency (MHz)	1961.090
Relative permittivity (real part)	40.048
Relative permittivity (imaginary part)	13.376
Conductivity (S/m)	1.454

C. SAR Surface and Volume

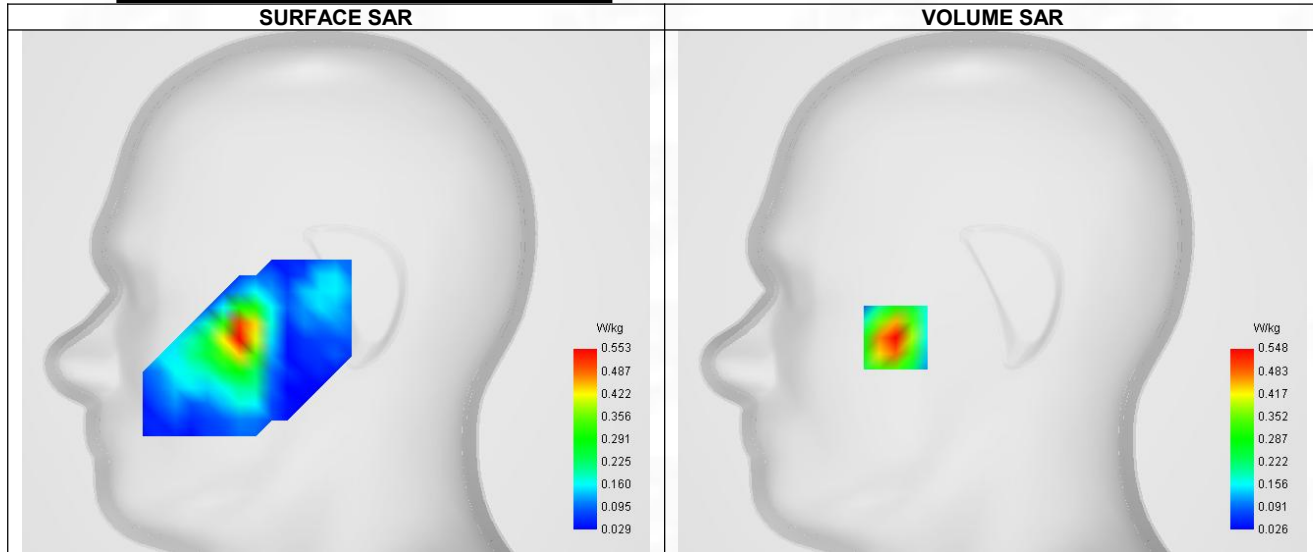


Maximum location: X=-48.00, Y=-23.00 ; SAR Peak: 0.77 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.309
SAR 1g (W/Kg)	0.539
Variation (%)	2.370
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.757	0.548	0.367	0.254	0.183

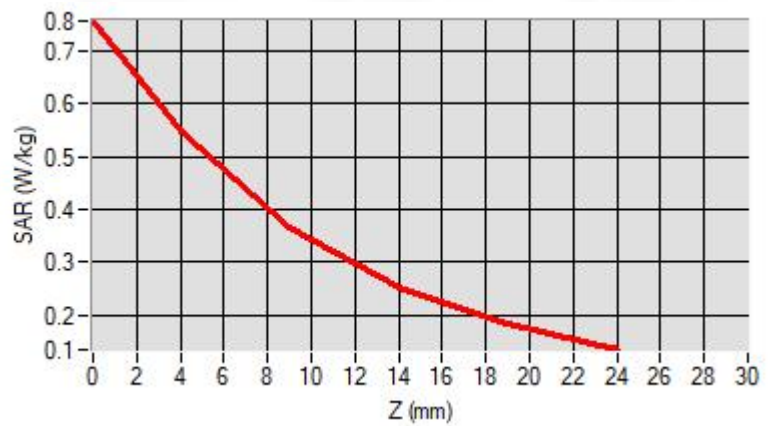

F. 3D Image

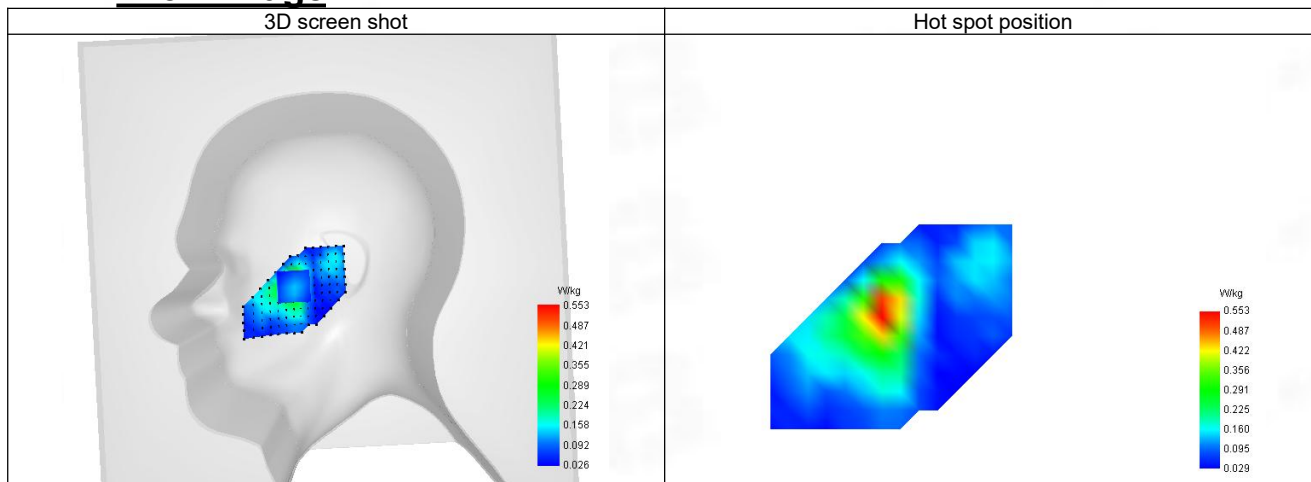

14-Body with front position in dist. 5mm on Channel 18500 in LTE Band 1

SAR Measurement at LTE band 1 (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.33
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 1
Channels	Higher (18500)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

B. Permittivity

Frequency (MHz)	1961.090
Relative permittivity (real part)	40.048
Relative permittivity (imaginary part)	13.376
Conductivity (S/m)	1.454

C. SAR Surface and Volume

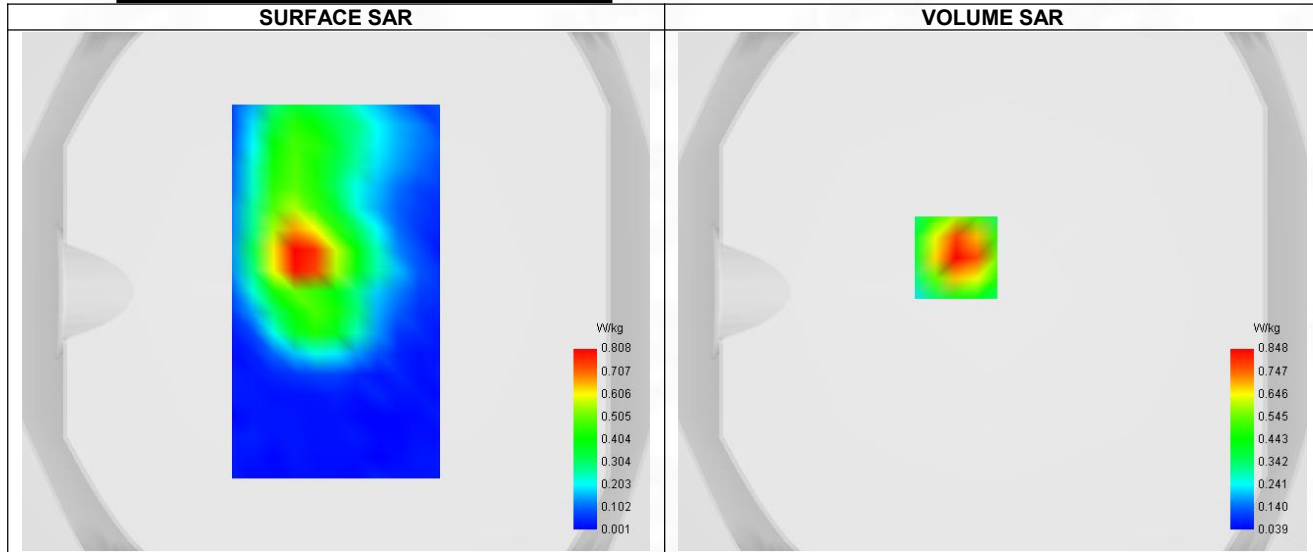


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.464
SAR 1g (W/Kg)	0.840
Variation (%)	-1.820
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.264	0.848	0.508	0.308	0.195

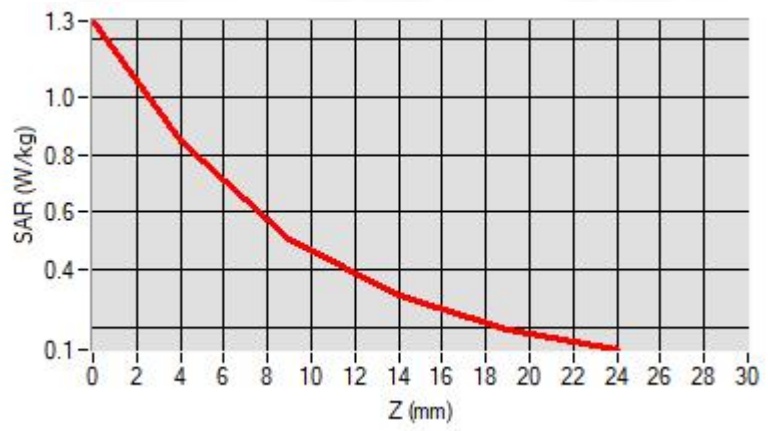

F. 3D Image

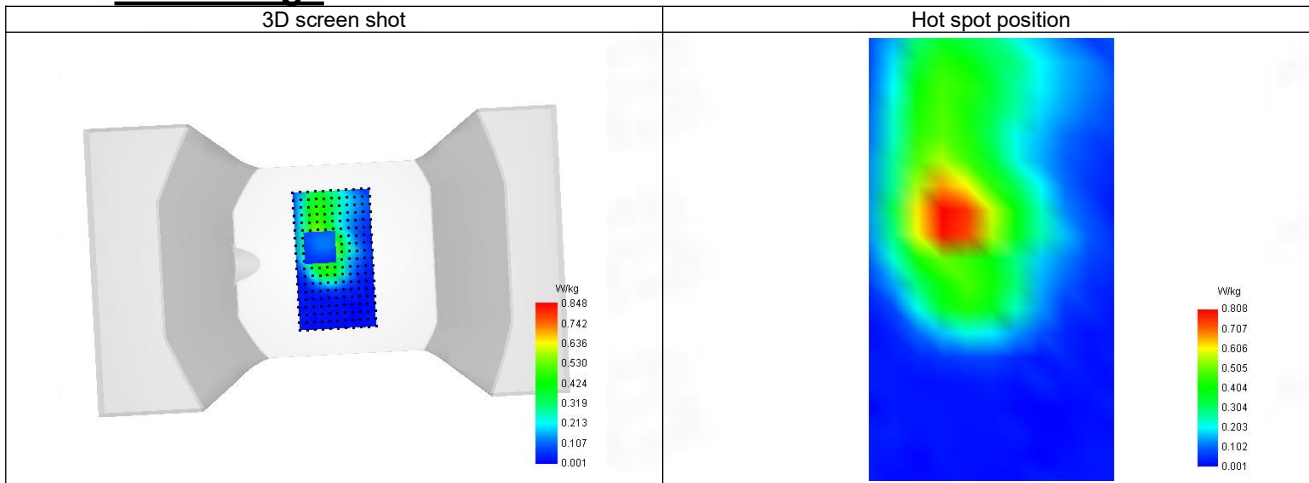

15-Body with back position in dist. 0mm on Channel 18500 in LTE Band 1

SAR Measurement at LTE band 1 (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.33
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 1
Channels	Higher (18500)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

B. Permittivity

Frequency (MHz)	1961.090
Relative permittivity (real part)	40.048
Relative permittivity (imaginary part)	13.376
Conductivity (S/m)	1.454

C. SAR Surface and Volume

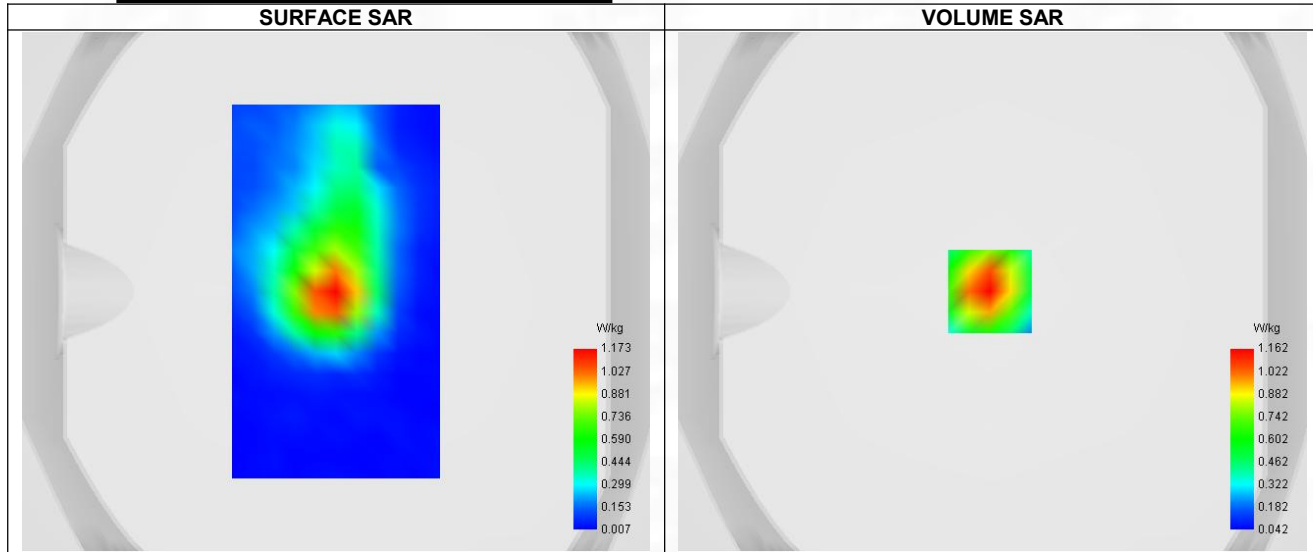


Maximum location: X=-1.00, Y=0.00 ; SAR Peak: 1.86 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.599
SAR 1g (W/Kg)	1.147
Variation (%)	-2.900
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.854	1.162	0.631	0.347	0.204

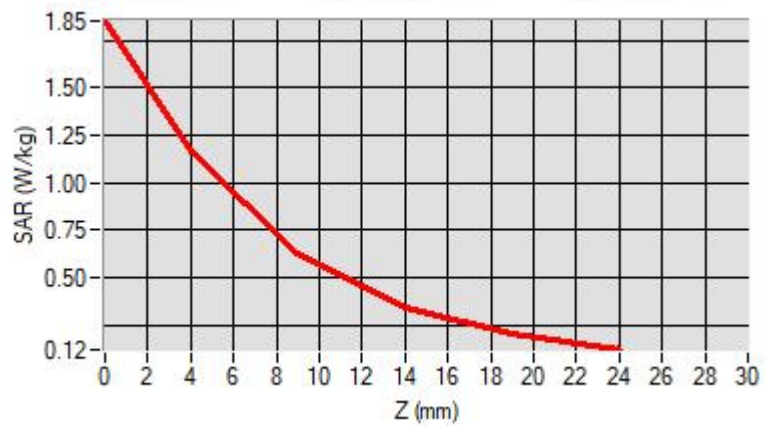

F. 3D Image

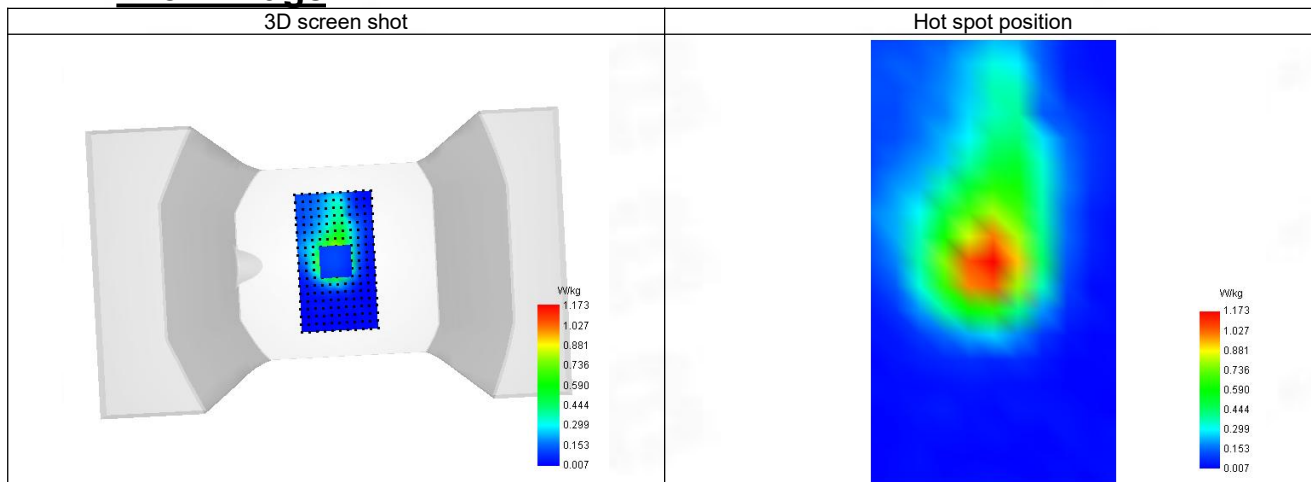

16-Head with front position in dist. 0mm on Channel 19300 in LTE Band 3

SAR Measurement at LTE band 3 (Cheek, Right)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 3
Channels	Lower (19300)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	99
RB size	1

B. Permittivity

Frequency (MHz)	1728.910
Relative permittivity (real part)	41.657
Relative permittivity (imaginary part)	14.488
Conductivity (S/m)	1.333

C. SAR Surface and Volume

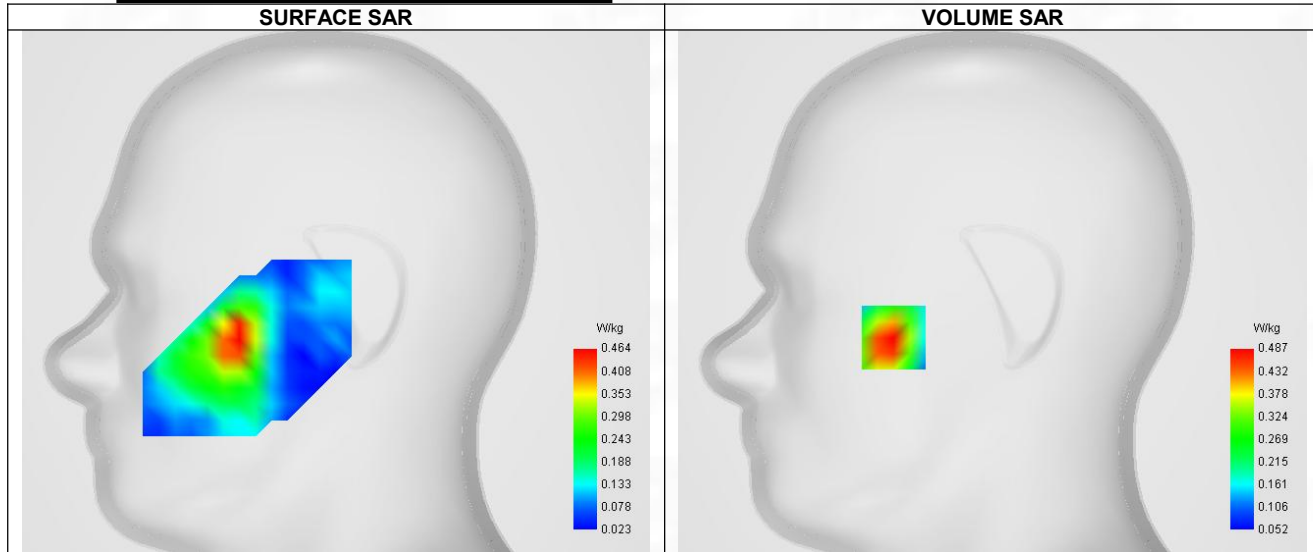


Maximum location: X=-49.00, Y=-23.00 ; SAR Peak: 0.61 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.307
SAR 1g (W/Kg)	0.486
Variation (%)	-2.360
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.601	0.487	0.367	0.272	0.195

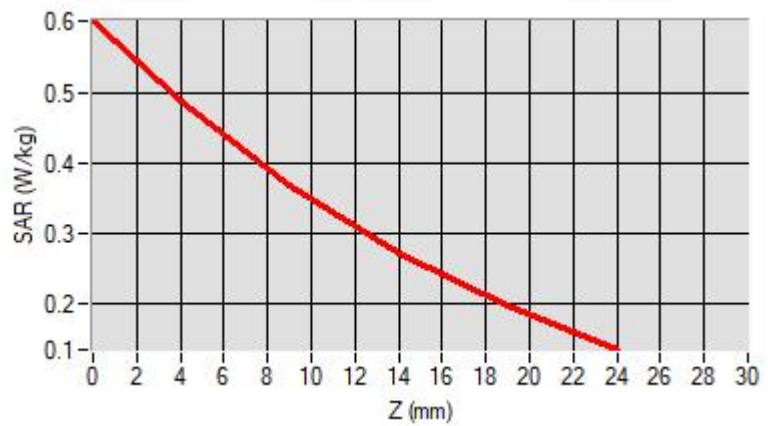

F. 3D Image

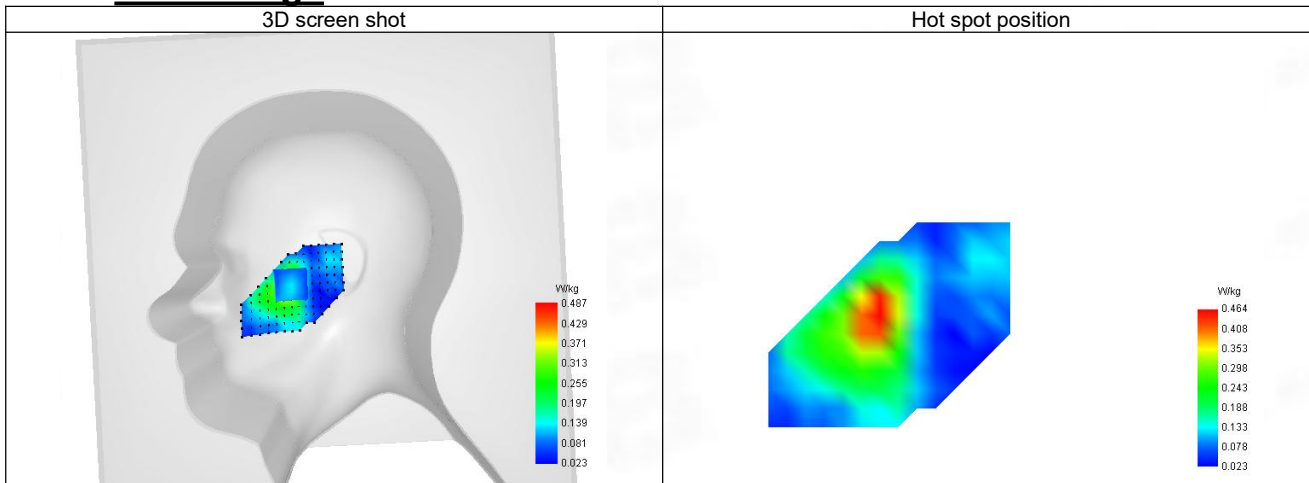

17-Body with front position in dist. 5mm on Channel 19300 in LTE Band 3

SAR Measurement at LTE band 3 (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 3
Channels	Lower (19300)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	99
RB size	1

B. Permittivity

Frequency (MHz)	1728.910
Relative permittivity (real part)	41.657
Relative permittivity (imaginary part)	14.488
Conductivity (S/m)	1.333

C. SAR Surface and Volume

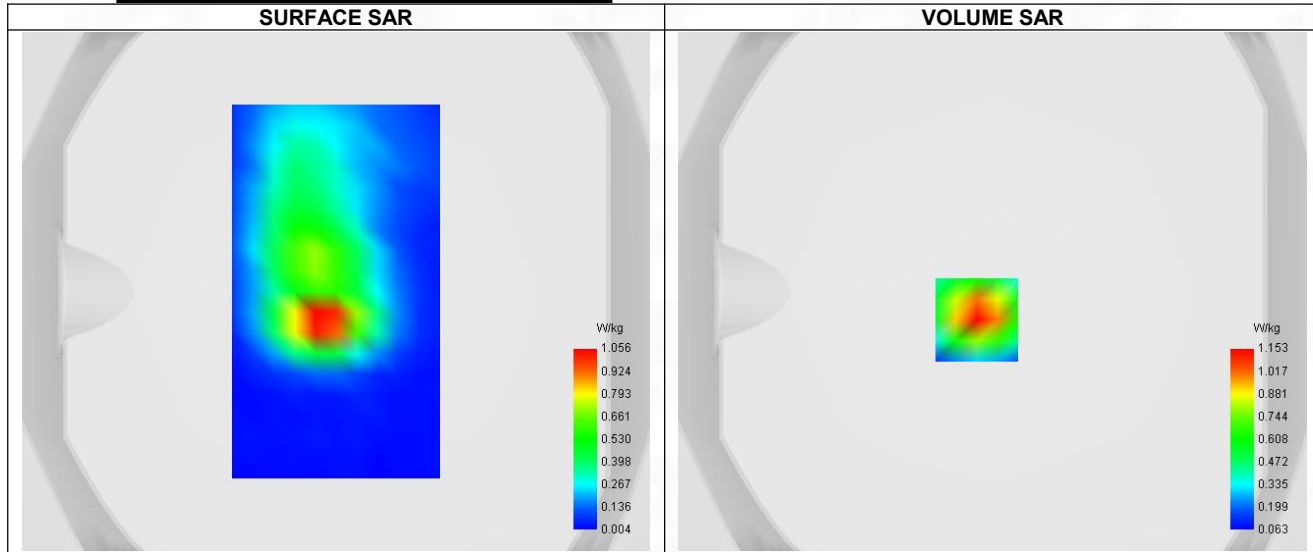


Maximum location: X=-6.00, Y=-11.00 ; SAR Peak: 1.95 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.552
SAR 1g (W/Kg)	1.122
Variation (%)	-0.890
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.922	1.153	0.587	0.303	0.171

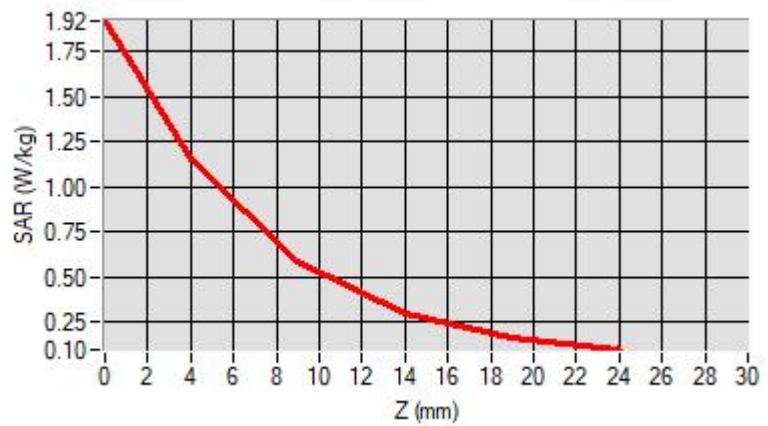

F. 3D Image

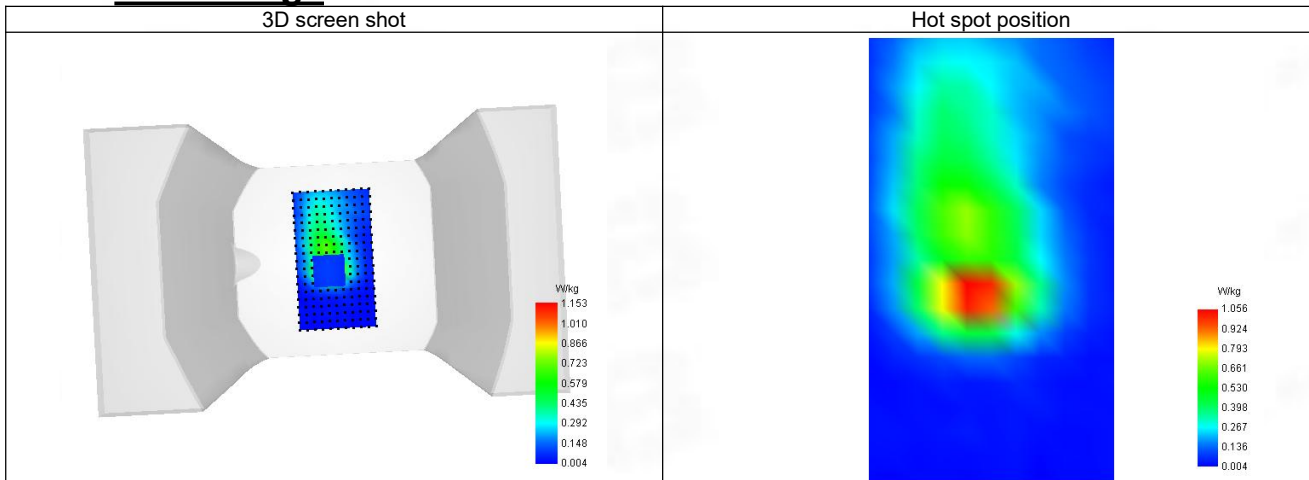

18-Body with back position in dist. 0mm on Channel 19300 in LTE Band 3

SAR Measurement at LTE band 3 (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 3
Channels	Lower (19300)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	99
RB size	1

B. Permittivity

Frequency (MHz)	1728.910
Relative permittivity (real part)	41.657
Relative permittivity (imaginary part)	14.488
Conductivity (S/m)	1.333

C. SAR Surface and Volume

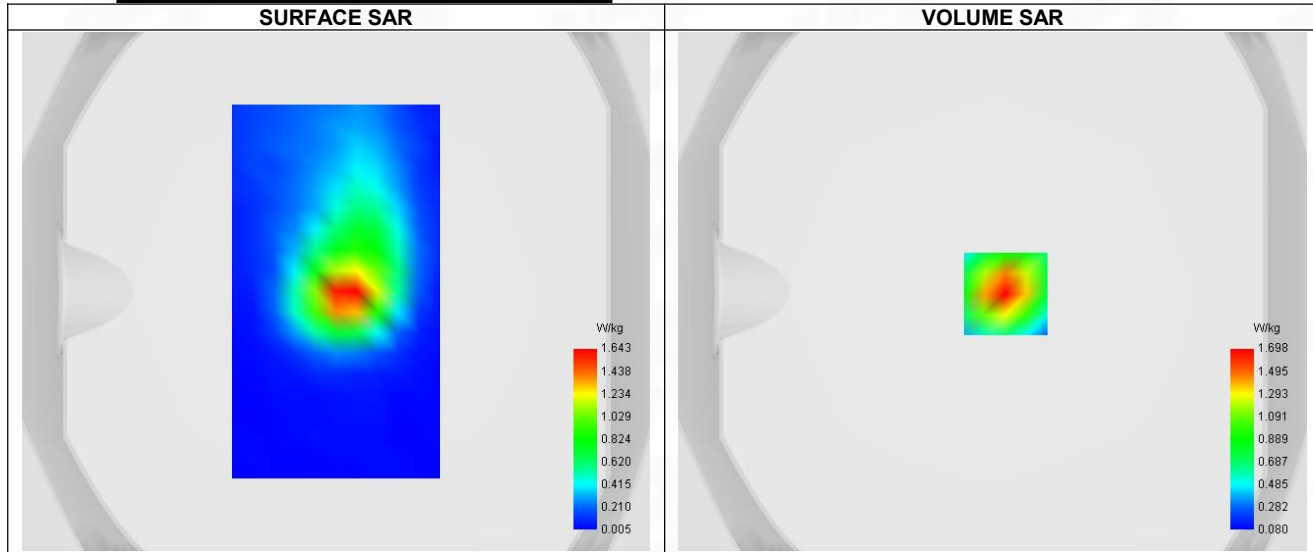


Maximum location: X=5.00, Y=-1.00 ; SAR Peak: 2.66 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.845
SAR 1g (W/Kg)	1.639
Variation (%)	-0.490
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.647	1.698	0.951	0.537	0.318

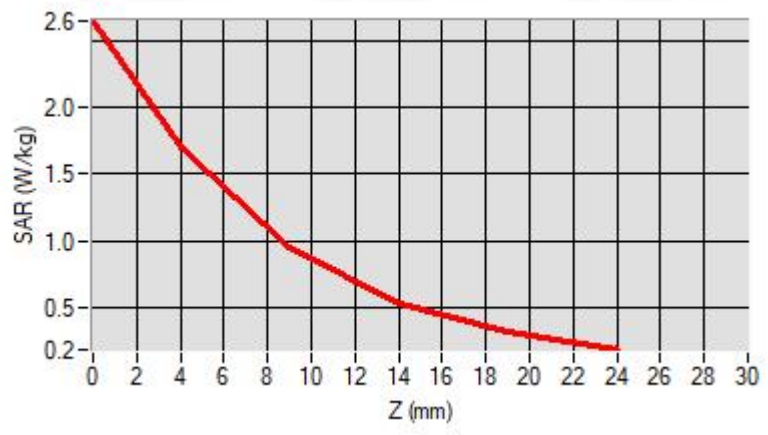

F. 3D Image

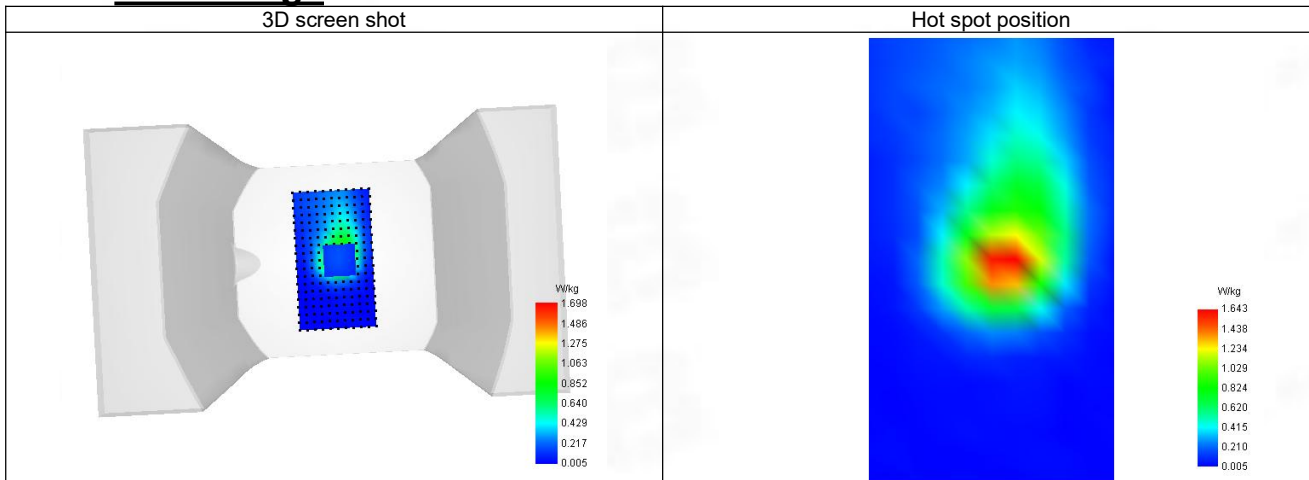

19-Head with front position in dist. 0mm on Channel 21350 in LTE band 7

SAR Measurement at LTE band 7 (Cheek, Right)

Date of measurement: 21/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.40
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 7
Channels	Higher (21350)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

B. Permittivity

Frequency (MHz)	2551.090
Relative permittivity (real part)	39.698
Relative permittivity (imaginary part)	12.902
Conductivity (S/m)	1.918

C. SAR Surface and Volume

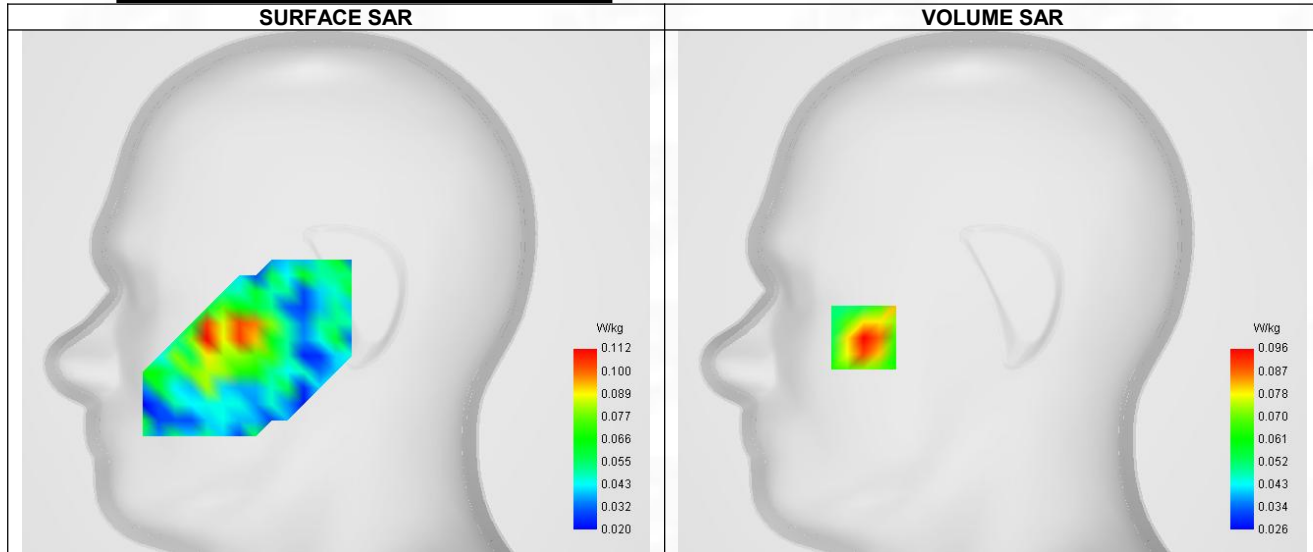


Maximum location: X=-64.00, Y=-23.00 ; SAR Peak: 0.14 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.115
SAR 1g (W/Kg)	0.224
Variation (%)	-1.240
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.130	0.096	0.067	0.050	0.040

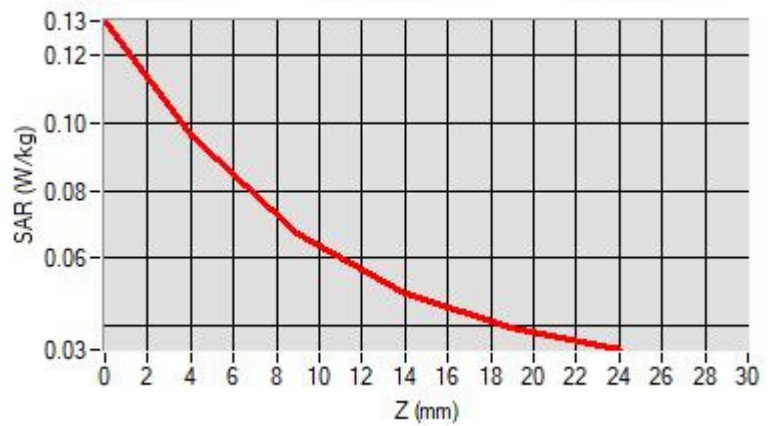

F. 3D Image

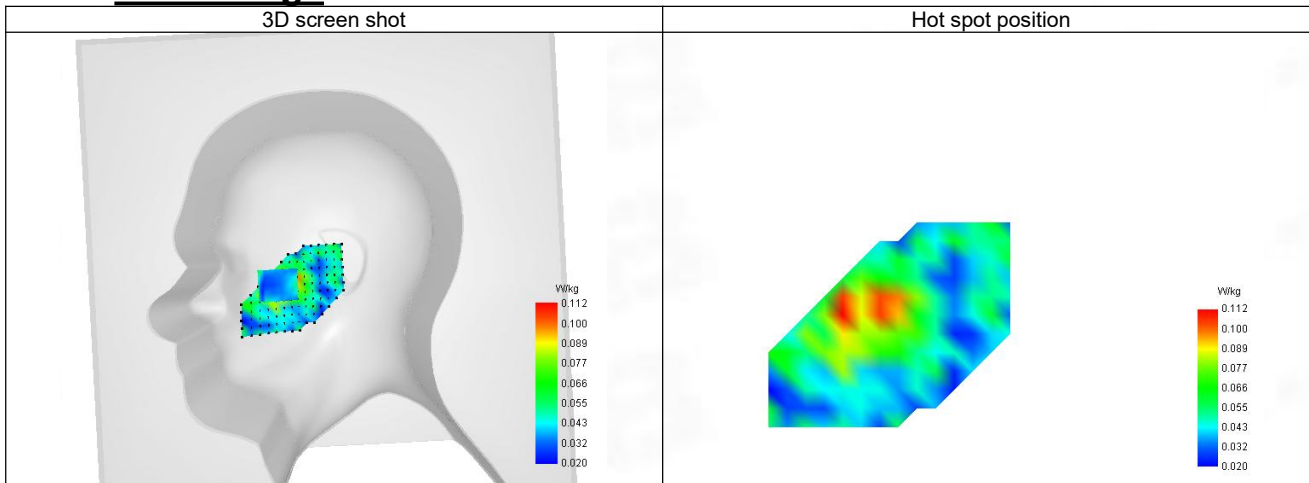

20-Body with front position in dist. 5mm on Channel 21350 in LTE band 7

SAR Measurement at LTE band 7 (Body, Validation Plane)

Date of measurement: 21/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.40
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 7
Channels	Higher (21350)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

B. Permittivity

Frequency (MHz)	2551.090
Relative permittivity (real part)	39.698
Relative permittivity (imaginary part)	12.902
Conductivity (S/m)	1.918

C. SAR Surface and Volume

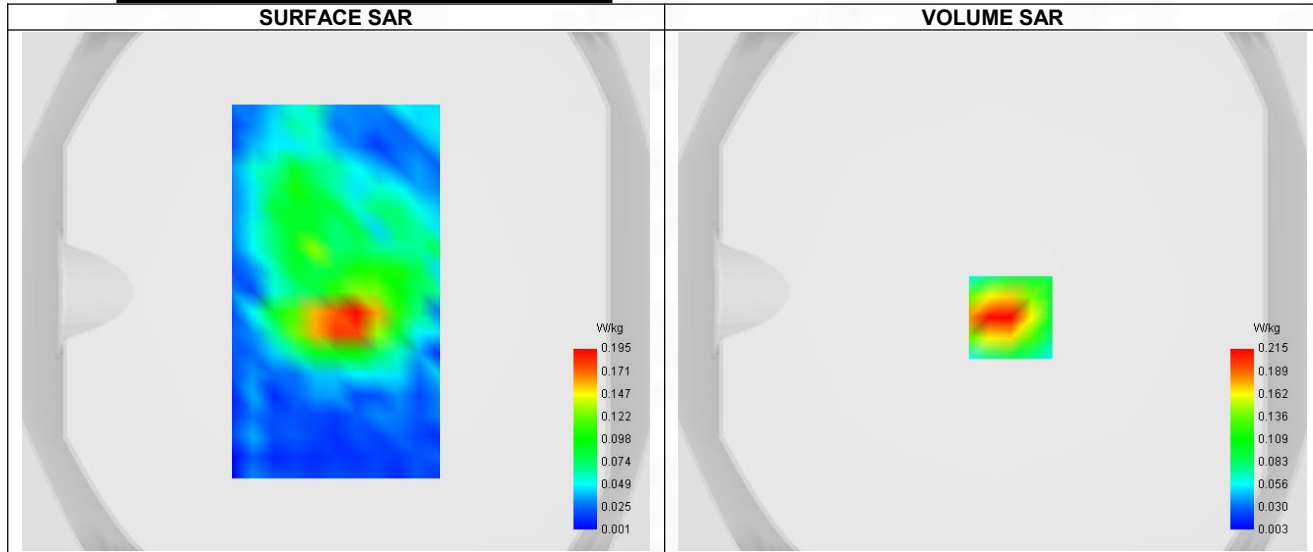


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.116
SAR 1g (W/Kg)	0.212
Variation (%)	-1.340
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.321	0.215	0.131	0.083	0.058

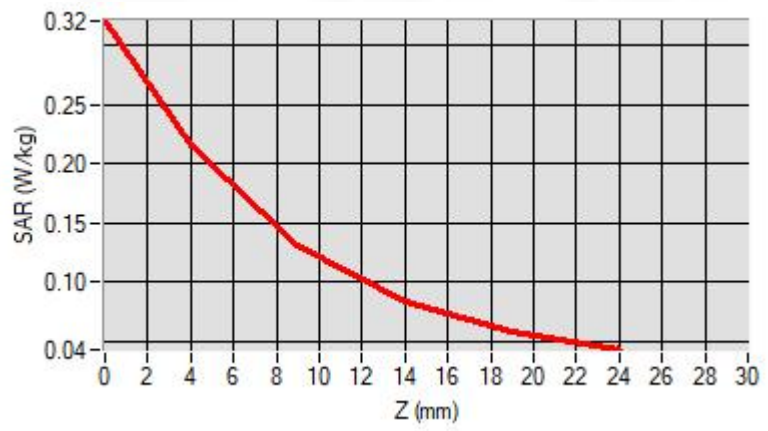

F. 3D Image

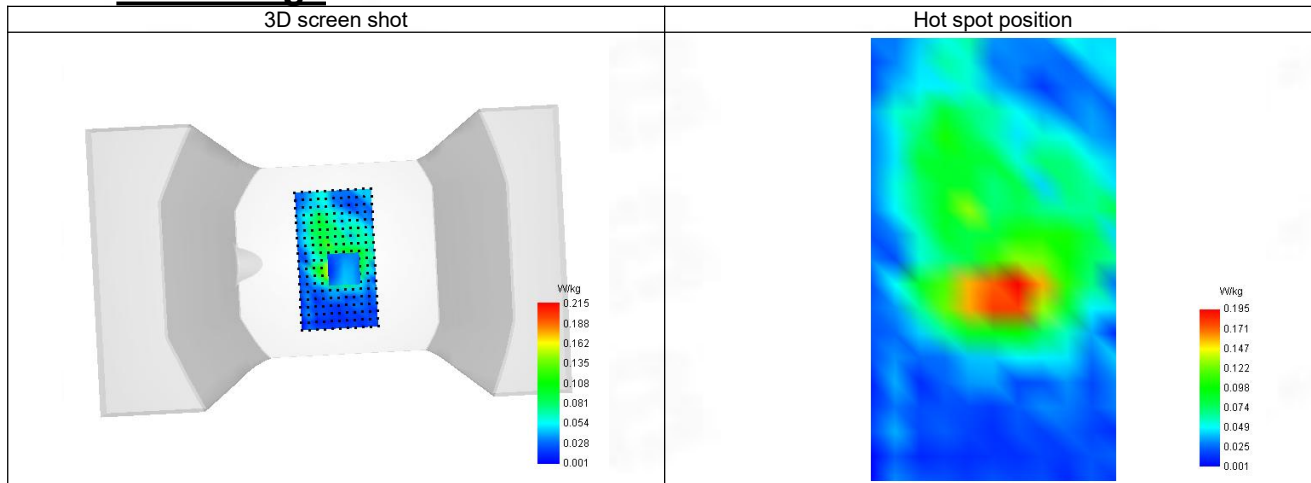

21-Body with back position in dist. 0mm on Channel 21350 in LTE band 7

SAR Measurement at LTE band 7 (Body, Validation Plane)

Date of measurement: 21/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.40
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 7
Channels	Higher (21350)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

B. Permittivity

Frequency (MHz)	2551.090
Relative permittivity (real part)	39.698
Relative permittivity (imaginary part)	12.902
Conductivity (S/m)	1.918

C. SAR Surface and Volume

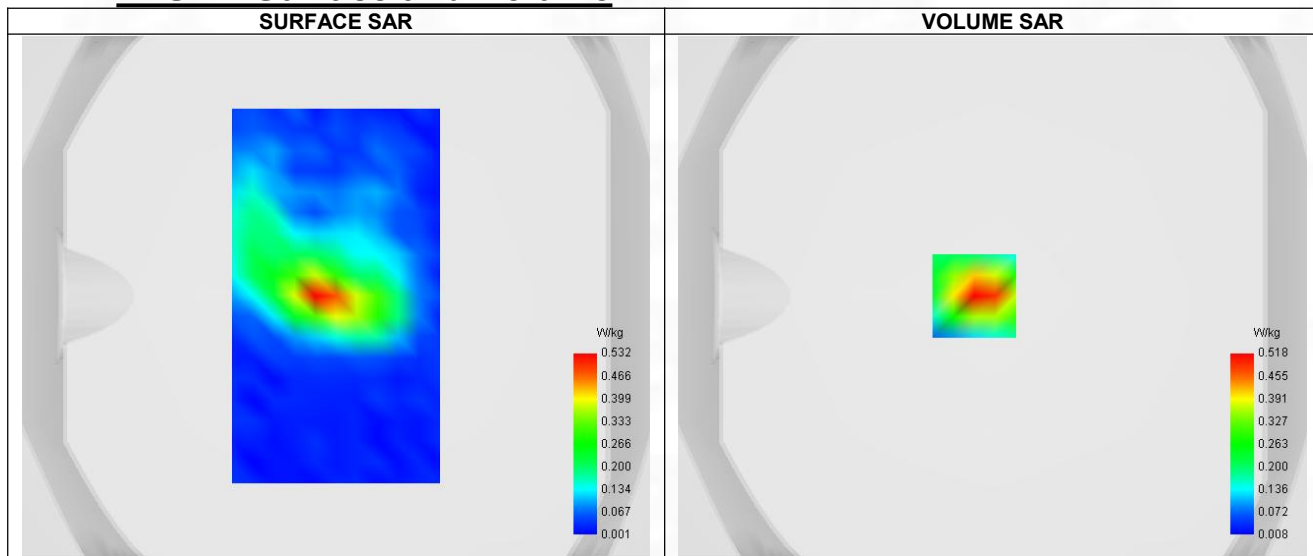


Maximum location: X=-7.00, Y=0.00 ; SAR Peak: 0.85 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.239
SAR 1g (W/Kg)	0.491
Variation (%)	-4.820
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.831	0.518	0.273	0.137	0.066

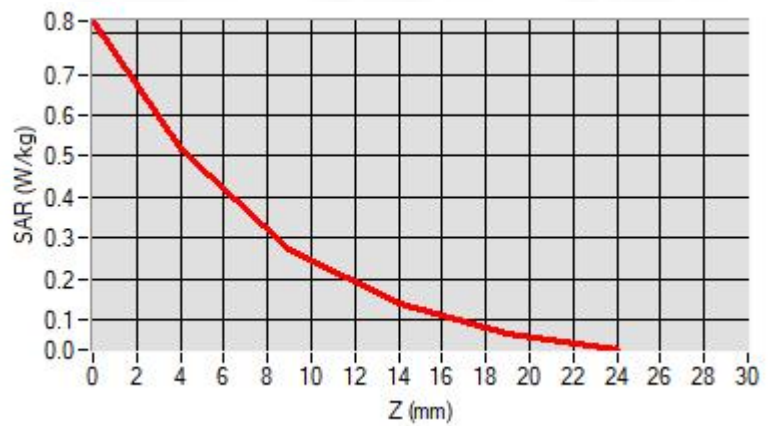

F. 3D Image

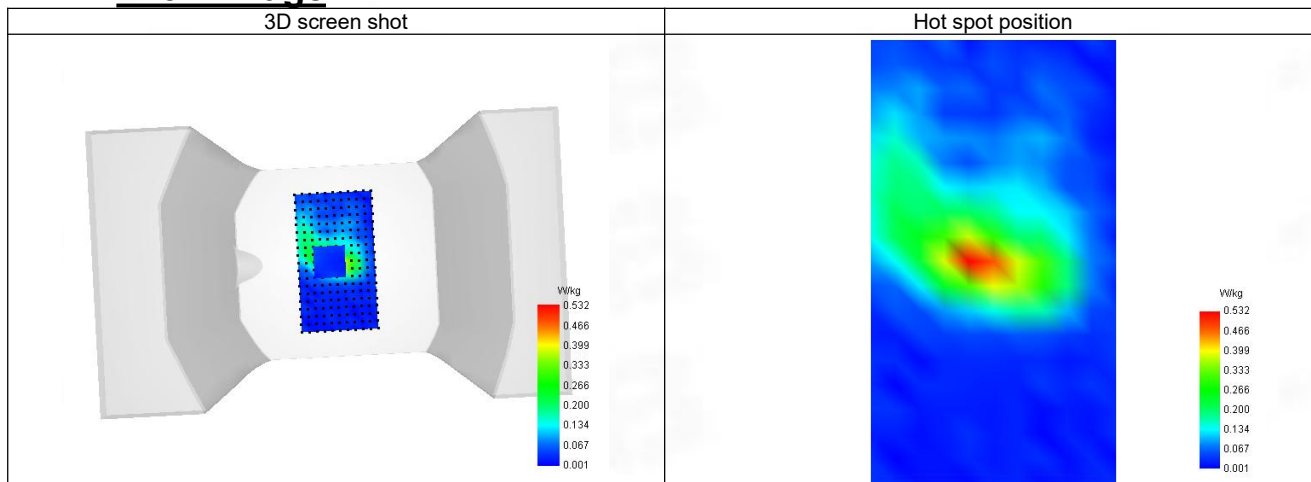

22-Head with front position in dist. 0mm on Channel 21750 in LTE band 8

SAR Measurement at LTE band 8 (Cheek, Right)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 8
Channels	Higher (21750)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

B. Permittivity

Frequency (MHz)	905.590
Relative permittivity (real part)	43.124
Relative permittivity (imaginary part)	19.095
Conductivity (S/m)	0.907

C. SAR Surface and Volume

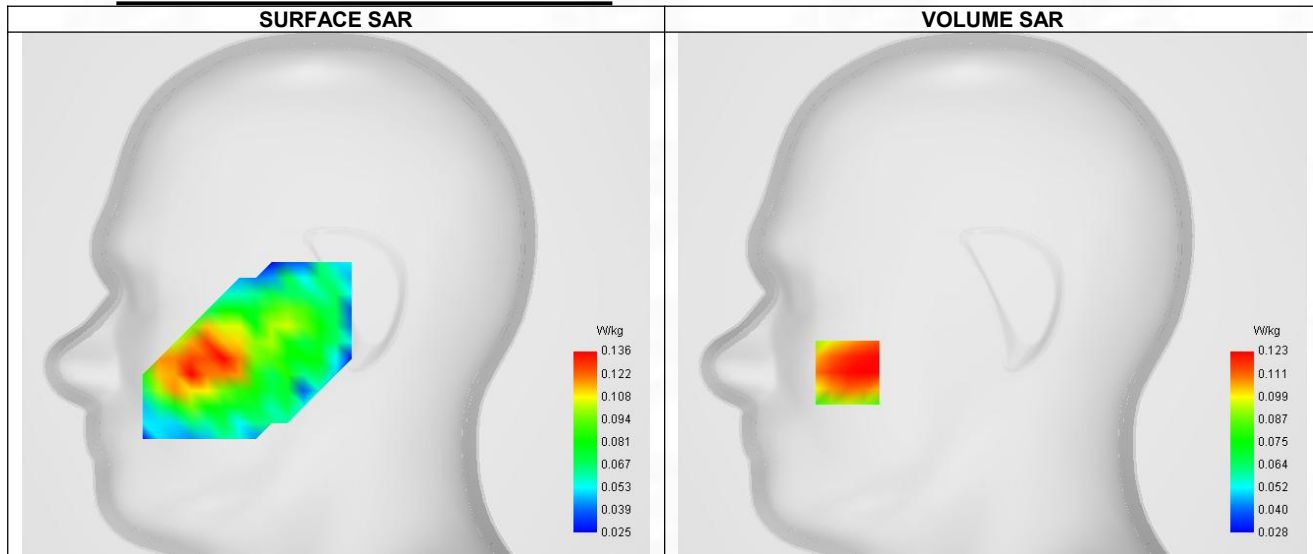

Maximum location: X=-72.00, Y=-39.00 ; SAR Peak: 0.15 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.100
SAR 1g (W/Kg)	0.126
Variation (%)	-1.450
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000


E. Z Axis Scan

Total or partial reproduction of this document without permission of the Laboratory is not allowed.


BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.222	0.123	0.100	0.092	0.065

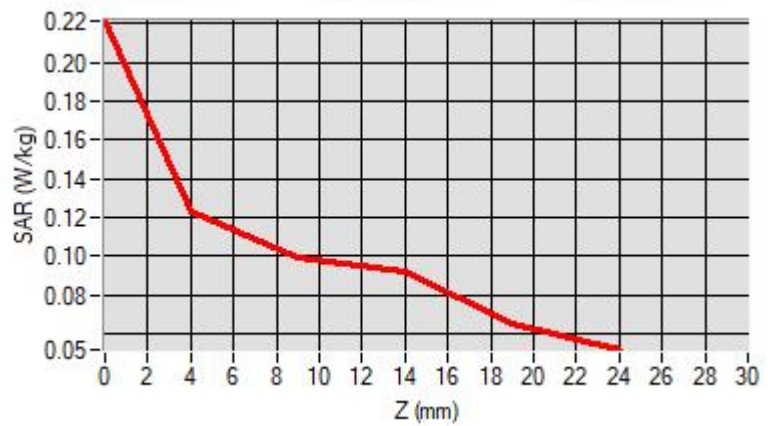

F. 3D Image

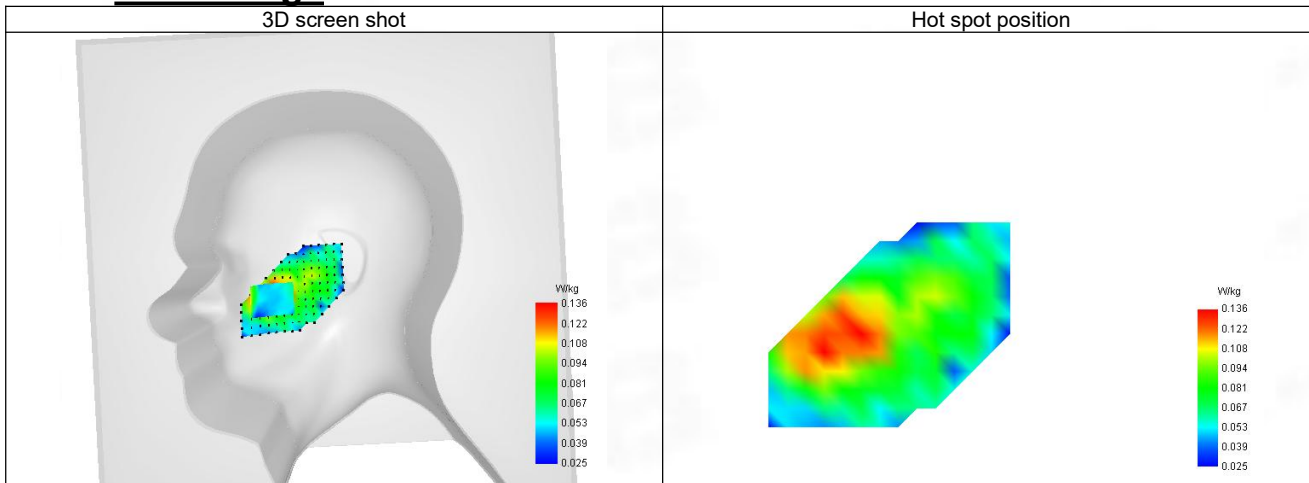

23-Body with front position in dist. 5mm on Channel 21750 in LTE band 8

SAR Measurement at LTE band 8 (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 8
Channels	Higher (21750)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

B. Permittivity

Frequency (MHz)	905.590
Relative permittivity (real part)	43.124
Relative permittivity (imaginary part)	19.095
Conductivity (S/m)	0.907

C. SAR Surface and Volume

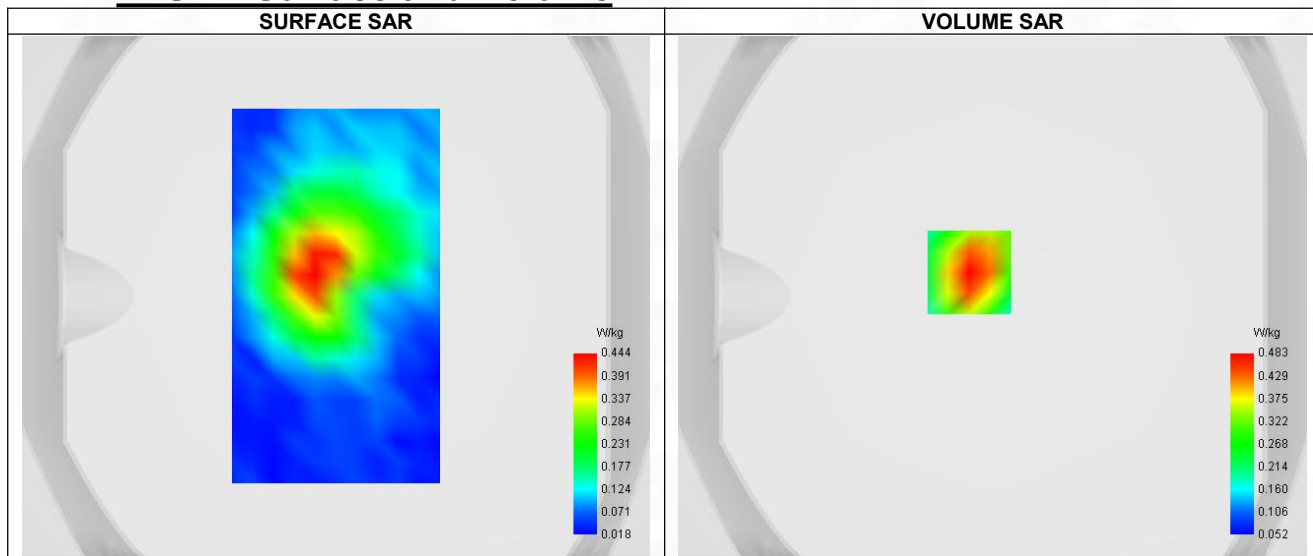


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.284
SAR 1g (W/Kg)	0.468
Variation (%)	-1.360
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.723	0.483	0.295	0.193	0.142

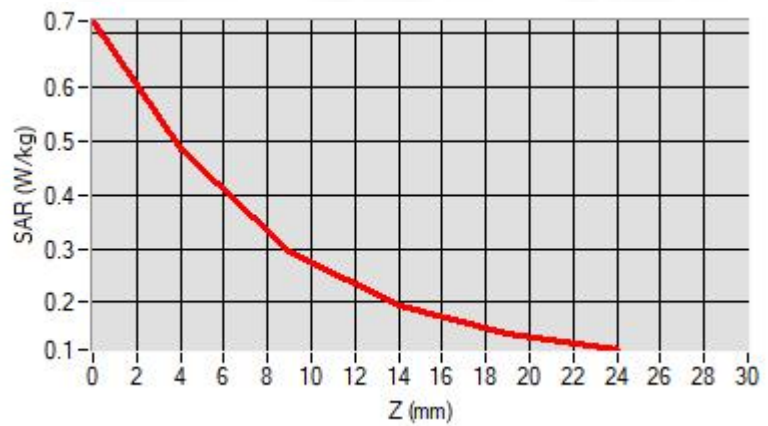

F. 3D Image

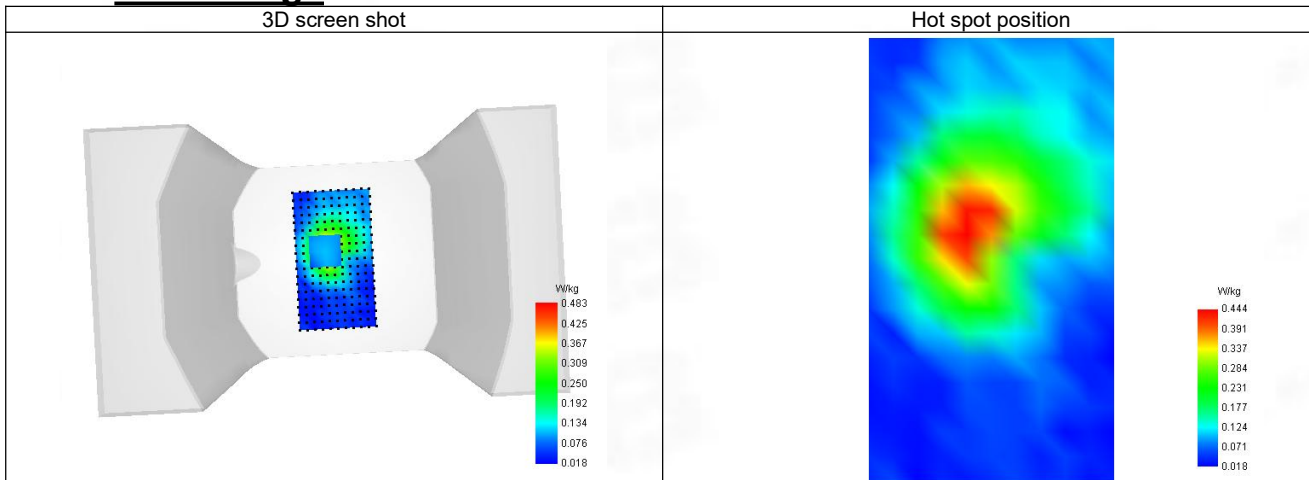

24-Body with back position in dist. 0mm on Channel 21750 in LTE band 8

SAR Measurement at LTE band 8 (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 8
Channels	Higher (21750)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

B. Permittivity

Frequency (MHz)	905.590
Relative permittivity (real part)	43.124
Relative permittivity (imaginary part)	19.095
Conductivity (S/m)	0.907

C. SAR Surface and Volume

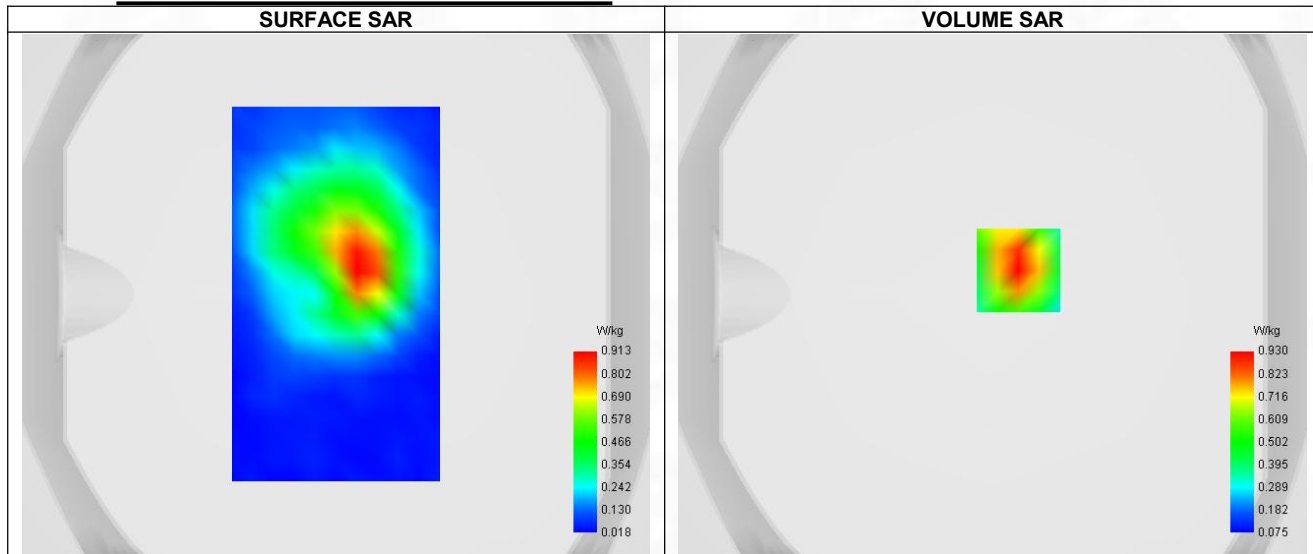

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.525
SAR 1g (W/Kg)	0.897
Variation (%)	-4.050
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000


E. Z Axis Scan

Total or partial reproduction of this document without permission of the Laboratory is not allowed.


BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.398	0.930	0.558	0.351	0.242

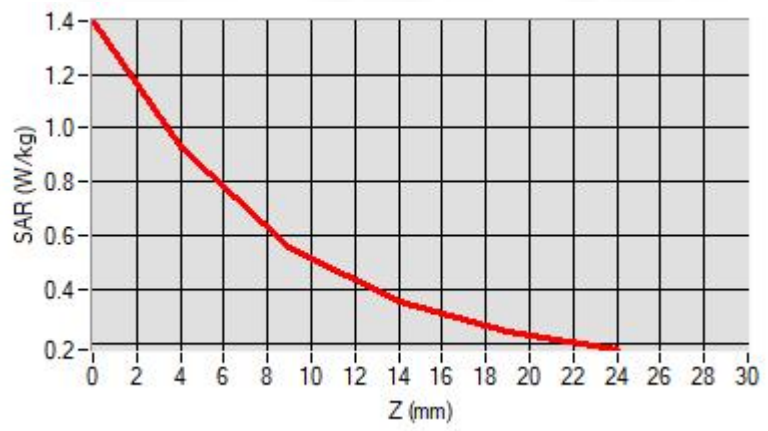

F. 3D Image

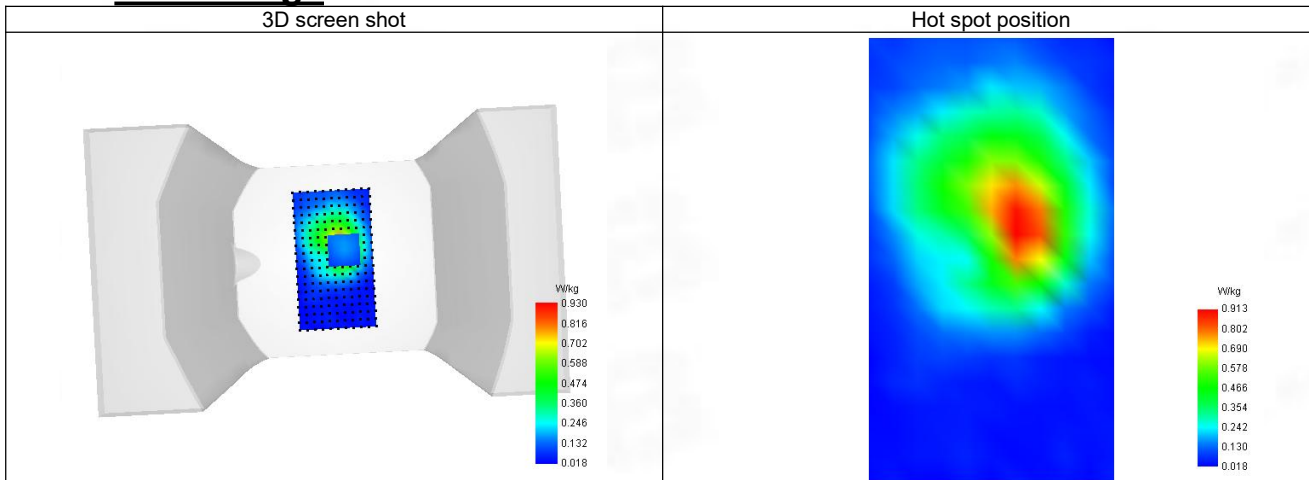

25-Head with front position in dist. 0mm on Channel 24300 in LTE band 20

SAR Measurement at LTE band 20 (Cheek, Right)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 20
Channels	Middle (24300)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	99
RB size	1

B. Permittivity

Frequency (MHz)	855.910
Relative permittivity (real part)	43.213
Relative permittivity (imaginary part)	19.373
Conductivity (S/m)	0.881

C. SAR Surface and Volume

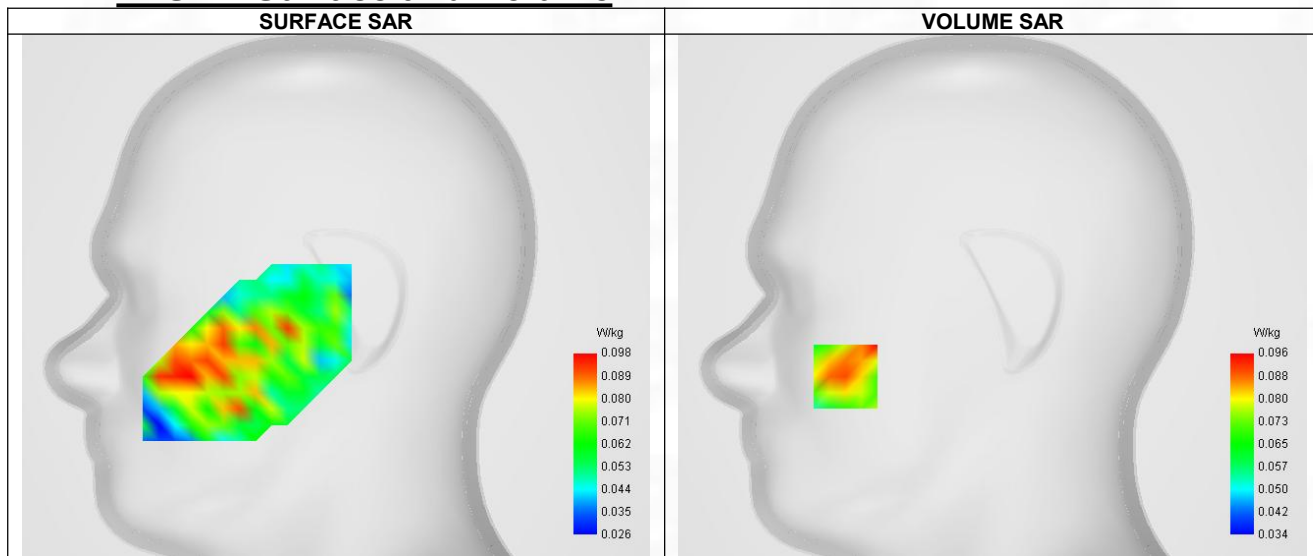


Maximum location: X=-73.00, Y=-40.00 ; SAR Peak: 0.13 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.095
SAR 1g (W/Kg)	0.121
Variation (%)	-1.070
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.422	0.096	0.039	0.062	0.037

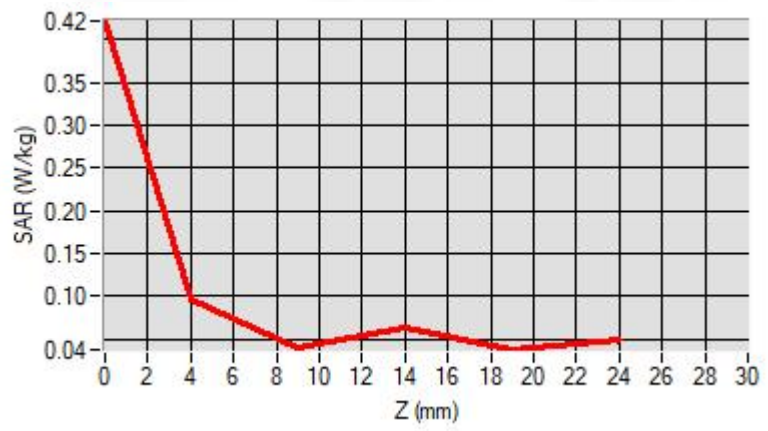

F. 3D Image

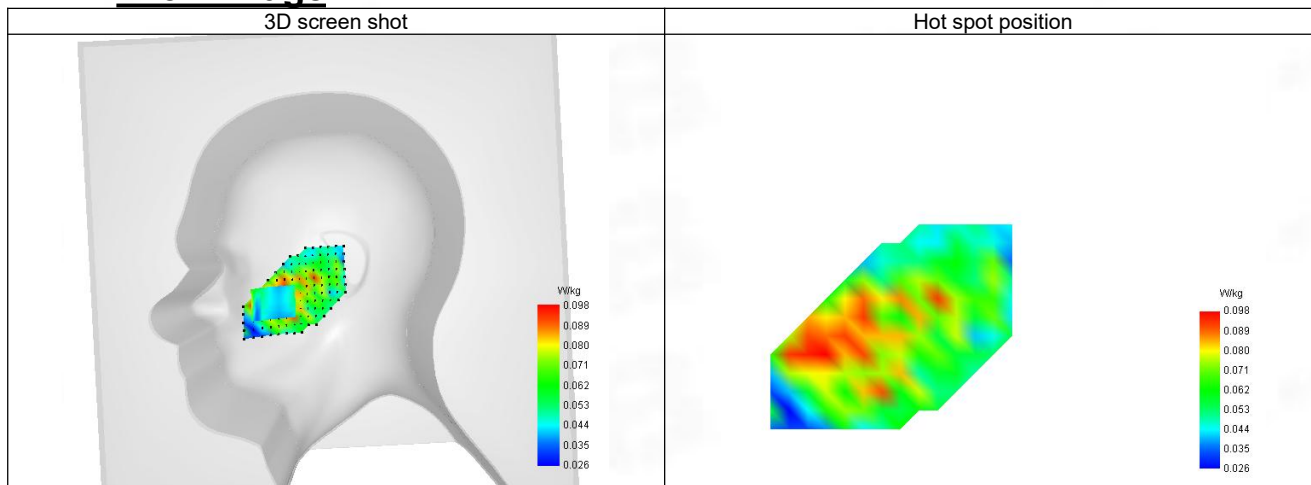

26-Body with back position in dist. 5mm on Channel 24300 in LTE band 20

SAR Measurement at LTE band 20 (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 20
Channels	Middle (24300)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	99
RB size	1

B. Permittivity

Frequency (MHz)	855.910
Relative permittivity (real part)	43.213
Relative permittivity (imaginary part)	19.373
Conductivity (S/m)	0.881

C. SAR Surface and Volume

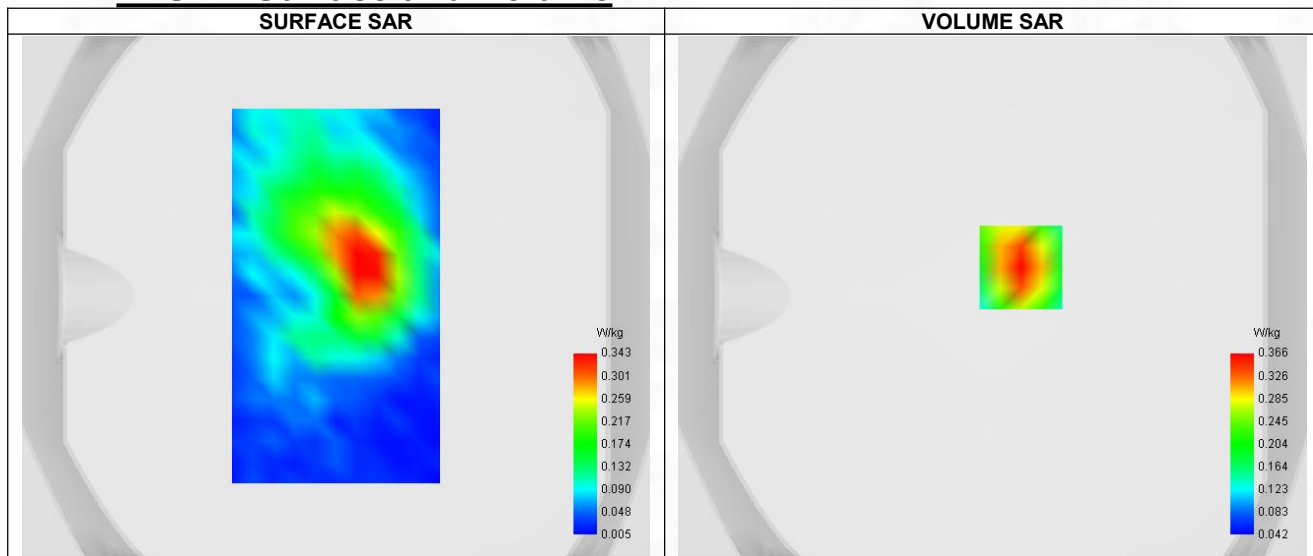


Maximum location: X=11.00, Y=11.00 ; SAR Peak: 0.53 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.218
SAR 1g (W/Kg)	0.362
Variation (%)	-2.210
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.532	0.366	0.229	0.148	0.102

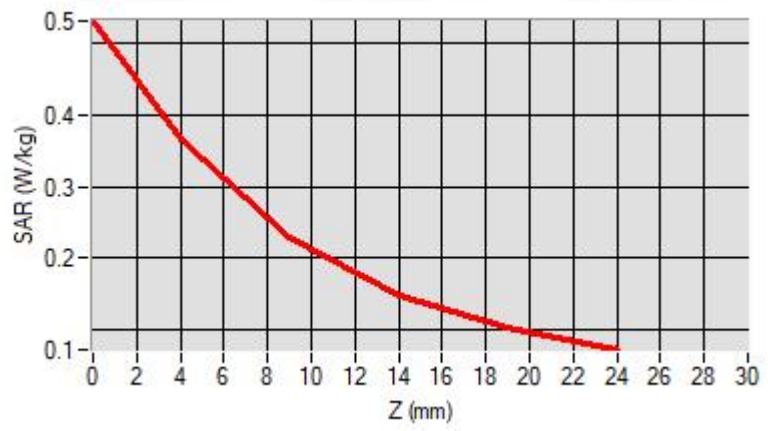

F. 3D Image

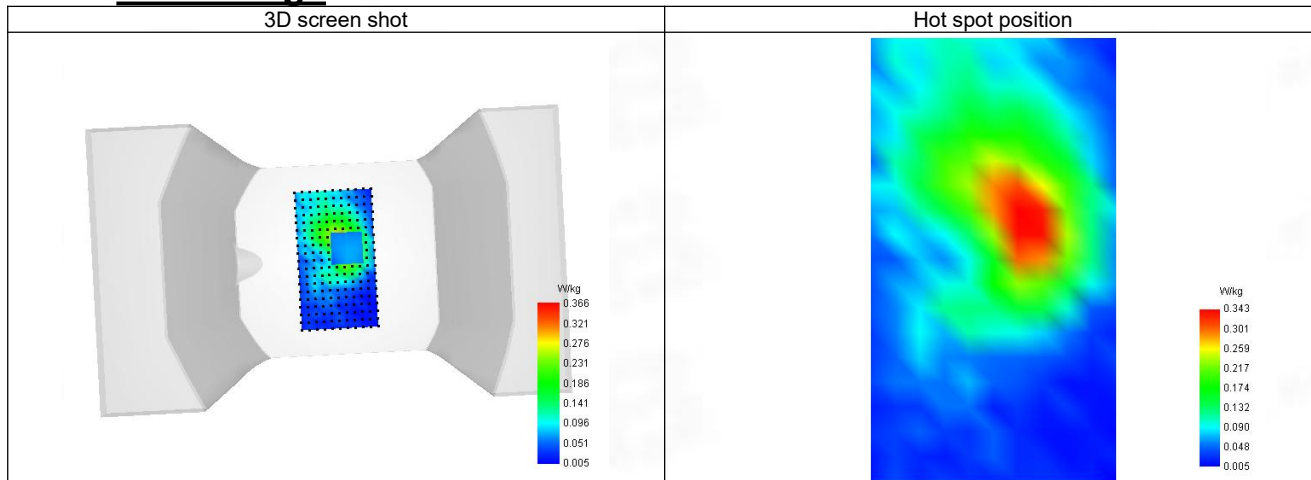

27-Body with back position in dist. 0mm on Channel 24300 in LTE band 20

SAR Measurement at LTE band 20 (Body, Validation Plane)

Date of measurement: 20/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 20
Channels	Middle (24300)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	99
RB size	1

B. Permittivity

Frequency (MHz)	855.910
Relative permittivity (real part)	43.213
Relative permittivity (imaginary part)	19.373
Conductivity (S/m)	0.881

C. SAR Surface and Volume

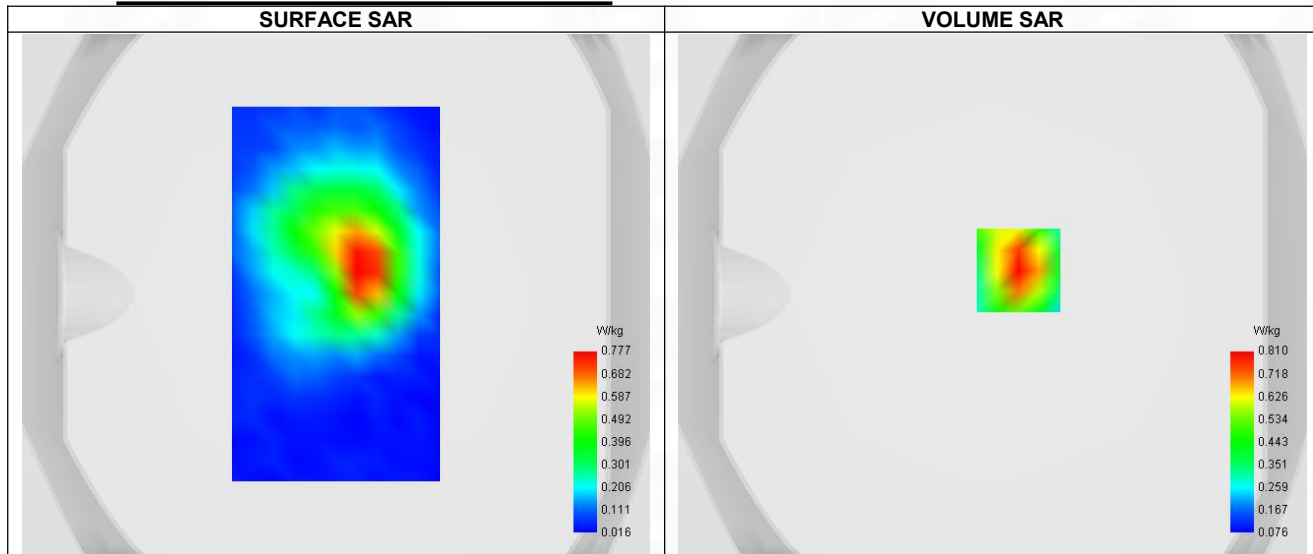

Maximum location: X=10.00, Y=9.00 ; SAR Peak: 1.19 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.467
SAR 1g (W/Kg)	0.796
Variation (%)	-1.790
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000


E. Z Axis Scan

Total or partial reproduction of this document without permission of the Laboratory is not allowed.


BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.185	0.810	0.497	0.309	0.200

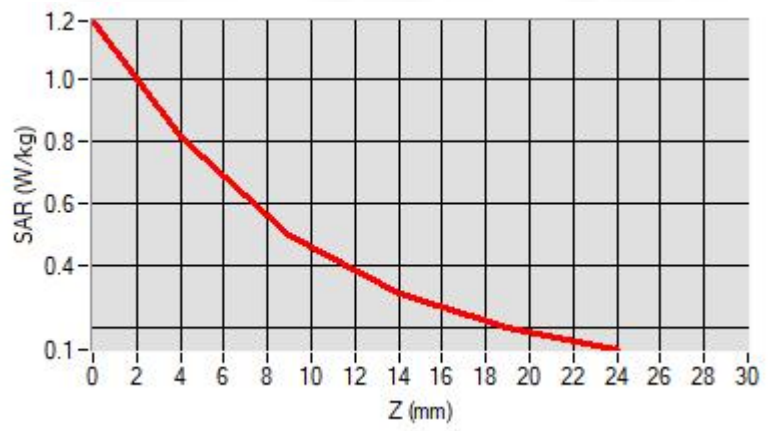

F. 3D Image

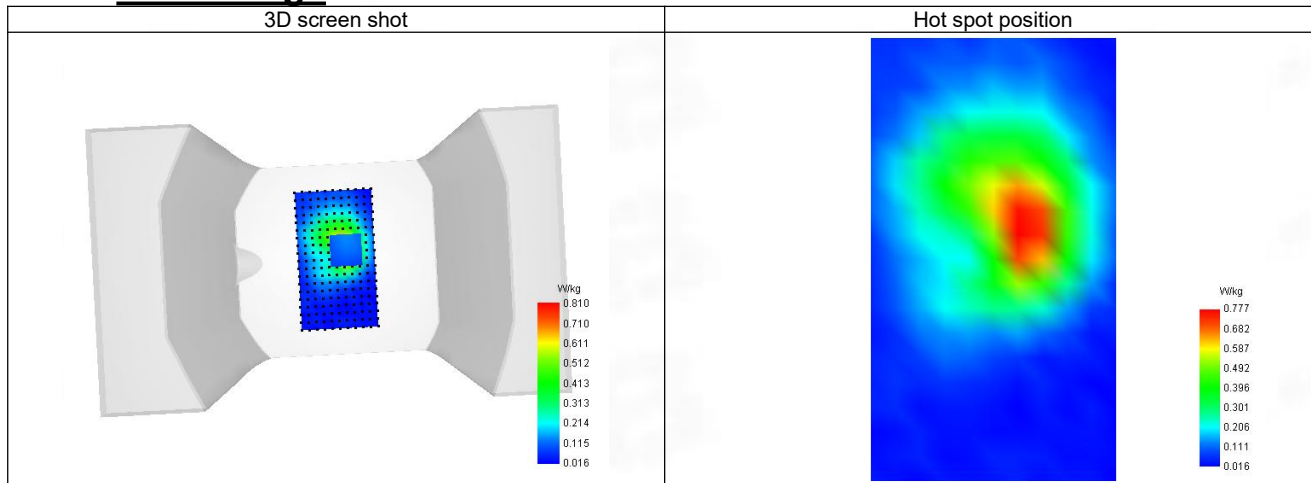

28-Head with front position in dist. 0mm on Channel 1 in IEEE 802.11b ISM

SAR Measurement at IEEE 802.11b ISM (Cheek, Right)

Date of measurement: 21/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11b ISM
Channels	Lower (1)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	2412.000
Relative permittivity (real part)	41.286
Relative permittivity (imaginary part)	13.343
Conductivity (S/m)	1.782

C. SAR Surface and Volume

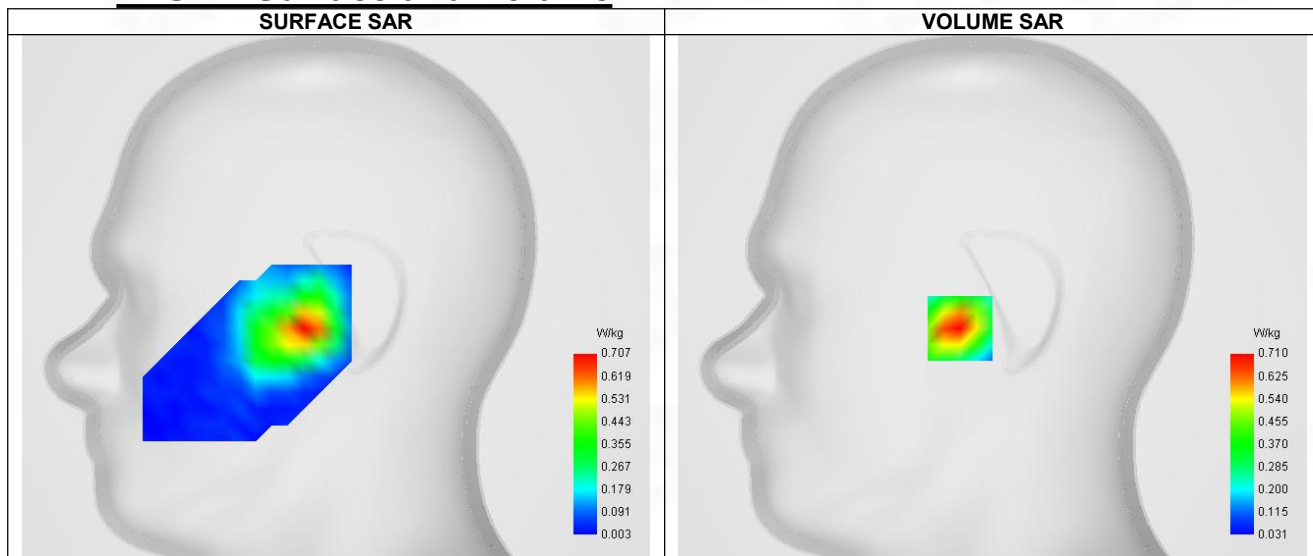


Maximum location: X=-16.00, Y=-16.00 ; SAR Peak: 1.12 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.356
SAR 1g (W/Kg)	0.687
Variation (%)	4.360
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.104	0.710	0.399	0.226	0.134

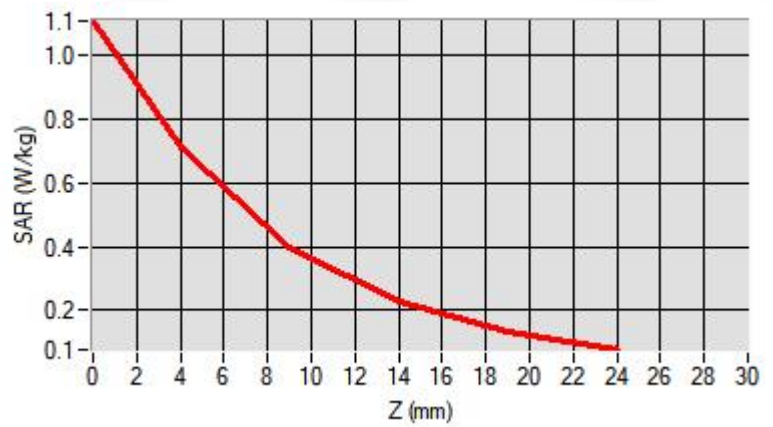

F. 3D Image

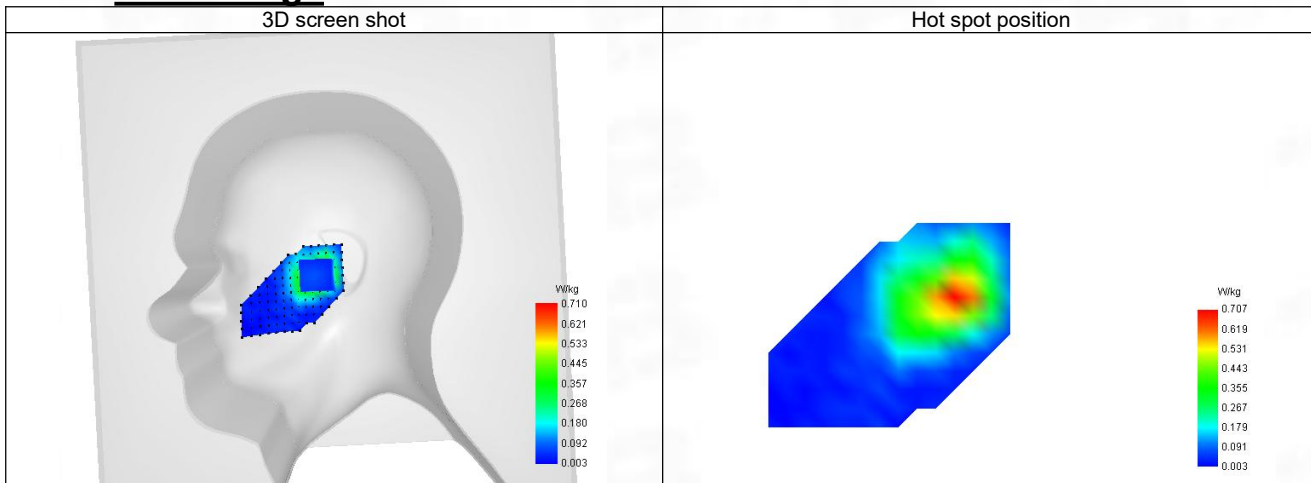

29-Body with front position in dist. 5mm on Channel 1 in IEEE 802.11b ISM

SAR Measurement at IEEE 802.11b ISM (Body, Validation Plane)

Date of measurement: 21/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11b ISM
Channels	Lower (1)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	2412.000
Relative permittivity (real part)	41.286
Relative permittivity (imaginary part)	13.343
Conductivity (S/m)	1.782

C. SAR Surface and Volume

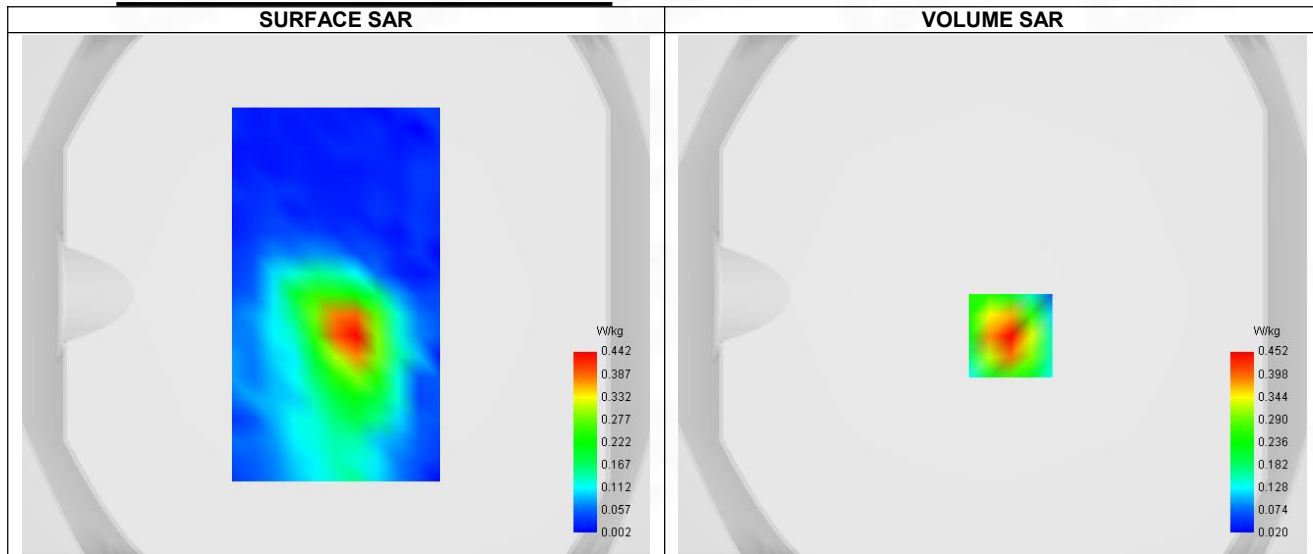


Maximum location: X=7.00, Y=-16.00 ; SAR Peak: 0.70 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.224
SAR 1g (W/Kg)	0.433
Variation (%)	-3.220
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.702	0.452	0.254	0.142	0.081

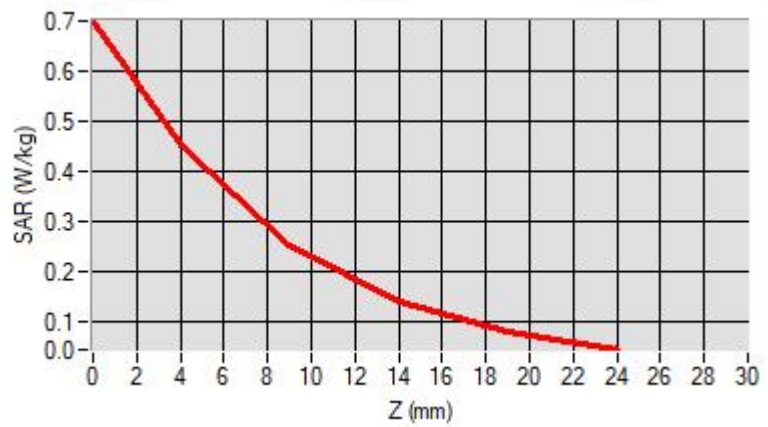

F. 3D Image

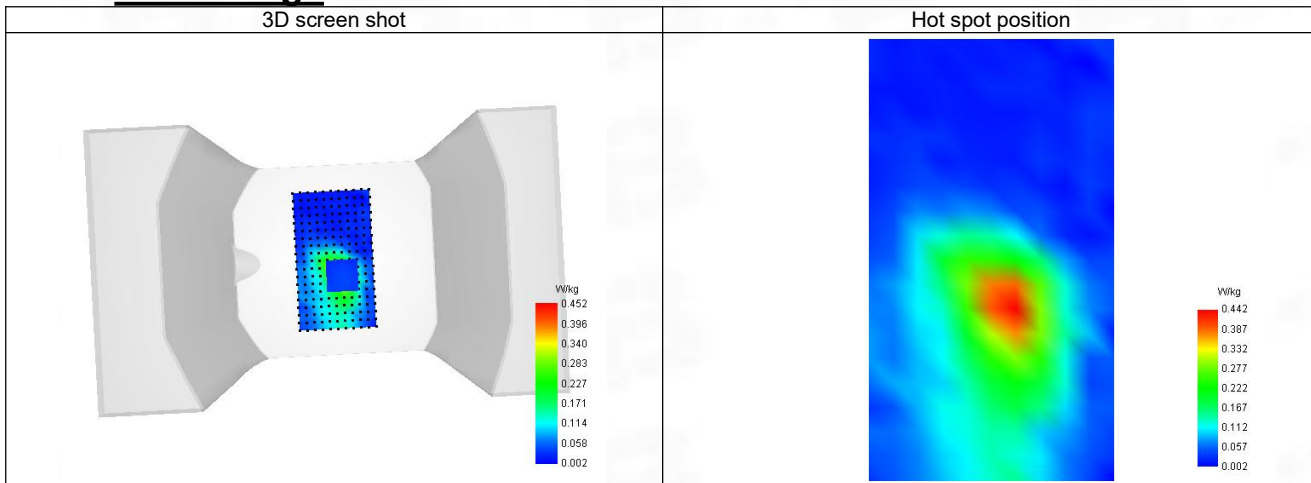

30-Body with back position in dist. 0mm on Channel 1 in IEEE 802.11b ISM

SAR Measurement at IEEE 802.11b ISM (Body, Validation Plane)

Date of measurement: 21/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11b ISM
Channels	Lower (1)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	2412.000
Relative permittivity (real part)	41.286
Relative permittivity (imaginary part)	13.343
Conductivity (S/m)	1.782

C. SAR Surface and Volume

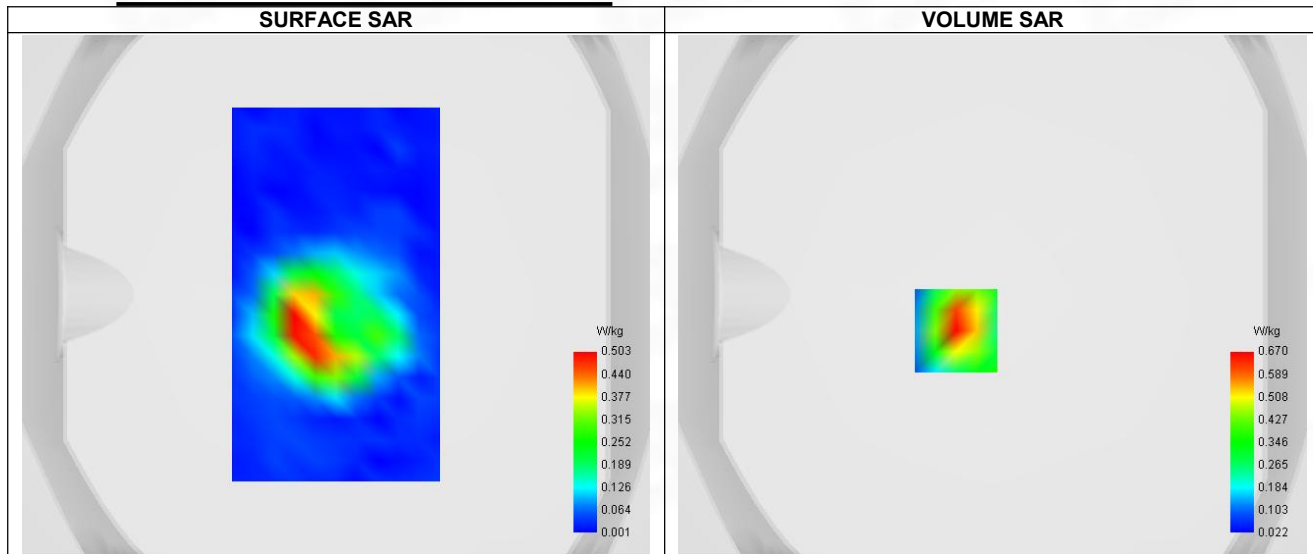


Maximum location: X=-14.00, Y=-14.00 ; SAR Peak: 1.23 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.304
SAR 1g (W/Kg)	0.649
Variation (%)	1.400
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.211	0.670	0.296	0.126	0.057

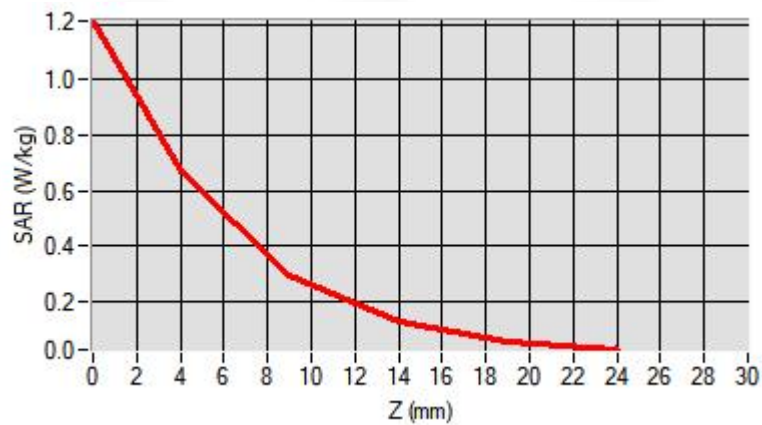

F. 3D Image

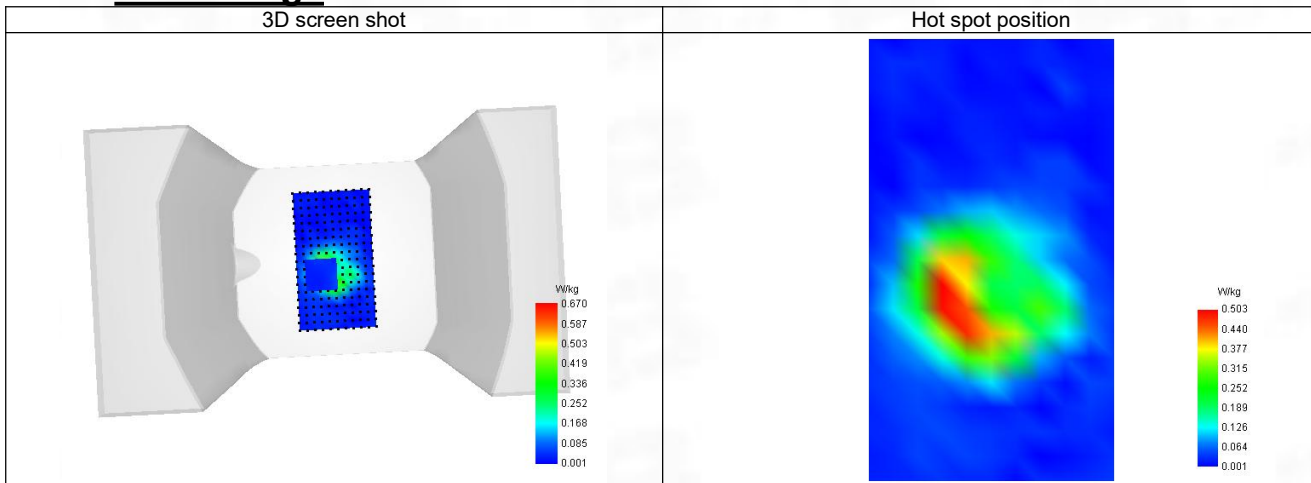

31-Head with front position in dist. 0mm on Channel 38 in IEEE 802.11ac U-NII

SAR Measurement at IEEE 802.11ac U-NII (Cheek, Right)

Date of measurement: 22/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11ac U-NII
Channels	Lower (38)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	5190.000
Relative permittivity (real part)	35.892
Relative permittivity (imaginary part)	16.236
Conductivity (S/m)	4.690

C. SAR Surface and Volume

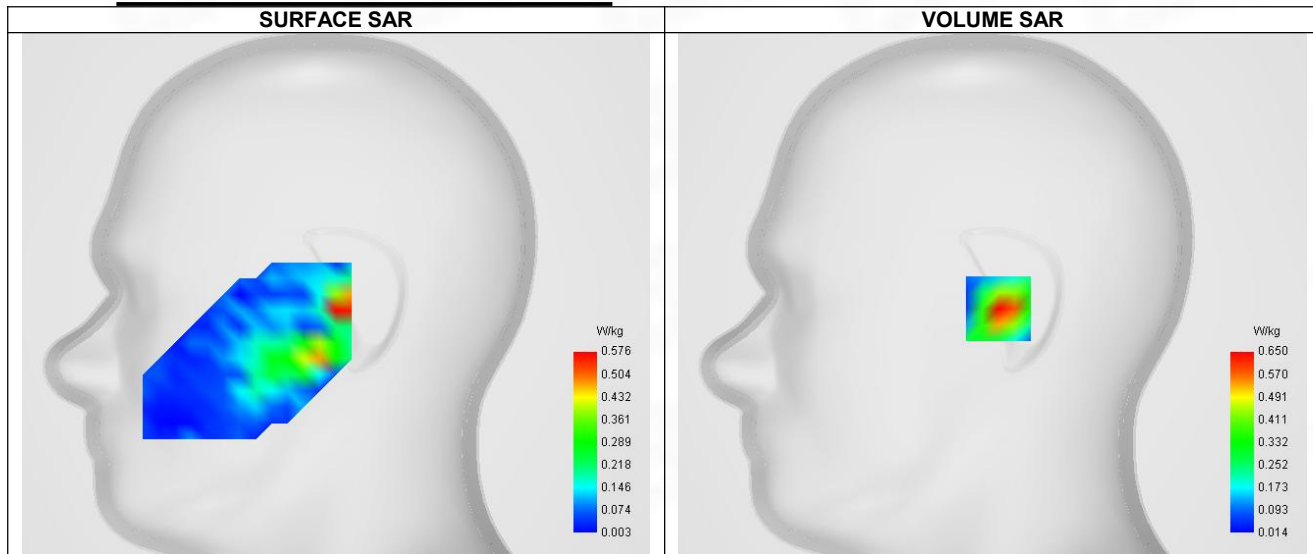


Maximum location: X=3.00, Y=-7.00 ; SAR Peak: 1.65 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.256
SAR 1g (W/Kg)	0.655
Variation (%)	2.060
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	1.042	0.650	0.158	0.036	0.023

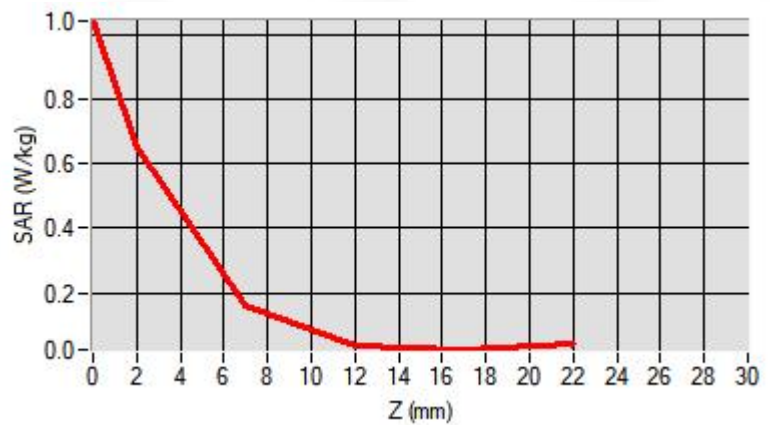

F. 3D Image

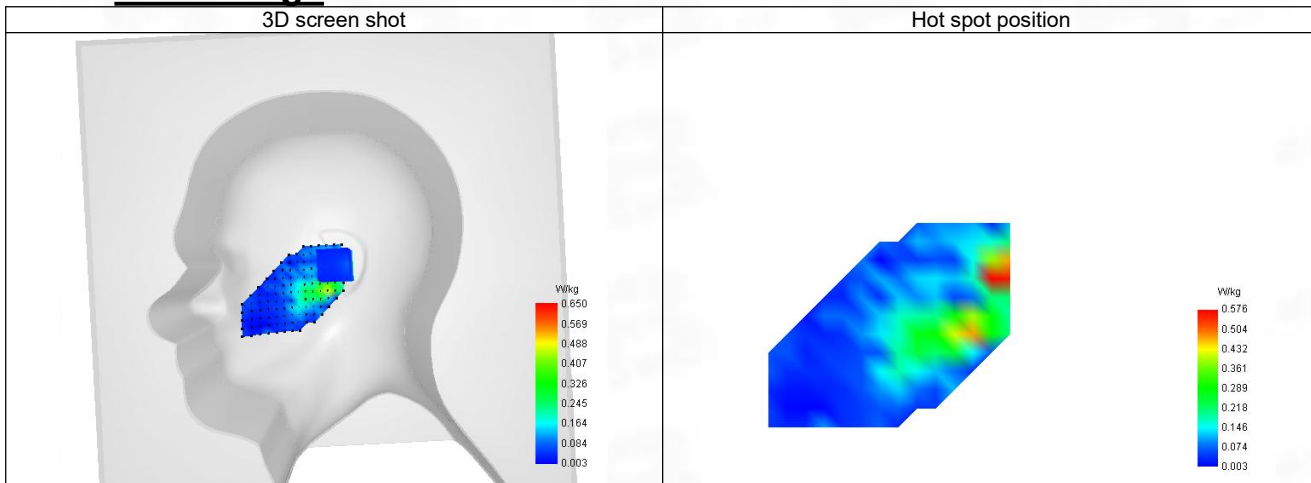

32-Body with front position in dist. 5mm on Channel 38 in IEEE 802.11ac U-NII

SAR Measurement at IEEE 802.11ac U-NII (Body, Validation Plane)

Date of measurement: 22/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11ac U-NII
Channels	Lower (38)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	5190.000
Relative permittivity (real part)	35.892
Relative permittivity (imaginary part)	16.236
Conductivity (S/m)	4.690

C. SAR Surface and Volume

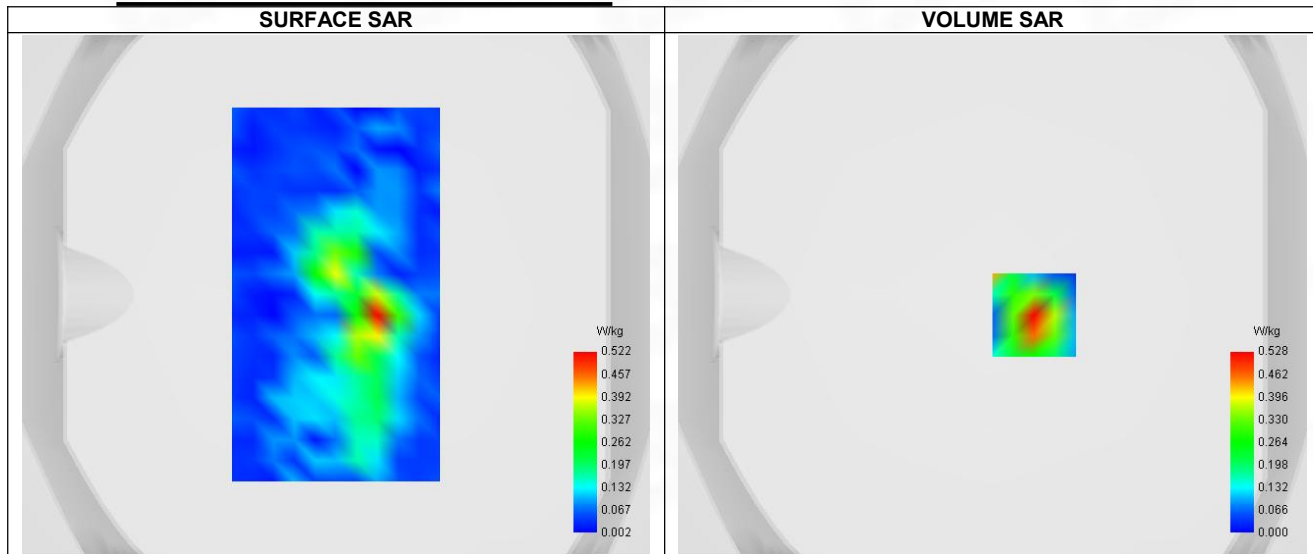


Maximum location: X=16.00, Y=-8.00 ; SAR Peak: 0.88 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.130
SAR 1g (W/Kg)	0.318
Variation (%)	-2.280
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.841	0.528	0.133	0.033	0.023

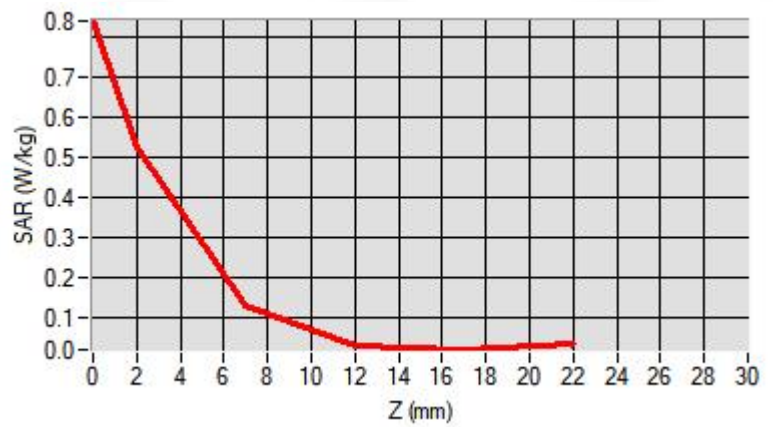

F. 3D Image

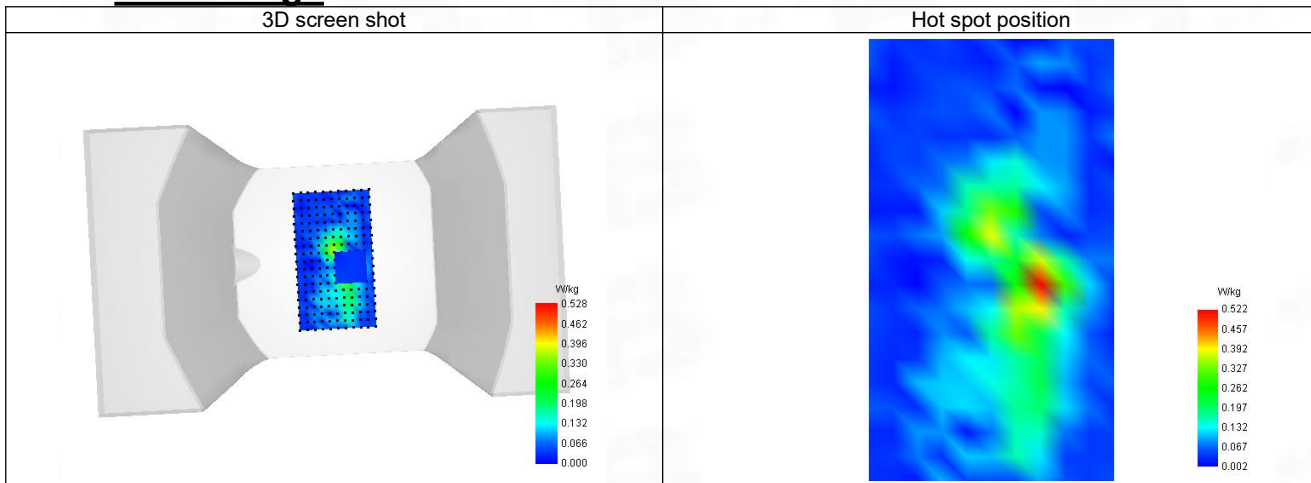

33-Body with back position in dist. 0mm on Channel 38 in IEEE 802.11ac U-NII

SAR Measurement at IEEE 802.11ac U-NII (Body, Validation Plane)

Date of measurement: 22/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11ac U-NII
Channels	Lower (38)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	5190.000
Relative permittivity (real part)	35.892
Relative permittivity (imaginary part)	16.236
Conductivity (S/m)	4.690

C. SAR Surface and Volume

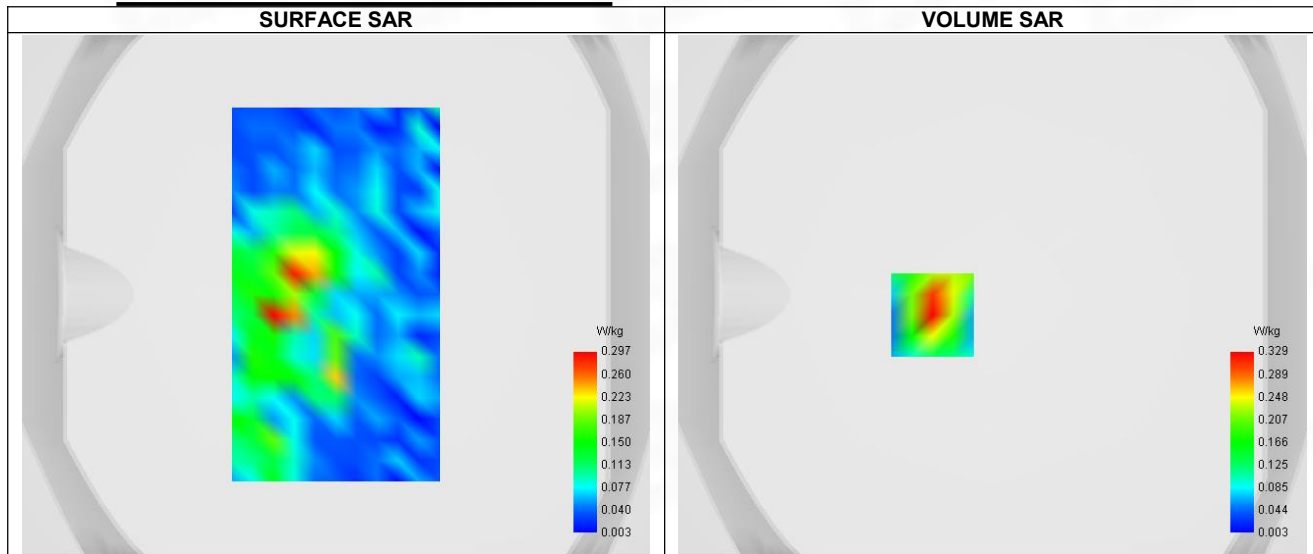


Maximum location: X=-23.00, Y=-8.00 ; SAR Peak: 0.57 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.089
SAR 1g (W/Kg)	0.199
Variation (%)	-1.010
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.531	0.329	0.080	0.021	0.020

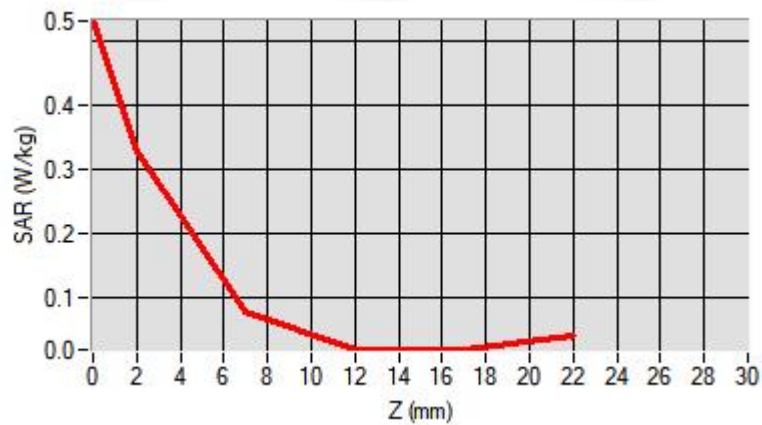

F. 3D Image

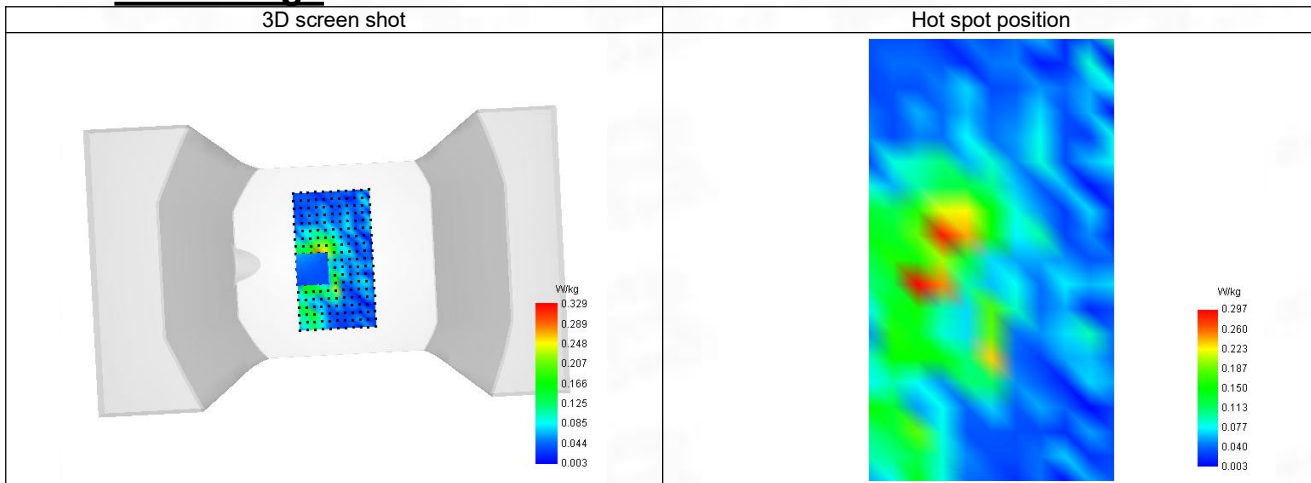

34-Head with front position in dist. 0mm on Channel 106 in IEEE 802.11ac U-NII

SAR Measurement at IEEE 802.11ac U-NII (Cheek, Right)

Date of measurement: 22/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.18
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11ac U-NII
Channels	Lower (106)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	5530.000
Relative permittivity (real part)	34.614
Relative permittivity (imaginary part)	16.385
Conductivity (S/m)	5.037

C. SAR Surface and Volume

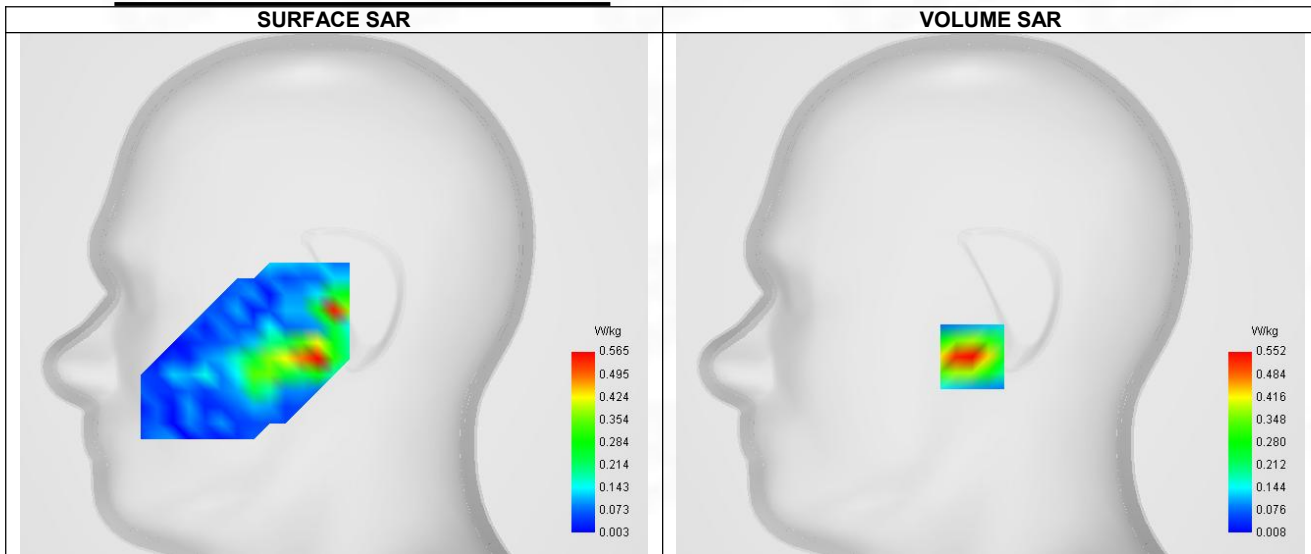


Maximum location: X=-9.00, Y=-31.00 ; SAR Peak: 1.23 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.232
SAR 1g (W/Kg)	0.542
Variation (%)	-3.690
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.814	0.552	0.191	0.076	0.056

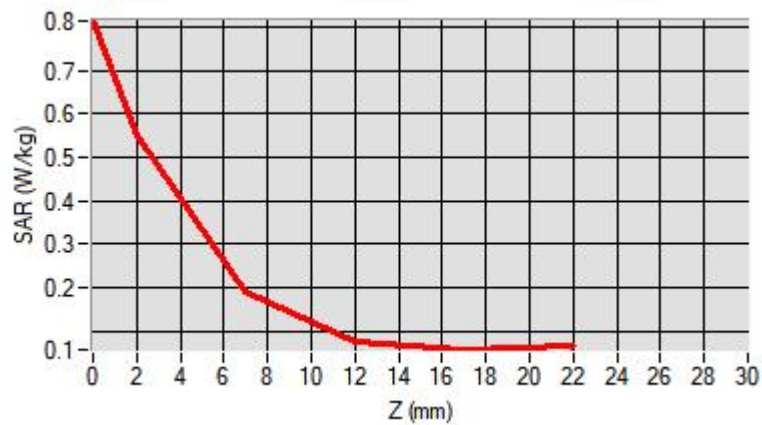

F. 3D Image

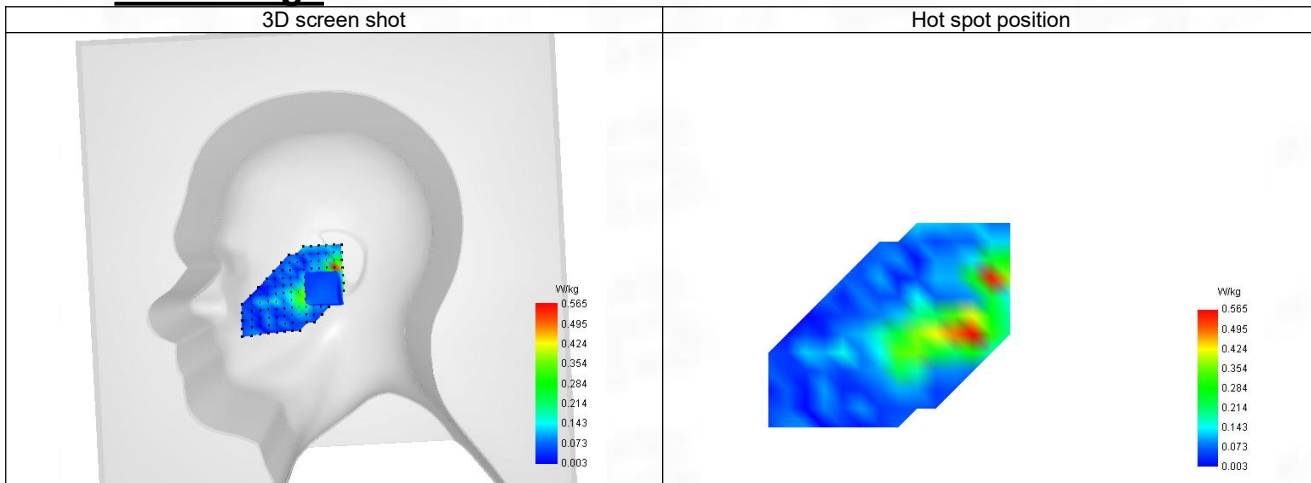

35-Body with front position in dist. 5mm on Channel 106 in IEEE 802.11ac U-NII

SAR Measurement at IEEE 802.11ac U-NII (Body, Validation Plane)

Date of measurement: 22/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.18
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11ac U-NII
Channels	Lower (106)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	5530.000
Relative permittivity (real part)	34.614
Relative permittivity (imaginary part)	16.385
Conductivity (S/m)	5.037

C. SAR Surface and Volume

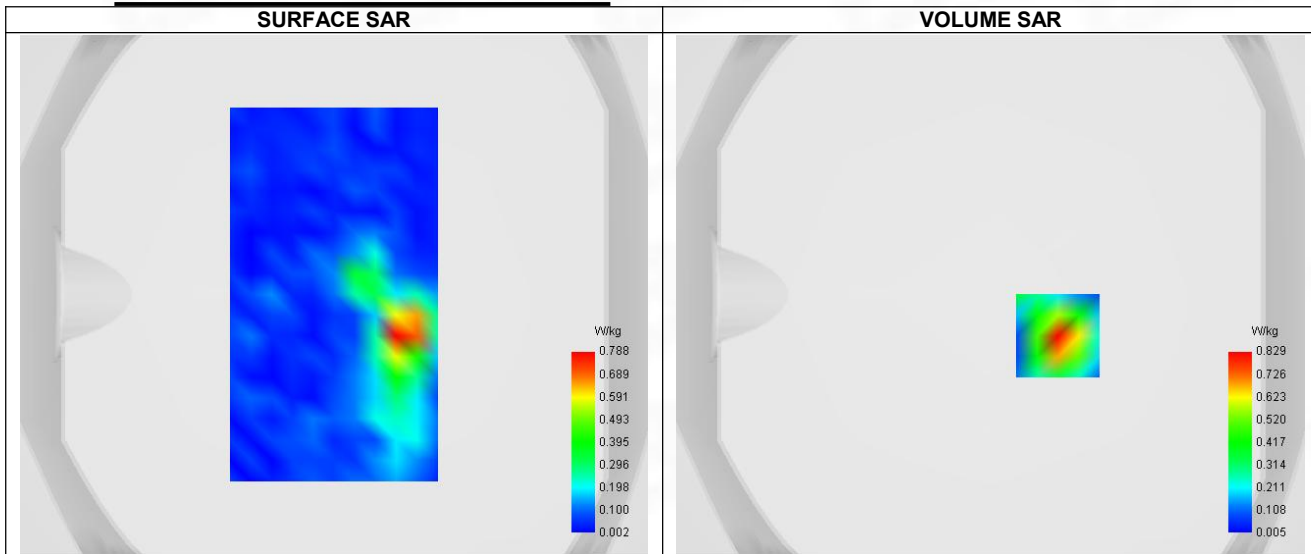


Maximum location: X=26.00, Y=-16.00 ; SAR Peak: 1.42 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.201
SAR 1g (W/Kg)	0.495
Variation (%)	2.110
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	1.356	0.829	0.184	0.035	0.023

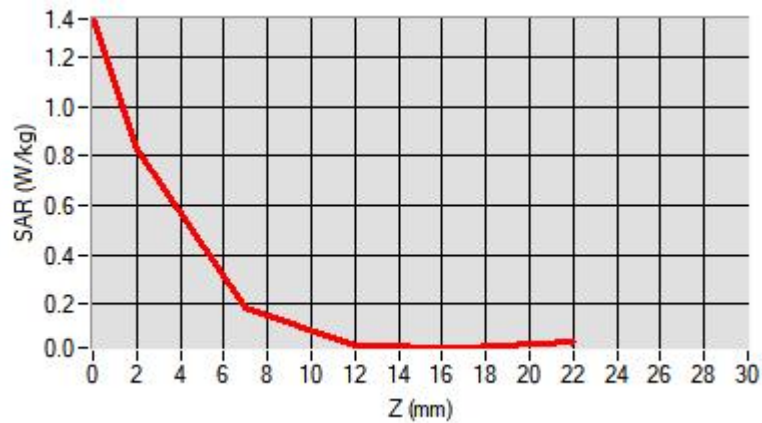

F. 3D Image

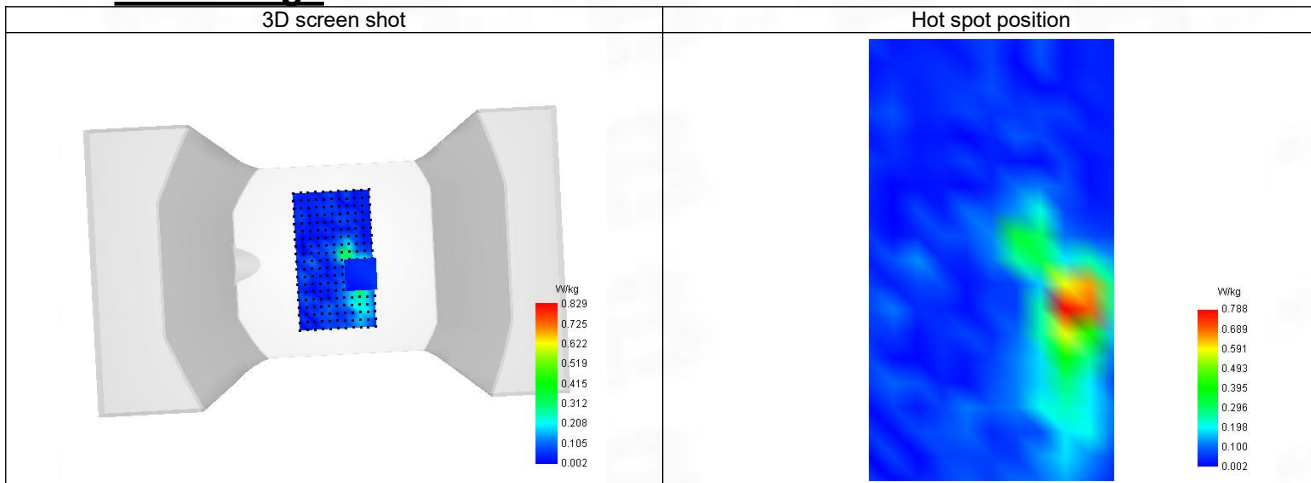

36-Body with back position in dist. 0mm on Channel 106 in IEEE 802.11ac U-NII

SAR Measurement at IEEE 802.11ac U-NII (Body, Validation Plane)

Date of measurement: 22/9/2023


A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.18
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11ac U-NII
Channels	Lower (106)
Signal	IEEE 802.11

B. Permittivity

Frequency (MHz)	5530.000
Relative permittivity (real part)	34.614
Relative permittivity (imaginary part)	16.385
Conductivity (S/m)	5.037

C. SAR Surface and Volume

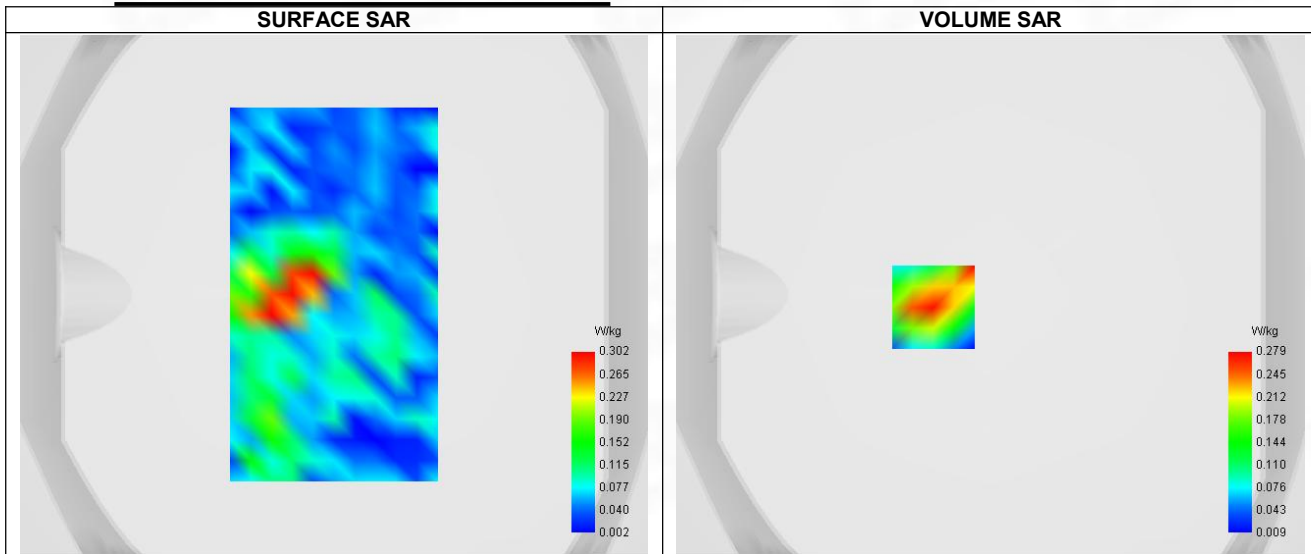


Maximum location: X=-22.00, Y=-5.00 ; SAR Peak: 0.41 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.095
SAR 1g (W/Kg)	0.179
Variation (%)	-3.020
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.553	0.279	0.040	0.045	0.039

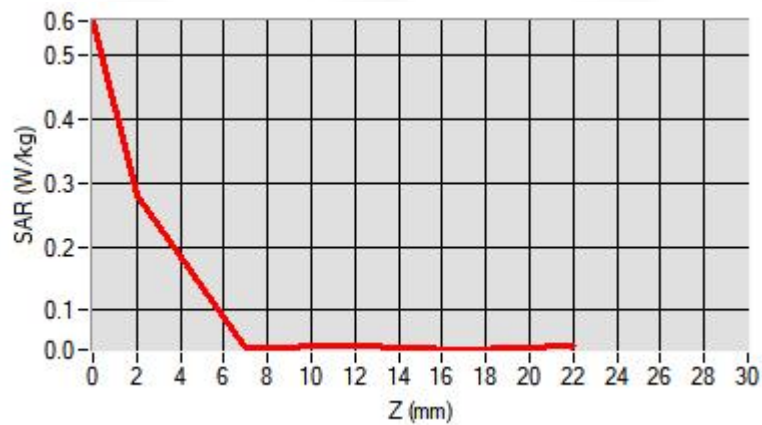

F. 3D Image

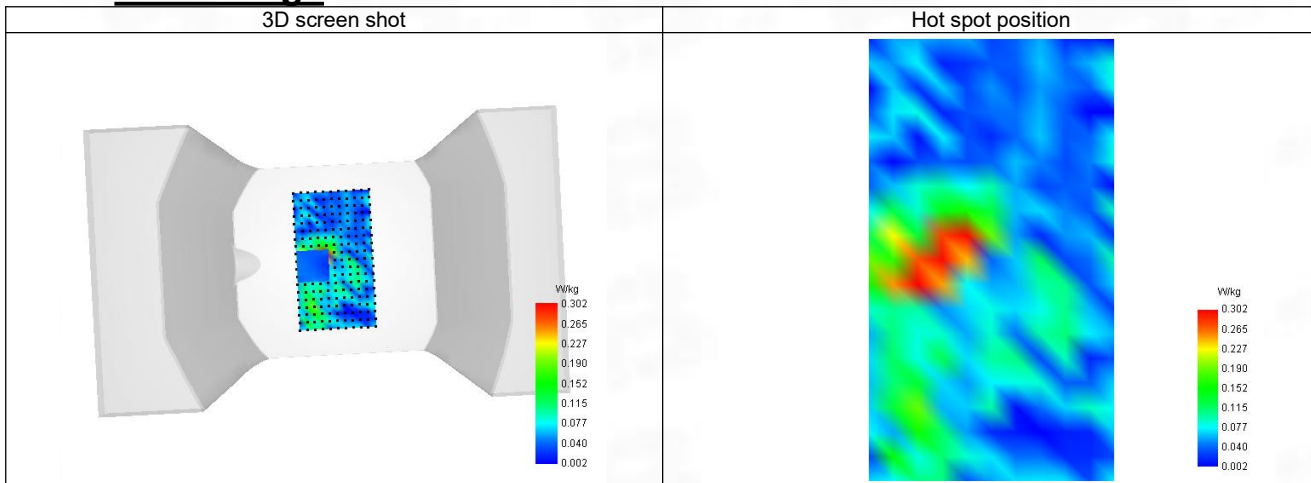

ANNEX D SAR Test Setup Photos

Reference Photo: simulation liquid depth 15cm




Reference Photos



Left Head - Cheek




Left Head - Tilt

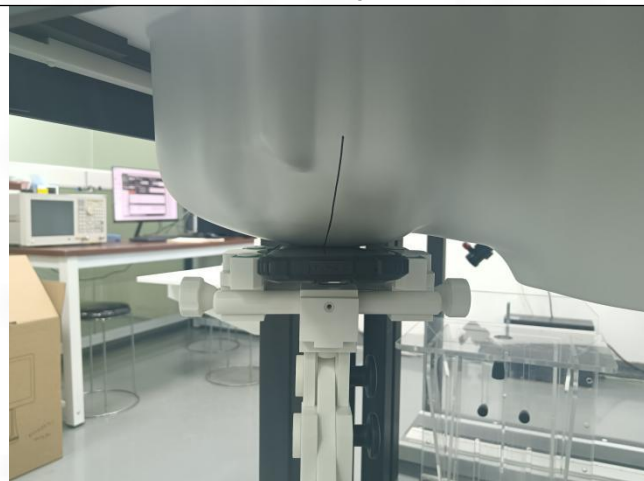

Right Head - Cheek



Right Head - Tilt

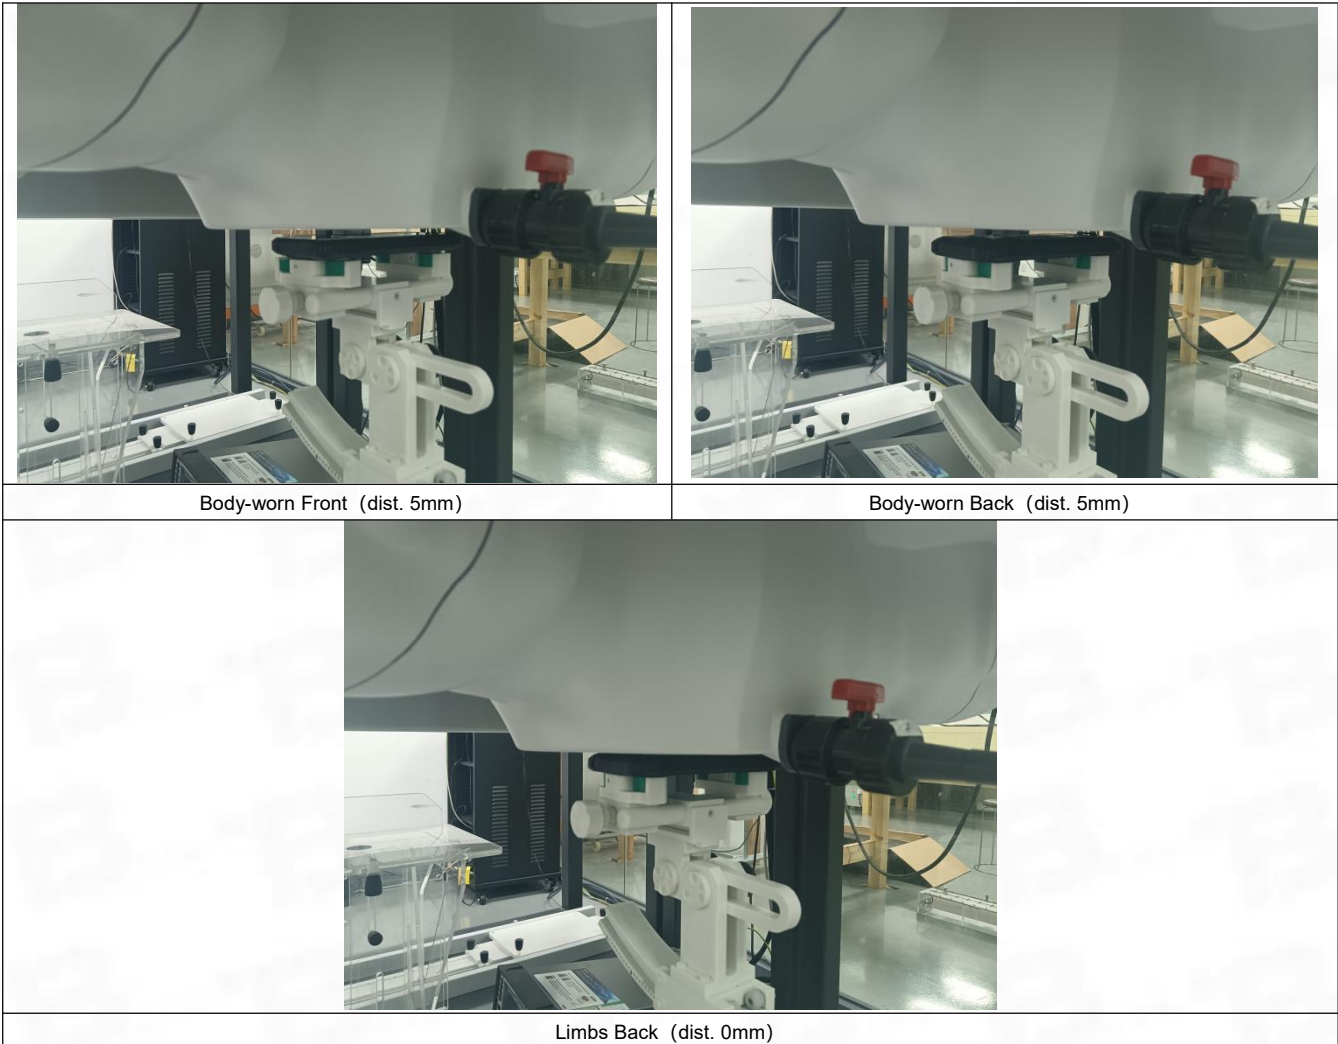

ANNEX E EUT External and Internal Photos

Please refer to RF Report.

ANNEX F Calibration Information

Please refer to the document "Calibration.pdf".



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

--END OF REPORT--