RADIO TEST REPORT
ETSI EN 300 328 V2.2.2 (2019-07)

Product：	Smartphone
Trade Mark：	HOTWAV, iHunt, BLACK FOX,
Model Name：	Note 13 Pro
Family Model：	Note 13, Note, T1, T1-S1L, Note 11, iHunt S24 Xtreme, HT02, HT03, Note 15, Note 15 Pro, Note 16, Note 16 Pro
Report No.：	S23082105304001

Prepared for

SHENZHEN TUGAO INTELLIGENT CO.,LTD

8th Floor, Bldg A, Jinggang Science&Technology Park, Fuyong, Bao'an District, Shenzhen, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1&5/F, Building C, 1&2/F, Building E, Fenda Science Park, Sanwei Community, Hangcheng Street, Baoan District, Shenzhen ,Guangdong, China

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website:http://www.ntek.org.cn

TEST RESULT CERTIFICATION

Applicant's name	:	SHENZHEN TUGAO INTELLIGENT CO.,LTD
Address	:	8th Floor, Bldg A, Jinggang Science&Technology Park, Fuyong, Bao'an District, Shenzhen, China
Manufacturer's Name	:	SHENZHEN TUGAO INTELLIGENT CO.,LTD
Address	:	8th Floor, Bldg A, Jinggang Science&Technology Park, Fuyong, Bao'an District, Shenzhen, China
Product description		
Product name	:	Smartphone
Trade Mark	:	HOTWAV, iHunt, BLACK FOX,
Model Name	:	Note 13 Pro
Family Model	:	Note 13, Note, T1, T1-S1L, Note 11,iHunt S24 Xtreme, HT02, HT03, Note 15, Note 15 Pro, Note 16, Note 16 Pro
Standards	:	ETSI EN 300 328 V2.2.2 (2019-07)

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the of article 3.2 of the Directive 2014/53/EU requirements. And it is applicable only to the tested sample identified in the report.
This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Test Sample Number	.....	S230821053002
Date of Test	.....	
Date (s) of performance of tests	.....	Aug 21, 2023 ~ Sep 20, 2023
Date of Issue	.....	Sep 20, 2023
Test Result	.....	**Pass**

Testing Engineer : _____
(Mary Hu)

Authorized Signatory : _____
(Alex Li)

Table of Contents **Page**

1 . GENERAL INFORMATION 6
1.1 GENERAL DESCRIPTION OF EUT 6
1.2 INFORMATION ABOUT THE EUT 7
1.3 TEST CONDITIONS 12
1.4 TEST CONFIGURATION OF EUT 12
1.5 DESCRIPTION OF TEST CONDITIONS 13
1.6 DESCRIPTION OF SUPPORT UNITS 14
1.7 EQUIPMENTS LIST FOR ALL TEST ITEMS 15
2 . SUMMARY OF TEST RESULTS 16
2.1 TEST FACILITY 17
3 . RF OUTPUT POWER 18
3.1 LIMITS OF RF OUTPUT POWER 18
3.2 TEST PROCEDURE 18
3.3 DEVIATION FROM TEST STANDARD 18
3.4 TEST SETUP 18
3.5 TEST RESULTS 19
4 . ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE 20
4.1 LIMITS OF ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE 20
4.2 TEST PROCEDURE 20
4.3 DEVIATION FROM TEST STANDARD 20
4.4 TEST SETUP 21
4.5 TEST RESULTS 21
5 . OCCUPIED CHANNEL BANDWIDTH 22
5.1 LIMITS OF OCCUPIED CHANNEL BANDWIDTH 22
5.2 TEST PROCEDURE 22
5.3 DEVIATION FROM TEST STANDARD 23
5.4 TEST SETUP 23
5.5 TEST RESULTS 23
6 . TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN 24
6.1 LIMITS OF TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN 24
6.2 TEST PROCEDURE 24

Table of Contents **Page**

6.3 DEVIATION FROM TEST STANDARD 25
6.4 TEST SETUP 25
6.5 TEST RESULTS 25
7 . HOPPING FREQUENCY SEPARATION 26
7.1 LIMITS OF HOPPING FREQUENCY SEPARATION 26
7.2 TEST PROCEDURE 26
7.3 DEVIATION FROM TEST STANDARD 26
7.4 TEST SETUP 27
7.5 TEST RESULTS 27
8 . TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN 28
8.1 LIMITS OF TRANSMITTER TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN 28
8.2 TEST PROCEDURE 28
8.3 DEVIATION FROM TEST STANDARD 28
8.4 TEST SETUP 29
8.5 TEST RESULTS (Radiated measurement) 30
8.6 TEST RESULTS (Conducted measurement) 31
9 . RECEIVER SPURIOUS EMISSIONS 32
9.1 LIMITS OF RECEIVER SPURIOUS RADIATION 32
9.2 TEST PROCEDURE 32
9.3 DEVIATION FROM TEST STANDARD 32
9.4 TEST SETUP 33
9.5 TEST RESULTS (Radiated measurement) 34
9.6 TEST RESULTS (Conducted measurement) 35
10. RECEIVER BLOCKING 36
10.1 PERFORMANCE CRITERIA 36
10.2 LIMITS OF RECEIVER BLOCKING 36
10.3 TEST PROCEDURE 37
10.4 DEVIATION FROM TEST STANDARD 38
10.5 TEST SETUP 38
10.6 TEST RESULTS 39
11. TEST RESULTS 42
12. EUT TEST PHOTO 103

Revision History

Report No.	Version	Description	Issued Date
S23082105304001	Rev.01	Initial issue of report	Sep 20, 2023

1. GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

Equipment	Smartphone
Trade Mark	HOTWAV, iHunt, BLACK FOX,
Model Name.	Note 13 Pro
Family Model	Note 13, Note, T1, T1-S1L, Note 11,iHunt S24 Xtreme, HT02, HT03, Note 15, Note 15 Pro, Note 16, Note 16 Pro
Model Difference	All the model are the same circuit and RF module, except the model names.
Product Description	The EUT is Smartphone Operation Frequency: 2402~2480 MHz Modulatin Type: GFSK,π/4-DQPSK,8-DPSK Modulation Technology: FHSS Adaptive/non-adaptive: Adaptive equipment Receiver categories: 2 Number Of Channel: 79CH Antenna Designation: PIFA Antenna Antenna Gain(Peak): 1.47 dBi Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.
Channel List	Refer to below Table
Adapter	Model: QZ-02002EC00 Input: 100-240V~50/60Hz 0.5A Output: 5.0V⎓3.0A (15.0W) or 9.0V⎓2.22A or 12.0V⎓1.67A(20.0W)
Battery	DC 3.87V, 5160mAh, 19.97Wh
Rating	DC 3.87V from battery or DC 5V from adapter
I/O Ports	Refer to users manual
Hardware Version	N/A
Software Version	N/A

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

79 channels are provided to (GFSK, π/4-DQPSK, 8-DPSK)

Channel	Frequency (MHz
00	2402
01	2403
……	……
……	……
……	…
……	……
77	2479
78	2480

1.2 INFORMATION ABOUT THE EUT

a) The type of modulation used by the equipment:

☒ FHSS

☐ other forms of modulation

b) In case of FHSS modulation:

● In case of non-Adaptive Frequency Hopping equipment:

The number of Hopping Frequencies: ……..

● In case of Adaptive Frequency Hopping Equipment:

The maximum number of Hopping Frequencies: 79

The minimum number of Hopping Frequencies: 79

● The (average) Dwell Time: 346.171ms Maximum

c) Adaptive / non-adaptive equipment:

☐ non-adaptive Equipment

☒ adaptive Equipment without the possibility to switch to a non-adaptive mode

☐ adaptive Equipment which can also operate in a non-adaptive mode

d) In case of adaptive equipment:

The maximum Channel Occupancy Time implemented by the equipment: ..../..... ms

☒ The equipment has implemented an LBT based DAA mechanism

● In case of equipment using modulation different from FHSS:

☐ The equipment is Frame Based equipment

☐ The equipment is Load Based equipment

☐ The equipment can switch dynamically between Frame Based and Load Based equipment

The CCA time implemented by the equipment: ...../.. μs

☐ The equipment has implemented a non-LBT based DAA mechanism

☐ The equipment can operate in more than one adaptive mode

e) In case of non-adaptive Equipment:

The maximum RF Output Power (e.i.r.p.):

The maximum (corresponding) Duty Cycle:

Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

f) The worst case operational mode for each of the following tests:

- RF Output Power

  GFSK
- Power Spectral Density

  N/A
- Duty cycle, Tx-Sequence, Tx-gap

  N/A
- Accumulated Transmit time, Frequency Occupation & Hopping Sequence (only for FHSS equipment)

  GFSK
- Hopping Frequency Separation (only for FHSS equipment)

  8-DPSK
- Medium Utilization

  N/A
- Adaptivity

  N/A
- Receiver Blocking

  GFSK
- Nominal Channel Bandwidth

  8-DPSK
- Transmitter unwanted emissions in the OOB domain

  π/4-DQPSK
- Transmitter unwanted emissions in the spurious domain

  π/4-DQPSK
- Receiver spurious emissions

  π/4-DQPSK

g) The different transmit operating modes (tick all that apply):

☒ Operating mode 1: Single Antenna Equipment

☒ Equipment with only one antenna

☐ Equipment with two diversity antennas but only one antenna active at any moment in time

☐ Smart Antenna Systems with two or more antennas, but operating in a (legacy) mode where only one antenna is used (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)

☐ Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming

☐ Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)

☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1

☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2

NOTE 1: Add more lines if more channel bandwidths are supported.

☐ Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming

☐ Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)

☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1

☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2

NOTE 2: Add more lines if more channel bandwidths are supported.

h) In case of Smart Antenna Systems:

- The number of Receive chains: .....
- The number of Transmit chains: .....

☐ symmetrical power distribution

☐ asymmetrical power distribution

In case of beam forming, the maximum (additional) beam forming gain: ..... dB

NOTE: The additional beam forming gain does not include the basic gain of a single antenna.

i) Operating Frequency Range(s) of the equipment:

- Operating Frequency Range 1: 2402 MHz to 2480 MHz
- Operating Frequency Range 2: ..... MHz to ..... MHz

NOTE: Add more lines if more Frequency Ranges are supported.

j) Nominal Channel Bandwidth(s):

- Nominal Channel Bandwidth 1: 1.195MHz
- Nominal Channel Bandwidth 2: ...../..... MHz

NOTE: Add more lines if more channel bandwidths are supported.

k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):

☒ Stand-alone

☐ Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)

☐ Plug-in radio device (Equipment intended for a variety of host systems)

☐ Other

l) The normal and the extreme operating conditions that apply to the equipment:

Normal operating conditions (if applicable):

Operating temperature: 15℃~35℃

Other (please specify if applicable): ……

Extreme operating conditions:

Operating temperature range: Minimum: -10℃ Maximum 40℃

Other (please specify if applicable): …… Minimum: …… Maximum ……

Details provided are for the:

☒ stand-alone equipment

☐ combined (or host) equipment

☐ test jig

m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p. levels:

● Antenna Type: PIFA Antenna

☒ Integral Antenna (information to be provided in case of conducted measurements)

Antenna Gain: 1.47 dBi

If applicable, additional beamforming gain (excluding basic antenna gain): ...../..... dB

☐ Temporary RF connector provided

☐ No temporary RF connector provided

☐ Dedicated Antennas (equipment with antenna connector)

☐ Single power level with corresponding antenna(s)

☐ Multiple power settings and corresponding antenna(s)

Number of different Power Levels: .....

Power Level 1: ..... dBm

Power Level 2: ..... dBm

Power Level 3: ..... dBm

NOTE 1: Add more lines in case the equipment has more power levels.

NOTE 2: These power levels are conducted power levels (at antenna connector).

●For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable

Power Level 1: ..... dBm

Number of antenna assemblies provided for this power level: .....

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1	1.47	4.49	
2			
3			

NOTE 3: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 2: ..... dBm

Number of antenna assemblies provided for this power level: .....

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			

NOTE 4: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 3: ..... dBm

Number of antenna assemblies provided for this power level: .....

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			

NOTE 5: Add more rows in case more antenna assemblies are supported for this power level.

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Details provided are for the:

☒ stand-alone equipment

☐ combined (or host) equipment

☐ test jig

Supply Voltage ☐ AC mains State AC voltage …….. V

☒ DC State DC voltage: DC 3.87V

In case of DC, indicate the type of power source

☐ Internal Power Supply

☒ External Power Supply or AC/DC adapter: DC 5V

☒ Battery: DC 3.87V

☐ Other: .....

o) Describe the test modes available which can facilitate testing:

See clause 1.4

p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], IEEE 802.15.4™ [i.4], proprietary, etc.):

Bluetooth®

q) If applicable, the statistical analysis referred to in clause 5.4.1 q)

(to be provided as separate attachment)

r) If applicable, the statistical analysis referred to in clause 5.4.1 r)

(to be provided as separate attachment)

s) Geo-location capability supported by the equipment:

☐ Yes

☐ The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user

☒ No

t) Describe the minimum performance criteria that apply to the equipment (see clause 4.3.1.12.3 or clause 4.3.2.11.3):

8-DPSK=0.93%

1.3 TEST CONDITIONS

	Normal Test Conditions	Extreme Test Conditions
Temperature	15℃ - 35℃	-10℃ ~ 40℃ Note: (1)
Relative Humidity	20% - 75%	N/A
Supply Voltage	DC 3.87V	/


Note:
(1) The HT 40℃ and LT -10℃ was declarated by manufacturer, The EUT couldn't be operate normally with higher or lower temperature.
(2) The measurements are performed at the highest, middle, lowest available channels.

1.4 TEST CONFIGURATION OF EUT

Modulation Used For Conformance Testing		
Bluetooth mode	Data rate	Modulation type
BR	1Mbps	GFSK
EDR	2Mbps	π/4-DQPSK
EDR	3Mbps	8-DPSK

Test Channel Frequencies Configuration		
Test Channel	EUT Channel	Test Frequency (MHz)
Lowest	CH00	2402
Middle	CH39	2441
Highest	CH78	2480

1.5 DESCRIPTION OF TEST CONDITIONS



1.6 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Smartphone	Note 13 Pro	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

(1) The support equipment was authorized by Declaration of Confirmation.
(2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

1.7 EQUIPMENTS LIST FOR ALL TEST ITEMS

EQUIPMENT TYPE	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
EMI Test Receiver	R&S	ESPI7	101318	2023.03.27	2024.03.26	1 year
Bilog Antenna	TESEQ	CBL6111D	31216	2023.03.16	2024.03.15	1 year
Turn Table	EM	SC100_1	60531	N/A	N/A	N/A
Antnna Mast	EM	SC100	N/A	N/A	N/A	N/A
Horn Antenna	SCHWARZBECK	BBHA 9120 D	2816	2023.01.12	2024.01.11	1 year
Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2022.11.07	2023.11.06	1 year
Test Cable (30MHz-1GHz)	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
Test Cable (1-18GHz)	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2023.05.06	2026.05.05	3 year
Pre-Amplifier	EMC	EMC051835SE	980246	2023.05.29	2024.05.28	1 year
Spectrum Analyzer	Agilent	E4407B	MY45108040	2023.03.31	2024.03.30	1 year
Filter	TRILTHIC	2400MHz	29	2023.03.27	2026.03.26	3 year
Attenuator	Weinschel	33-10-33	AR4010	2023.03.27	2026.03.26	3 year
Attenuator	Weinschel	24-20-34	BP4485	2023.03.27	2026.03.26	3 year
MXA Signal Analyzer	Agilent	N9020A	MY49100060	2023.05.29	2024.05.28	1 year
ESG VETCTOR SIGNAL GENERAROR	Agilent	E4438C	MY45093347	2023.03.21	2024.03.20	1 year
Power Splitter	Mini-Circuits/ USA	ZN2PD-63-S+	SF025101428	2023.03.27	2026.03.26	3 year
Coupler	Mini-Circuits	ZADC-10-63-S +	SF794101410	2023.03.27	2026.03.26	3 year
Directional Coupler	MCLI/USA	CB11-20	0D2L51502	2023.07.04	2026.07.03	3 year
Attenuator	Agilent	8495B	MY42147029	2023.03.27	2026.03.26	3 year
Power Meter	DARE	RPR3006W	15I00041SNO 84	2023.05.29	2024.05.28	1 year
MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2023.05.29	2024.05.28	1 year
Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	2023.05.29	2024.05.28	1 year
temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

ETSI EN 300 328 V2.2.2 (2019-07)		
Clause	Test Item	Results
TRANSMITTER PARAMETERS		
4.3.1.2	RF Output Power	Pass
4.3.1.3	Duty cycle, Tx-Sequence, Tx-gap	Not Applicable (See Note 1/2)
4.3.1.4	Accumulated Transmit Time, Frequency Occupation and Hopping Sequence	Pass
4.3.1.5	Hopping Frequency Separation	Pass
4.3.1.6	Medium Utilization (MU) factor	Not Applicable (See Note 1/2)
4.3.1.7	Adaptivity	Not Applicable (See Note 1)
4.3.1.8	Occupied Channel Bandwidth	Pass
4.3.1.9	Transmitter unwanted emission in the OOB domain	Pass
4.3.1.10	Transmitter unwanted emissions in the spurious domain	Pass
RECEIVER PARAMETERS		
4.3.1.11	Receiver Spurious Emissions	Pass
4.3.1.12	Receiver Blocking	Pass

Note:
1. These requirements do not apply for equipment with a maximum declared RF output power of less than 10 dBm EIRP or for equipment when operating in a mode where the RF output power is less than 10 dBm EIRP.
2. These requirements apply to non-adaptive frequency hopping equipment or to adaptive frequency hopping equipment operating in a non-adaptive mode
3. The antenna gain provided by customer is used to calculate the EIRP result. NTEK is not responsible for the accuracy of antenna gain parameter.

2.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.
Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China
FCC Registered No.: 463705 IC Registered No.:9270A-1
CNAS Registration No.:L5516

2.2 MAXIMUM MEASUREMENT UNCERTAINTY

For the test methods, according to ETSI EN 300 328 standard, the measurement uncertainty figures shall be calculated in accordance with ETR 100 028-1[4] and shall correspond to an expansion factor(coverage factor) k=1.96 or k=2 (which provide confidence levels of respectively **95** % and **95.45** % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Maximum measurement uncertainty

No.	Item	Uncertainty
1	Occupied Channel Bandwidth	± 5%
2	RF output Power,conducted	±1.5dB
3	Power Spectral Density, conducted	± 3dB
4	Unwanted emissions, conducted	± 3dB
5	All emissions,radiated	± 6dB
6	Temperature	± 3°C
7	Humidity	± 3%
9	Time	± 5%

TRANSMITTER PARAMETERS

3. RF OUTPUT POWER

3.1 LIMITS OF RF OUTPUT POWER

Refer to chapter 4.3.1.2.3 of ETSI EN 300 328 V2.2.2 (2019-07)

RF OUTPUT POWER	
Condition	Limit
☐ Non-adaptive frequency hopping systems	Equal to or less than the value declared by the supplier. This declared value shall be equal to or less than 20 dBm.
☒ Adaptive frequency hopping systems	equal to or less than 20 dBm.

3.2 TEST PROCEDURE


Refer to chapter 5.4.2.2 of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
☒Conducted measurement	☐Radiated measurement

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

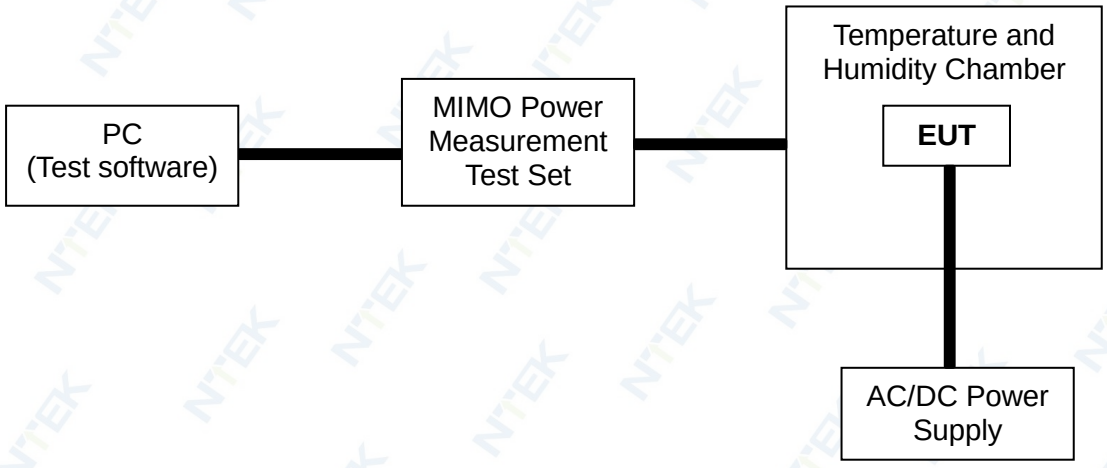

3.5 TEST RESULTS

EUT：	Smartphone	Model Name ：	Note 13 Pro
Temperature：	20°C	Relative Humidity：	55 %
Pressure：	1012 hPa	Test Voltage ：	DC 3.87V
Test Mode ：	BT-GFSK/π/4-DQPSK /8-DPSK		

Test data reference attachment

4. ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE

4.1 LIMITS OF ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE

Refer to chapter 4.3.1.4.3 of ETSI EN 300 328 V2.2.2 (2019-07)

Accumulated Transmit Time	
Condition	Limit
☐ Non-adaptive frequency hopping systems	≤ 15 ms[15 ms * the minimum number of hopping frequencies (N)]
☒ Adaptive frequency hopping systems	≤ 400 ms in [400 ms * the minimum number of hopping frequencies (N)]
MINIMUM FREQUENCY OCCUPATION TIME	
Condition	Limit
☐ Non-adaptive frequency hopping systems	Each hopping frequency of the hopping sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use.
☒ Adaptive frequency hopping systems	
HOPPING SEQUENCE (S)	
Condition	Limit
☐ Non-adaptive frequency hopping systems	≥15 hopping frequencies or 15/minimum
☒ Adaptive frequency hopping systems	Operating over a minimum of 70% of the Operating in the band 2.4 GHz to 2.4835 GHz
	≥15 hopping frequencies or 15/minimum

4.2 TEST PROCEDURE

Refer to chapter 5.4.4 of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
☒Conducted measurement	☐Radiated measurement

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP



The measurements only were performed at normal test conditions. The equipment was configured to operate at its maximun Dwell time and maximum Duty Cycle. The measurement was performed on a minimum of 2 hopping frequencies chosen arbitrary from the actual hopping sequence. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator. Controlling software (Button Function) has been activated to set the EUT on specific status.

4.5 TEST RESULTS

EUT：	Smartphone	Model Name ：	Note 13 Pro
Temperature：	26°C	Relative Humidity	60 %
Pressure：	1012 hPa	Test Voltage ：	DC 3.87V
Test Mode ：	BT-GFSK/π/4-DQPSK /8-DPSK-Hopping Mode		

Test data reference attachment

5. OCCUPIED CHANNEL BANDWIDTH

5.1 LIMITS OF OCCUPIED CHANNEL BANDWIDTH

Refer to chapter 4.3.1.8.3 of ETSI EN 300 328 V2.2.2 (2019-07)

OCCUPIED CHANNEL BANDWIDTH		
Condition		Limit
All types of equipment		Shall fall completely within the band 2400 to 2483.5 MHz
Additional requirement	For non-adaptive using wide band modulations other than FHSS system and EIRP >10 dBm	Less than 20 MHz
	For non-adaptive frequency hopping system and EIRP >10 dBm	Less than 5 MHz

5.2 TEST PROCEDURE

Refer to chapter 5.4.7.2 of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
☒Conducted measurement	☐Radiated measurement

The setting of the Spectrum Analyzer

Center Frequency	The centre frequency of the channel under test
Frequency Span	2 × Nominal Channel Bandwidth
Detector	RMS
RBW	~ 1 % of the span without going below 1 %
VBW	3 × RBW
Trace	Max hold
Sweep time	1s

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP



These measurements only were performed at normal test conditions. The measurement shall be performed only on the lowest and the highest frequency within the ststed frequency range. Using software to force the EUT to hop or transmit on a single Hopping frequency. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator. Controlling software (Button Function) has been activated to set the EUT on specific status.

5.5 TEST RESULTS

EUT：	Smartphone	Model Name ：	Note 13 Pro
Temperature：	26°C	Relative Humidity：	60 %
Pressure：	1012 hPa	Test Voltage ：	DC 3.87V
Test Mode ：	BT-GFSK/π/4-DQPSK /8-DPSK-(CH00/CH78)		

Test data reference attachment

6. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

6.1 LIMITS OF TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

Refer to chapter 4.3.1.9.3 of ETSI EN 300 328 V2.2.2 (2019-07)

TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	
Condition	Limit
Under all test conditions	The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in below figure.

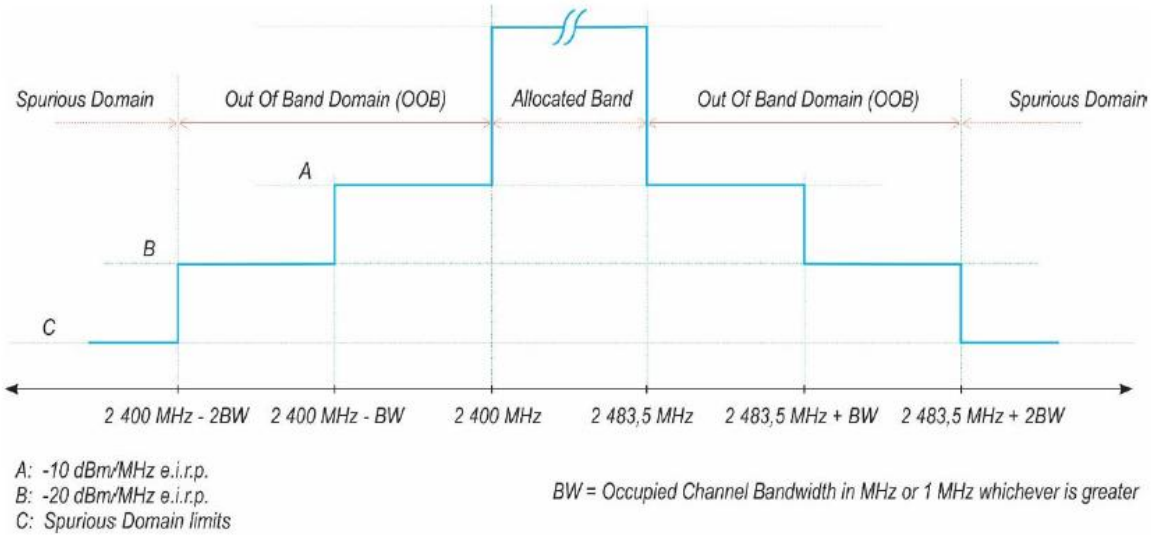


Figure 1: Transmit mask

6.2 TEST PROCEDURE

Refer to chapter 5.4.8.2of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
☒Conducted measurement	☐Radiated measurement


The setting of the Spectrum Analyzer

Span	0Hz
Filter Mode	Channel Filter
Trace Mode	Clear/Write
Trigger Mode	Video Trigger
Detector	RMS
Sweep Point / Sweep Mode	5000 / Continuous
RBW / VBW	1MHz / 3MHz

6.3 DEVIATION FROM TEST STANDARD

No deviation

6.4 TEST SETUP

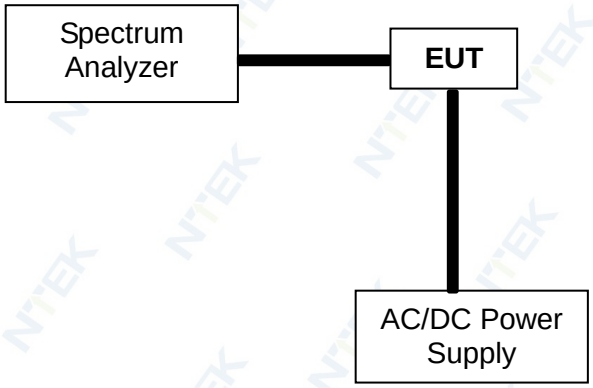

According to the ETSI EN 300328 V2.2.2 clause 5.4.8.1: These measurements shall only be performed at normal test conditions. For equipment using FHSS modulation, the measurements shall be performed during normal operation (hopping).

For equipment using wide band modulations other than FHSS, the measurement shall be performed at the lowest and the highest channel on which the equipment can operate. These operating channels shall be recorded.

The equipment shall be configured to operate under its worst case situation with respect to output power.

If the equipment can operate with different Nominal Channel Bandwidths (e.g. 20 MHz and 40 MHz), then each channel bandwidth shall be tested separately.

6.5 TEST RESULTS

EUT：	Smartphone	Model Name ：	Note 13 Pro
Temperature：	26°C	Relative Humidity：	60 %
Pressure：	1012 hPa	Test Voltage ：	DC 3.87V
Test Mode ：	BT-GFSK/π/4-DQPSK /8-DPSK-(CH78)		

Test data reference attachment

7. HOPPING FREQUENCY SEPARATION

7.1 LIMITS OF HOPPING FREQUENCY SEPARATION

Refer to chapter 4.3.1.5.3 of ETSI EN 300 328 V2.2.2 (2019-07)

HOPPING FREQUENCY SEPARATION	
Condition	Limit
☐ Non-adaptive frequency hopping systems	The minimum Hopping Frequency Separation shall be equal to or greater than occupide channel bandwidth of a single hop, with a minimum separation of 100 kHz.
☒ Adaptive frequency hopping systems	The minimum Hopping Frequency Separation shall be 100 kHz.

7.2 TEST PROCEDURE

Refer to chapter 5.4.5.2 of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
☒Conducted measurement	☐Radiated measurement

The setting of the Spectrum Analyzer

Center Frequency	Centre of the two adjacent hopping frequencies
Frequency Span	Sufficient to see the complete power envelope of both hopping frequencies
Detector	Max Peak
RBW	~ 1 % of the span
VBW	3 × RBW
Trace	Max hold
Sweep Time	Auto

7.3 DEVIATION FROM TEST STANDARD

No deviation

7.4 TEST SETUP



The measurements were performed at normal test conditions. The measurement was performed on 2 adjacent hopping frequencies. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator. Controlling software (Button Function) has been activated to set the EUT on specific status.

7.5 TEST RESULTS

EUT：	Smartphone	Model Name ：	Note 13 Pro
Temperature：	26°C	Relative Humidity：	60 %
Pressure：	1012 hPa	Test Voltage ：	DC 3.87V
Test Mode ：	BT-GFSK/π/4-DQPSK /8-DPSK-(CH00/CH39/CH78)		

Test data reference attachment

Note: 1.The limitation is from OCB of a single hop and this value must greater and equal to 100kHz.
2.The device will never “hop” to its neighbour channel, therefore the “effective” channel separation becomes 2x the “normal” channel separation.

8. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

8.1 LIMITS OF TRANSMITTER TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

Refer to chapter 4.3.1.10.3 of ETSI EN 300 328 V2.2.2 (2019-07)

TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN		
Frequency Range	Maximum Power Limit (E.R.P.(≤1 GHz) E.I.R.P.(> 1 GHz))	Bandwidth
30 MHz to 47 MHz	-36dBm	100 kHz
47 MHz to 74 MHz	-54dBm	100 kHz
74 MHz to 87.5 MHz	-36dBm	100 kHz
87.5 MHz to 118 MHz	-54dBm	100 kHz
118 MHz to 174 MHz	-36dBm	100 kHz
174 MHz to 230 MHz	-54dBm	100 kHz
230 MHz to 470 MHz	-36dBm	100 kHz
470 MHz to 694 MHz	-54dBm	100 kHz
694 MHz to 1 GHz	-36dBm	100 kHz
1 GHz ~ 12.75 GHz	-30dBm	1 MHz

8.2 TEST PROCEDURE

Refer to chapter 5.4.9.2 of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
☒Conducted measurement	☒Radiated measurement

The setting of the Spectrum Analyzer


RBW	100K(＜1GHz) / 1M(＞1GHz)
VBW	300K(＜1GHz) / 3M(＞1GHz)

8.3 DEVIATION FROM TEST STANDARD


No deviation

8.4 TEST SETUP

Radiated measurement:

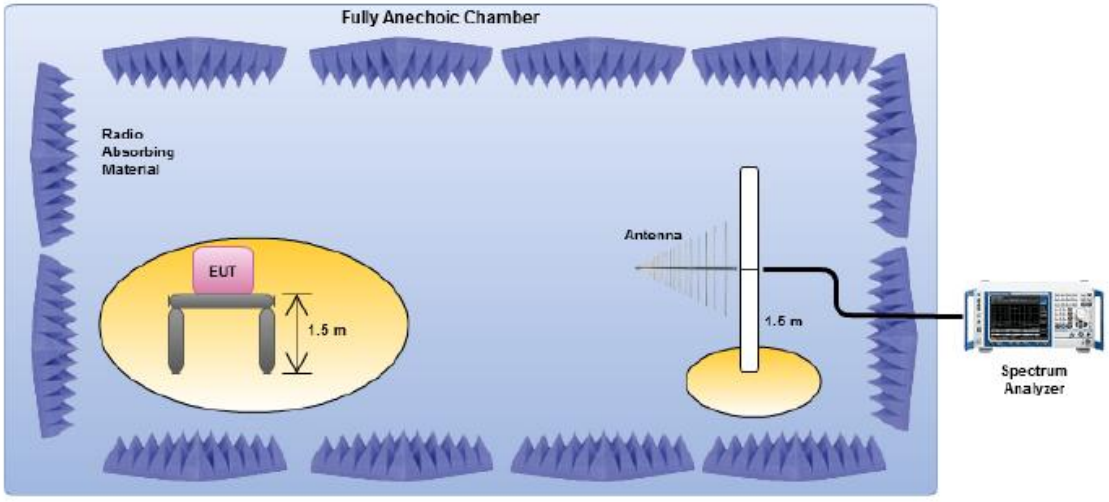

Conducted measurement:

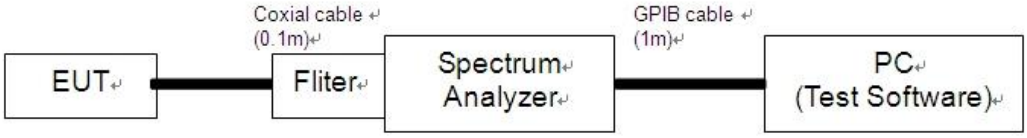

1. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).

2. The measurements were performed when normal hopping was disabled. In this case measurements were performed when operating at the lowest and the highest hopping frequency.

3. The equipment was configured to operate under its worst case situation with respect to output power.

4. The test setup has been constructed as the normal use condition. Controlling software (Button Function) has been activated to set the EUT on specific status.

8.5 TEST RESULTS (Radiated measurement)

BELOW 1 GHz WORST- CASE DATA (30 MHz ~ 1GHz)

EUT：	Smartphone	Model Name ：	Note 13 Pro
Temperature：	24 ℃	Relative Humidity	54%
Pressure：	1010 hPa	Test Power ：	DC 3.87V
Test Mode ：	BT-GFSK (CH00)		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	41.5734	-81.53	15.77	-65.76	-36	-29.76	peak
V	104.9491	-84.68	16.26	-68.42	-54	-14.42	peak
V	184.6002	-77.13	16.22	-60.91	-36	-24.91	peak
V	407.521	-84.5	16.19	-68.31	-54	-14.31	peak
V	556.7128	-79.78	14.53	-65.25	-36	-29.25	peak
V	740.2976	-86.88	16.03	-70.85	-36	-34.85	peak
H	39.4757	-84.09	15.45	-68.64	-54	-14.64	peak
H	110.1707	-78.29	15.20	-63.09	-54	-9.09	peak
H	194.4784	-77.33	15.83	-61.50	-36	-25.50	peak
H	323.0369	-84.45	16.11	-68.34	-54	-14.34	peak
H	312.7213	-86.81	17.36	-69.45	-36	-33.45	peak
H	707.867	-79.74	16.03	-63.71	-36	-27.71	peak

Remark:

1. Emission Level= Meter Reading+ Factor, Margin= Limit- Emission Level.
2. All the modes had been tested, but only the worst data recorded in the report.

ABOVE 1 GHz WORST- CASE DATA (1GHz ~ 12.75GHz)

EUT：	Smartphone	Model Name ：	Note 13 Pro
Temperature：	24 ℃	Relative Humidity	54%
Pressure：	1010 hPa	Test Power ：	DC 3.87V
Test Mode ：	GFSK (CH00/CH39/CH78)		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
operation frequency:2402							
V	4804.26	-75.40	25.63	-49.77	-30	-19.77	peak
V	7206.11	-80.00	29.83	-50.17	-30	-20.17	peak
H	4804.26	-66.90	25.63	-41.27	-30	-11.27	peak
H	7206.11	-78.20	29.83	-48.37	-30	-18.37	peak
operation frequency:2441							
V	4882.58	-70.50	26.62	-43.88	-30	-13.88	peak
V	7324.55	-74.90	29.64	-45.26	-30	-15.26	peak
H	4882.58	-67.70	26.62	-41.08	-30	-11.08	peak
H	7324.55	-74.80	29.64	-45.16	-30	-15.16	peak
operation frequency:2480							
V	4960.46	-67.50	27.49	-40.01	-30	-10.01	peak
V	7440.91	-71.80	29.82	-41.98	-30	-11.98	peak
H	4960.46	-75.40	27.49	-47.91	-30	-17.91	peak
H	7440.91	-70.50	29.82	-40.68	-30	-10.68	peak

Remark:

1. Emission Level= Meter Reading+ Factor, Margin= Limit- Emission Level.
2. All the modes had been tested, but only the worst data recorded in the report.

8.6 TEST RESULTS (Conducted measurement)

Test data reference attachment

9. RECEIVER SPURIOUS EMISSIONS

9.1 LIMITS OF RECEIVER SPURIOUS RADIATION

Refer to chapter 4.3.1.11.3 of ETSI EN 300 328 V2.2.2 (2019-07)

RECEIVER SPURIOUS EMISSIONS		
Frequency Range	Maximum Power Limit (E.R.P.(≤1 GHz) E.I.R.P.(> 1 GHz))	Measurement Bandwidth
30 MHz ~ 1 GHz	-57dBm	100KHz
1 GHz ~ 12.75 GHz	-47dBm	1MHz

9.2 TEST PROCEDURE

Refer to chapter 5.4.10.2 of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
☒Conducted measurement	☒Radiated measurement

The setting of the Spectrum Analyzer


RBW	100K(＜1GHz) / 1M(＞1GHz)
VBW	300K(＜1GHz) / 3M(＞1GHz)

9.3 DEVIATION FROM TEST STANDARD


No deviation

9.4 TEST SETUP

Radiated measurement:

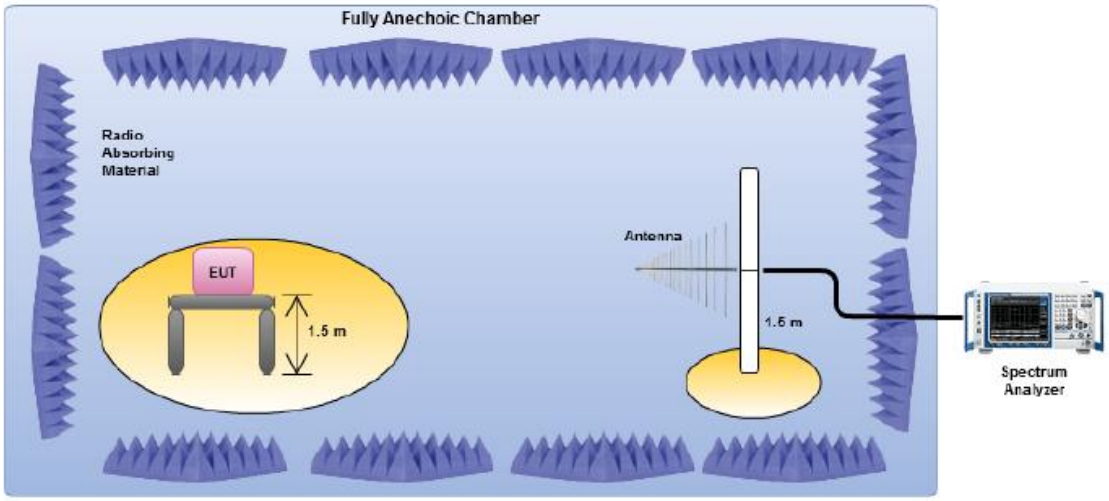

Conducted measurement:



1. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).

2. Testing was performed when the equipment was in a receive-only mode.

3. The measurements were performed when normal hopping was disabled. In this case measurements were performed when operating at the lowest and the highest hopping frequency.

4. The test setup has been constructed as the normal use condition. Controlling software (Button Function) has been activated to set the EUT on specific status.

9.5 TEST RESULTS (Radiated measurement)

RX BELOW 1 GHz WORST- CASE DATA (30 MHz ~ 1GHz)

EUT：	Smartphone	Model Name ：	Note 13 Pro
Temperature：	24 ℃	Relative Humidity	54%
Pressure：	1010 hPa	Test Power ：	DC 3.87V
Test Mode ：	GFSK(CH00)		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	42.2709	-85.38	11.98	-73.40	-57	-16.40	peak
V	97.6684	-82.08	12.67	-69.41	-57	-12.41	peak
V	204.7553	-87.33	13.94	-73.39	-57	-16.39	peak
V	288.2502	-82.01	14.65	-67.36	-57	-10.36	peak
V	686.5859	-89.66	16.25	-73.41	-57	-16.41	peak
V	712.7592	-89.6	14.45	-75.15	-57	-18.15	peak
H	41.1436	-87.14	13.60	-73.54	-57	-16.54	peak
H	106.8355	-89.93	15.11	-74.82	-57	-17.82	peak
H	184.8196	-87.62	13.30	-74.32	-57	-17.32	peak
H	244.0577	-79.77	18.00	-61.77	-57	-4.77	peak
H	536.9207	-86.3	16.63	-69.67	-57	-12.67	peak
H	746.9556	-89.98	17.63	-72.35	-57	-15.35	peak

Remark:

1. Emission Level= Meter Reading+ Factor, Margin= Limit- Emission Level.
2. All the modes had been tested, but only the worst data recorded in the report.

RX ABOVE 1 GHz WORST- CASE DATA (1GHz ~ 12.75GHz)

EUT：	Smartphone	Model Name ：	Note 13 Pro
Temperature：	24 ℃	Relative Humidity	54%
Pressure：	1010 hPa	Test Power ：	DC 3.87V
Test Mode ：	GFSK (CH00)		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	1581.52	-93.44	18.94	-74.50	-47	-27.50	peak
V	2180.01	-94.78	18.82	-75.96	-47	-28.96	peak
V	3840.03	-93.63	19.02	-74.61	-47	-27.61	peak
V	4056.53	-89.00	25.13	-63.87	-47	-16.87	peak
V	4874.00	-91.62	25.16	-66.46	-47	-19.46	peak
V	5407.21	-92.11	25.19	-66.92	-47	-19.92	peak
H	2768.39	-87.00	19.11	-67.89	-47	-20.89	peak
H	2586.82	-87.97	19.68	-68.29	-47	-21.29	peak
H	3369.50	-88.37	19.21	-69.16	-47	-22.16	peak
H	3502.07	-87.39	20.23	-67.16	-47	-20.16	peak
H	4188.42	-91.88	17.6	-74.28	-47	-27.28	peak
H	5829.32	-94.78	23.56	-71.22	-47	-24.22	peak

1. Emission Level= Meter Reading+ Factor, Margin= Limit- Emission Level.
2. All the modes had been tested, but only the worst data recorded in the report.

9.6 TEST RESULTS (Conducted measurement)

Test data reference attachment

10. RECEIVER BLOCKING

10.1 PERFORMANCE CRITERIA

The minimum performance criterion shall be a PER less than or equal to 10 %. The manufacturer may declare alternative performance criteria as long as that is appropriate for the intended use of the equipment (see clause 5.4.1.t)).

10.2 LIMITS OF RECEIVER BLOCKING

While maintaining the minimum performance criteria as defined in clause 4.3.1.12.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 6, table 7 or table 8.

☐Table 6: Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	**Blocking signal Frequency (MHz)**	**Blocking signal power (dBm) (see note 4)**	**Type of blocking signal**
(-133 dBm + 10 × $\log_{10}$(OCBW)) or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW
(-139 dBm + 10 × $\log_{10}$(OCBW)) or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2524 2584 2674		

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 26 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 20 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

☒**Table 7: Receiver Blocking parameters receiver category 2 equipment**

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	**Blocking signal Frequency (MHz)**	**Blocking signal power (dBm) (see note 3)**	**Type of blocking signal**
(-139 dBm + 10 × $\log_{10}$(OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 26 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.
NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements,this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

☐**Table 8: Receiver Blocking parameters receiver category 3 equipment**

Wanted signal mean power from companion device (dBm)	**Blocking signal Frequency (MHz)**	**Blocking signal power (dBm) (see note 2)**	**Type of blocking signal**
(-139 dBm + 10 × $\log_{10}$(OCBW) + 20 dB) or (-74 dBm + 20 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative the test may be performed using a wanted signal up to P_{min} + 30 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.
NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

10.3 TEST PROCEDURE


Refer to chapter 5.4.11.2 of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
☒Conducted measurement	☐Radiated measurement

10.4 DEVIATION FROM TEST STANDARD

No deviation

10.5 TEST SETUP

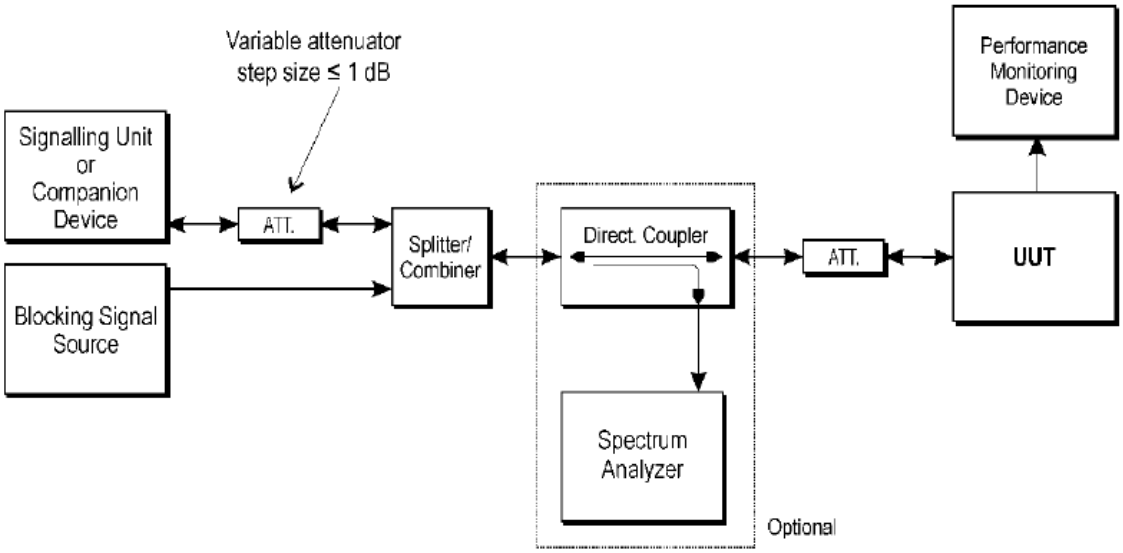

10.6 TEST RESULTS

EUT：	Smartphone	Model Name ：	Note 13 Pro
Temperature：	24 ℃	Relative Humidity	54%
Pressure：	1010 hPa	Test Power ：	DC 3.87V
Test Mode ：	GFSK Hopping mode (RX)		

CH00

receiver category 2

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal Frequency (MHz)	Blocking signal power(dBm) (see note 3)	PER %	PER Limit %
-68.21	2 380	-34	0.20%	≤10
	2 504		0.87%	
	2 300		0.49%	≤10
	2 584		0.25%	

CH78

receiver category 2

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal Frequency (MHz)	Blocking signal power(dBm) (see note 3)	PER %	PER Limit %
-68.1	2 380	-34	0.61%	≤10
	2 504		0.23%	
	2 300		0.52%	≤10
	2 584		0.52%	

Note: (1) The above results were obtained from laboratory tests.

EUT：	Smartphone	Model Name ：	Note 13 Pro
Temperature：	24 ℃	Relative Humidity	54%
Pressure：	1010 hPa	Test Power ：	DC 3.87V
Test Mode ：	π/4-DQPSK Hopping mode (RX)		

CH00

receiver category 2

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal Frequency (MHz)	Blocking signal power(dBm) (see note 3)	PER %	PER Limit %
-66.8	2 380	-34	0.82%	≤10
	2 504		0.34%	
	2 300		0.05%	≤10
	2 584		0.05%	

CH78

receiver category 2

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal Frequency (MHz)	Blocking signal power(dBm) (see note 3)	PER %	PER Limit %
-66.8	2 380	-34	0.89%	≤10
	2 504		0.87%	
	2 300		0.07%	≤10
	2 584		0.90%	

Note: (1) The above results were obtained from laboratory tests.

EUT：	Smartphone	Model Name ：	Note 13 Pro
Temperature：	24 ℃	Relative Humidity	54%
Pressure：	1010 hPa	Test Power ：	DC 3.87V
Test Mode ：	8-DPSK Hopping mode (RX)		

CH00

receiver category 2

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal Frequency (MHz)	Blocking signal power(dBm) (see note 3)	PER %	PER Limit %
-66.76	2 380	-34	0.21%	≤10
	2 504		0.12%	
	2 300		0.53%	≤10
	2 584		0.17%	

CH78

receiver category 2

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal Frequency (MHz)	Blocking signal power(dBm) (see note 3)	PER %	PER Limit %
-66.76	2 380	-34	0.93%	≤10
	2 504		0.40%	
	2 300		0.69%	≤10
	2 584		0.65%	

Note: (1) The above results were obtained from laboratory tests.


11. TEST RESULTS

11.1 Accumulated Transmit Time


Condition	Mode	Frequency (MHz)	Antenna	Accumulated Transmit Time (ms)	Limit (ms)	Sweep Time (ms)	Burst Number	Verdict
NVNT	1-DH1	2402	Ant1	128.702	400	31600	317	Pass
NVNT	1-DH1	2480	Ant1	129.108	400	31600	318	Pass
NVNT	1-DH3	2402	Ant1	259.272	400	31600	156	Pass
NVNT	1-DH3	2480	Ant1	267.582	400	31600	161	Pass
NVNT	1-DH5	2402	Ant1	346.171	400	31600	119	Pass
NVNT	1-DH5	2480	Ant1	299.627	400	31600	103	Pass
NVNT	2-DH1	2402	Ant1	126.564	400	31600	318	Pass
NVNT	2-DH1	2480	Ant1	126.564	400	31600	318	Pass
NVNT	2-DH3	2402	Ant1	267.462	400	31600	162	Pass
NVNT	2-DH3	2480	Ant1	245.999	400	31600	149	Pass
NVNT	2-DH5	2402	Ant1	307.188	400	31600	106	Pass
NVNT	2-DH5	2480	Ant1	333.27	400	31600	115	Pass
NVNT	3-DH1	2402	Ant1	126.324	400	31600	319	Pass
NVNT	3-DH1	2480	Ant1	126.643	400	31600	319	Pass
NVNT	3-DH3	2402	Ant1	258.422	400	31600	157	Pass
NVNT	3-DH3	2480	Ant1	268.461	400	31600	163	Pass
NVNT	3-DH5	2402	Ant1	327.474	400	31600	113	Pass
NVNT	3-DH5	2480	Ant1	301.392	400	31600	104	Pass

Test Graphs


Dwell NVNT 1-DH1 2402MHz Ant1

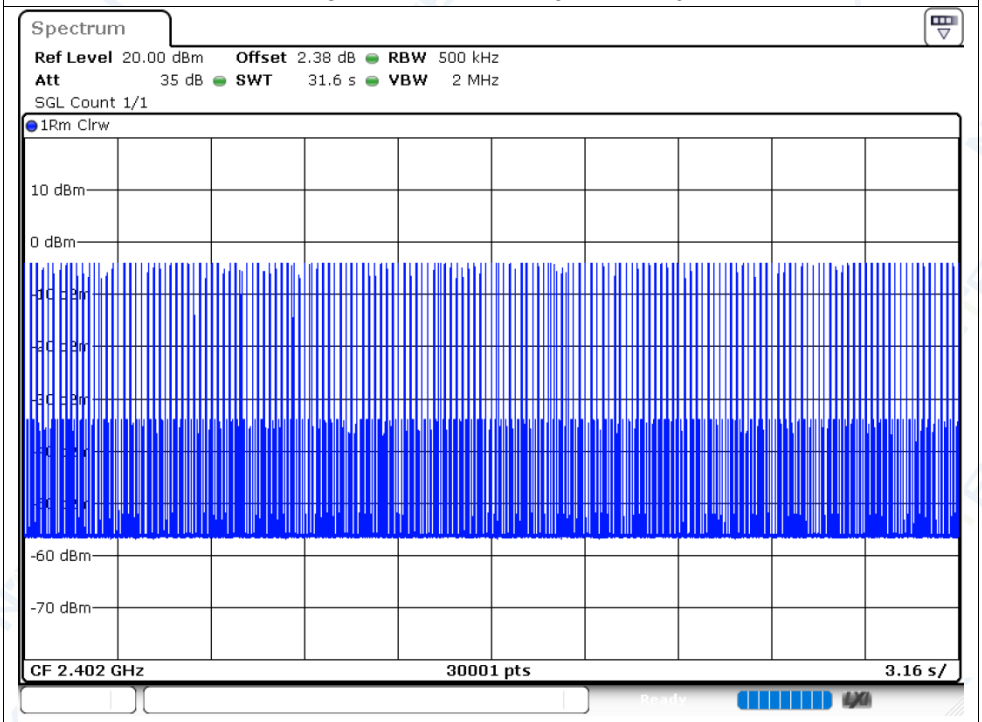


Dwell NVNT 1-DH1 2480MHz Ant1

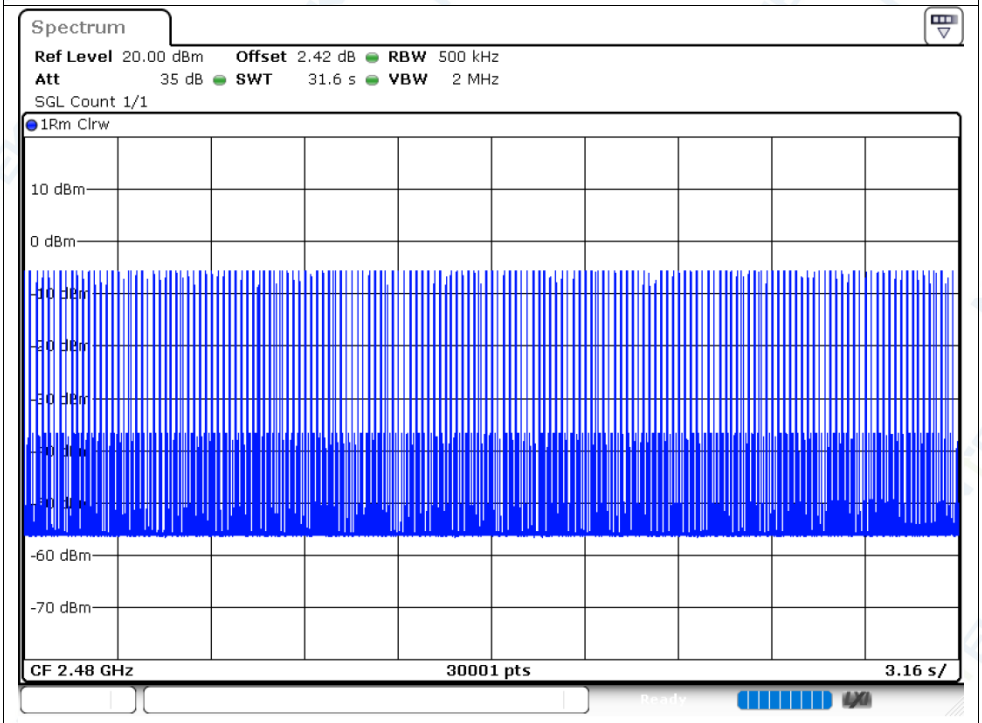


Dwell NVNT 1-DH3 2402MHz Ant1

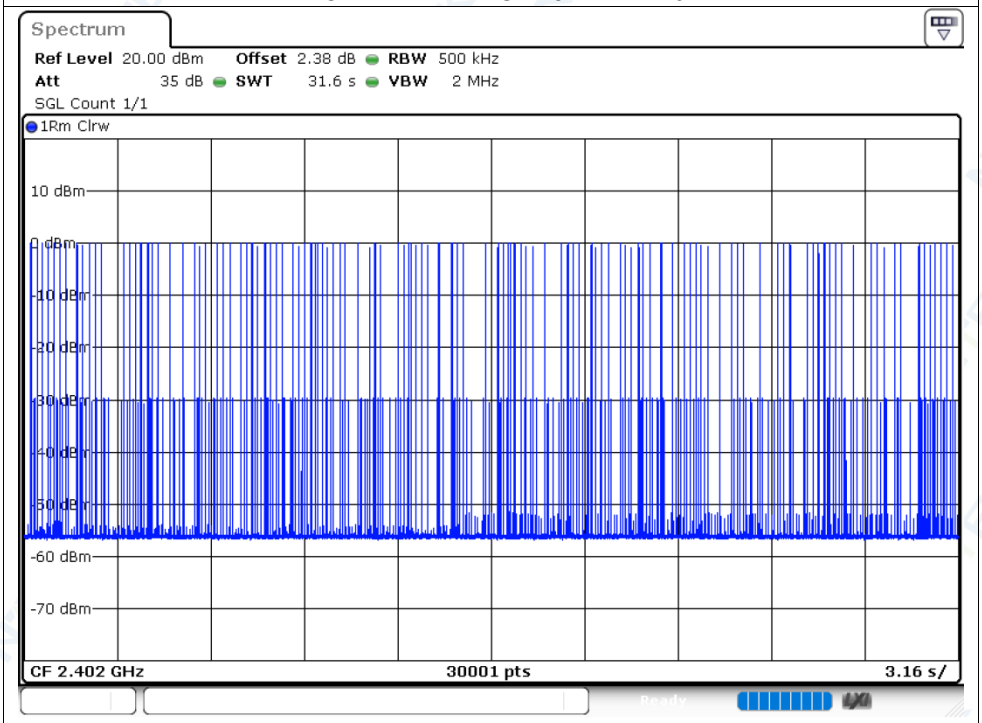


Dwell NVNT 1-DH3 2480MHz Ant1

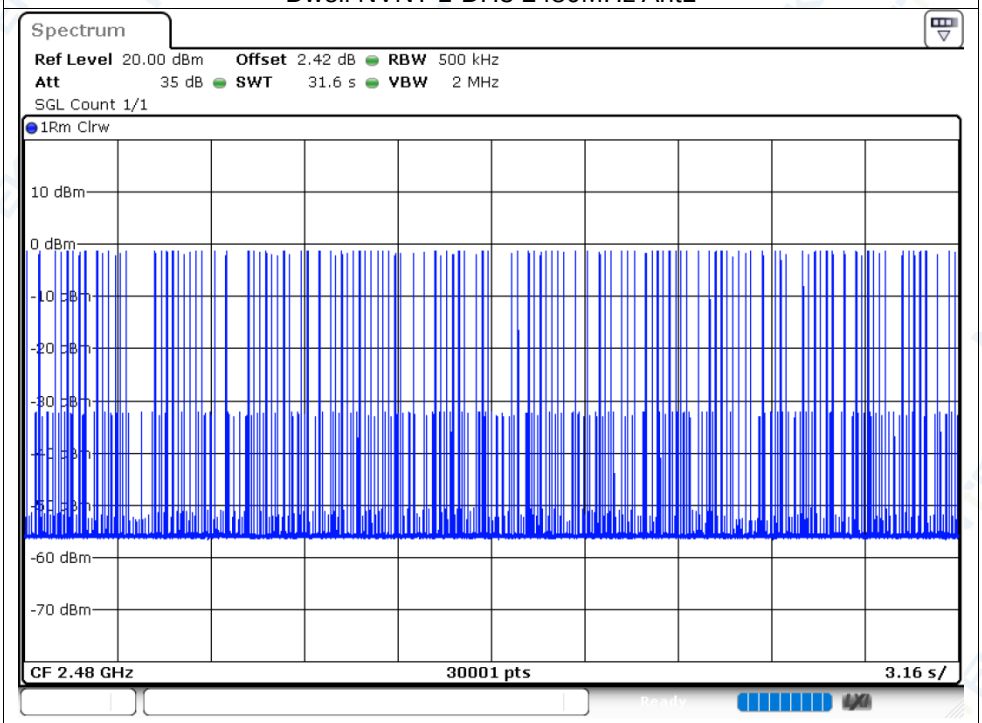


Dwell NVNT 1-DH5 2402MHz Ant1

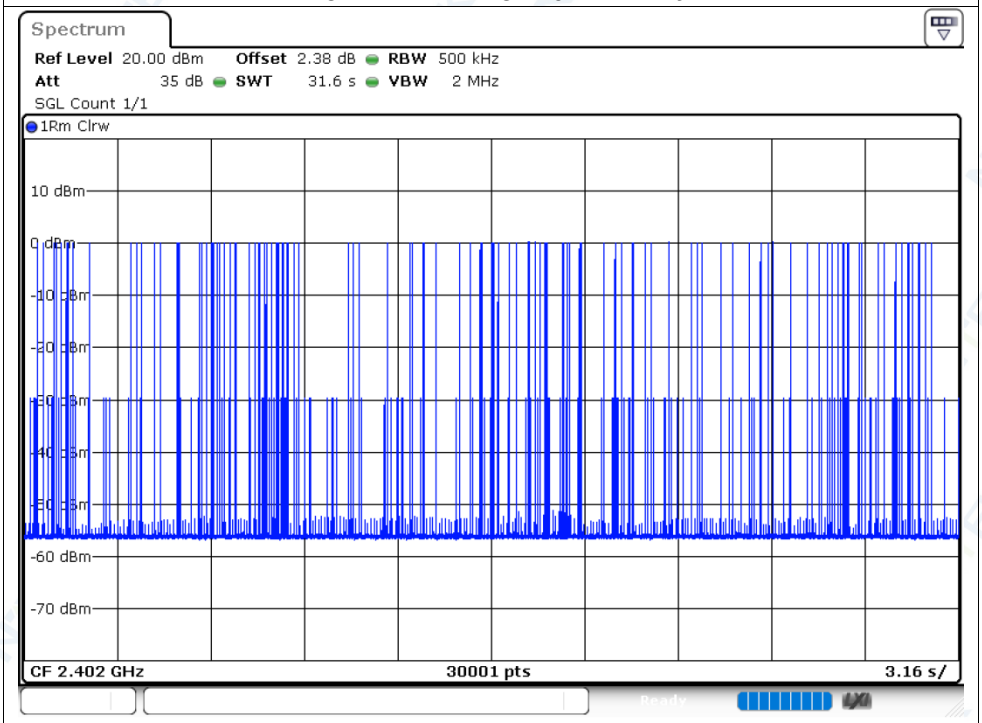


Dwell NVNT 1-DH5 2480MHz Ant1

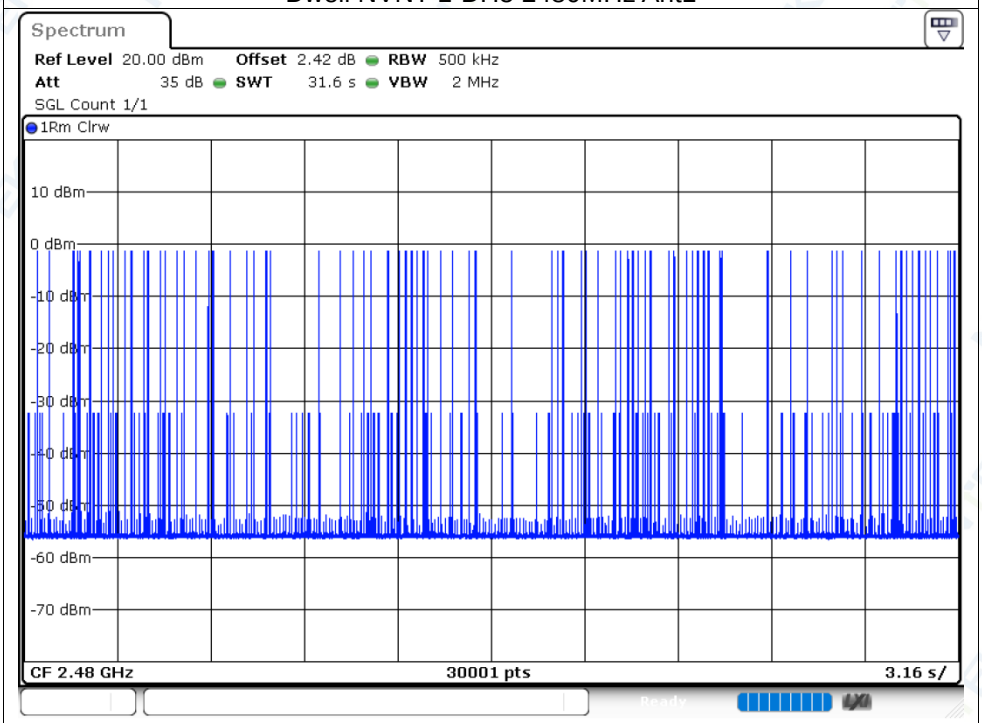


Dwell NVNT 2-DH1 2402MHz Ant1

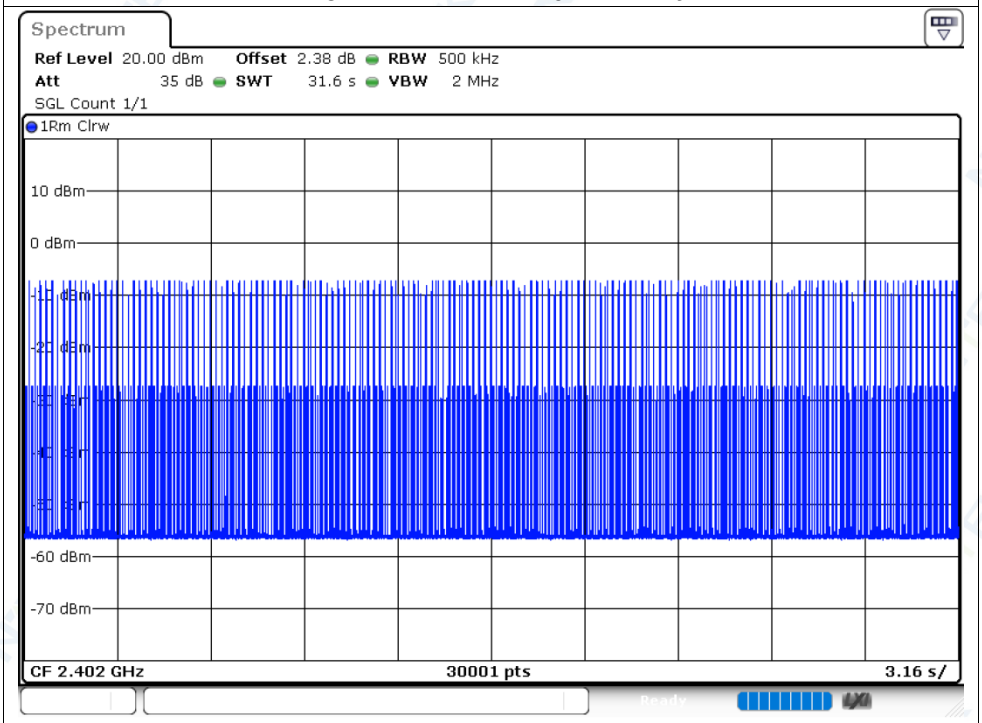


Dwell NVNT 2-DH1 2480MHz Ant1

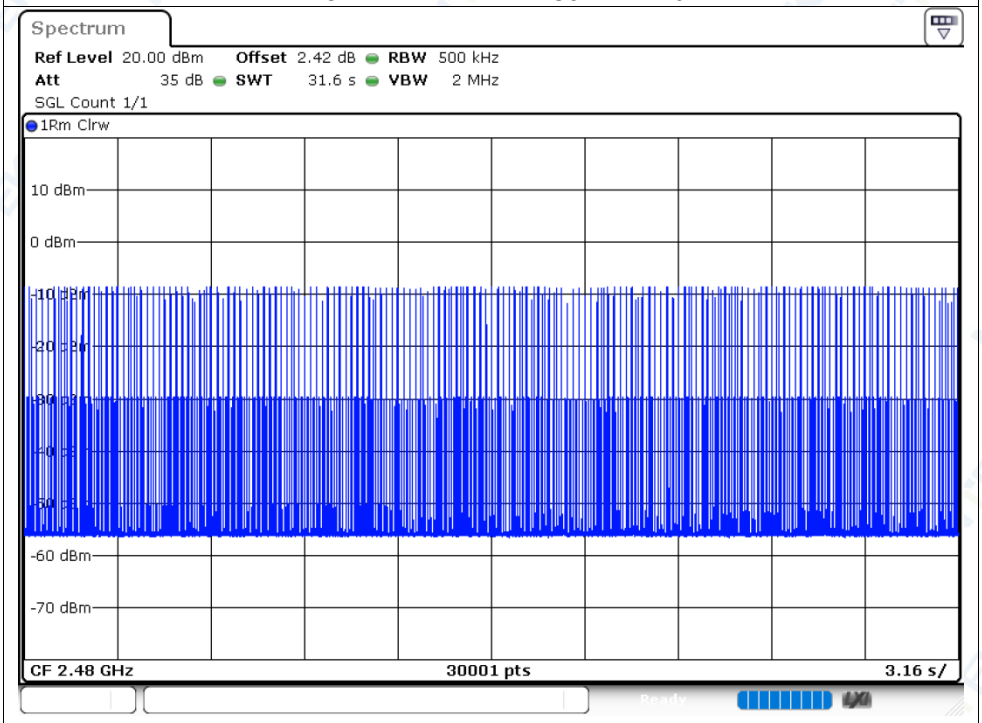


Dwell NVNT 2-DH3 2402MHz Ant1

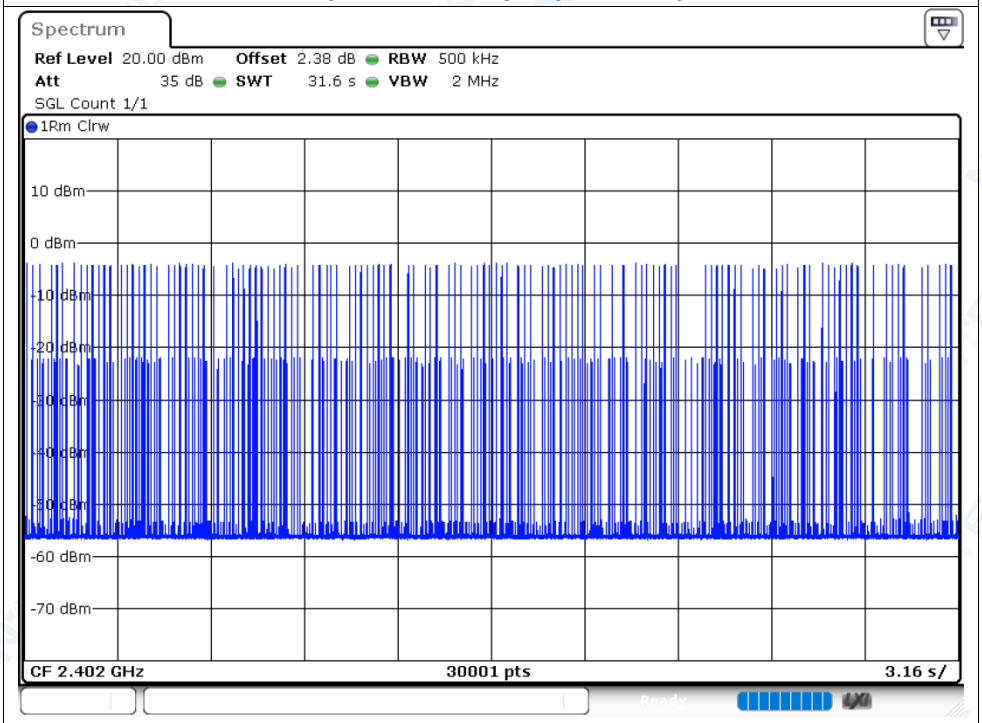


Dwell NVNT 2-DH3 2480MHz Ant1

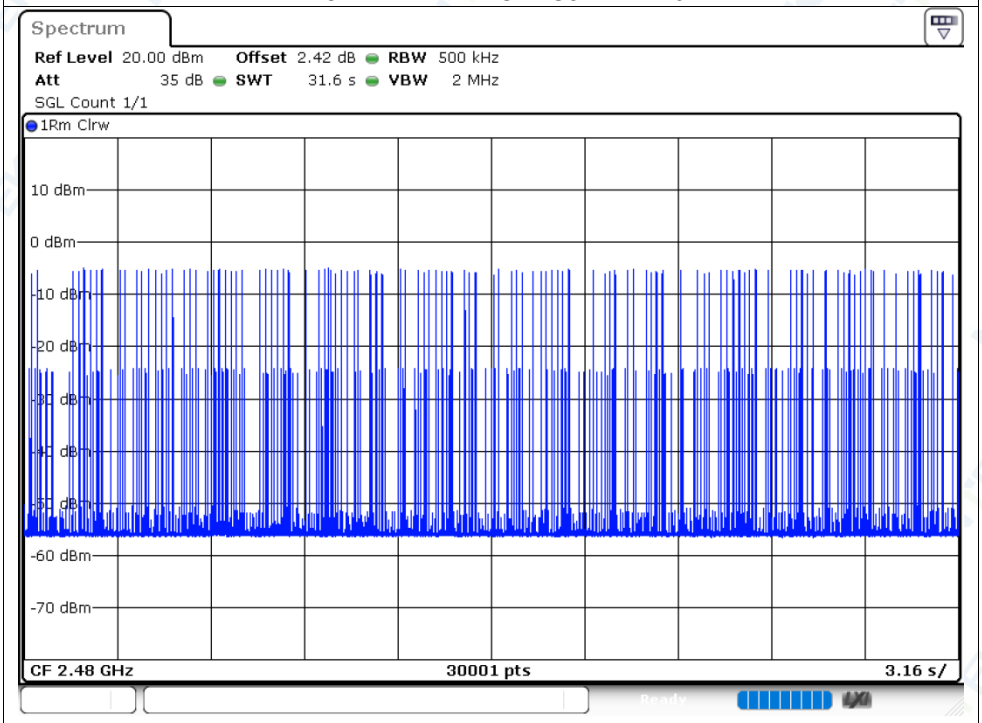


Dwell NVNT 2-DH5 2402MHz Ant1

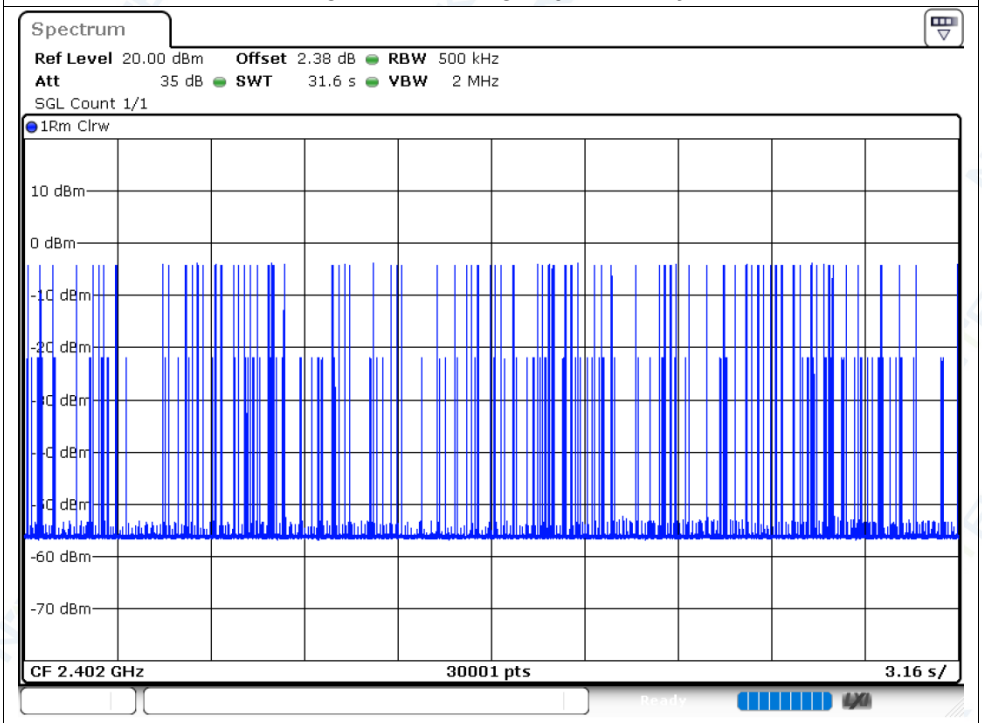


Dwell NVNT 2-DH5 2480MHz Ant1

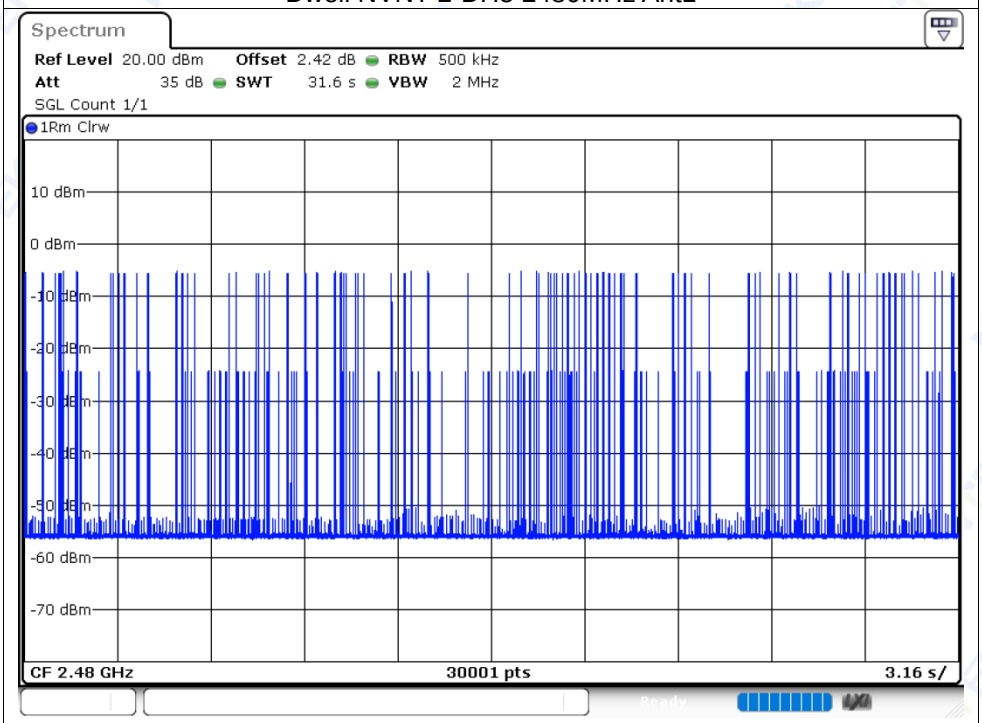


Dwell NVNT 3-DH1 2402MHz Ant1

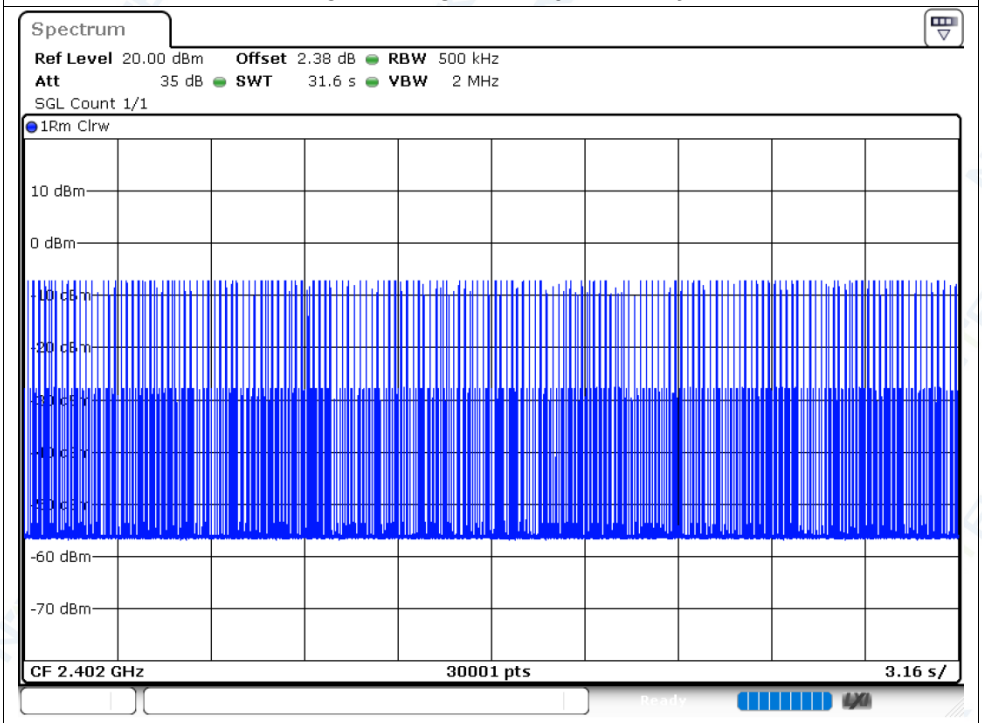


Dwell NVNT 3-DH1 2480MHz Ant1

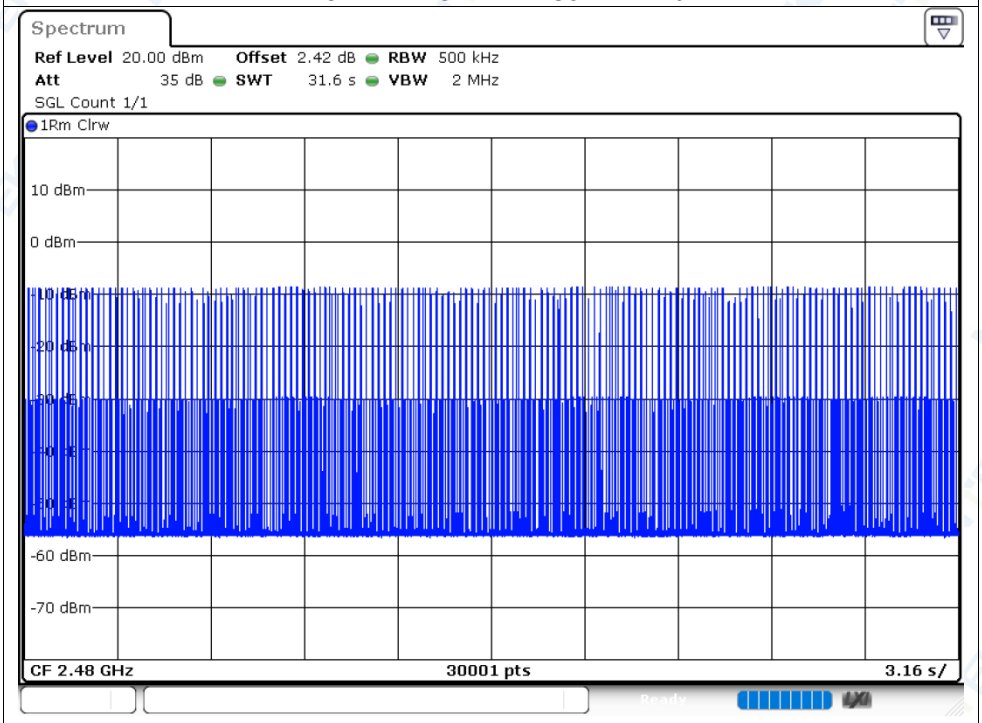


Dwell NVNT 3-DH3 2402MHz Ant1

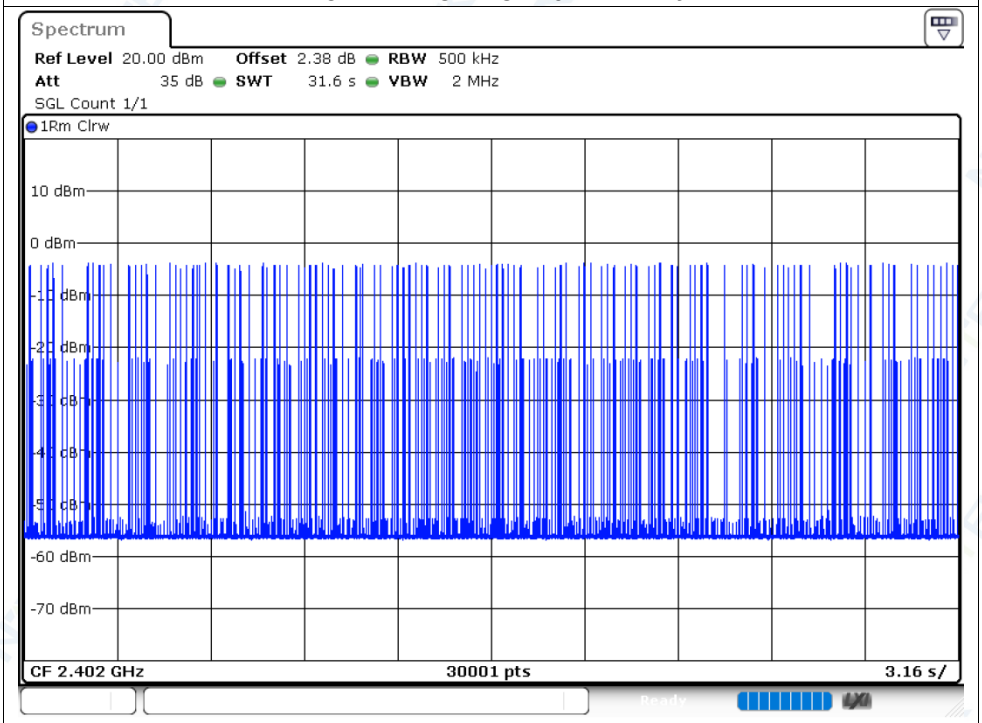


Dwell NVNT 3-DH3 2480MHz Ant1

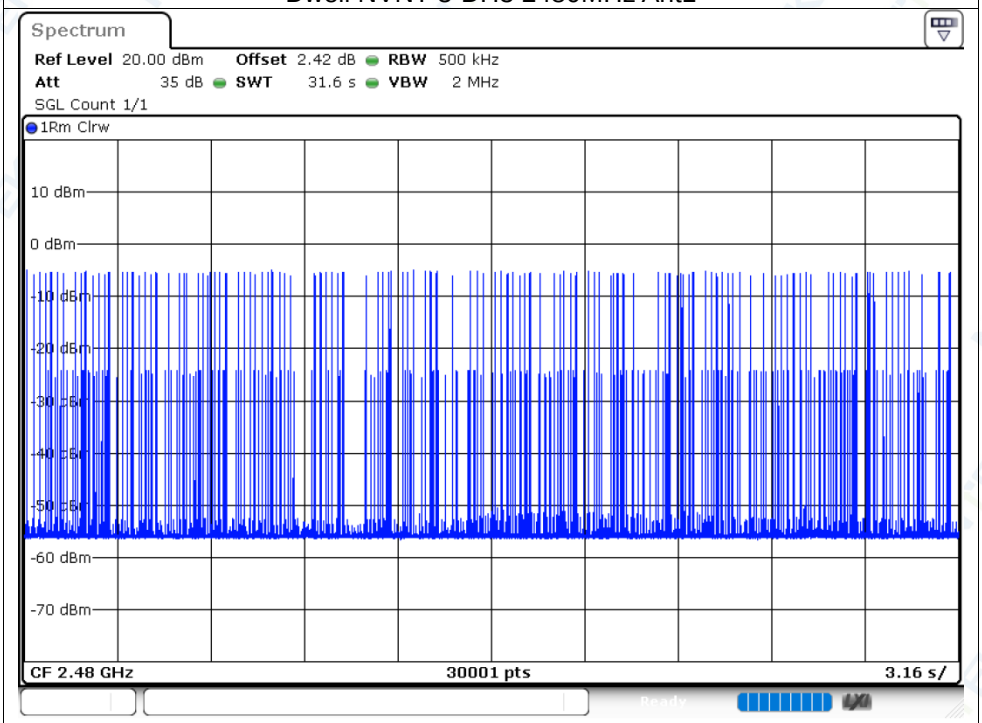

Dwell NVNT 3-DH5 2402MHz Ant1

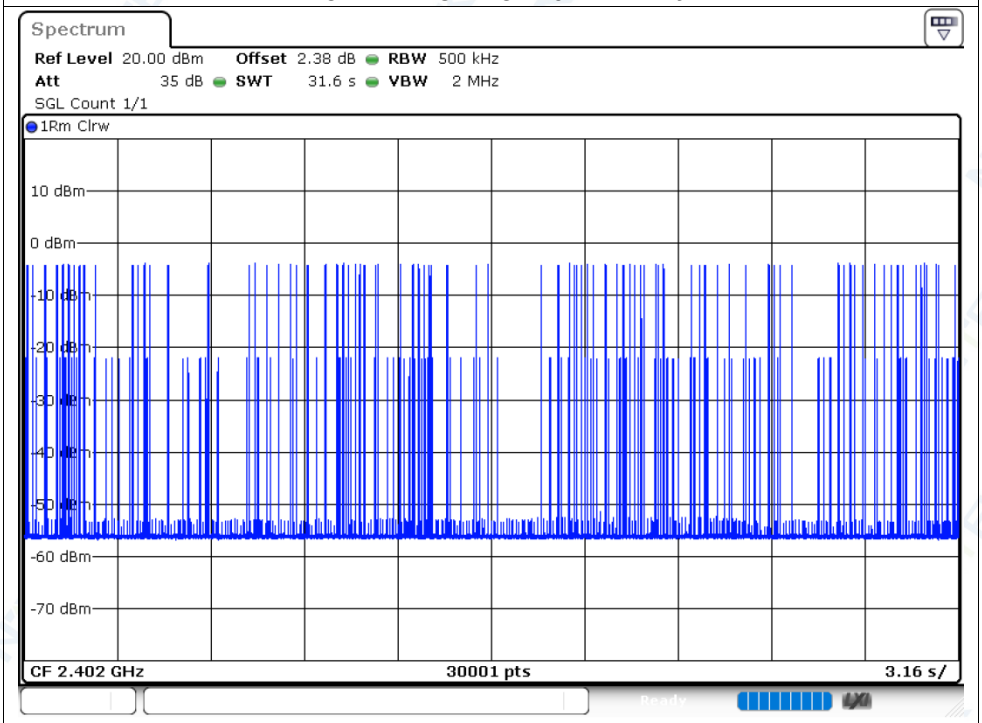

Dwell NVNT 3-DH5 2480MHz Ant1

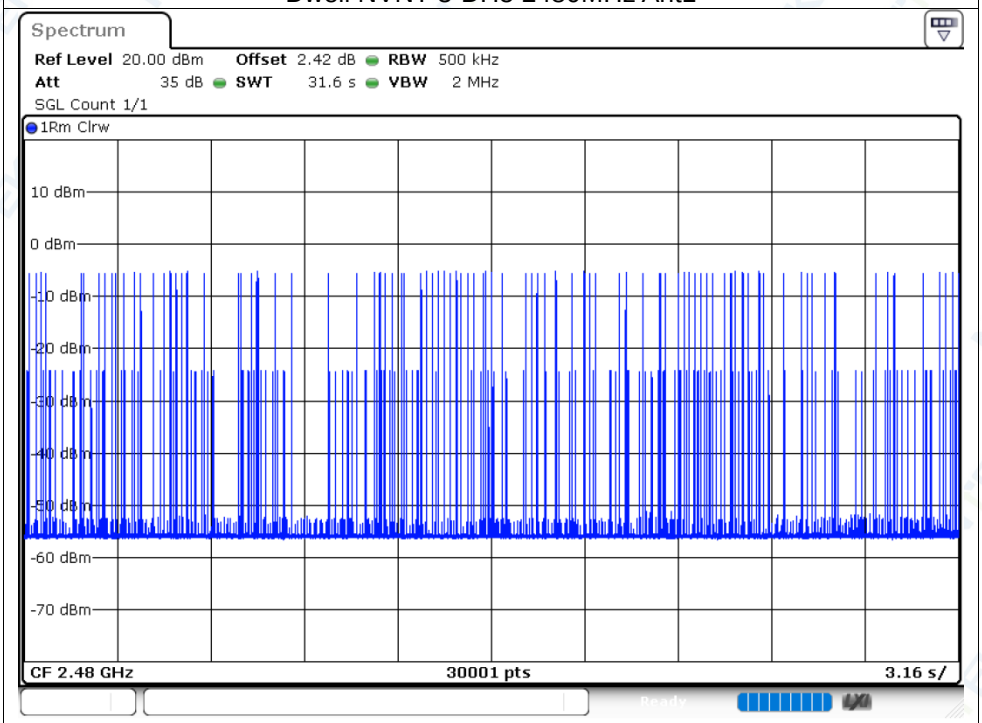


11.2 Frequency Occupation


Condition	Mode	Frequency (MHz)	Antenna	Burst Number	Limit	Sweep Time (ms)	Verdict
NVNT	1-DH1	2402	Ant1	2	1	128.296	Pass
NVNT	1-DH1	2480	Ant1	1	1	128.296	Pass
NVNT	1-DH3	2402	Ant1	3	1	525.192	Pass
NVNT	1-DH3	2480	Ant1	3	1	525.192	Pass
NVNT	1-DH5	2402	Ant1	8	1	919.244	Pass
NVNT	1-DH5	2480	Ant1	3	1	919.244	Pass
NVNT	2-DH1	2402	Ant1	2	1	125.768	Pass
NVNT	2-DH1	2480	Ant1	2	1	125.768	Pass
NVNT	2-DH3	2402	Ant1	3	1	521.716	Pass
NVNT	2-DH3	2480	Ant1	1	1	521.716	Pass
NVNT	2-DH5	2402	Ant1	8	1	915.768	Pass
NVNT	2-DH5	2480	Ant1	1	1	915.768	Pass
NVNT	3-DH1	2402	Ant1	2	1	125.136	Pass
NVNT	3-DH1	2480	Ant1	1	1	125.452	Pass
NVNT	3-DH3	2402	Ant1	1	1	520.136	Pass
NVNT	3-DH3	2480	Ant1	3	1	520.452	Pass
NVNT	3-DH5	2402	Ant1	3	1	915.768	Pass
NVNT	3-DH5	2480	Ant1	2	1	915.768	Pass

Test Graphs


Freq. Occup. NVNT 1-DH1 2402MHz Ant1

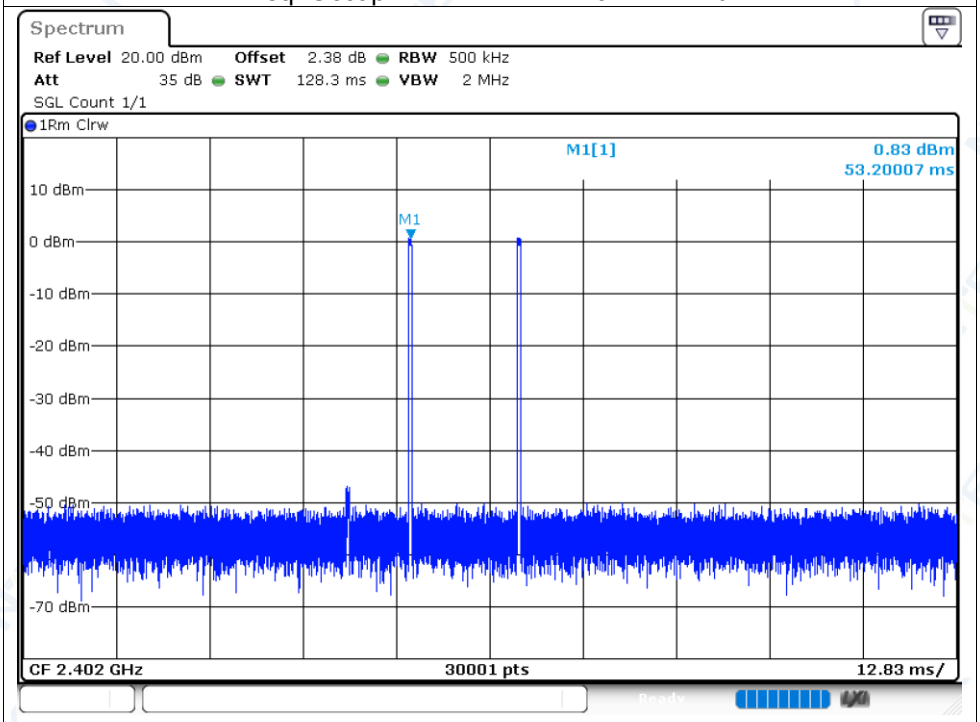


Freq. Occup. NVNT 1-DH1 2480MHz Ant1

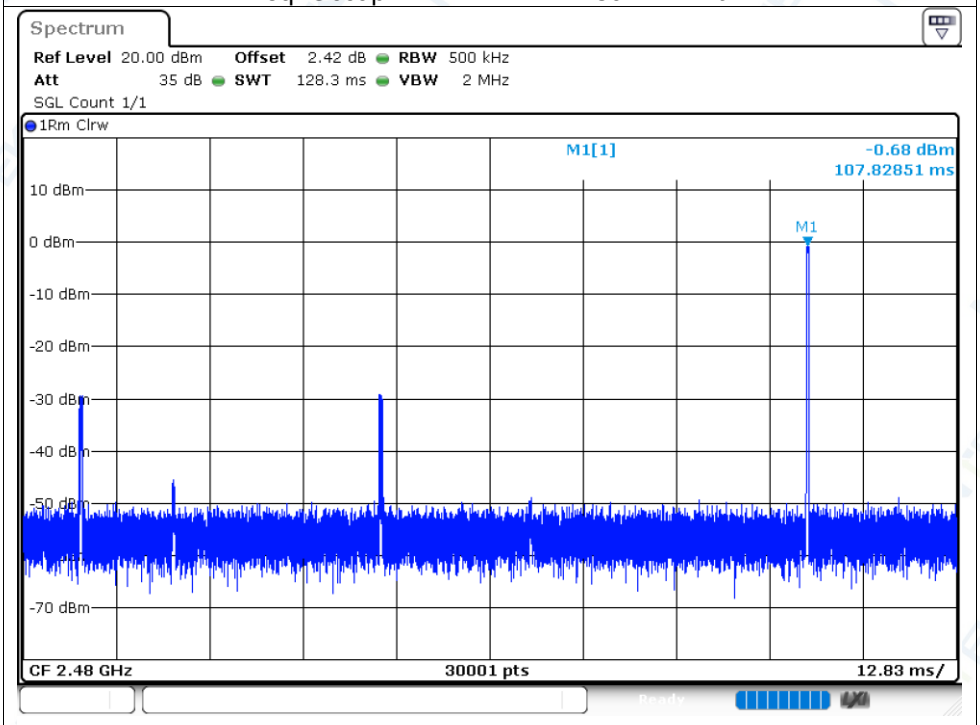


Freq. Occup. NVNT 1-DH3 2402MHz Ant1

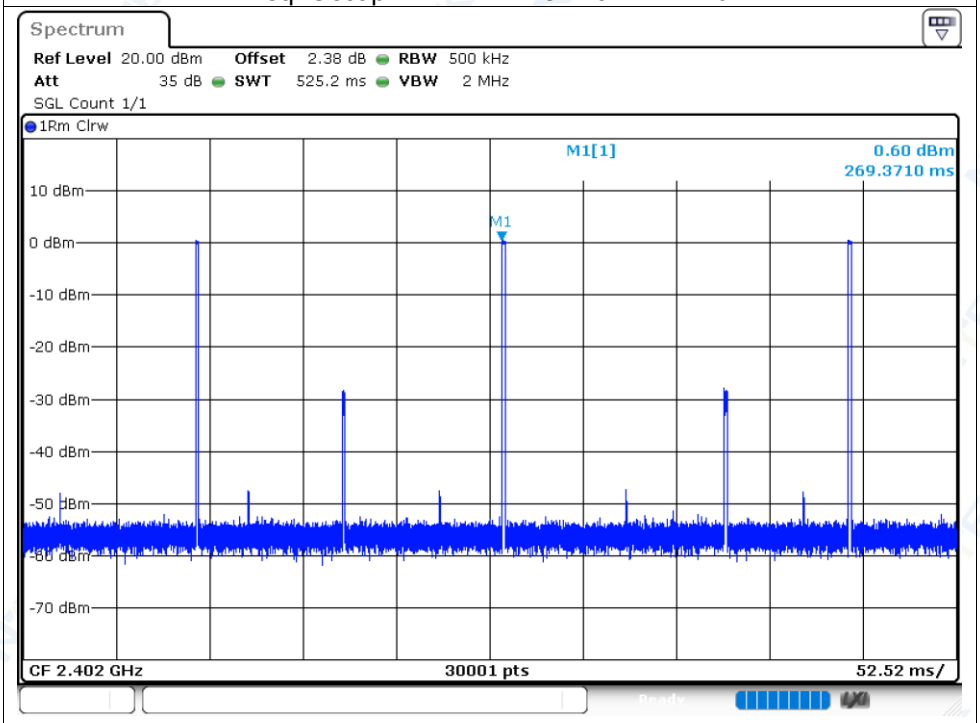


Freq. Occup. NVNT 1-DH3 2480MHz Ant1

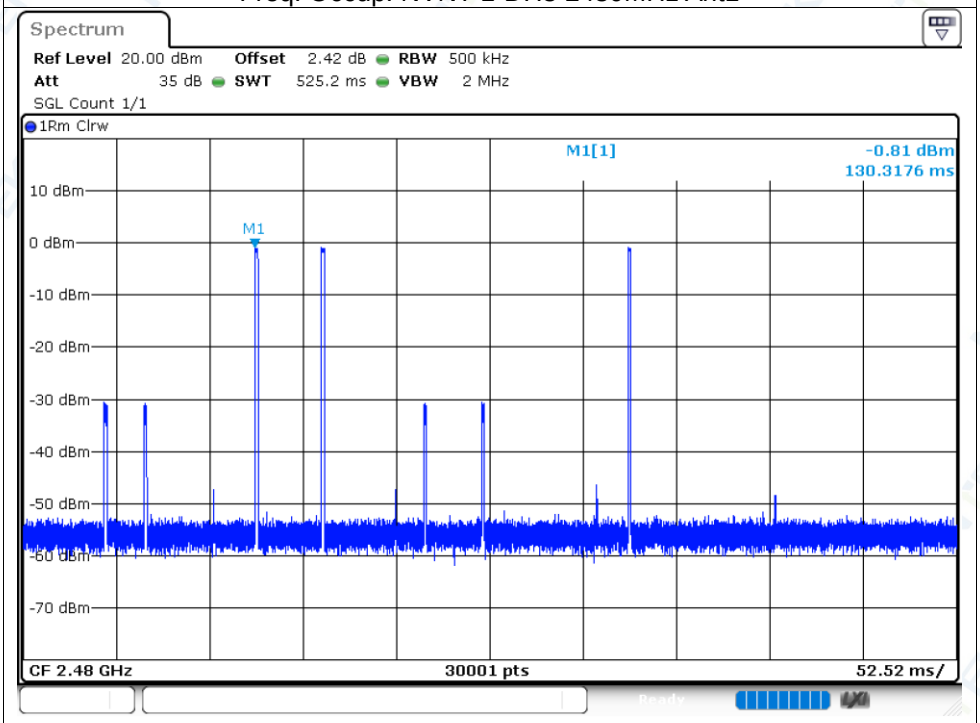


Freq. Occup. NVNT 1-DH5 2402MHz Ant1

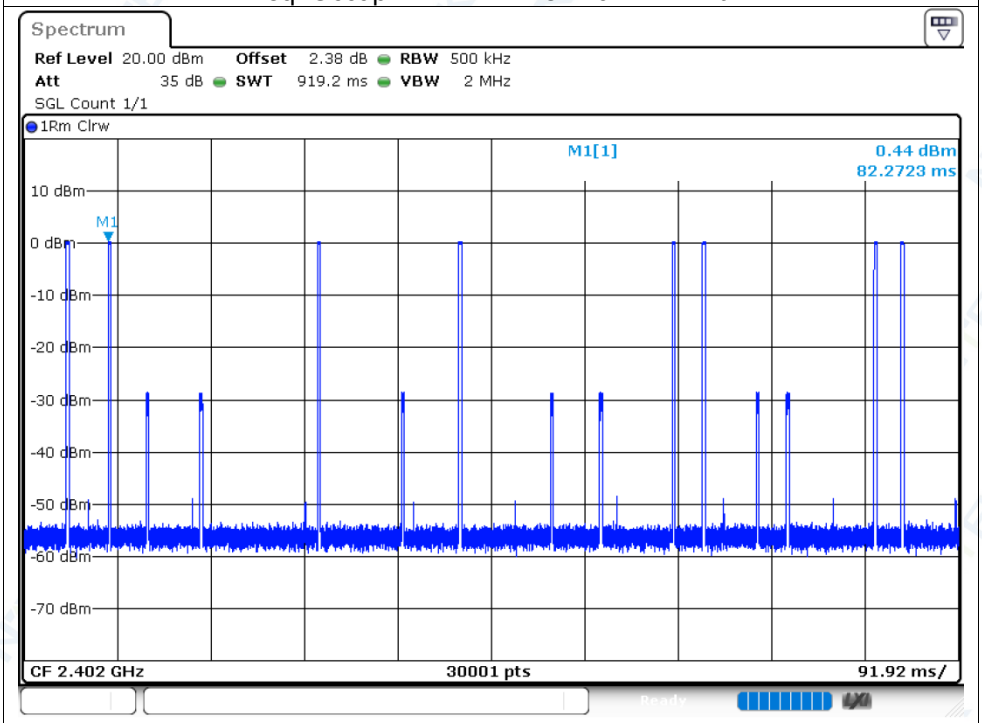


Freq. Occup. NVNT 1-DH5 2480MHz Ant1

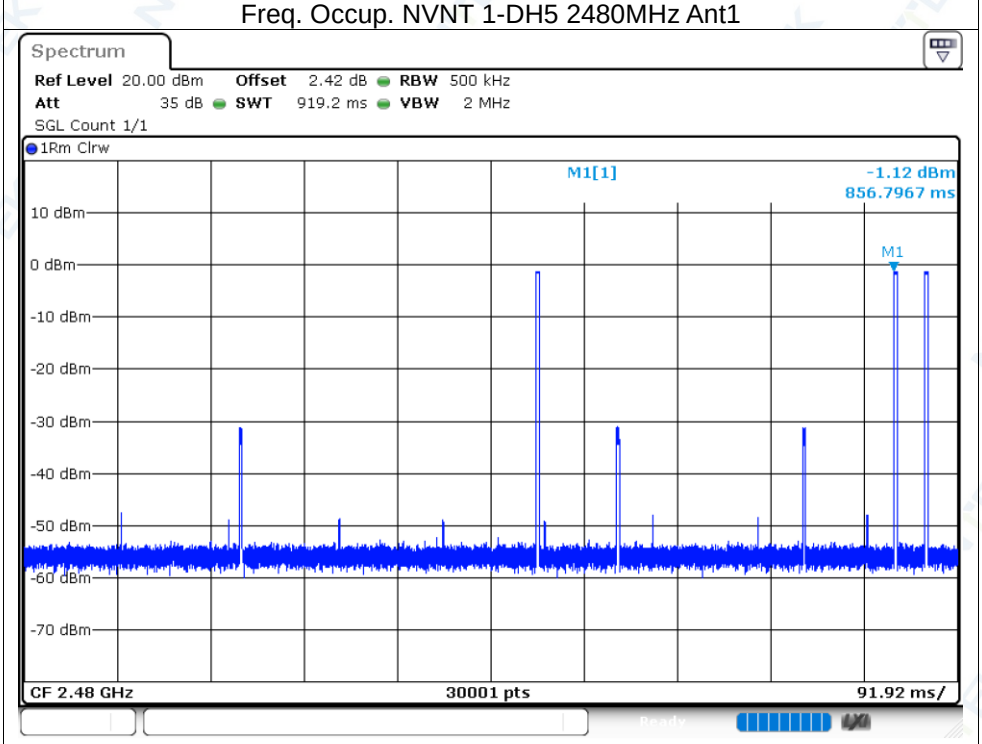


Freq. Occup. NVNT 2-DH1 2402MHz Ant1

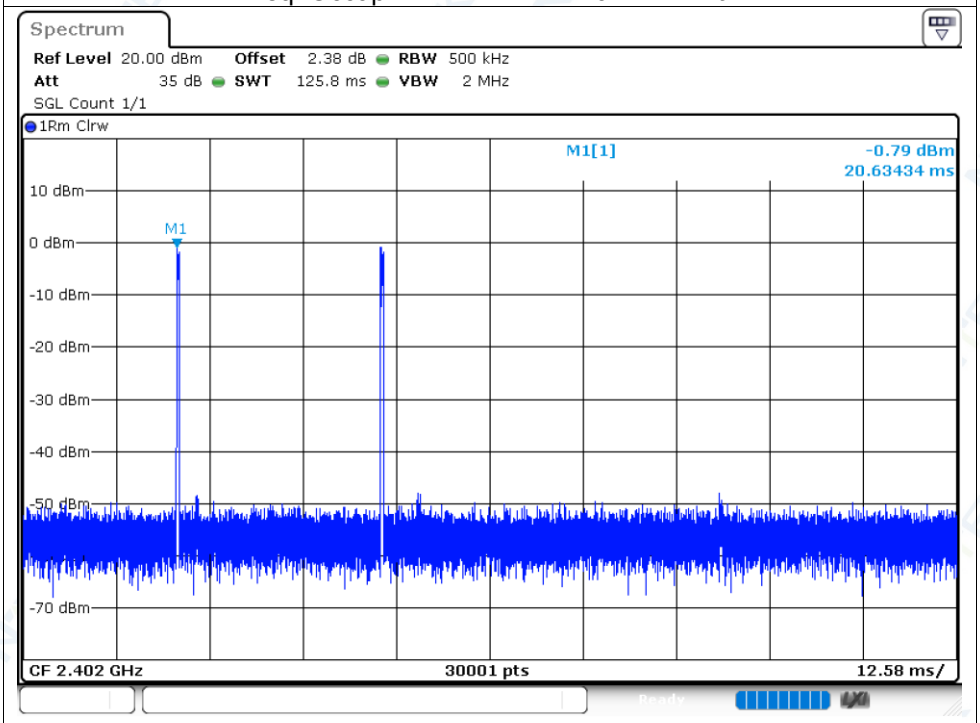


Freq. Occup. NVNT 2-DH1 2480MHz Ant1

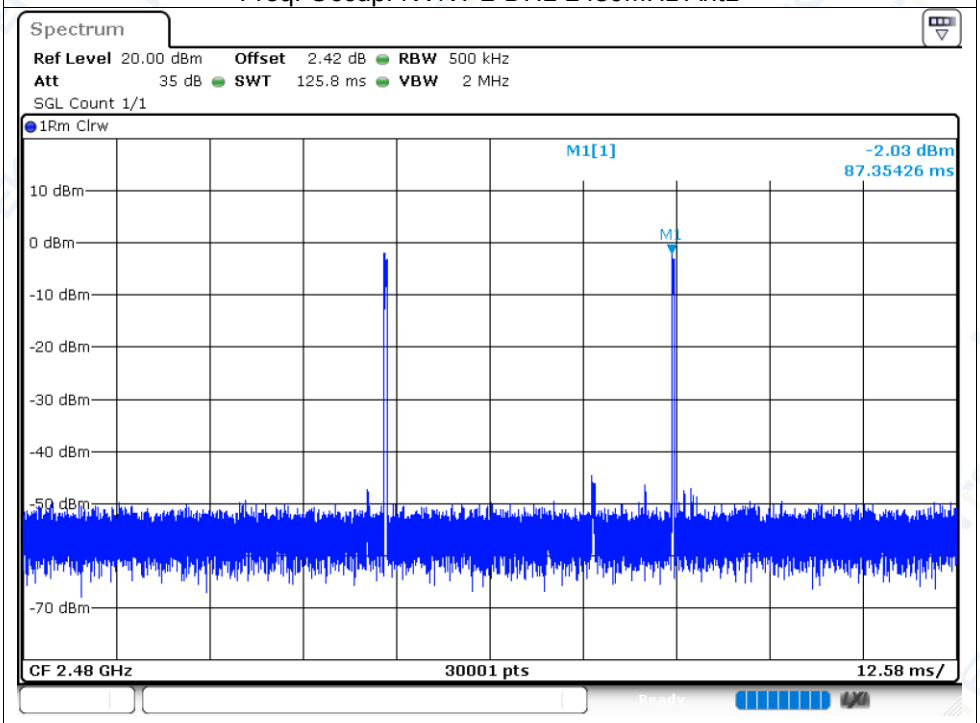


Freq. Occup. NVNT 2-DH3 2402MHz Ant1

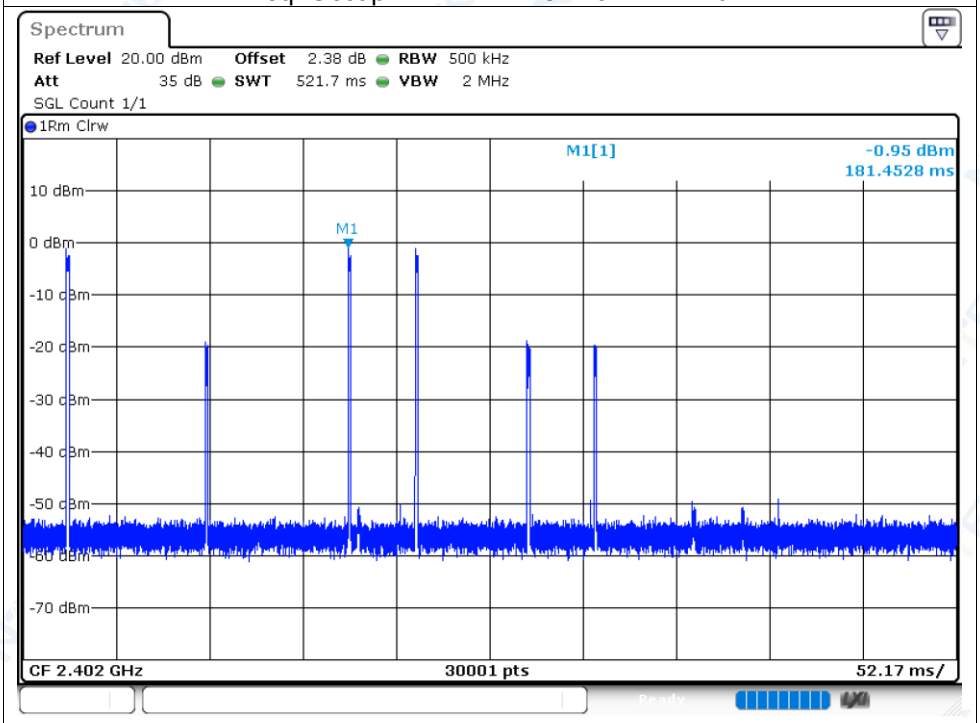


Freq. Occup. NVNT 2-DH3 2480MHz Ant1

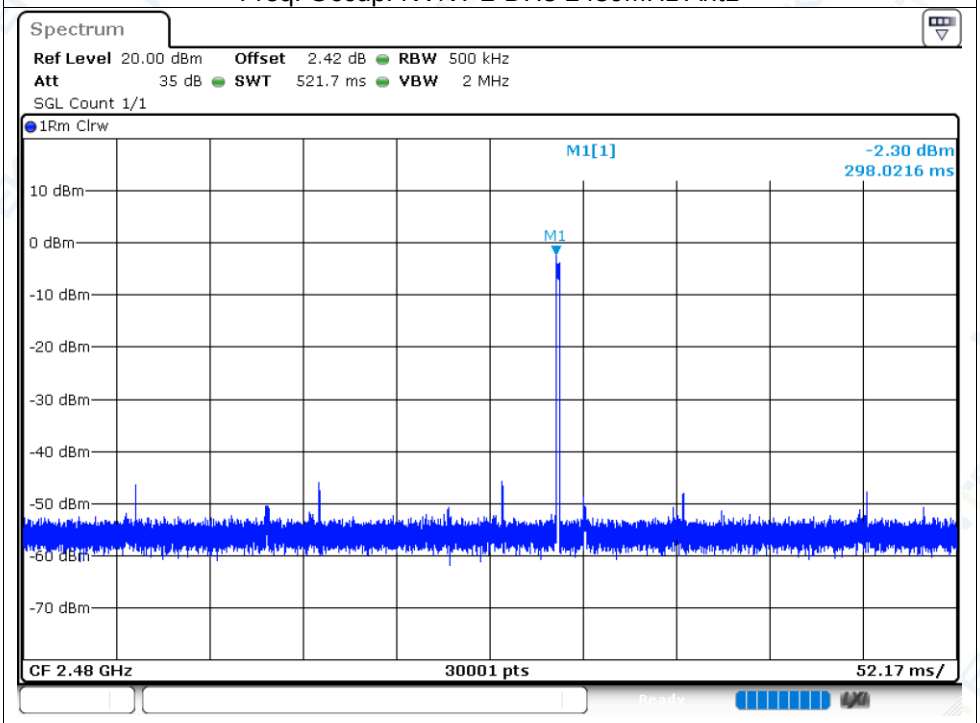


Freq. Occup. NVNT 2-DH5 2402MHz Ant1

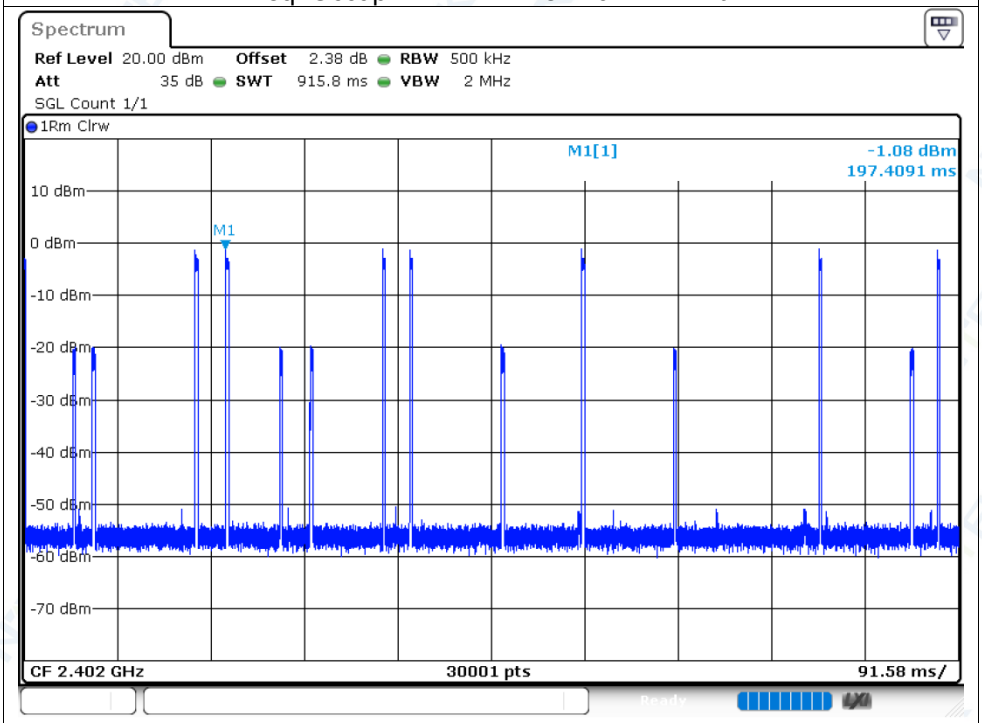


Freq. Occup. NVNT 2-DH5 2480MHz Ant1

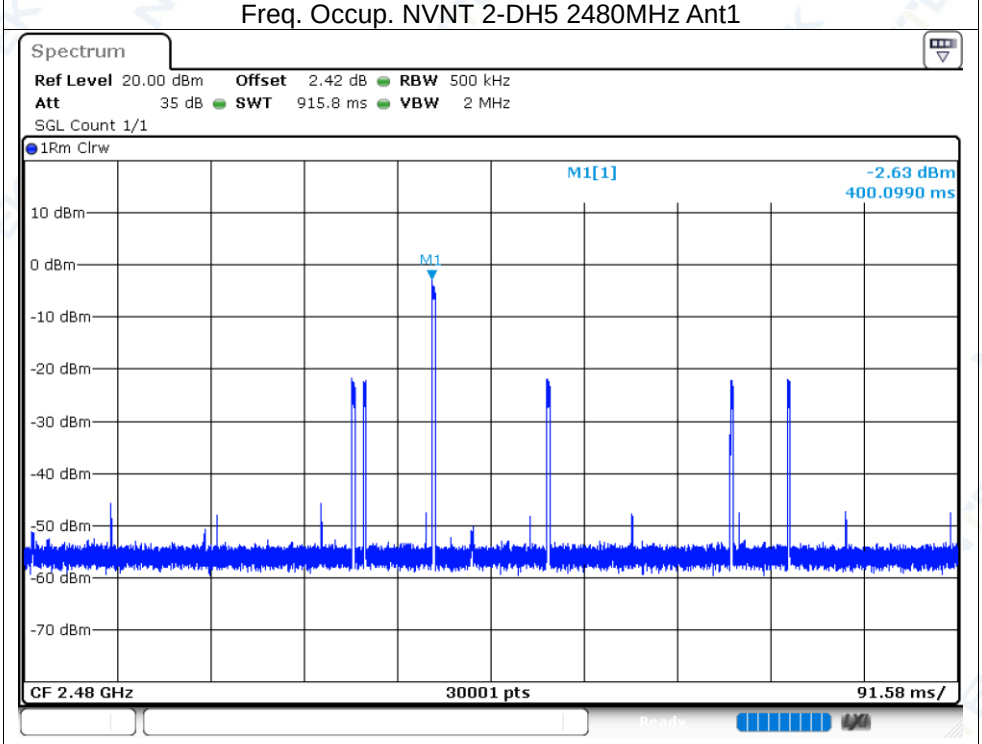


Freq. Occup. NVNT 3-DH1 2402MHz Ant1

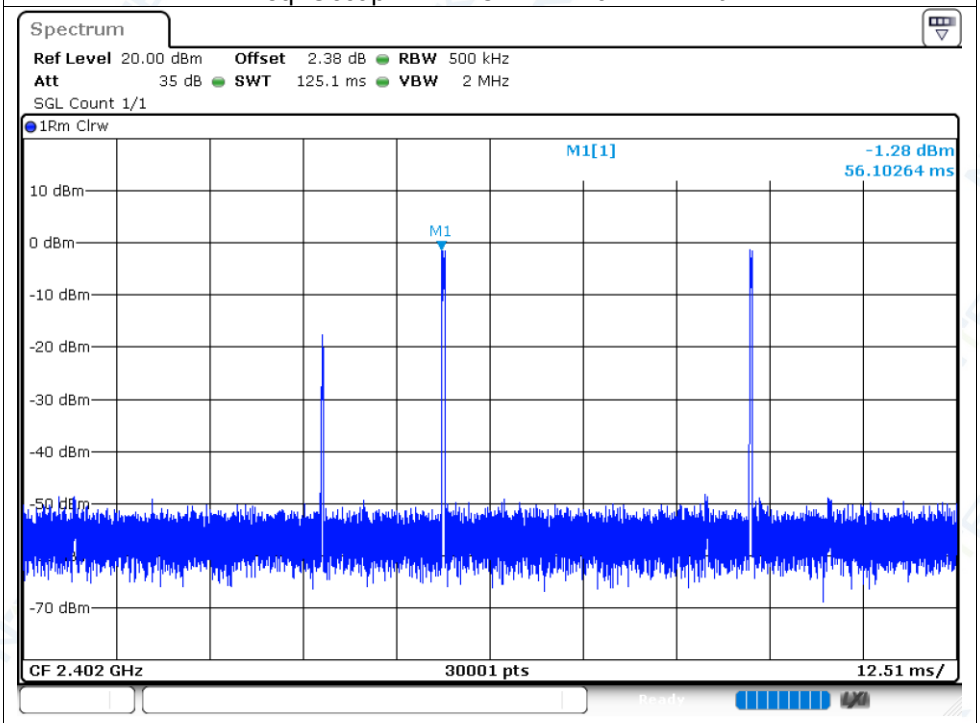


Freq. Occup. NVNT 3-DH1 2480MHz Ant1

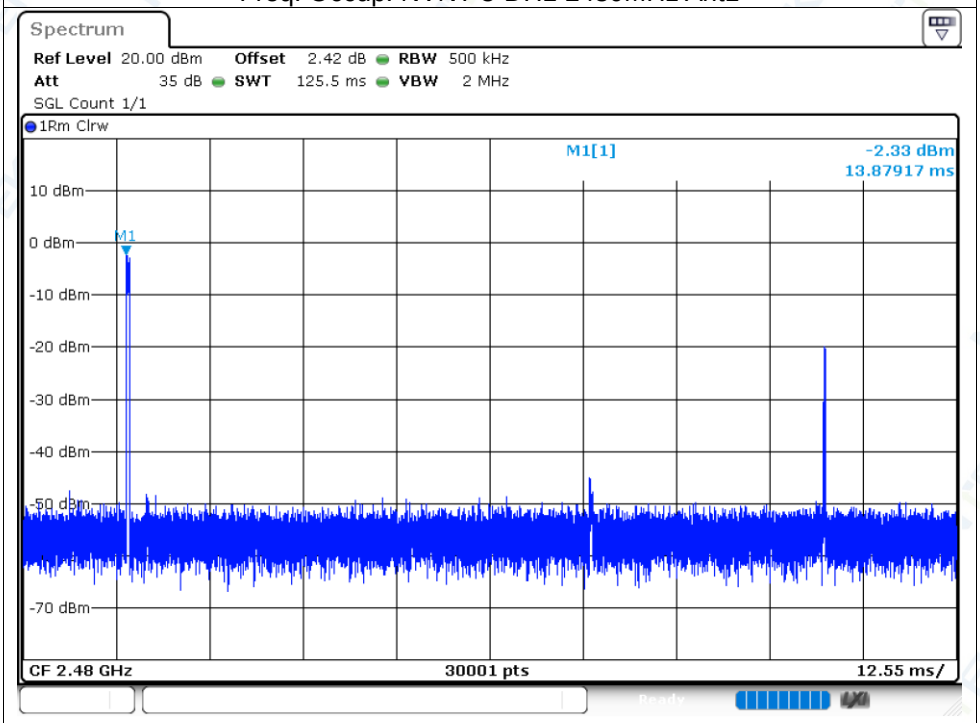


Freq. Occup. NVNT 3-DH3 2402MHz Ant1

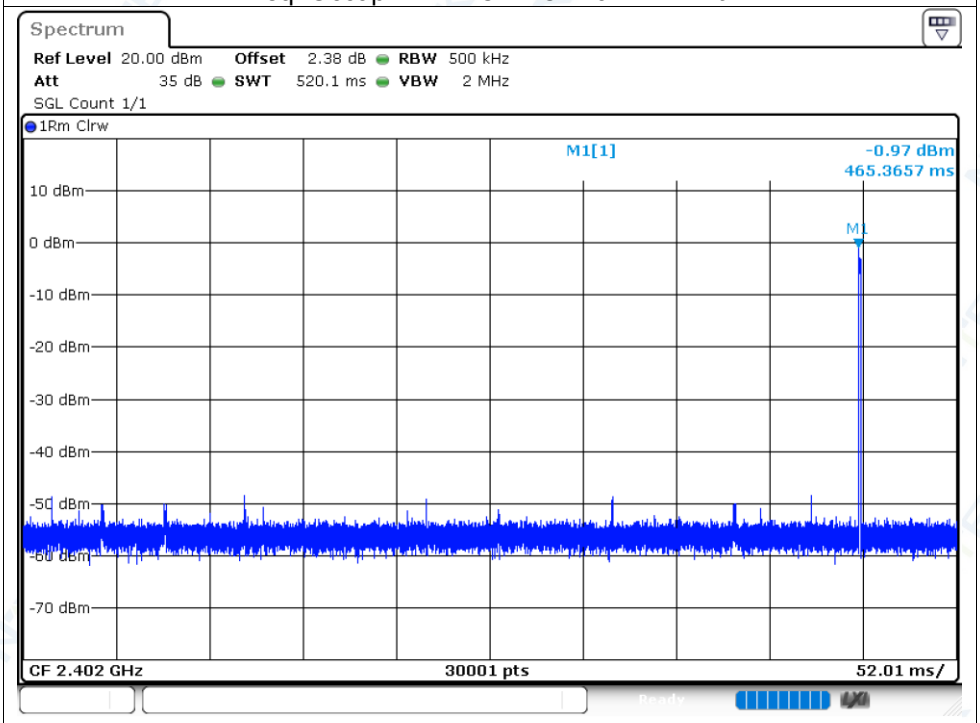


Freq. Occup. NVNT 3-DH3 2480MHz Ant1

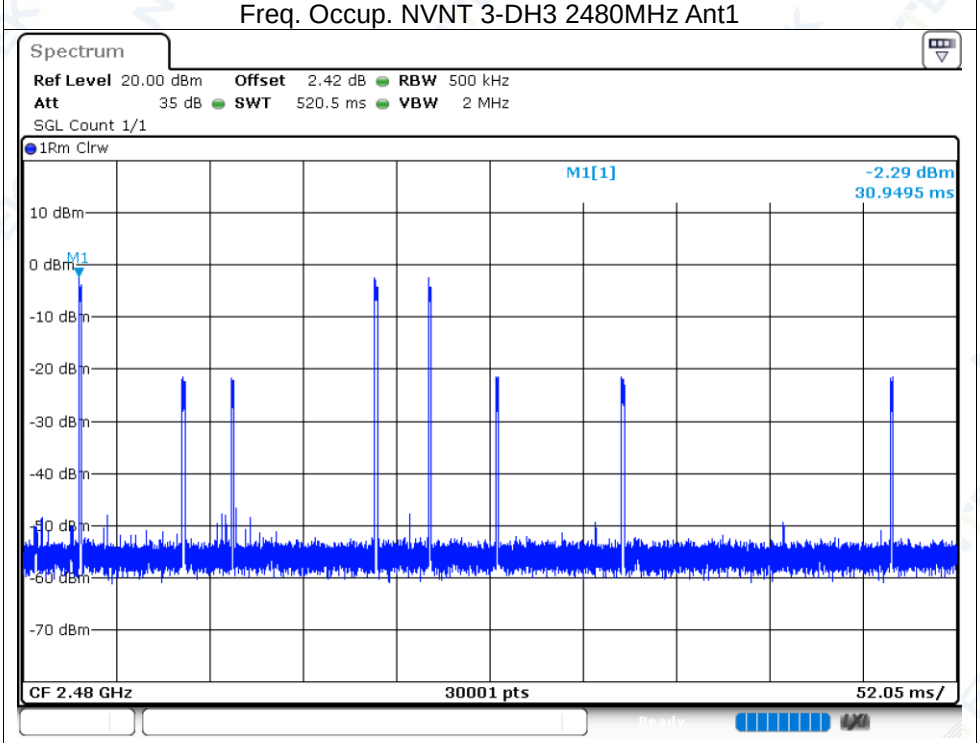

Freq. Occup. NVNT 3-DH5 2402MHz Ant1

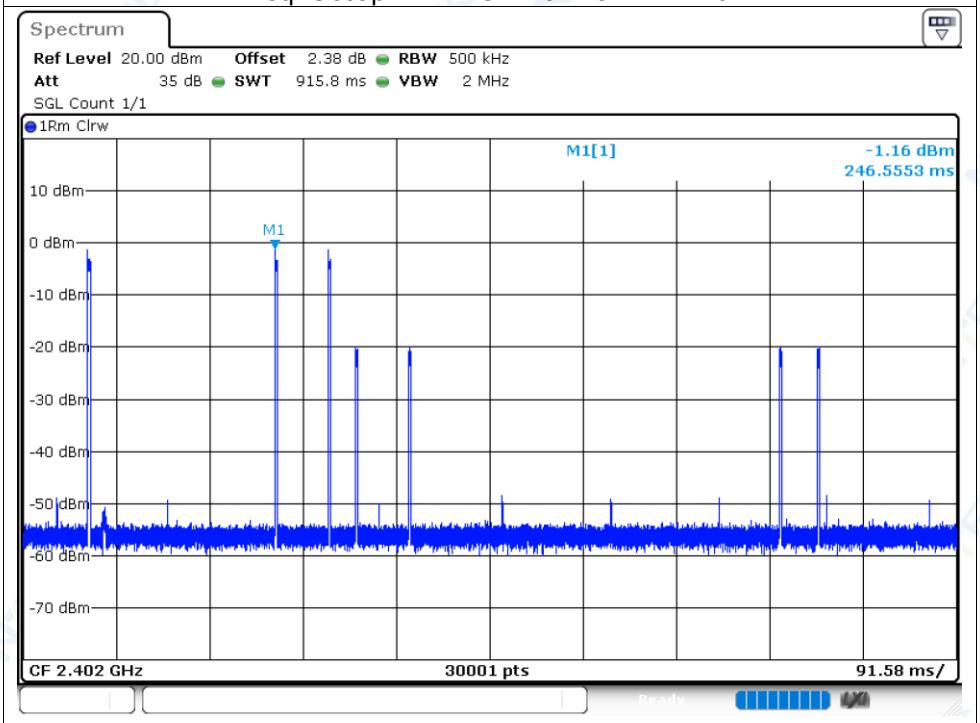

Freq. Occup. NVNT 3-DH5 2480MHz Ant1

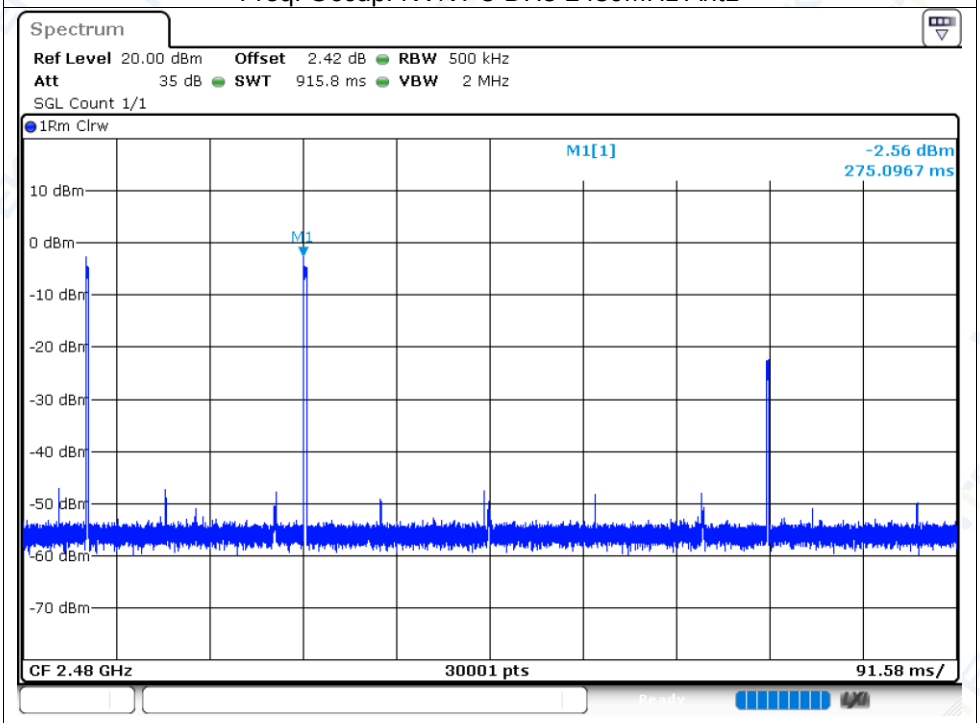


11.3 Dwell Time One Burst


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)
NVNT	1-DH1	2402	Ant1	0.406
NVNT	1-DH1	2480	Ant1	0.406
NVNT	1-DH3	2402	Ant1	1.662
NVNT	1-DH3	2480	Ant1	1.662
NVNT	1-DH5	2402	Ant1	2.909
NVNT	1-DH5	2480	Ant1	2.909
NVNT	2-DH1	2402	Ant1	0.398
NVNT	2-DH1	2480	Ant1	0.398
NVNT	2-DH3	2402	Ant1	1.651
NVNT	2-DH3	2480	Ant1	1.651
NVNT	2-DH5	2402	Ant1	2.898
NVNT	2-DH5	2480	Ant1	2.898
NVNT	3-DH1	2402	Ant1	0.396
NVNT	3-DH1	2480	Ant1	0.397
NVNT	3-DH3	2402	Ant1	1.646
NVNT	3-DH3	2480	Ant1	1.647
NVNT	3-DH5	2402	Ant1	2.898
NVNT	3-DH5	2480	Ant1	2.898

Test Graphs


One Burst NVNT 1-DH1 2402MHz Ant1 One Burst

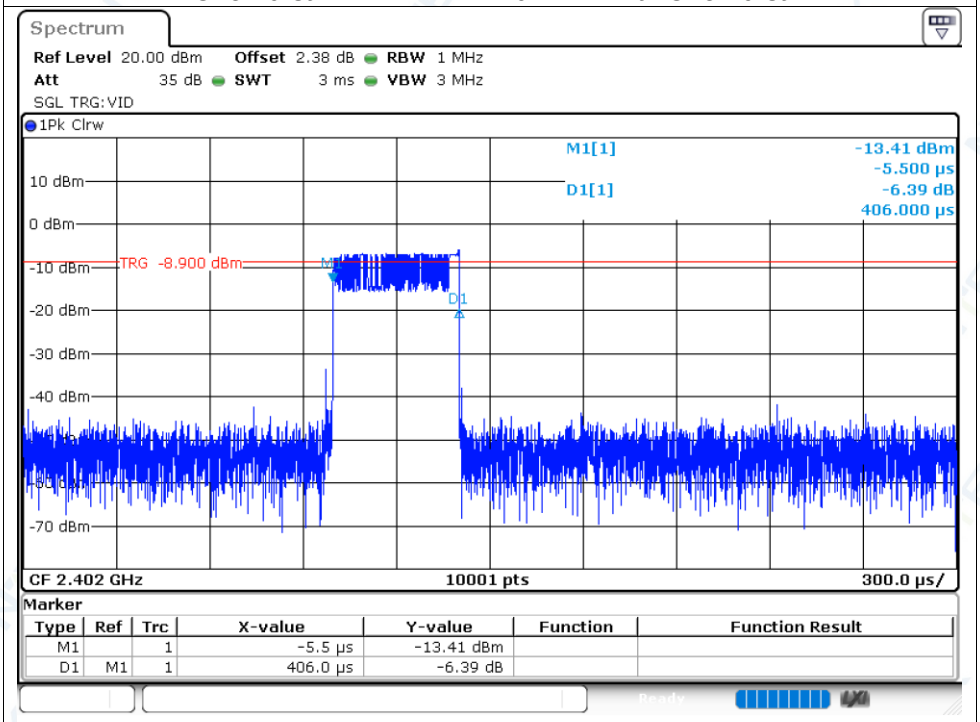


One Burst NVNT 1-DH1 2480MHz Ant1 One Burst

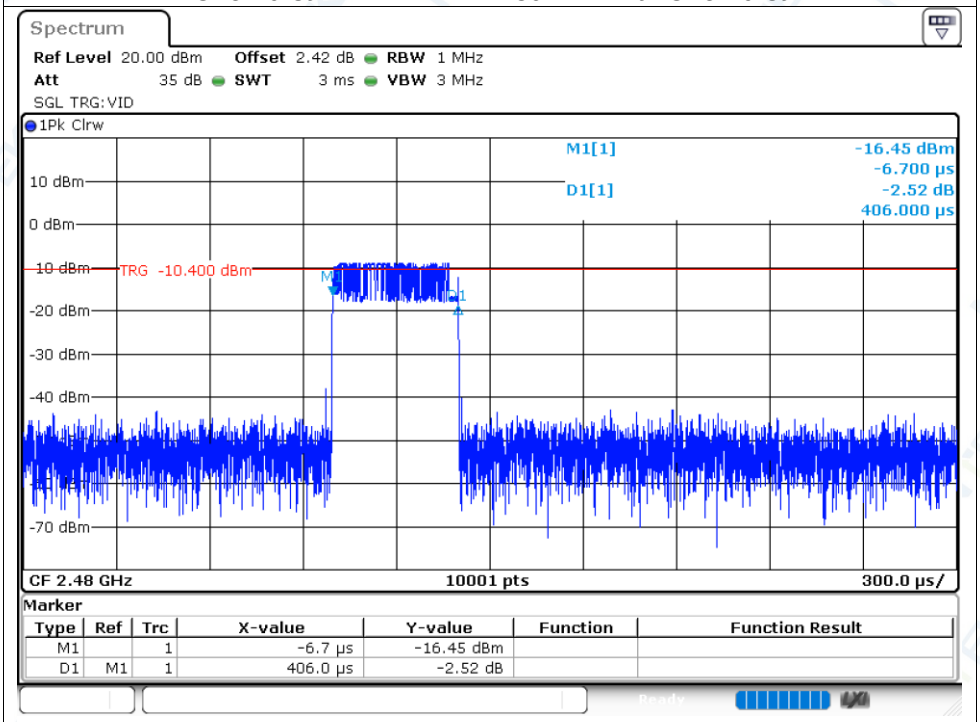


One Burst NVNT 1-DH3 2402MHz Ant1 One Burst

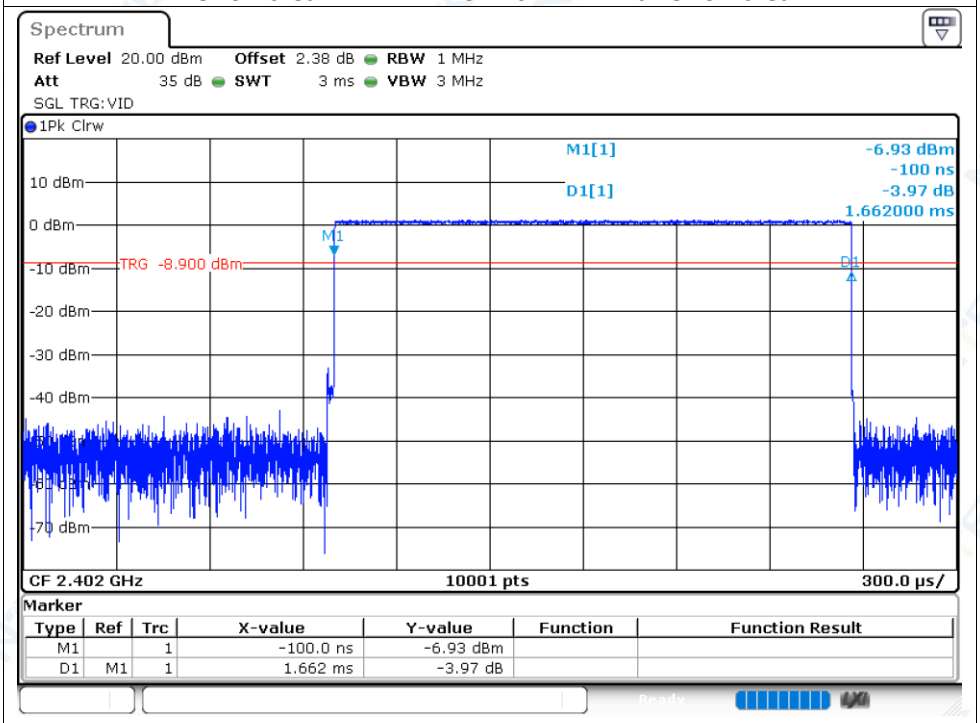


One Burst NVNT 1-DH3 2480MHz Ant1 One Burst

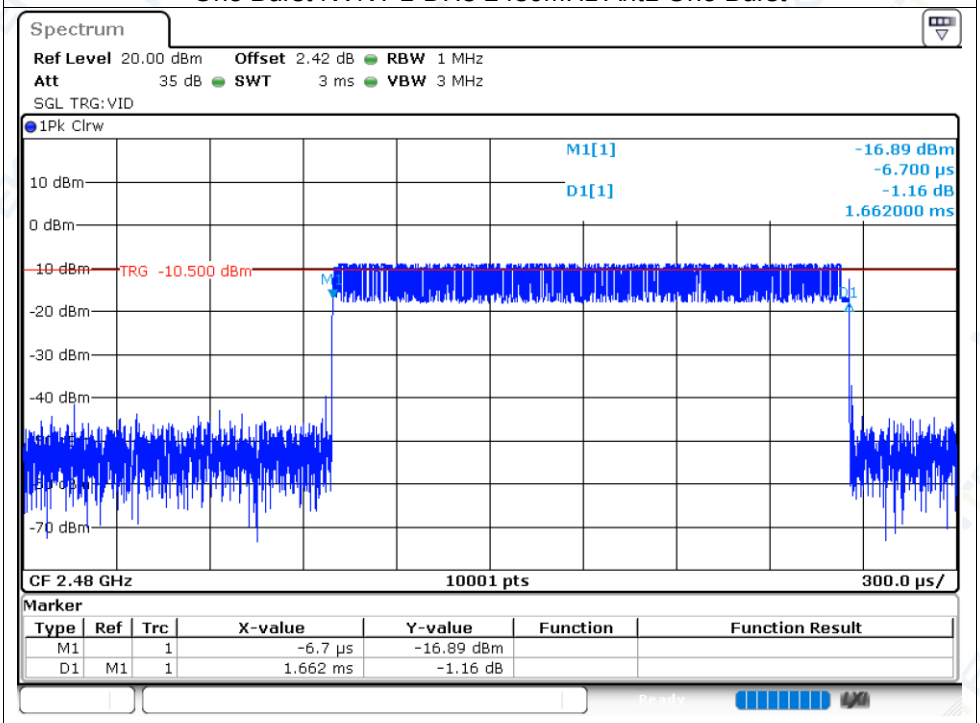


One Burst NVNT 1-DH5 2402MHz Ant1 One Burst

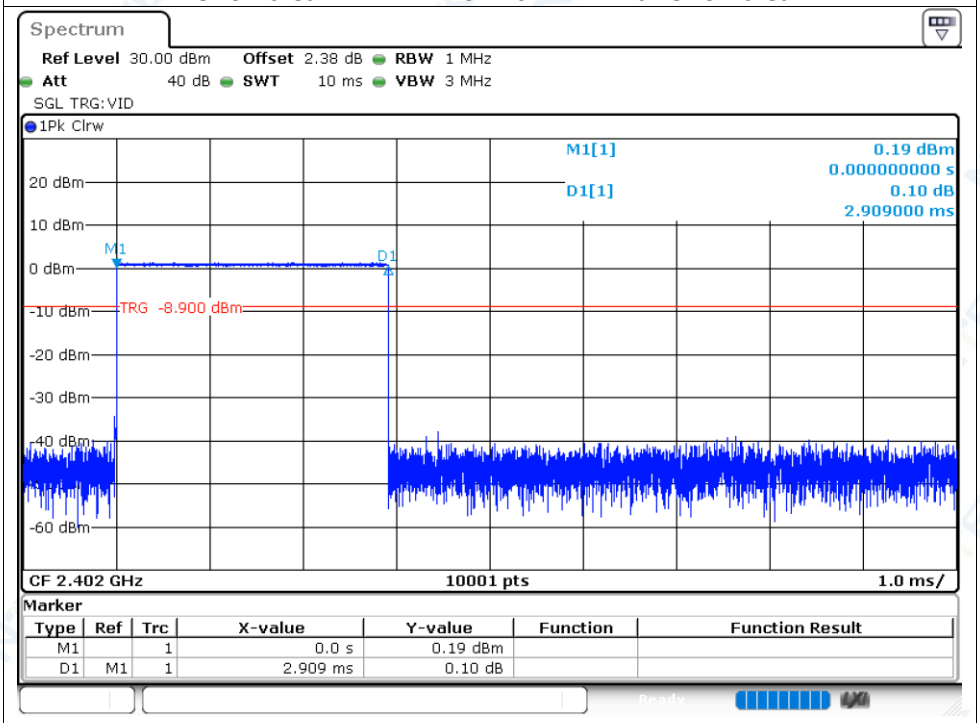


One Burst NVNT 1-DH5 2480MHz Ant1 One Burst

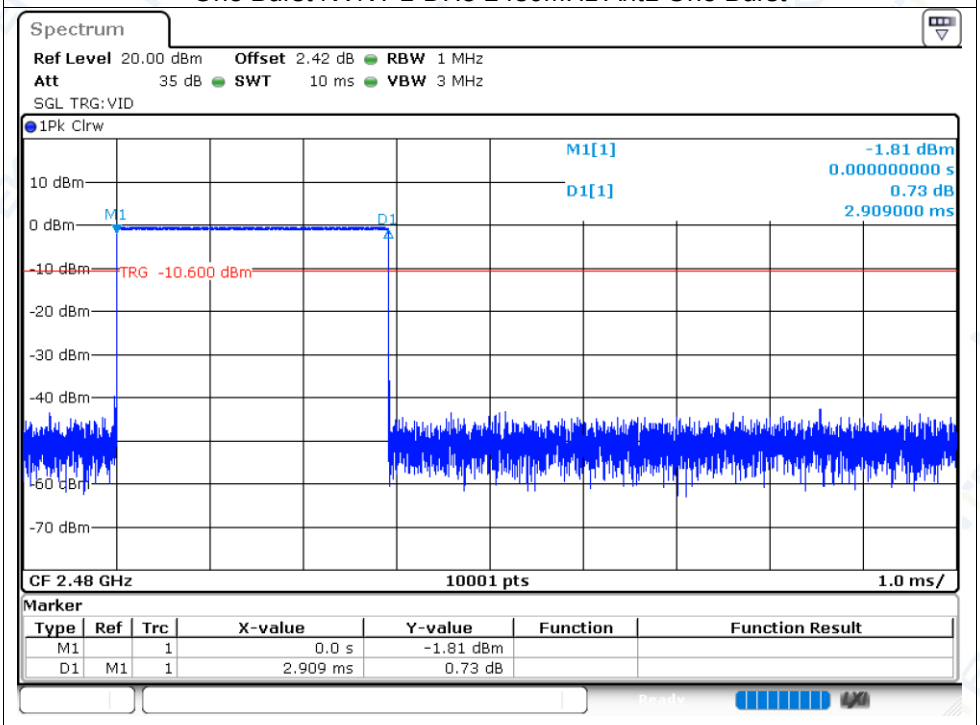


One Burst NVNT 2-DH1 2402MHz Ant1 One Burst

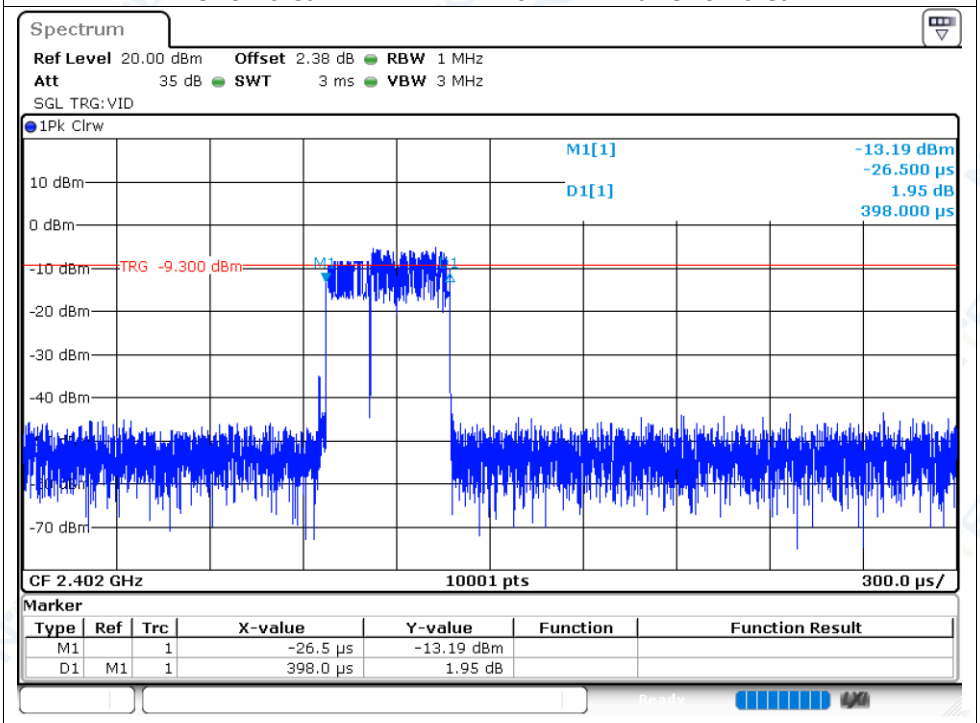


One Burst NVNT 2-DH1 2480MHz Ant1 One Burst

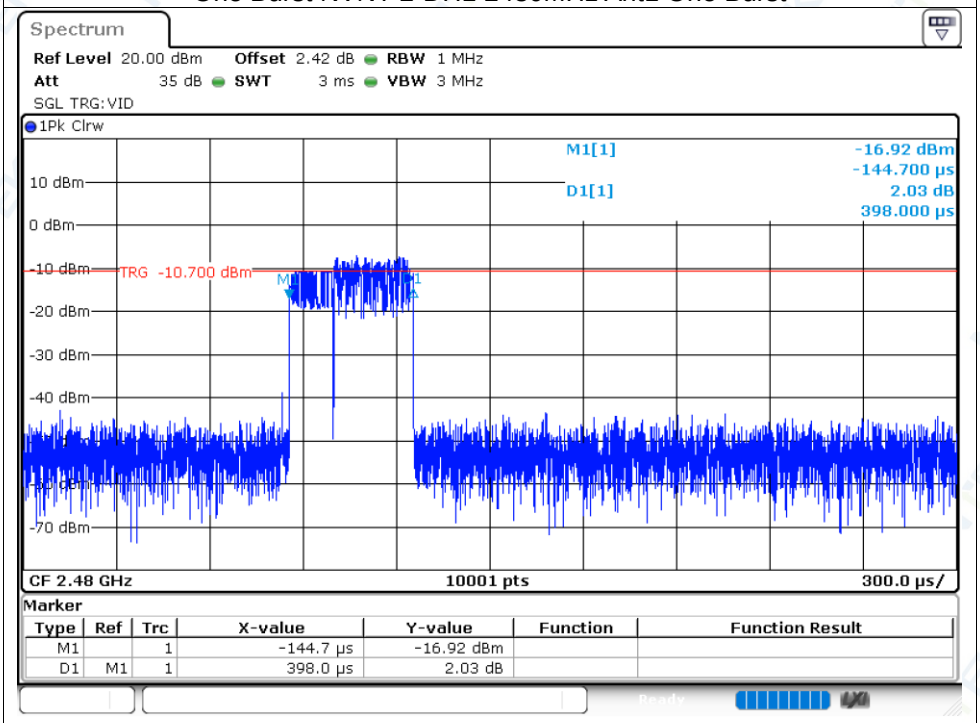


One Burst NVNT 2-DH3 2402MHz Ant1 One Burst

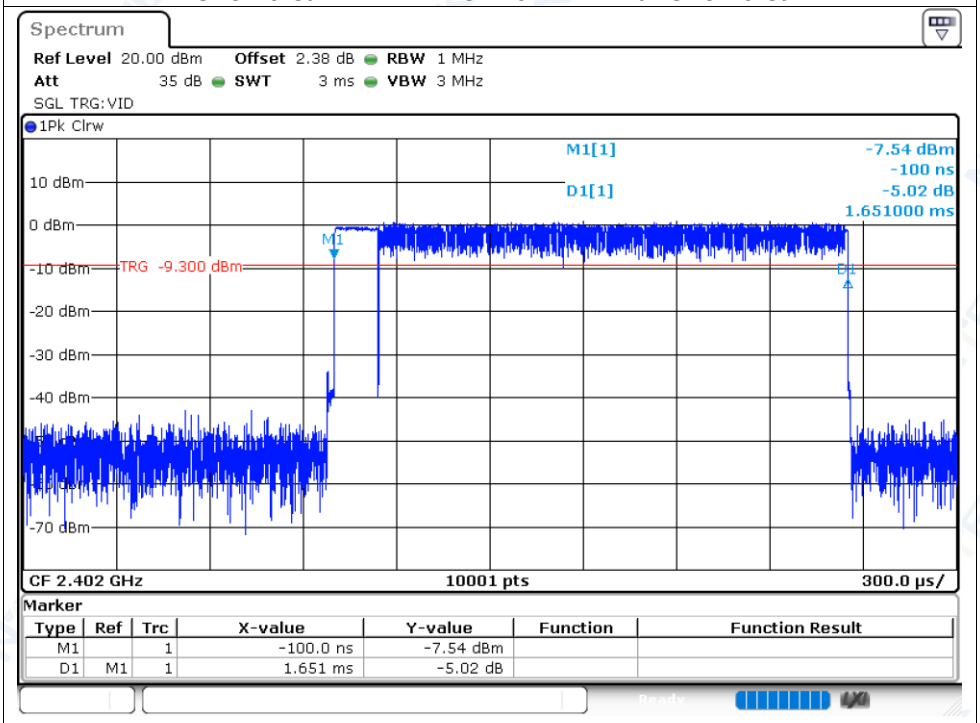


One Burst NVNT 2-DH3 2480MHz Ant1 One Burst

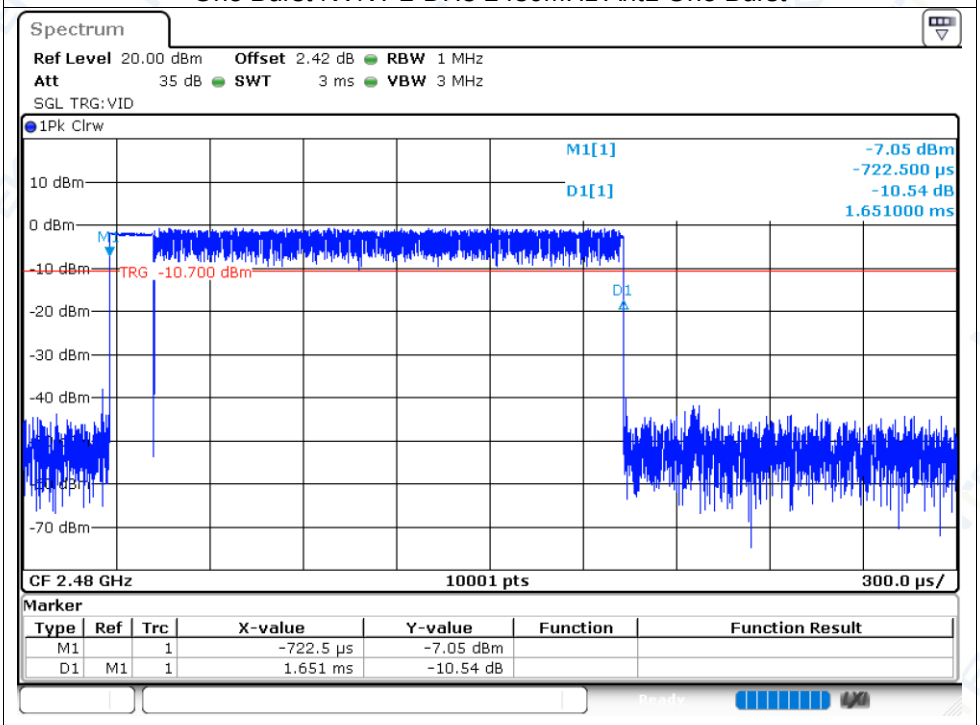


One Burst NVNT 2-DH5 2402MHz Ant1 One Burst

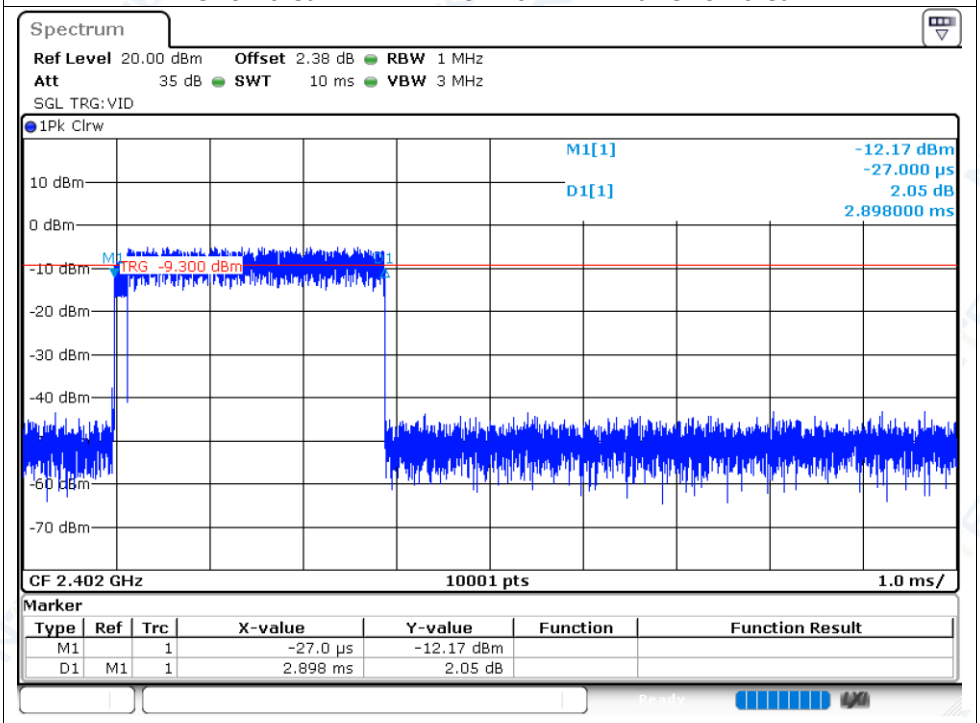


One Burst NVNT 2-DH5 2480MHz Ant1 One Burst

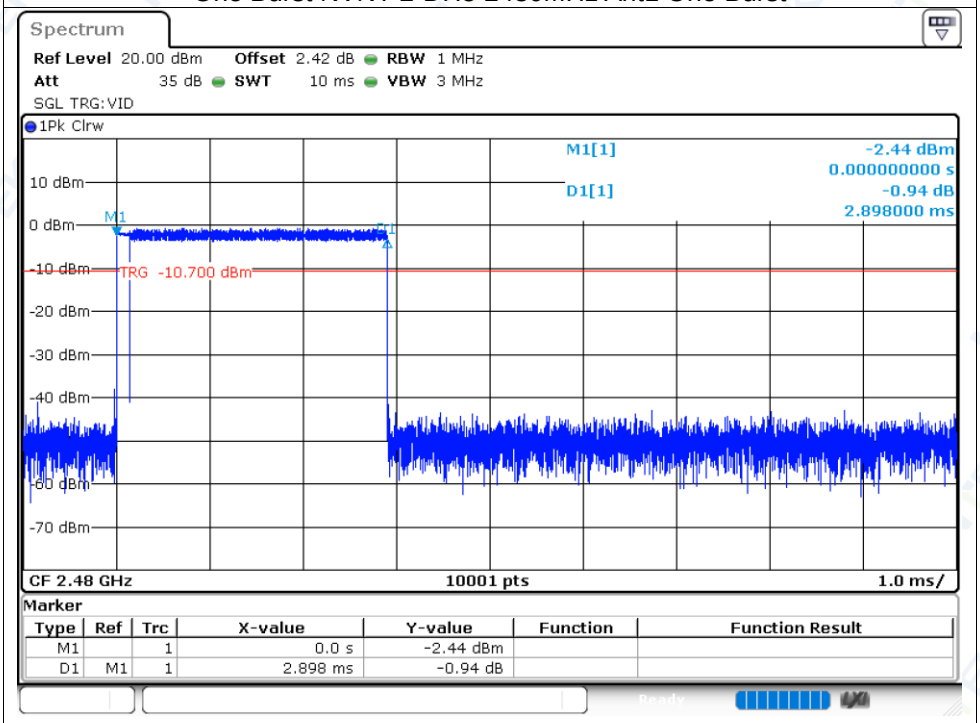


One Burst NVNT 3-DH1 2402MHz Ant1 One Burst

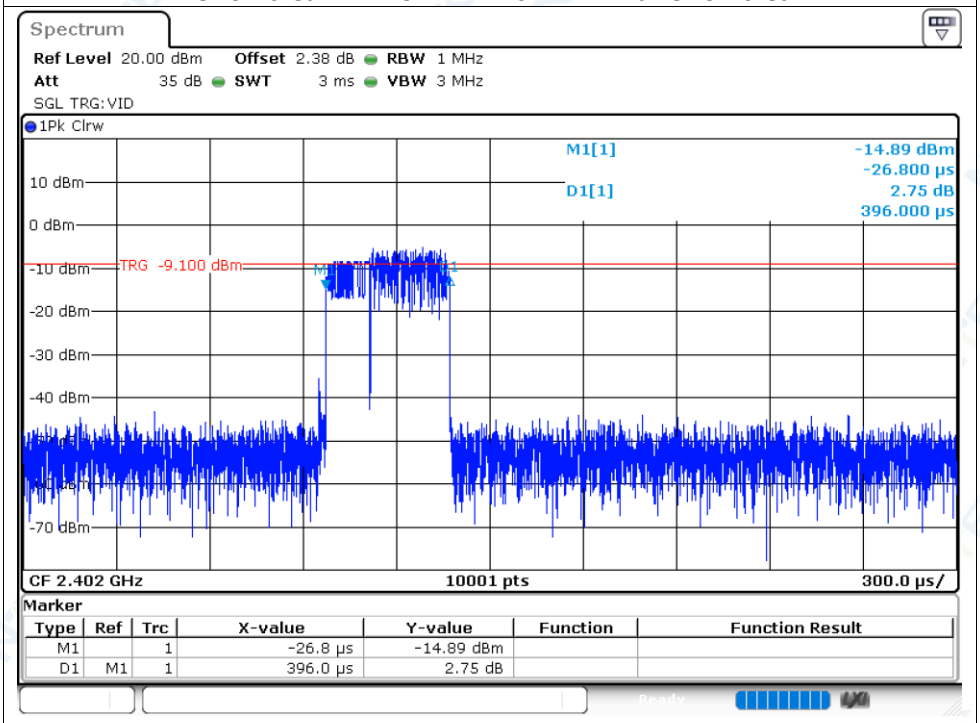


One Burst NVNT 3-DH1 2480MHz Ant1 One Burst

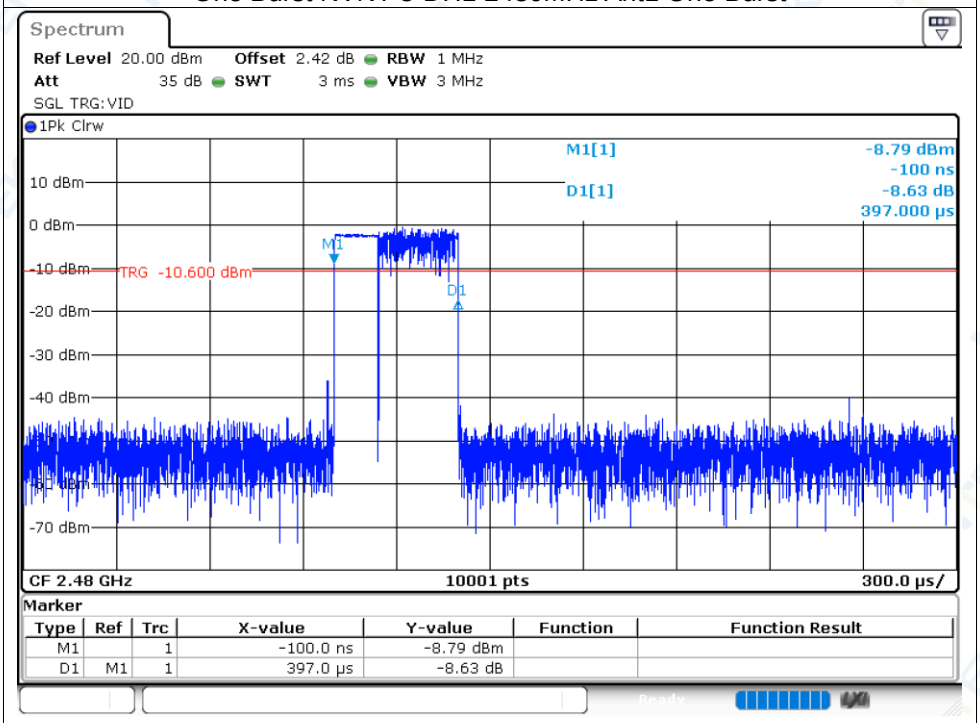


One Burst NVNT 3-DH3 2402MHz Ant1 One Burst

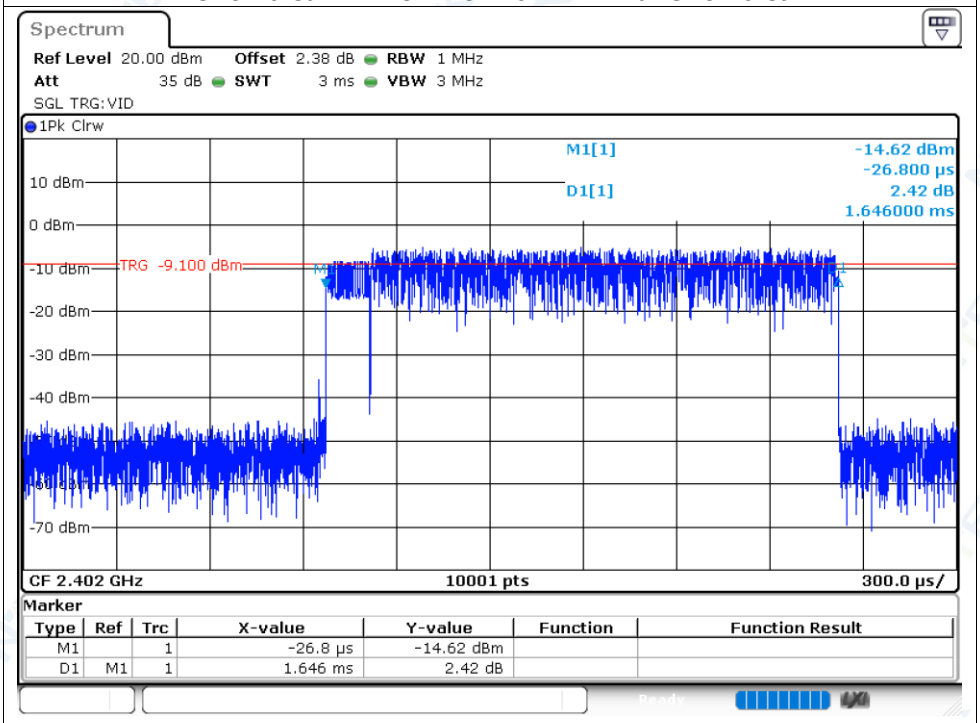


One Burst NVNT 3-DH3 2480MHz Ant1 One Burst

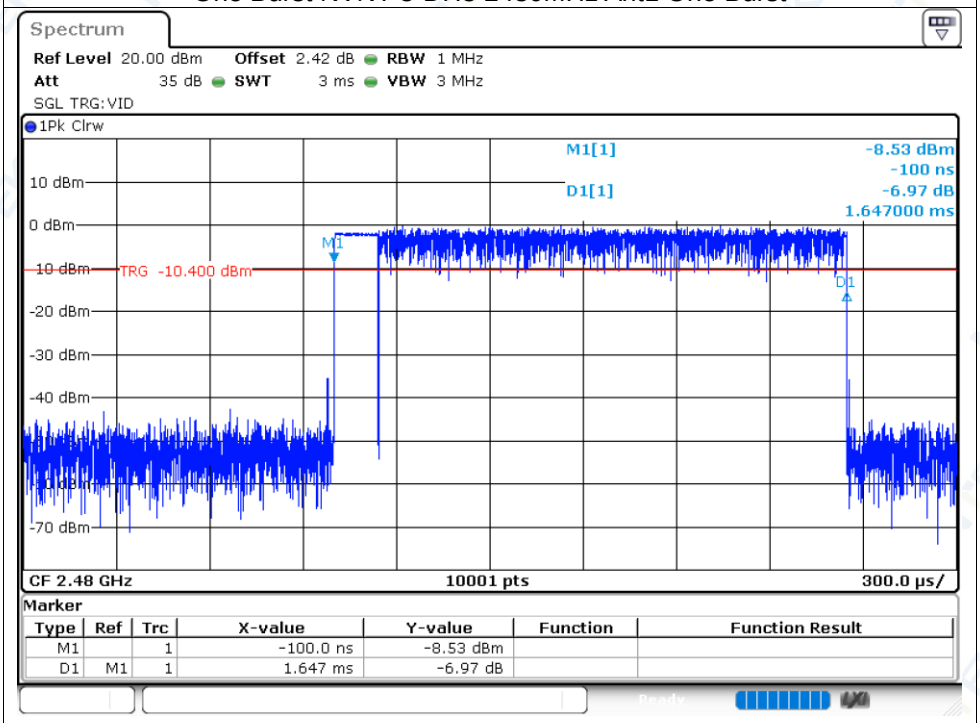

One Burst NVNT 3-DH5 2402MHz Ant1 One Burst

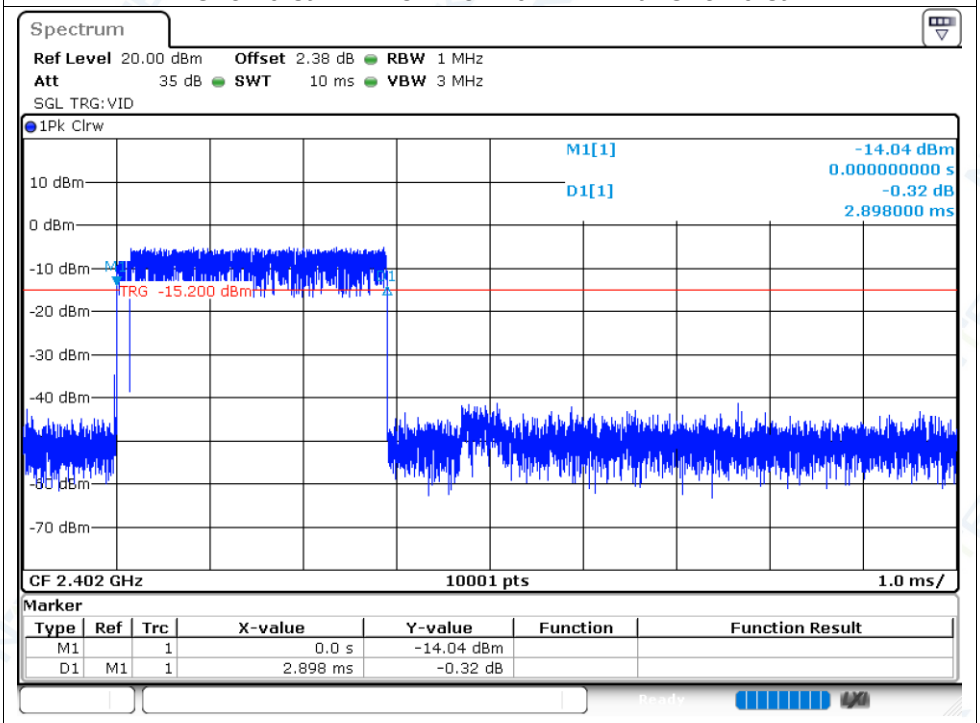

One Burst NVNT 3-DH5 2480MHz Ant1 One Burst

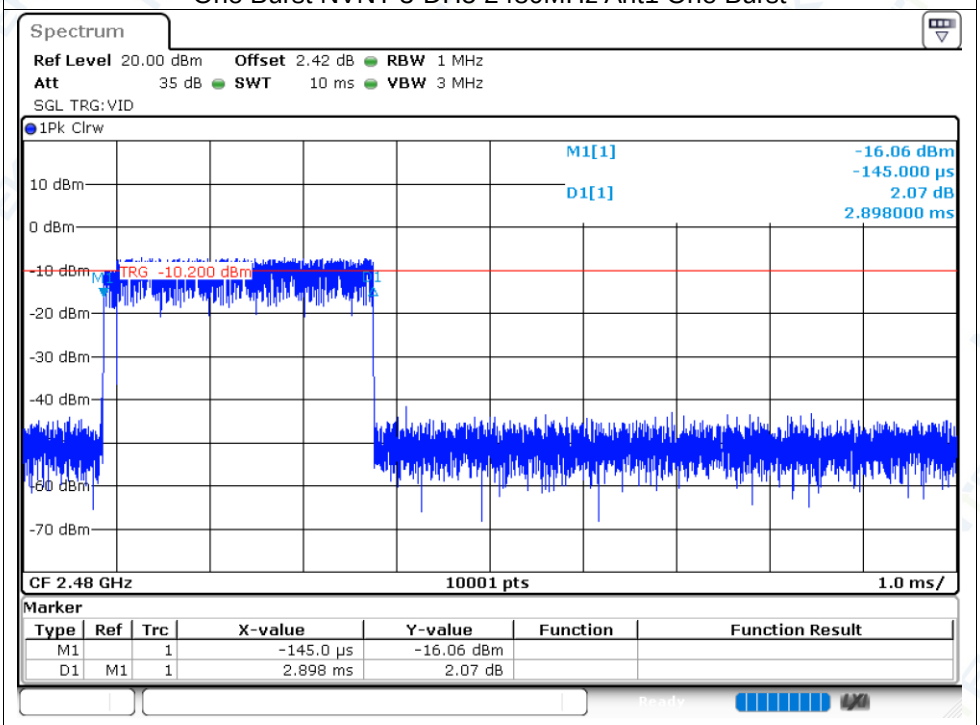


11.4 RF Output Power


Condition	Mode	Frequency (MHz)	Antenna	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	hopping	Ant1	3.02	27	4.49	20	Pass
NVNT	2-DH5	hopping	Ant1	1.07	30	2.54	20	Pass
NVNT	3-DH5	hopping	Ant1	0.91	35	2.38	20	Pass
NVLT	1-DH5	hopping	Ant1	2.34	27	3.81	20	Pass
NVLT	2-DH5	hopping	Ant1	0.48	27	1.95	20	Pass
NVLT	3-DH5	hopping	Ant1	0.34	28	1.81	20	Pass
NVHT	1-DH5	hopping	Ant1	2.31	27	3.78	20	Pass
NVHT	2-DH5	hopping	Ant1	0.38	27	1.85	20	Pass
NVHT	3-DH5	hopping	Ant1	0.14	28	1.61	20	Pass

Test Graphs


Power NVNT 1-DH5 2402MHz Ant1

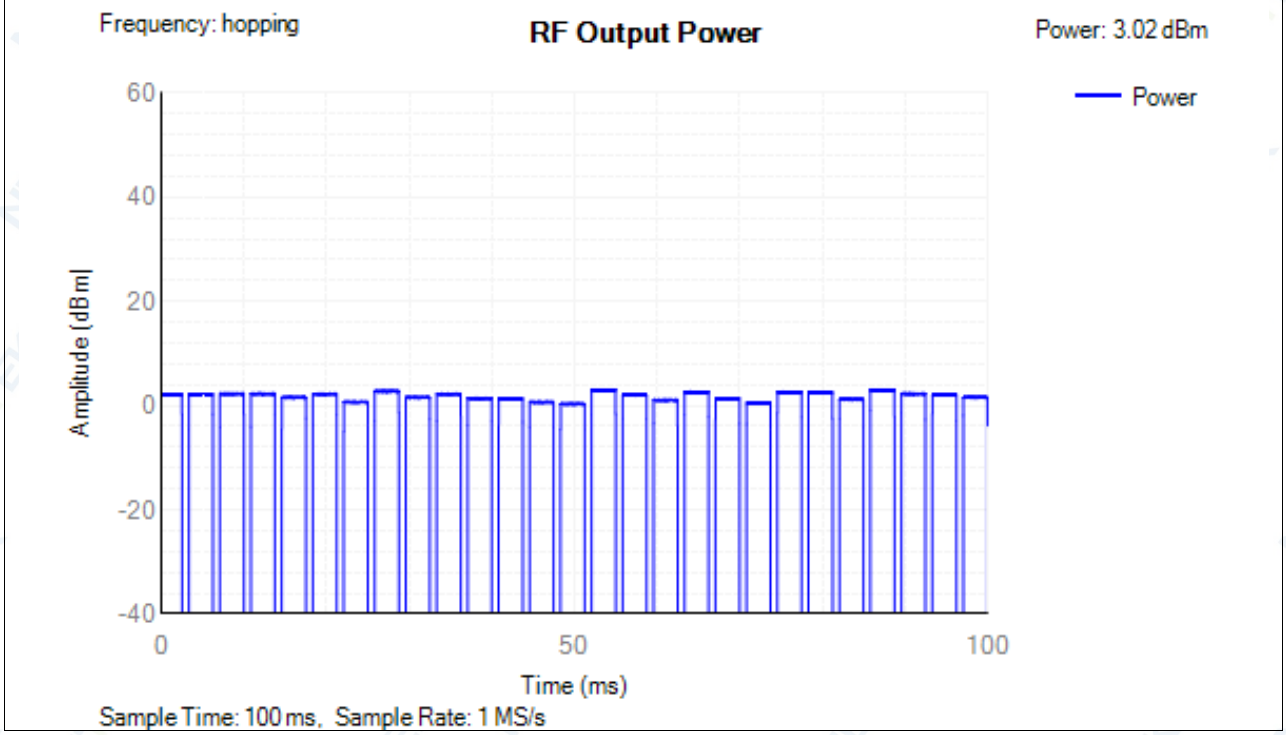

Power NVNT 2-DH5 2402MHz Ant1

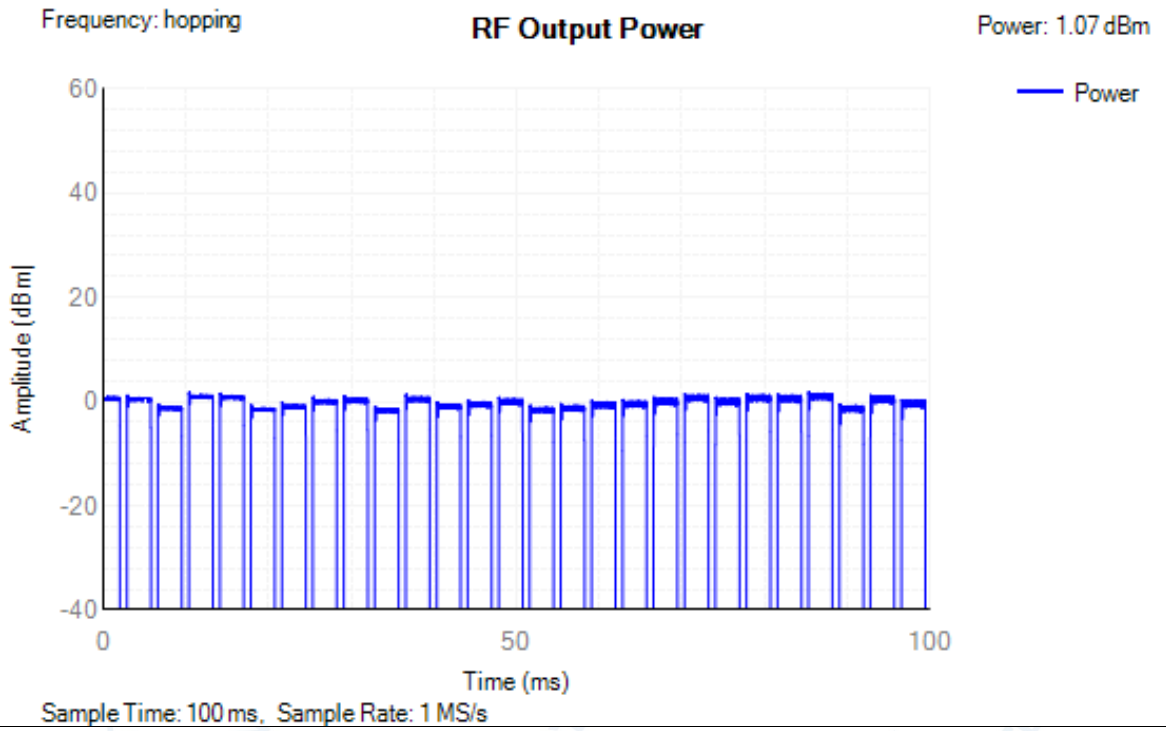

Power NVNT 3-DH5 2402MHz Ant1

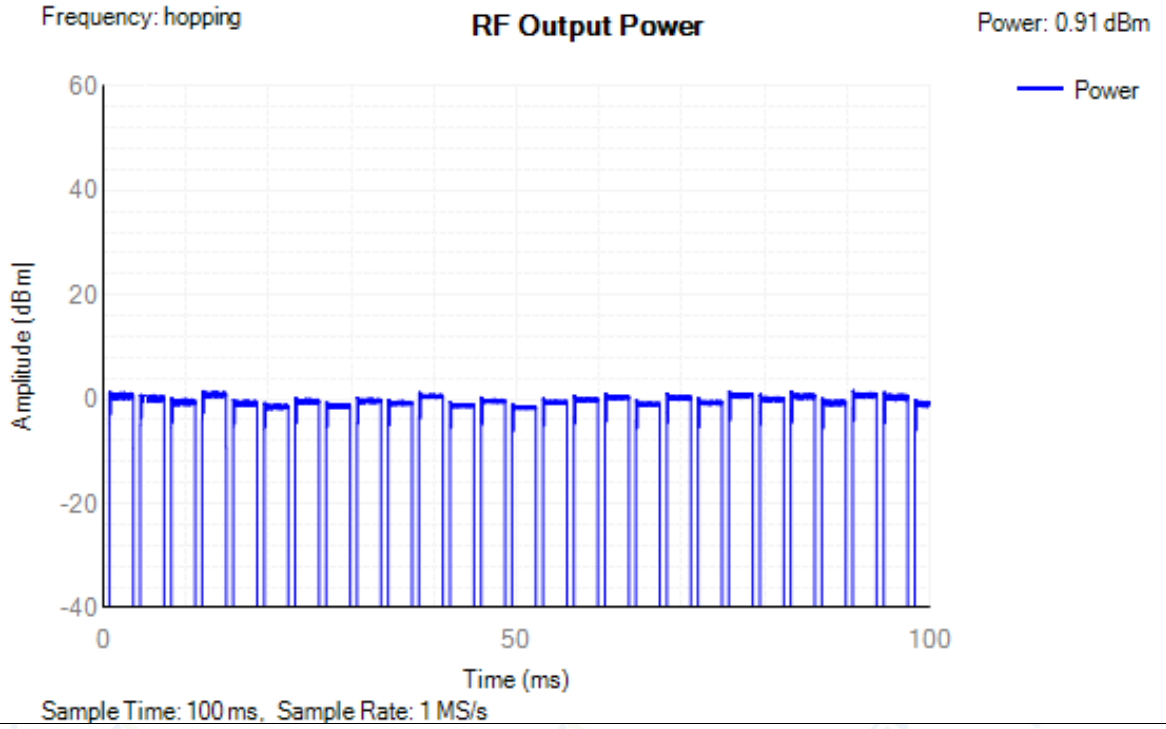


11.5 Hopping Frequency Separation


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.979	2402.978	0.999	0.1	Pass
NVNT	1-DH5	Ant1	2441	2442	1	0.1	Pass
NVNT	1-DH5	Ant1	2479.002	2479.979	0.977	0.1	Pass
NVNT	2-DH5	Ant1	2402.016	2403.012	0.996	0.1	Pass
NVNT	2-DH5	Ant1	2441.014	2442.016	1.002	0.1	Pass
NVNT	2-DH5	Ant1	2479.014	2480.018	1.004	0.1	Pass
NVNT	3-DH5	Ant1	2401.981	2402.983	1.002	0.1	Pass
NVNT	3-DH5	Ant1	2440.986	2441.951	0.965	0.1	Pass
NVNT	3-DH5	Ant1	2478.989	2480.055	1.066	0.1	Pass

Test Graphs


HFS NVNT 1-DH5 2402MHz Ant1

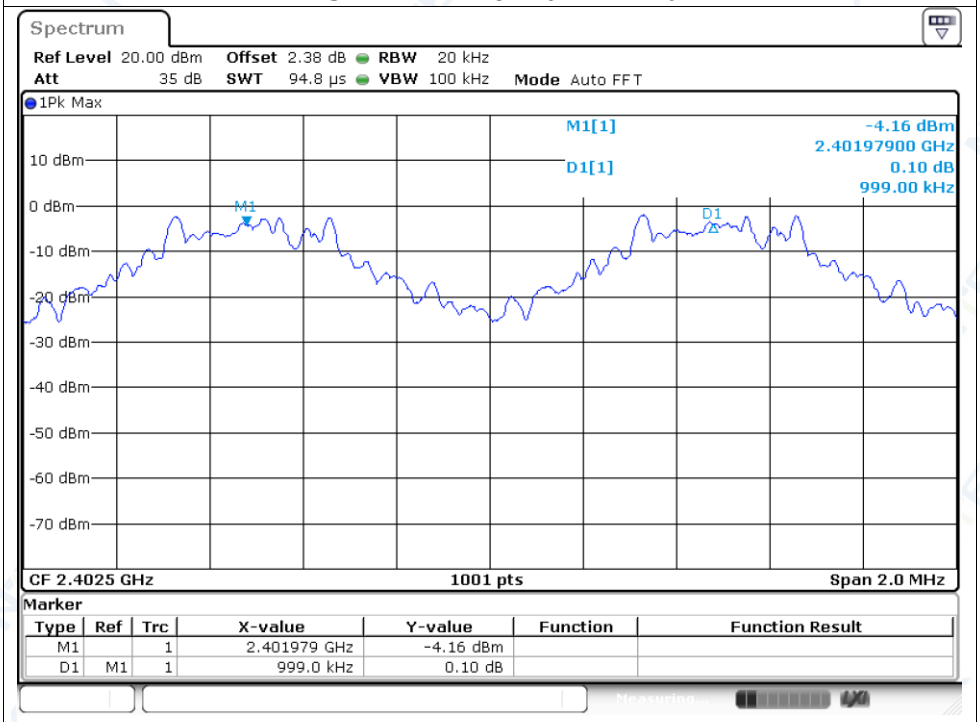


HFS NVNT 1-DH5 2441MHz Ant1

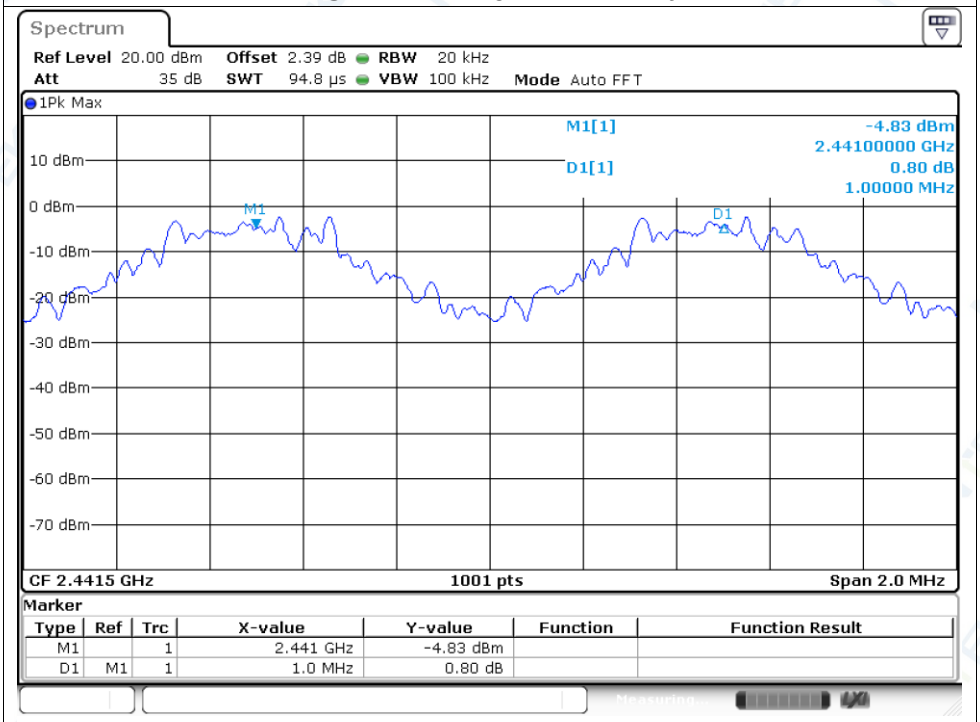


HFS NVNT 1-DH5 2480MHz Ant1

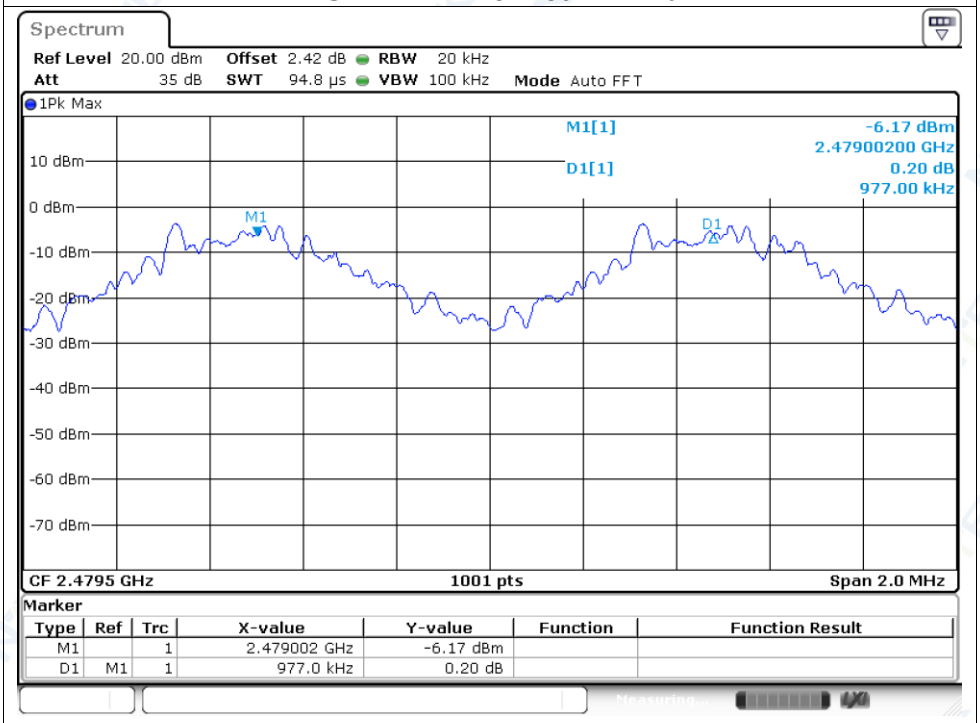


HFS NVNT 2-DH5 2402MHz Ant1

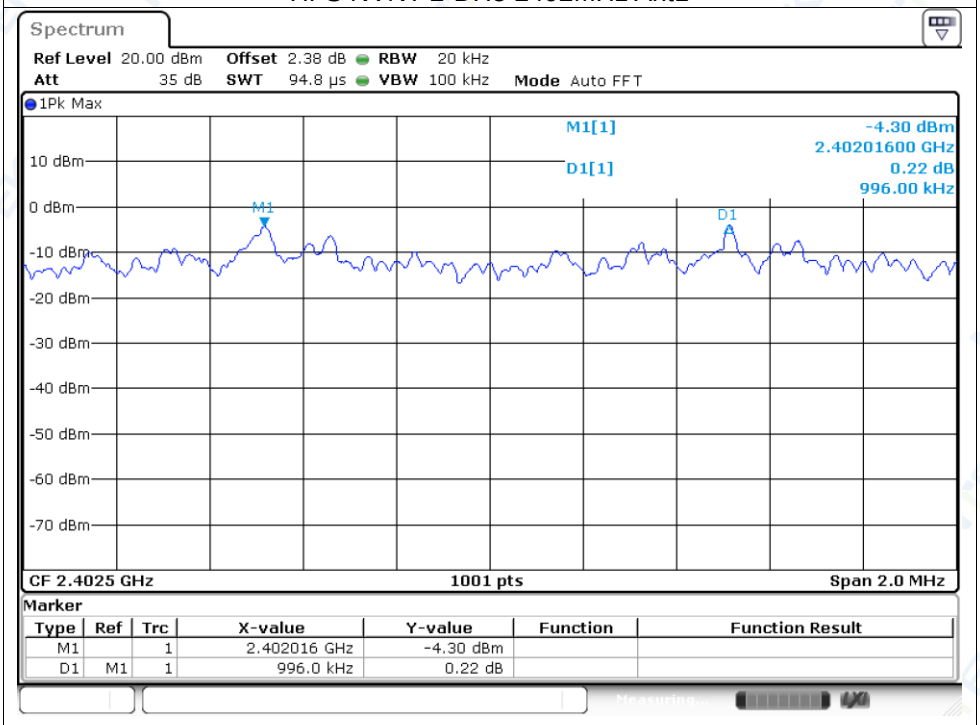


HFS NVNT 2-DH5 2441MHz Ant1

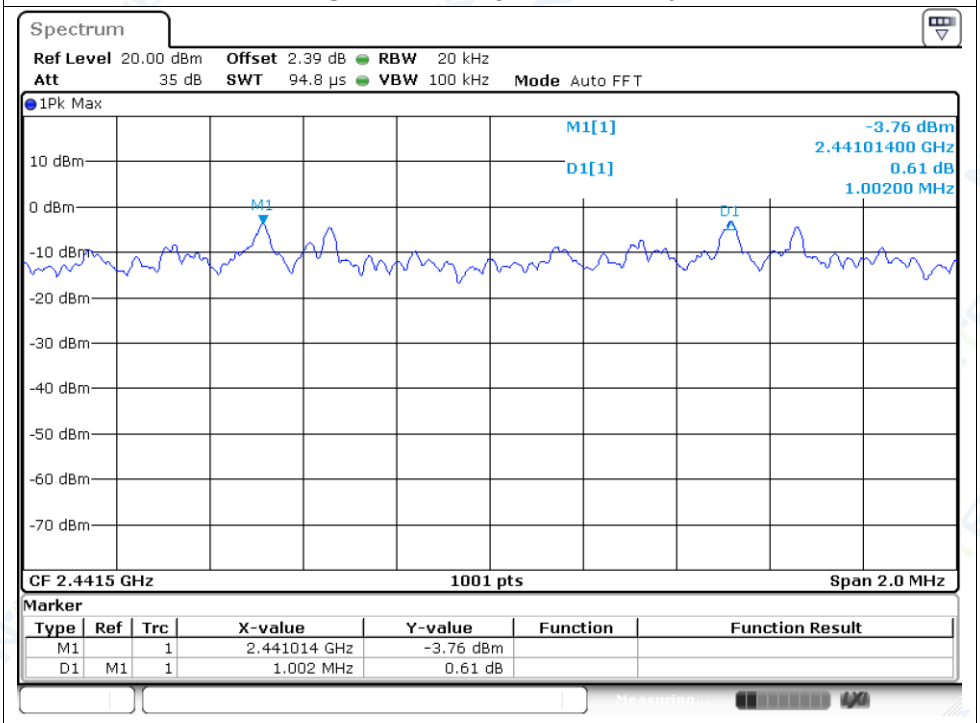


HFS NVNT 2-DH5 2480MHz Ant1

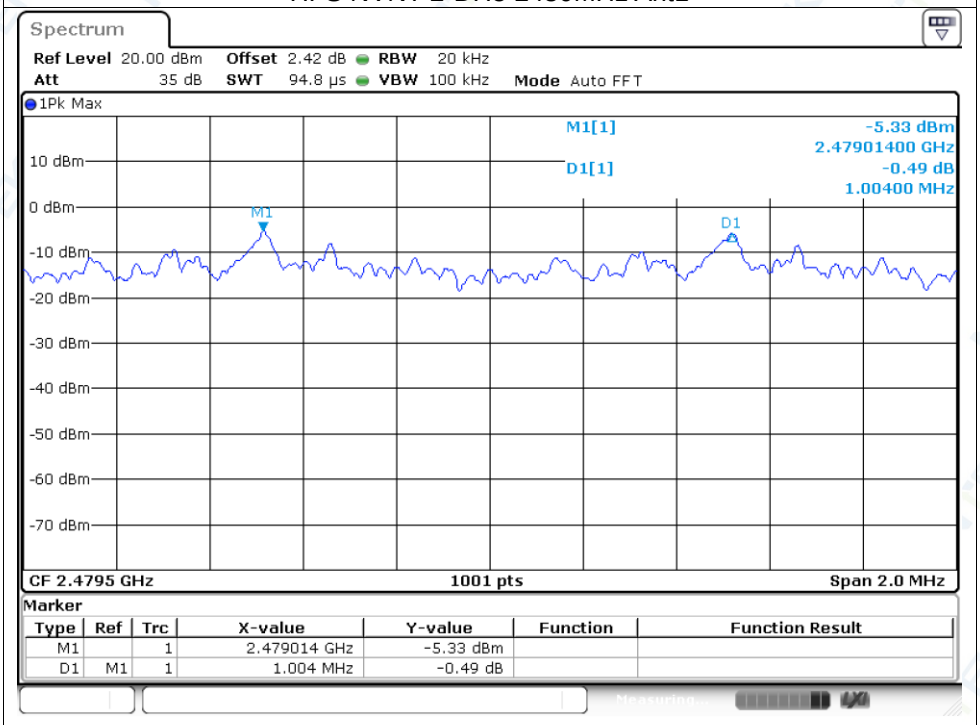


HFS NVNT 3-DH5 2402MHz Ant1

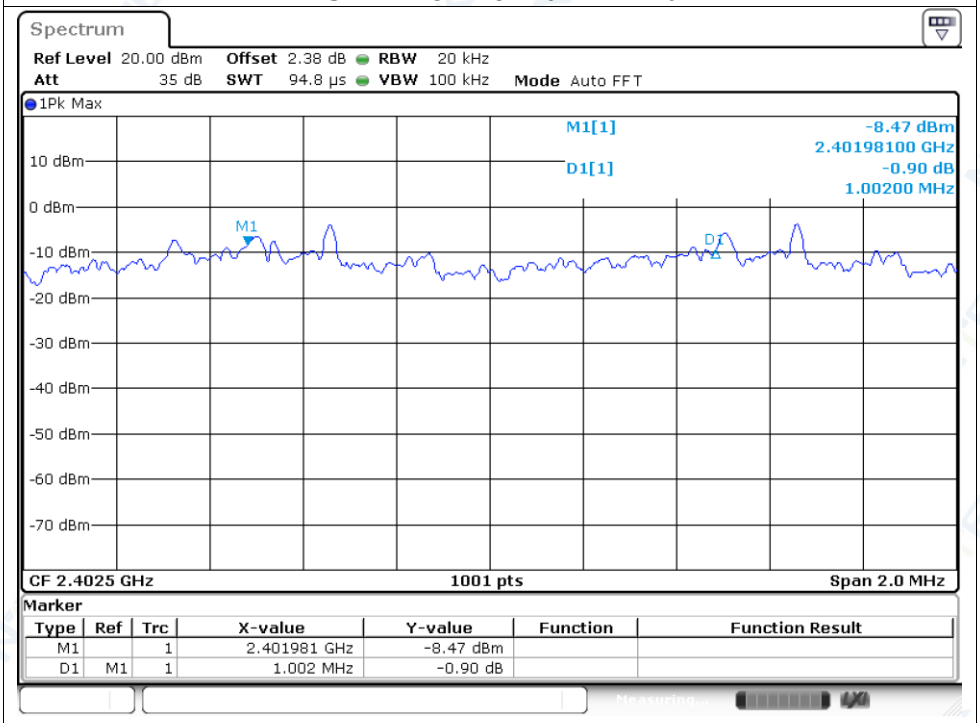

HFS NVNT 3-DH5 2441MHz Ant1

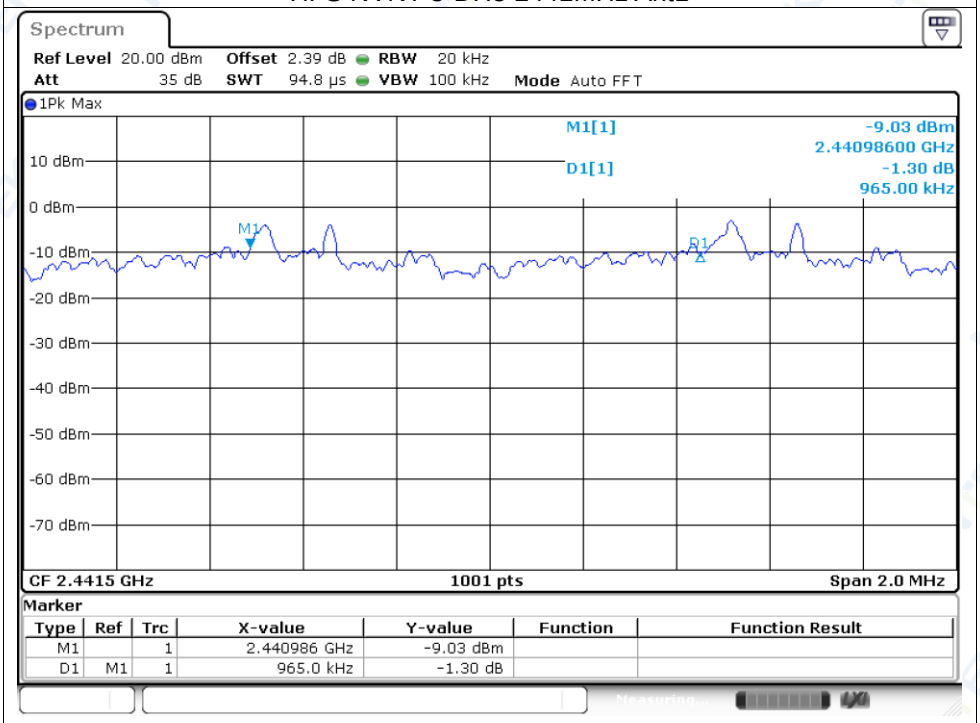

HFS NVNT 3-DH5 2480MHz Ant1

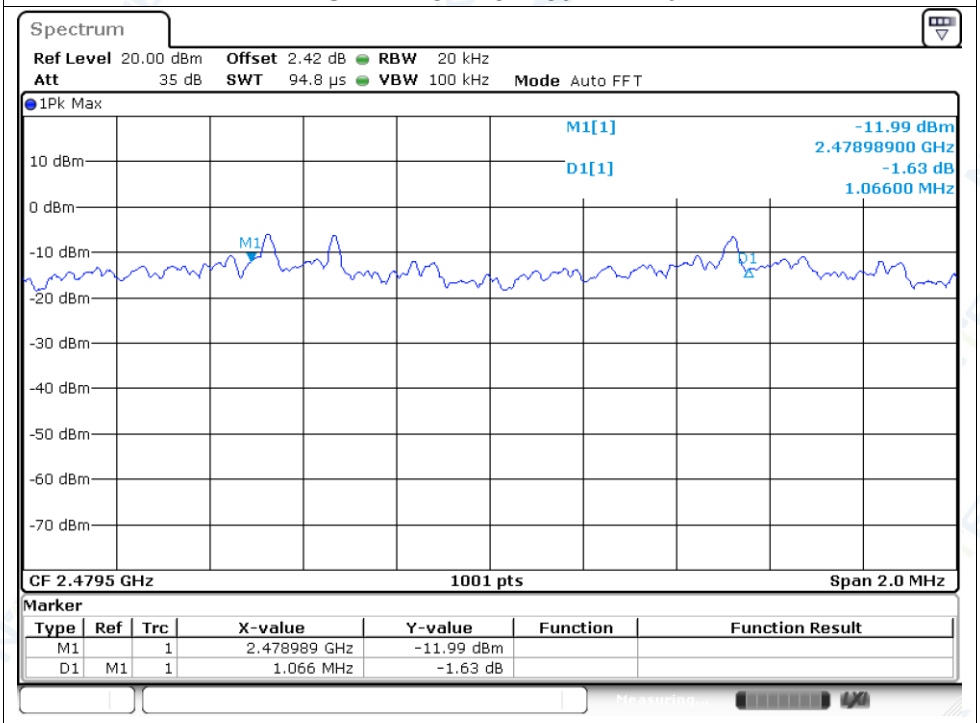


11.6 Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	2401.988	0.855	2401.56	2402.415	2400 - 2483.5MHz	Pass
NVNT	1-DH5	2480	Ant1	2479.987	0.877	2479.548	2480.425	2400 - 2483.5MHz	Pass
NVNT	2-DH5	2402	Ant1	2401.988	1.182	2401.396	2402.579	2400 - 2483.5MHz	Pass
NVNT	2-DH5	2480	Ant1	2479.986	1.182	2479.394	2480.577	2400 - 2483.5MHz	Pass
NVNT	3-DH5	2402	Ant1	2401.988	1.195	2401.39	2402.585	2400 - 2483.5MHz	Pass
NVNT	3-DH5	2480	Ant1	2479.985	1.193	2479.389	2480.582	2400 - 2483.5MHz	Pass

Test Graphs


OBW NVNT 1-DH5 2402MHz Ant1

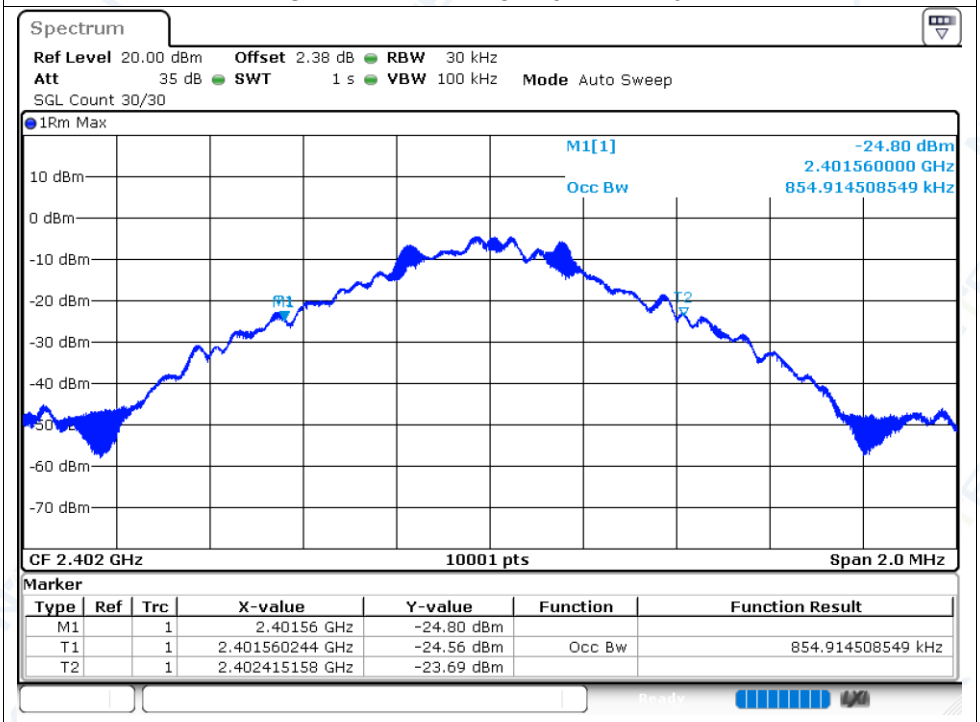


OBW NVNT 1-DH5 2480MHz Ant1

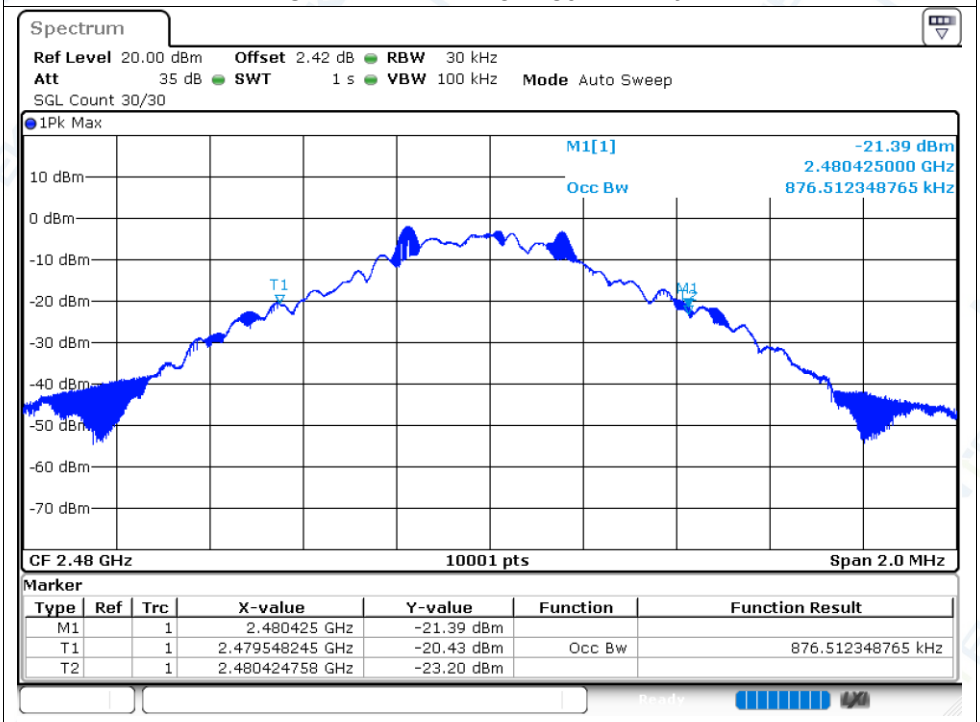


OBW NVNT 2-DH5 2402MHz Ant1

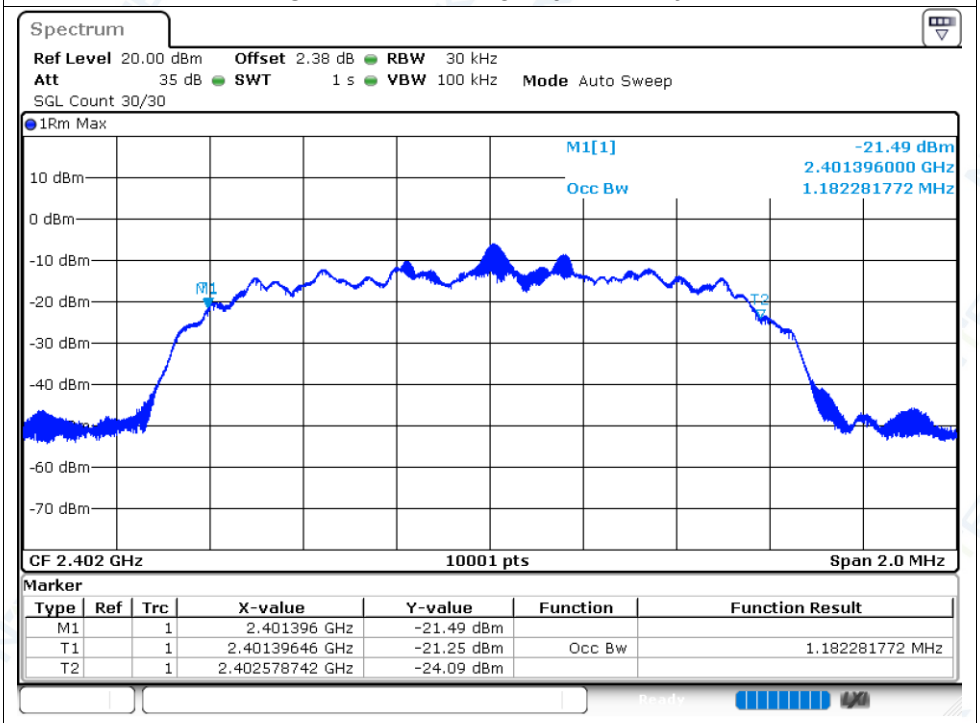


OBW NVNT 2-DH5 2480MHz Ant1

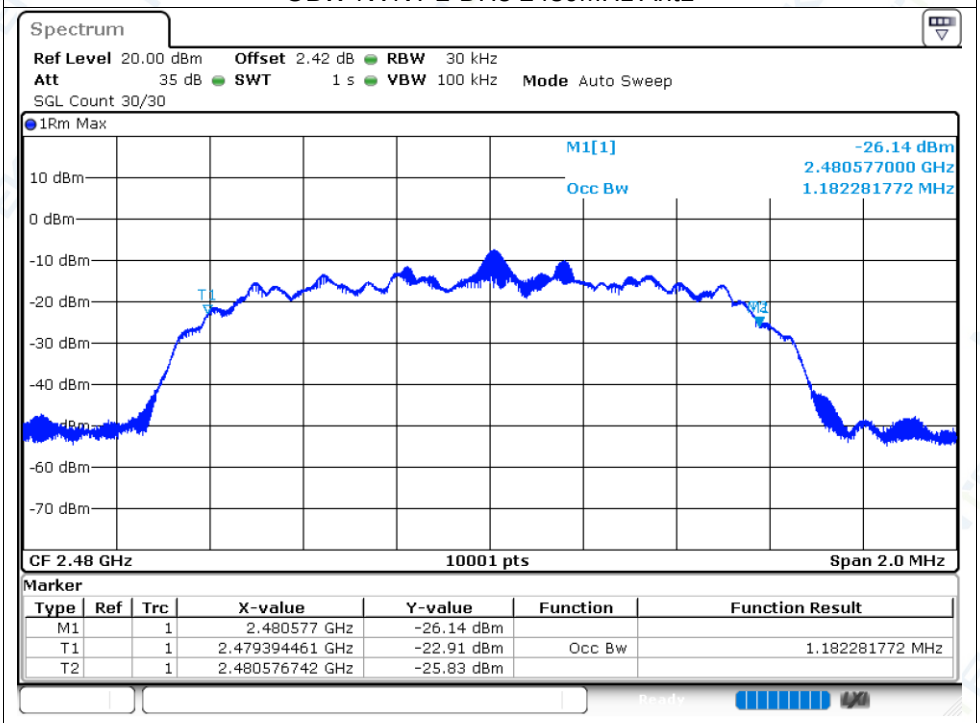

OBW NVNT 3-DH5 2402MHz Ant1

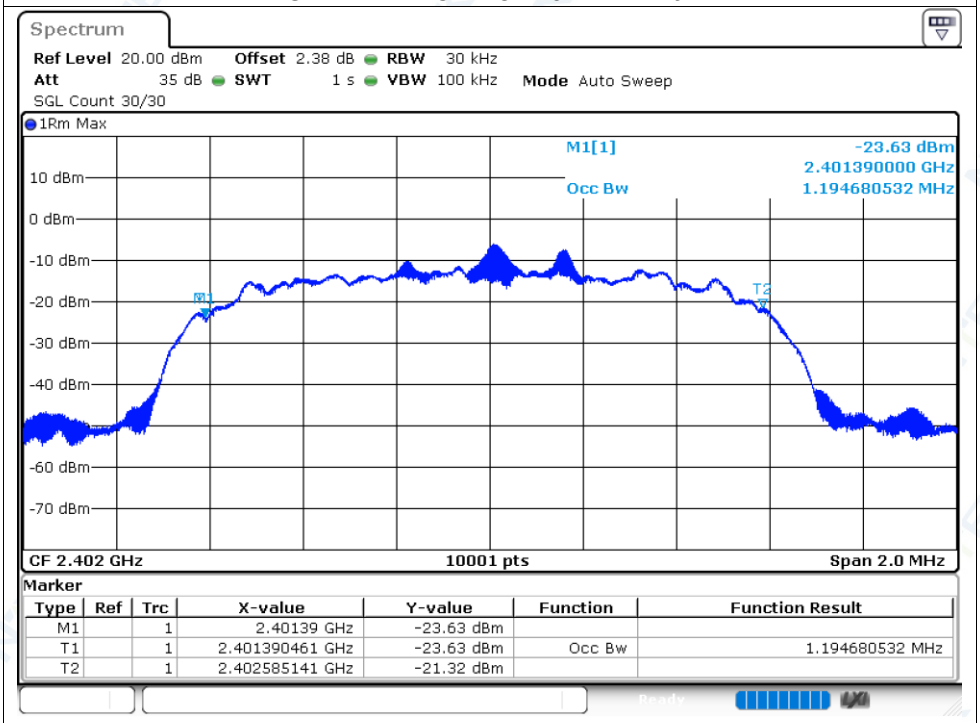


OBW NVNT 3-DH5 2480MHz Ant1

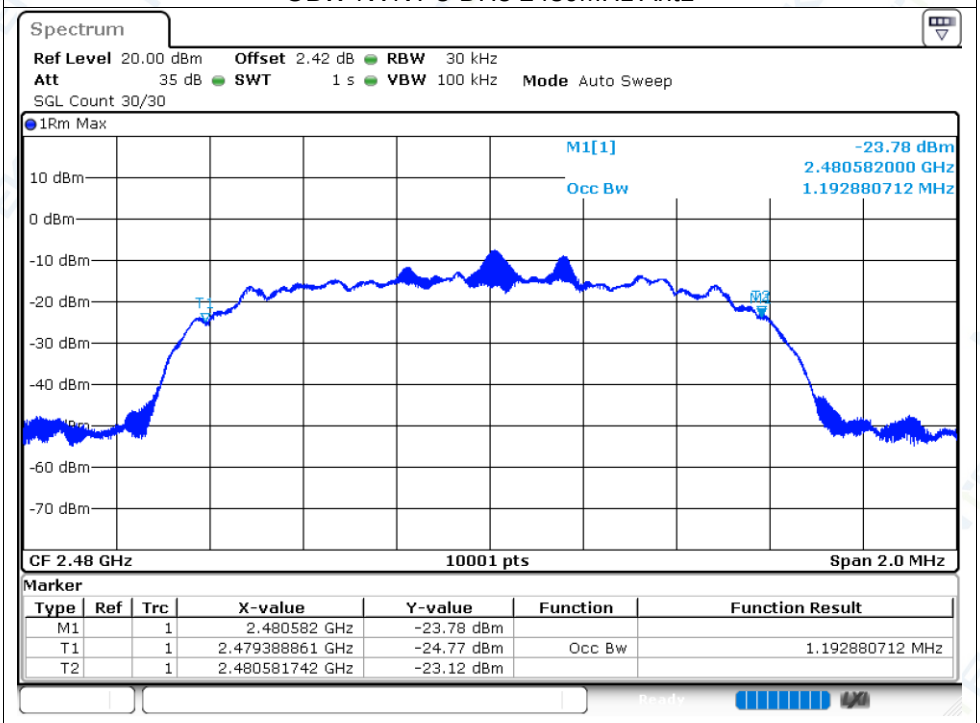


11.7 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	Antenna	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	1-DH5	Hopping	Ant1	2399.5	-44.72	-10	Pass
NVNT	1-DH5	Hopping	Ant1	2398.5	-44.19	-20	Pass
NVNT	1-DH5	Hopping	Ant1	2484	-43.93	-10	Pass
NVNT	1-DH5	Hopping	Ant1	2485	-43.93	-20	Pass
NVNT	1-DH5	Hopping	Ant1	2399.5	-44.65	-10	Pass
NVNT	1-DH5	Hopping	Ant1	2398.5	-44.16	-20	Pass
NVNT	1-DH5	Hopping	Ant1	2484	-43.87	-10	Pass
NVNT	1-DH5	Hopping	Ant1	2485	-43.91	-20	Pass
NVNT	2-DH5	Hopping	Ant1	2399.5	-44.6	-10	Pass
NVNT	2-DH5	Hopping	Ant1	2399.318	-44.26	-10	Pass
NVNT	2-DH5	Hopping	Ant1	2398.318	-44.14	-20	Pass
NVNT	2-DH5	Hopping	Ant1	2398.136	-44.14	-20	Pass
NVNT	2-DH5	Hopping	Ant1	2484	-43.88	-10	Pass
NVNT	2-DH5	Hopping	Ant1	2485	-43.88	-20	Pass
NVNT	2-DH5	Hopping	Ant1	2399.5	-44.58	-10	Pass
NVNT	2-DH5	Hopping	Ant1	2398.5	-44.08	-20	Pass
NVNT	2-DH5	Hopping	Ant1	2484	-43.83	-10	Pass
NVNT	2-DH5	Hopping	Ant1	2484.182	-43.85	-10	Pass
NVNT	2-DH5	Hopping	Ant1	2485.182	-43.85	-20	Pass
NVNT	2-DH5	Hopping	Ant1	2485.364	-43.83	-20	Pass
NVNT	3-DH5	Hopping	Ant1	2399.5	-44.63	-10	Pass
NVNT	3-DH5	Hopping	Ant1	2399.305	-44.29	-10	Pass
NVNT	3-DH5	Hopping	Ant1	2398.305	-44.14	-20	Pass
NVNT	3-DH5	Hopping	Ant1	2398.11	-44.12	-20	Pass
NVNT	3-DH5	Hopping	Ant1	2484	-43.86	-10	Pass
NVNT	3-DH5	Hopping	Ant1	2485	-43.9	-20	Pass
NVNT	3-DH5	Hopping	Ant1	2399.5	-44.99	-10	Pass
NVNT	3-DH5	Hopping	Ant1	2398.5	-44.5	-20	Pass
NVNT	3-DH5	Hopping	Ant1	2484	-44.28	-10	Pass
NVNT	3-DH5	Hopping	Ant1	2485	-44.27	-20	Pass


Test Graphs
Tx. Emissions OOB NVNT 1-DH5 2402MHz Ant1

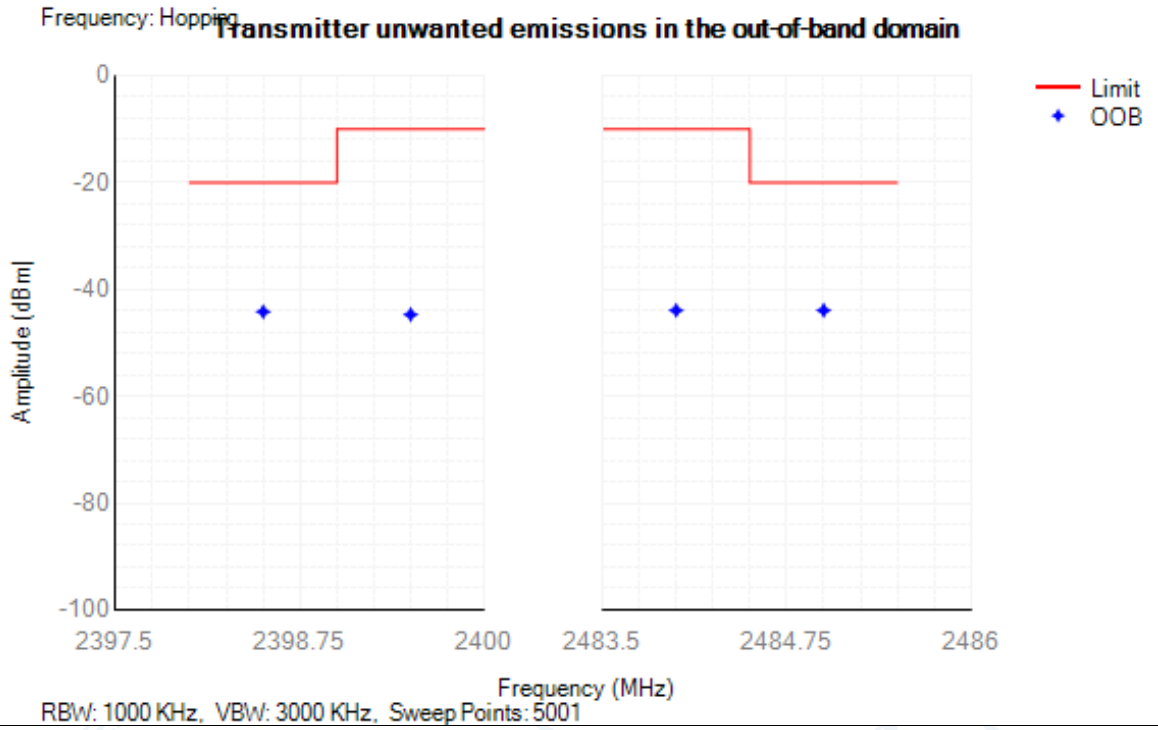


Tx. Emissions OOB NVNT 1-DH5 2480MHz Ant1

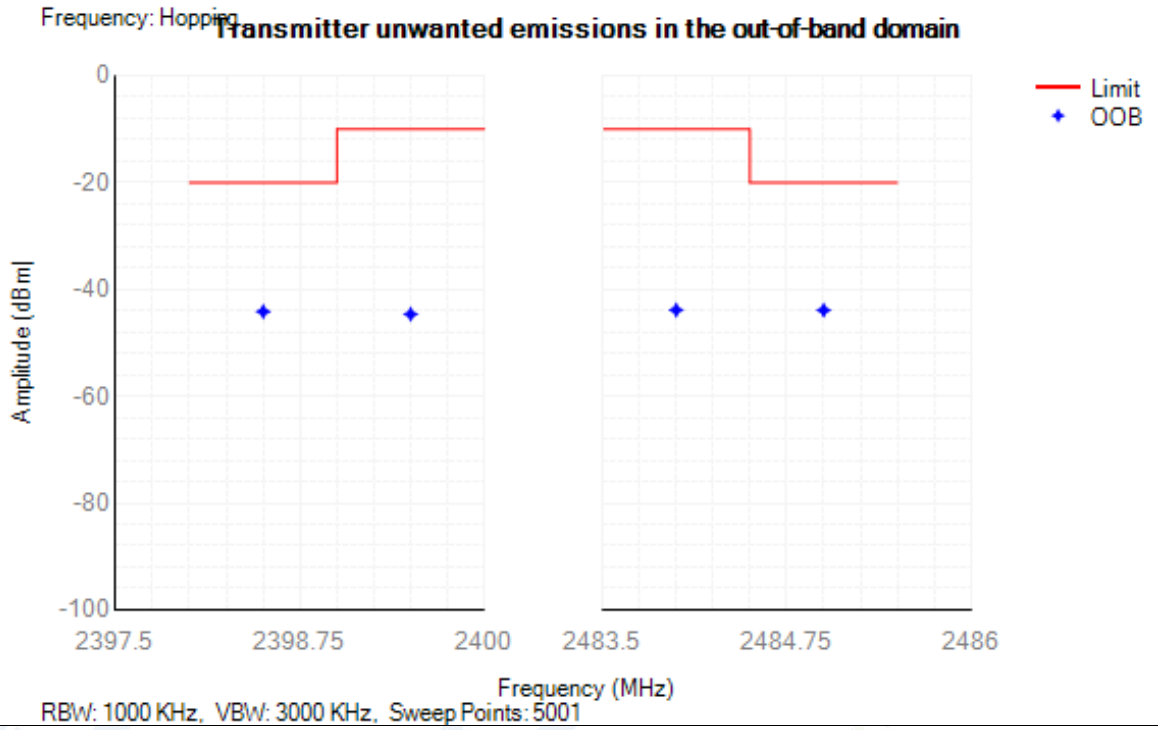


Tx. Emissions OOB NVNT 2-DH5 2402MHz Ant1

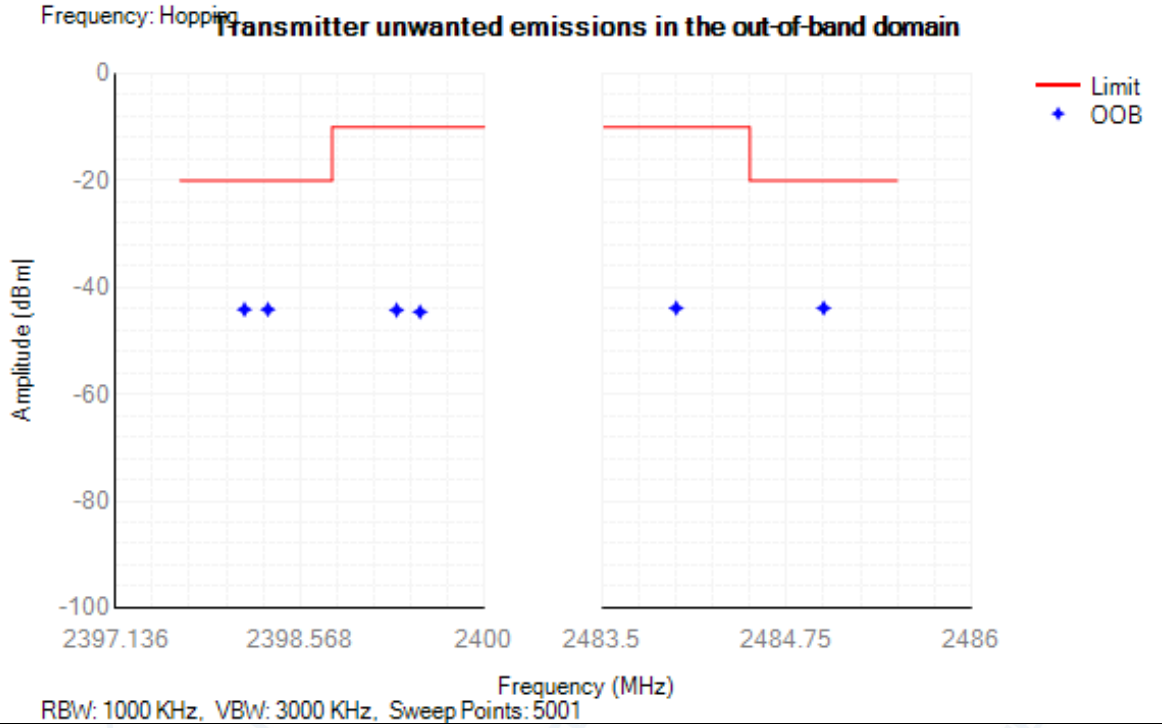


Tx. Emissions OOB NVNT 2-DH5 2480MHz Ant1

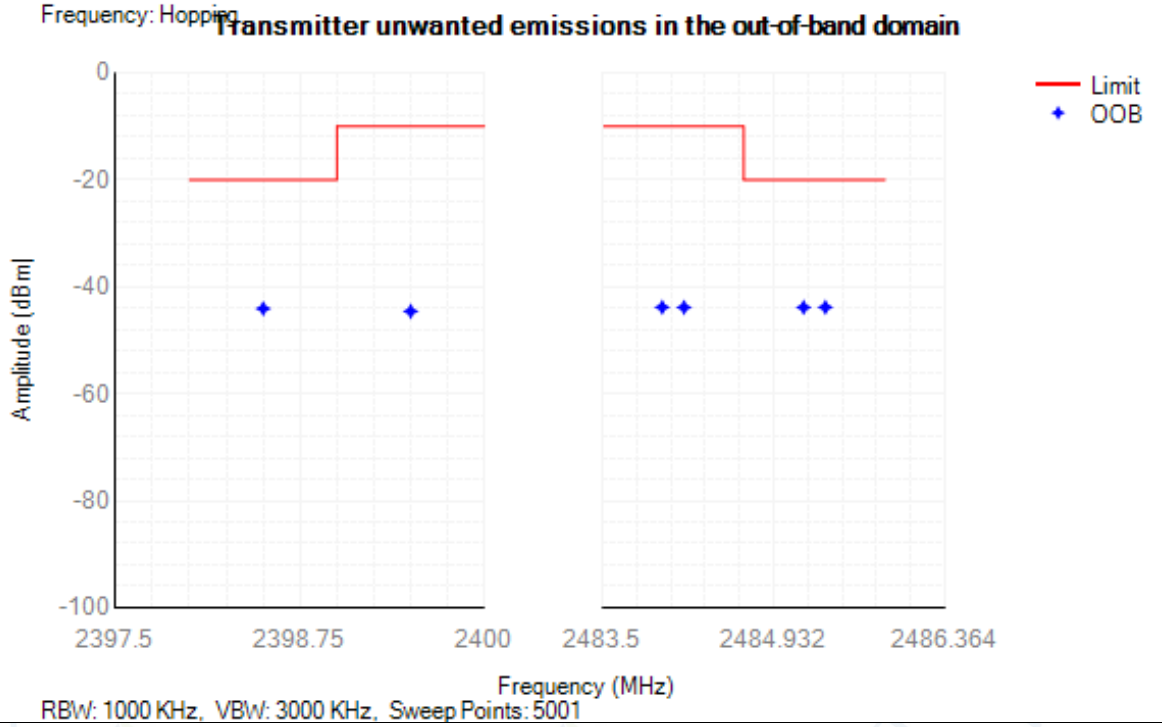

Tx. Emissions OOB NVNT 3-DH5 2402MHz Ant1

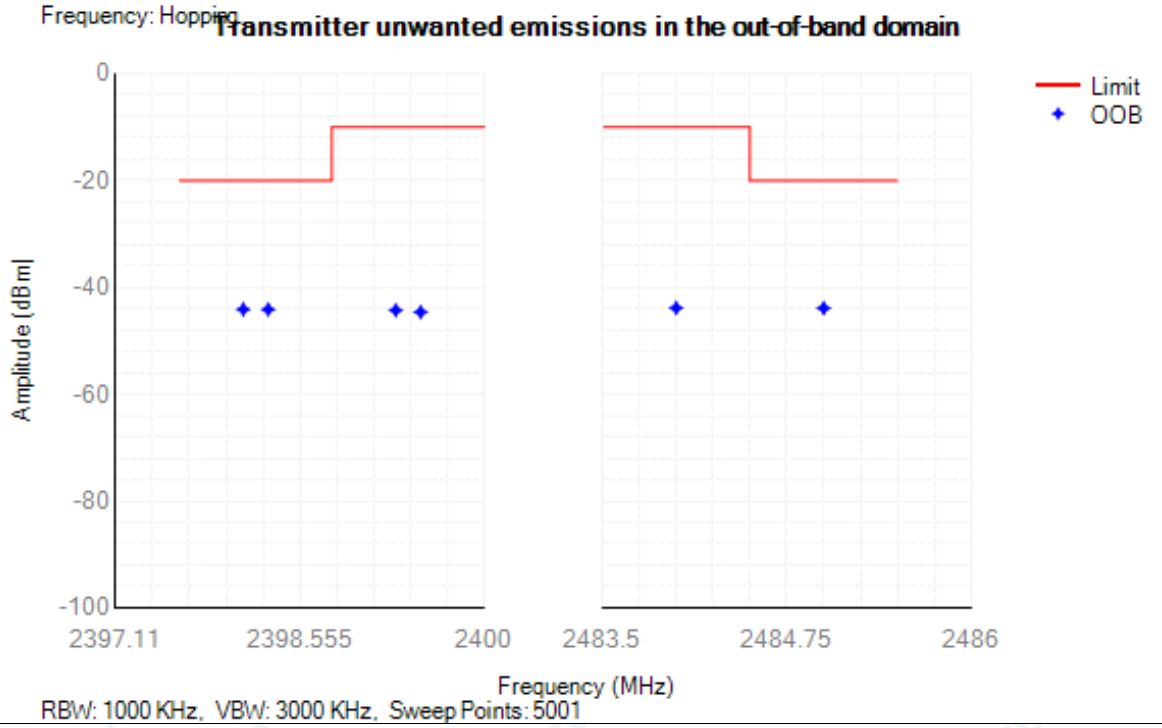

Tx. Emissions OOB NVNT 3-DH5 2480MHz Ant1

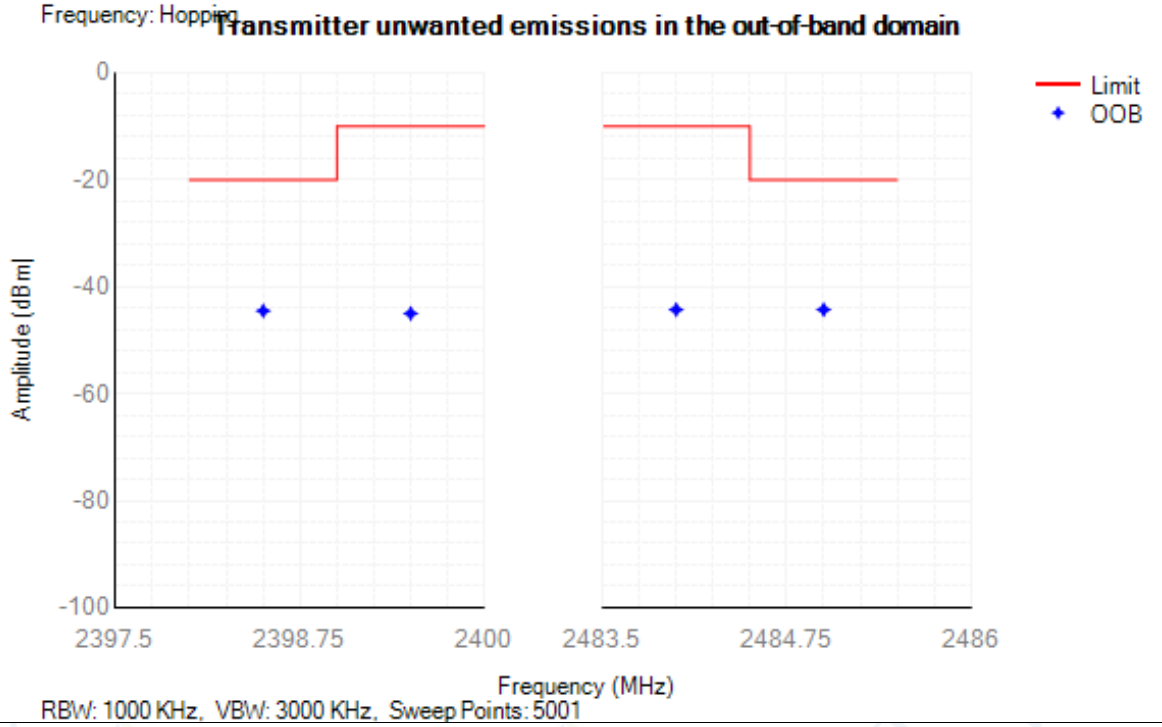


11.8 Transmitter unwanted emissions in the spurious domain

Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Spur Freq (MHz)	Peak (dBm)	RMS (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	30 -47	35.15	-81.39	NA	-36	Pass
NVNT	1-DH5	2402	Ant1	47 -74	71.30	-81.09	NA	-54	Pass
NVNT	1-DH5	2402	Ant1	74 -87.5	75.60	-80.63	NA	-36	Pass
NVNT	1-DH5	2402	Ant1	87.5 -118	113.70	-80.53	NA	-54	Pass
NVNT	1-DH5	2402	Ant1	118 -174	161.10	-80.01	NA	-36	Pass
NVNT	1-DH5	2402	Ant1	174 -230	188.90	-79.38	NA	-54	Pass
NVNT	1-DH5	2402	Ant1	230 -470	349.10	-78.81	NA	-36	Pass
NVNT	1-DH5	2402	Ant1	470 -694	552.95	-79.05	NA	-54	Pass
NVNT	1-DH5	2402	Ant1	694 -1000	980.40	-78.02	NA	-36	Pass
NVNT	1-DH5	2402	Ant1	1000 -2398	2359.00	-56.65	NA	-30	Pass
NVNT	1-DH5	2402	Ant1	2485.5 -12750	6889.00	-51.50	NA	-30	Pass
NVNT	1-DH5	2441	Ant1	30 -47	45.30	-81.16	NA	-36	Pass
NVNT	1-DH5	2441	Ant1	47 -74	67.00	-80.73	NA	-54	Pass
NVNT	1-DH5	2441	Ant1	74 -87.5	87.40	-81.58	NA	-36	Pass
NVNT	1-DH5	2441	Ant1	87.5 -118	89.45	-80.15	NA	-54	Pass
NVNT	1-DH5	2441	Ant1	118 -174	164.20	-80.13	NA	-36	Pass
NVNT	1-DH5	2441	Ant1	174 -230	221.10	-79.91	NA	-54	Pass
NVNT	1-DH5	2441	Ant1	230 -470	255.85	-78.74	NA	-36	Pass
NVNT	1-DH5	2441	Ant1	470 -694	688.90	-79.01	NA	-54	Pass
NVNT	1-DH5	2441	Ant1	694 -1000	905.70	-77.47	NA	-36	Pass
NVNT	1-DH5	2441	Ant1	1000 -2398	2115.00	-53.87	NA	-30	Pass
NVNT	1-DH5	2441	Ant1	2485.5 -12750	6989.50	-51.13	NA	-30	Pass
NVNT	1-DH5	2480	Ant1	30 -47	43.10	-81.19	NA	-36	Pass
NVNT	1-DH5	2480	Ant1	47 -74	52.05	-80.02	NA	-54	Pass
NVNT	1-DH5	2480	Ant1	74 -87.5	74.60	-82.04	NA	-36	Pass
NVNT	1-DH5	2480	Ant1	87.5 -118	114.70	-80.60	NA	-54	Pass
NVNT	1-DH5	2480	Ant1	118 -174	157.90	-79.68	NA	-36	Pass
NVNT	1-DH5	2480	Ant1	174 -230	205.80	-79.42	NA	-54	Pass
NVNT	1-DH5	2480	Ant1	230 -470	463.25	-79.15	NA	-36	Pass
NVNT	1-DH5	2480	Ant1	470 -694	671.70	-79.02	NA	-54	Pass
NVNT	1-DH5	2480	Ant1	694 -1000	997.90	-78.36	NA	-36	Pass
NVNT	1-DH5	2480	Ant1	1000 -2398	2161.50	-57.60	NA	-30	Pass
NVNT	1-DH5	2480	Ant1	2485.5 -12750	6829.50	-51.05	NA	-30	Pass
NVNT	2-DH5	2402	Ant1	30 -47	31.45	-81.90	NA	-36	Pass
NVNT	2-DH5	2402	Ant1	47 -74	66.80	-80.28	NA	-54	Pass
NVNT	2-DH5	2402	Ant1	74 -87.5	79.55	-81.48	NA	-36	Pass
NVNT	2-DH5	2402	Ant1	87.5 -118	102.40	-80.60	NA	-54	Pass
NVNT	2-DH5	2402	Ant1	118 -174	173.80	-80.68	NA	-36	Pass
NVNT	2-DH5	2402	Ant1	174 -230	206.35	-79.66	NA	-54	Pass
NVNT	2-DH5	2402	Ant1	230 -470	325.70	-78.79	NA	-36	Pass
NVNT	2-DH5	2402	Ant1	470 -694	684.05	-78.46	NA	-54	Pass
NVNT	2-DH5	2402	Ant1	694 -1000	981.00	-78.00	NA	-36	Pass
NVNT	2-DH5	2402	Ant1	1000 -2398	2111.50	-57.28	NA	-30	Pass
NVNT	2-DH5	2402	Ant1	2485.5 -12750	6836.00	-50.60	NA	-30	Pass
NVNT	2-DH5	2441	Ant1	30 -47	46.20	-81.19	NA	-36	Pass
NVNT	2-DH5	2441	Ant1	47 -74	65.45	-81.13	NA	-54	Pass
NVNT	2-DH5	2441	Ant1	74 -87.5	81.65	-81.02	NA	-36	Pass
NVNT	2-DH5	2441	Ant1	87.5 -118	102.30	-80.83	NA	-54	Pass
NVNT	2-DH5	2441	Ant1	118 -174	141.55	-80.38	NA	-36	Pass
NVNT	2-DH5	2441	Ant1	174 -230	210.10	-79.94	NA	-54	Pass
NVNT	2-DH5	2441	Ant1	230 -470	428.20	-78.11	NA	-36	Pass
NVNT	2-DH5	2441	Ant1	470 -694	610.25	-79.32	NA	-54	Pass
NVNT	2-DH5	2441	Ant1	694 -1000	958.10	-76.77	NA	-36	Pass
NVNT	2-DH5	2441	Ant1	1000 -2398	2223.00	-57.48	NA	-30	Pass
NVNT	2-DH5	2441	Ant1	2485.5 -12750	5174.00	-40.35	NA	-30	Pass
NVNT	2-DH5	2480	Ant1	30 -47	38.05	-79.98	NA	-36	Pass
NVNT	2-DH5	2480	Ant1	47 -74	63.65	-81.18	NA	-54	Pass
NVNT	2-DH5	2480	Ant1	74 -87.5	77.05	-81.10	NA	-36	Pass
NVNT	2-DH5	2480	Ant1	87.5 -118	89.20	-80.67	NA	-54	Pass
NVNT	2-DH5	2480	Ant1	118 -174	166.20	-80.26	NA	-36	Pass
NVNT	2-DH5	2480	Ant1	174 -230	216.35	-79.19	NA	-54	Pass
NVNT	2-DH5	2480	Ant1	230 -470	331.15	-79.25	NA	-36	Pass
NVNT	2-DH5	2480	Ant1	470 -694	681.05	-79.10	NA	-54	Pass
NVNT	2-DH5	2480	Ant1	694 -1000	894.45	-78.10	NA	-36	Pass
NVNT	2-DH5	2480	Ant1	1000 -2398	2171.50	-57.71	NA	-30	Pass
NVNT	2-DH5	2480	Ant1	2485.5 -12750	2487.00	-47.64	NA	-30	Pass
NVNT	3-DH5	2402	Ant1	30 -47	38.50	-81.32	NA	-36	Pass
NVNT	3-DH5	2402	Ant1	47 -74	59.55	-81.47	NA	-54	Pass
NVNT	3-DH5	2402	Ant1	74 -87.5	83.25	-81.33	NA	-36	Pass
NVNT	3-DH5	2402	Ant1	87.5 -118	108.10	-80.66	NA	-54	Pass
NVNT	3-DH5	2402	Ant1	118 -174	168.35	-79.38	NA	-36	Pass
NVNT	3-DH5	2402	Ant1	174 -230	213.55	-79.84	NA	-54	Pass


NVNT	3-DH5	2402	Ant1	230 -470	423.05	-79.23	NA	-36	Pass
NVNT	3-DH5	2402	Ant1	470 -694	504.35	-78.41	NA	-54	Pass
NVNT	3-DH5	2402	Ant1	694 -1000	936.15	-78.16	NA	-36	Pass
NVNT	3-DH5	2402	Ant1	1000 -2398	2397.50	-56.09	NA	-30	Pass
NVNT	3-DH5	2402	Ant1	2485.5 -12750	6986.50	-51.39	NA	-30	Pass
NVNT	3-DH5	2441	Ant1	30 -47	34.85	-80.77	NA	-36	Pass
NVNT	3-DH5	2441	Ant1	47 -74	66.90	-80.18	NA	-54	Pass
NVNT	3-DH5	2441	Ant1	74 -87.5	80.00	-81.38	NA	-36	Pass
NVNT	3-DH5	2441	Ant1	87.5 -118	110.70	-80.37	NA	-54	Pass
NVNT	3-DH5	2441	Ant1	118 -174	167.65	-79.21	NA	-36	Pass
NVNT	3-DH5	2441	Ant1	174 -230	210.70	-80.23	NA	-54	Pass
NVNT	3-DH5	2441	Ant1	230 -470	449.60	-79.01	NA	-36	Pass
NVNT	3-DH5	2441	Ant1	470 -694	601.05	-78.61	NA	-54	Pass
NVNT	3-DH5	2441	Ant1	694 -1000	946.65	-77.57	NA	-36	Pass
NVNT	3-DH5	2441	Ant1	1000 -2398	2118.00	-55.52	NA	-30	Pass
NVNT	3-DH5	2441	Ant1	2485.5 -12750	6826.50	-51.12	NA	-30	Pass
NVNT	3-DH5	2480	Ant1	30 -47	44.20	-81.22	NA	-36	Pass
NVNT	3-DH5	2480	Ant1	47 -74	62.35	-80.93	NA	-54	Pass
NVNT	3-DH5	2480	Ant1	74 -87.5	82.55	-81.01	NA	-36	Pass
NVNT	3-DH5	2480	Ant1	87.5 -118	117.05	-81.51	NA	-54	Pass
NVNT	3-DH5	2480	Ant1	118 -174	169.60	-79.99	NA	-36	Pass
NVNT	3-DH5	2480	Ant1	174 -230	213.45	-79.01	NA	-54	Pass
NVNT	3-DH5	2480	Ant1	230 -470	252.75	-78.39	NA	-36	Pass
NVNT	3-DH5	2480	Ant1	470 -694	499.05	-79.34	NA	-54	Pass
NVNT	3-DH5	2480	Ant1	694 -1000	952.80	-77.67	NA	-36	Pass
NVNT	3-DH5	2480	Ant1	1000 -2398	2126.00	-57.02	NA	-30	Pass
NVNT	3-DH5	2480	Ant1	2485.5 -12750	6979.50	-51.09	NA	-30	Pass

Test Graphs


Tx. Spurious NVNT 1-DH5 2402MHz Ant1

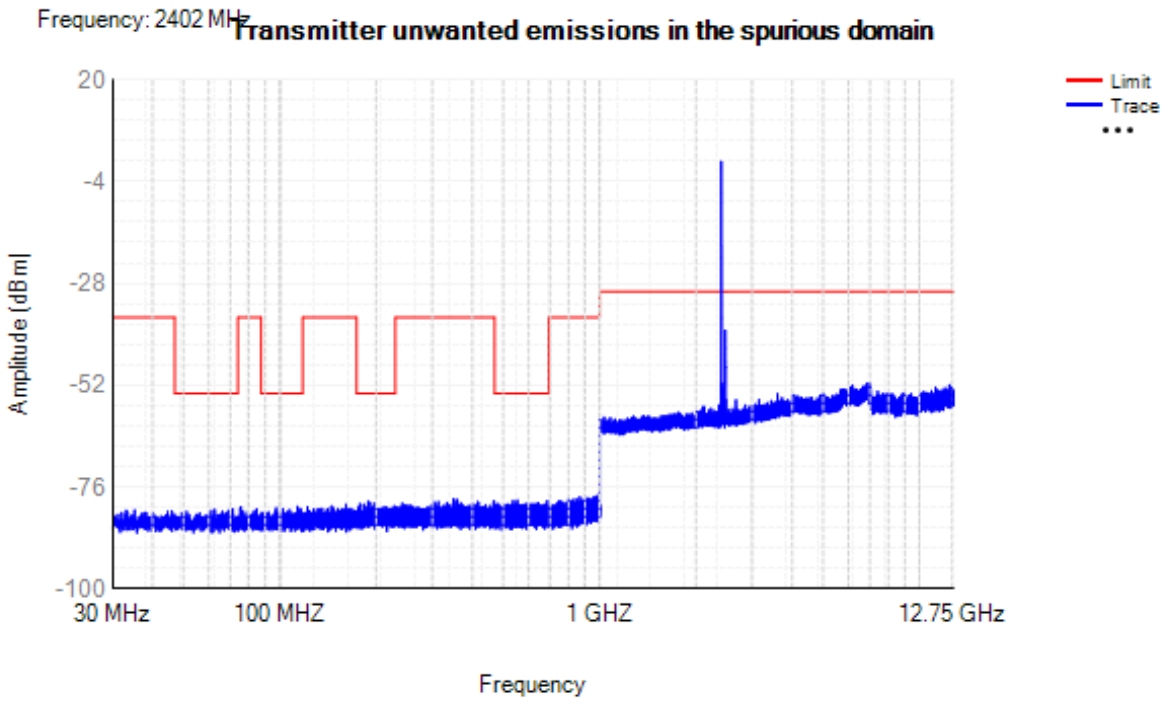


Tx. Spurious NVNT 1-DH5 2441MHz Ant1

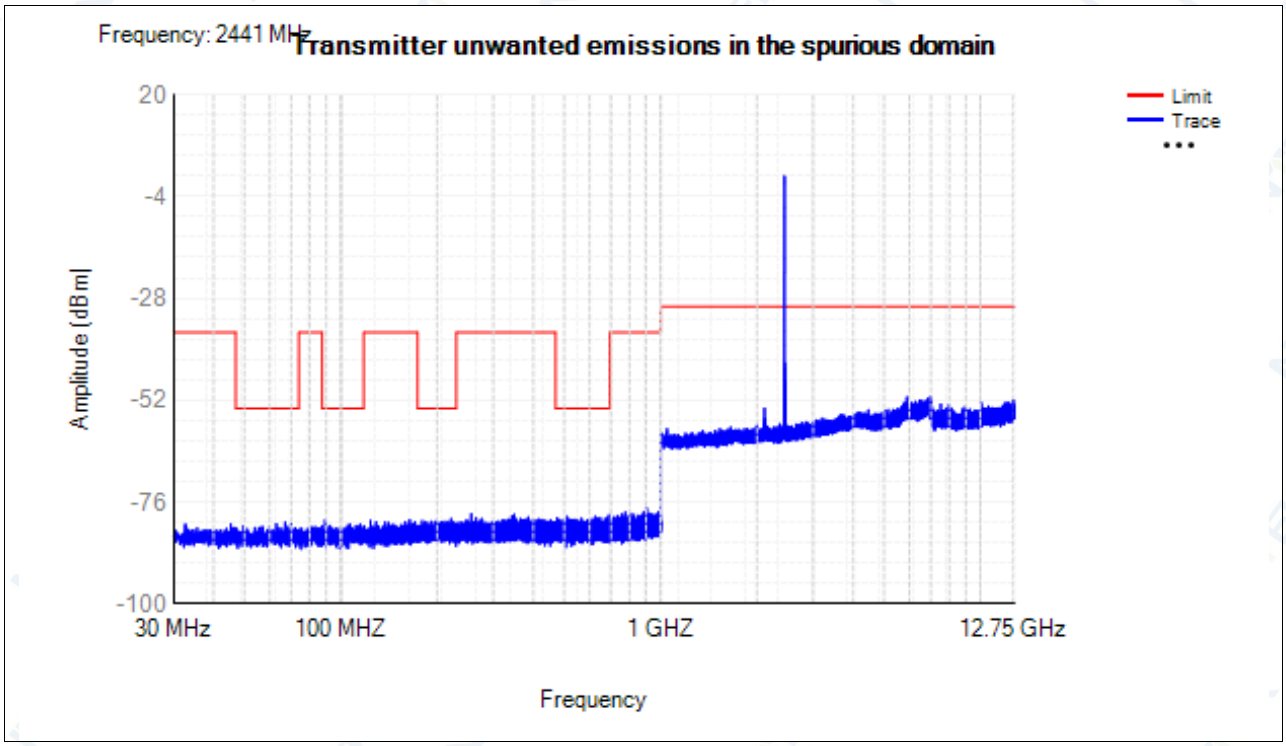
Frequency: 2441 MHz
Transmitter unwanted emissions in the spurious domain
Limit
Trace
20
-4
-28
-52
-76
-100
Amplitude [dBm]
30 MHz
100 MHZ
1 GHZ
12.75 GHz
Frequency


Tx. Spurious NVNT 1-DH5 2480MHz Ant1

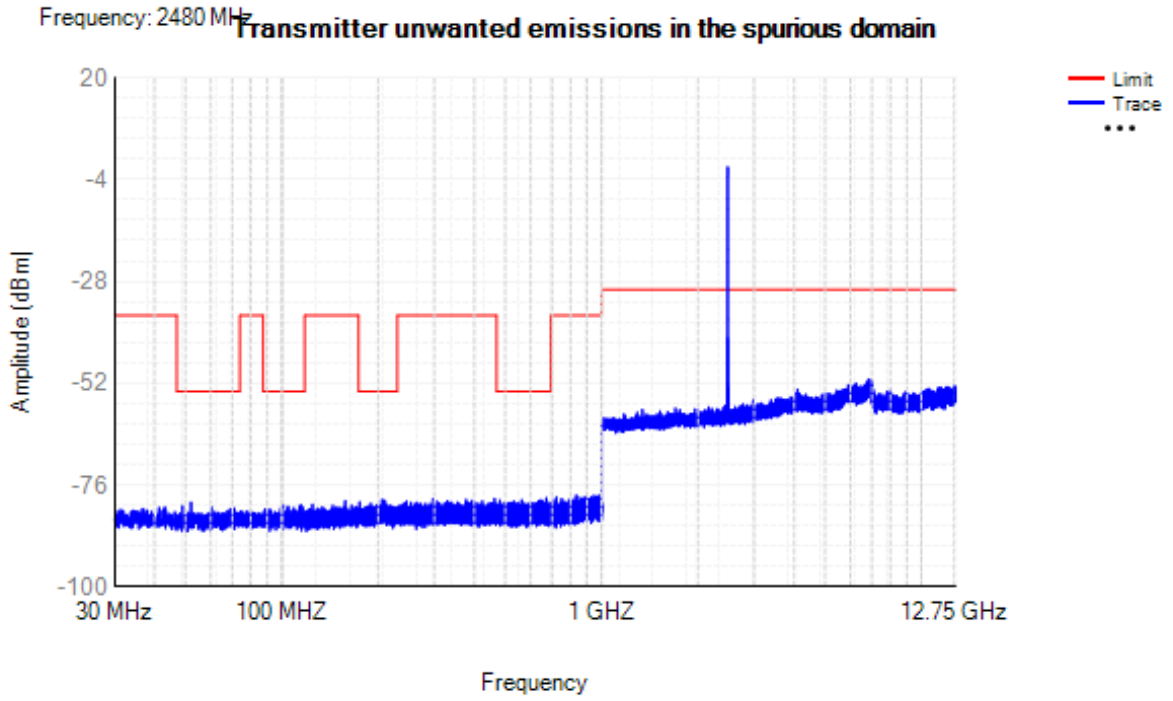


Tx. Spurious NVNT 2-DH5 2402MHz Ant1

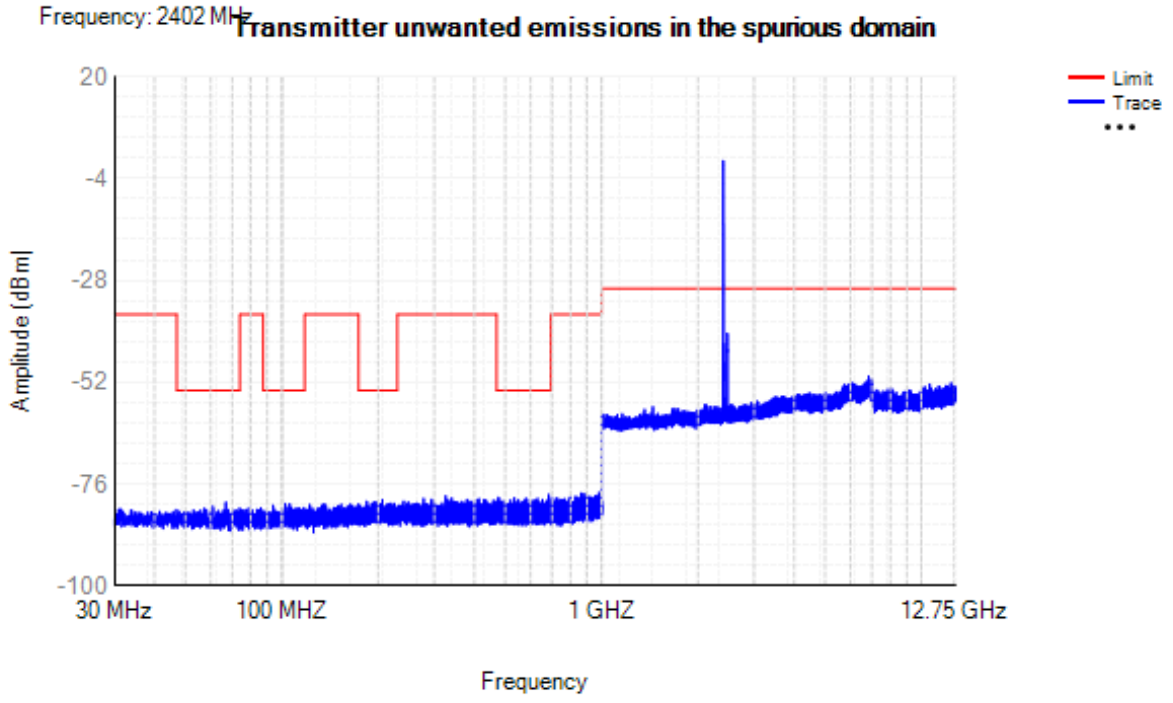


Tx. Spurious NVNT 2-DH5 2441MHz Ant1

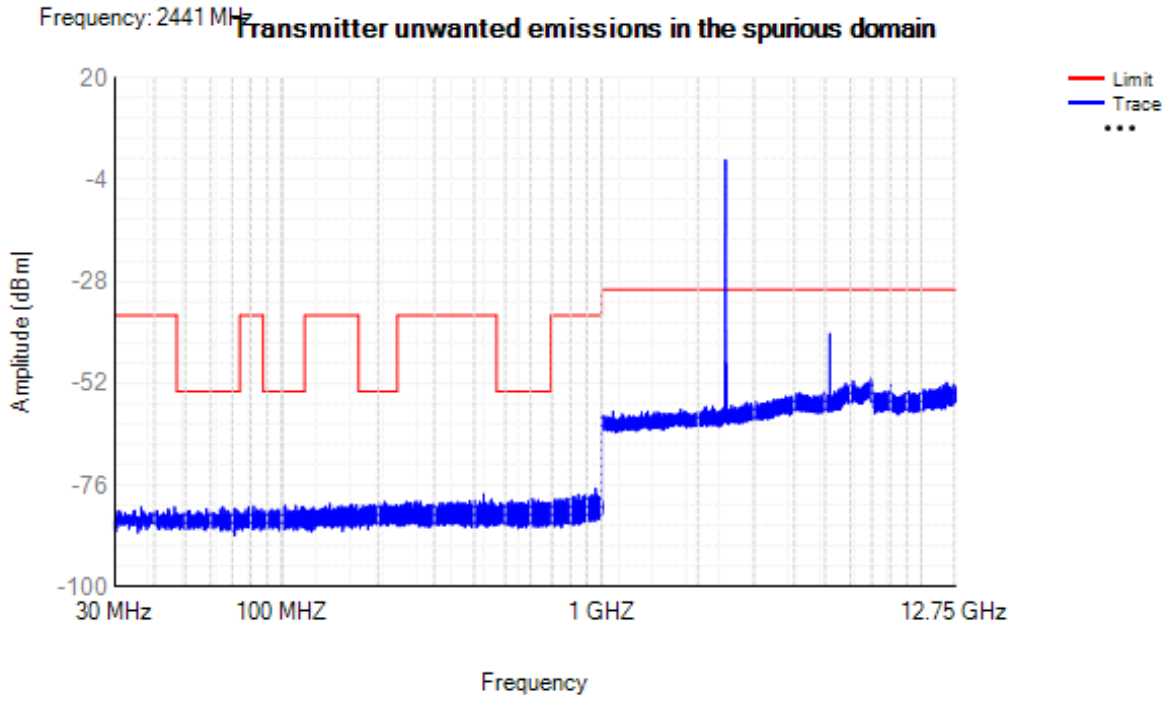


Tx. Spurious NVNT 2-DH5 2480MHz Ant1

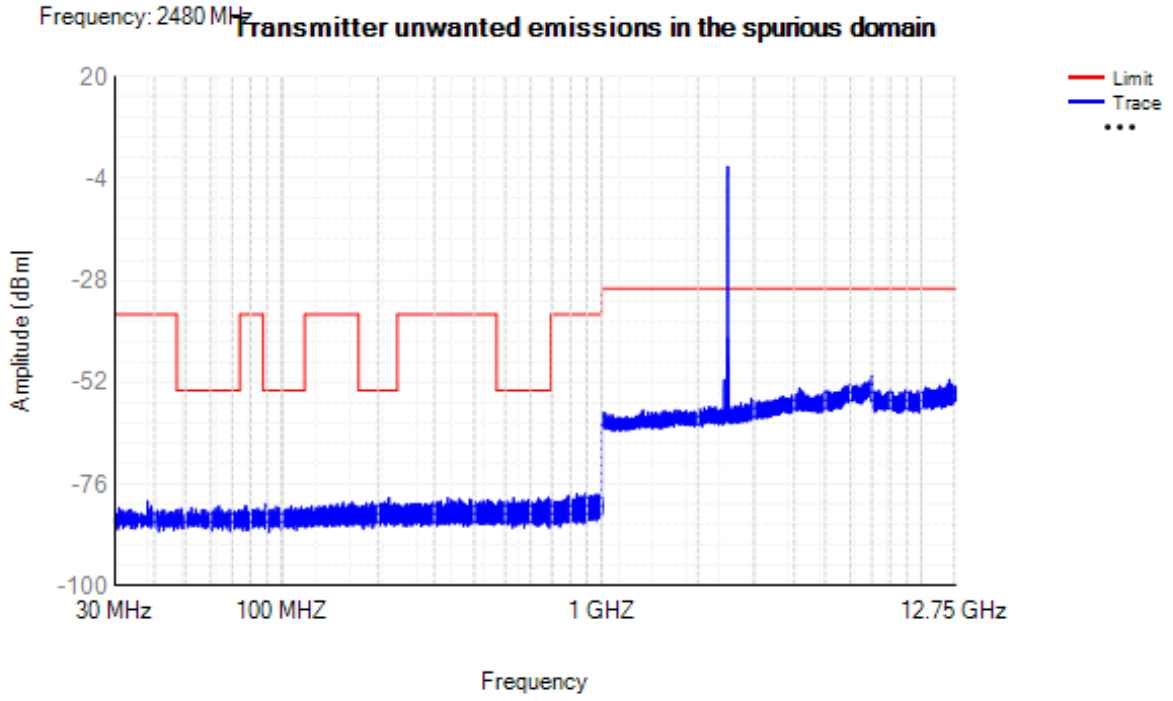


Tx. Spurious NVNT 3-DH5 2402MHz Ant1

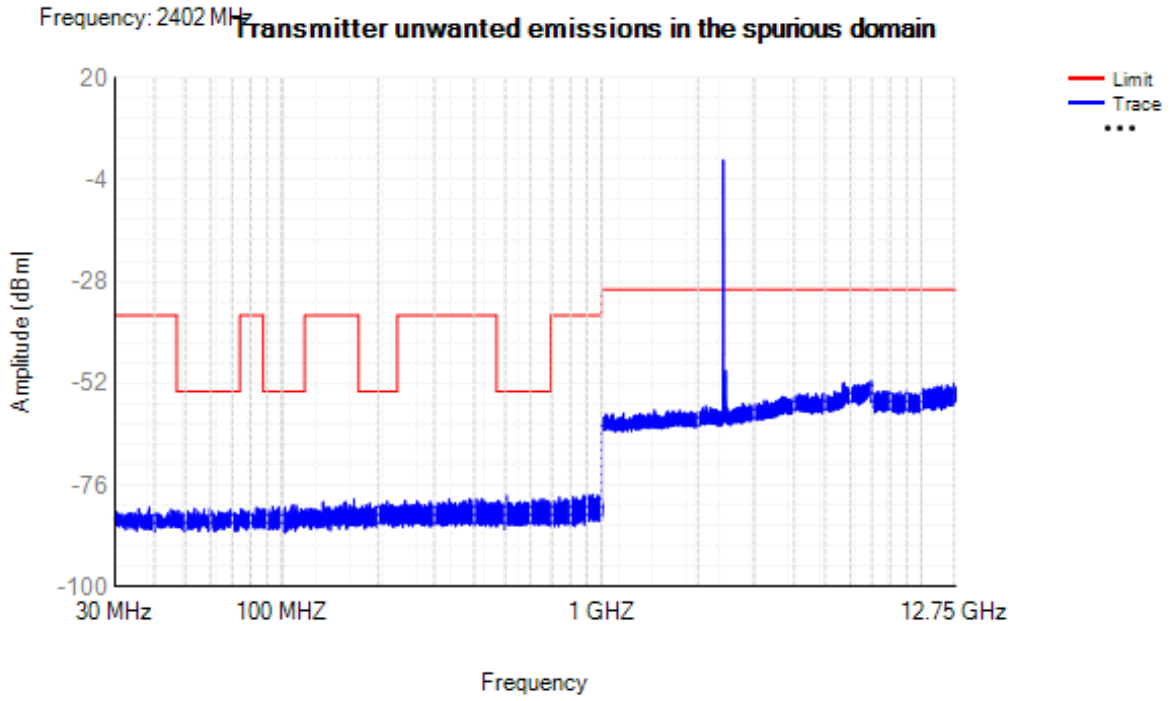

Tx. Spurious NVNT 3-DH5 2441MHz Ant1

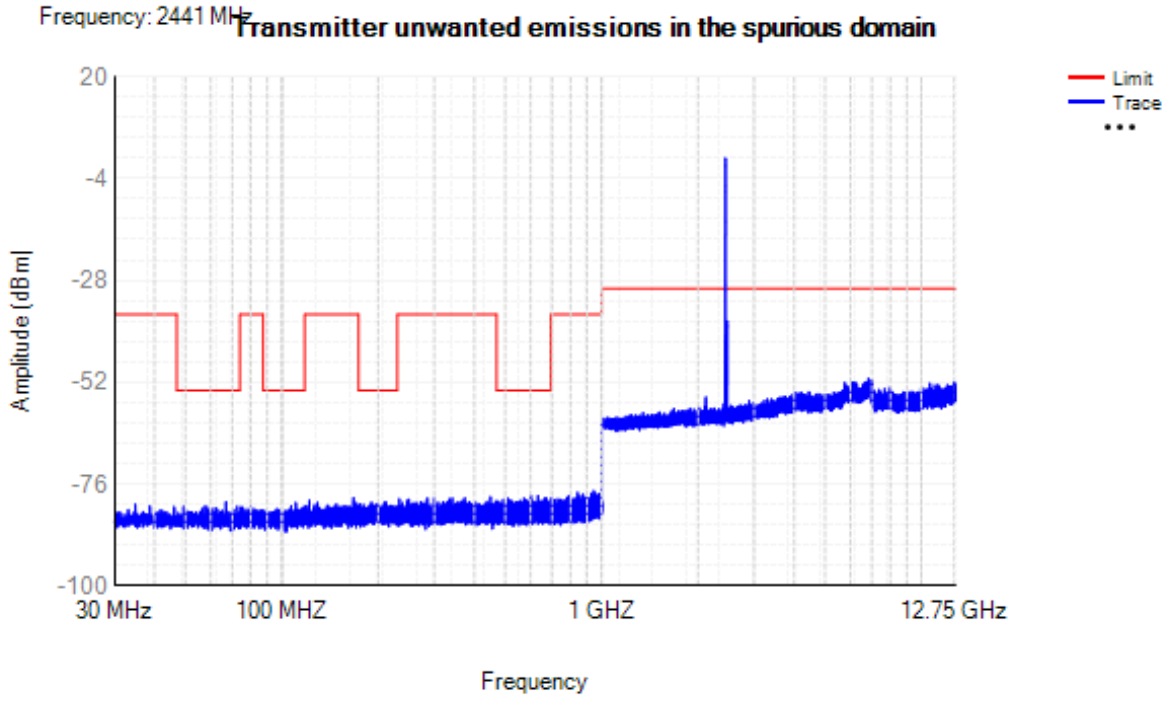


Tx. Spurious NVNT 3-DH5 2480MHz Ant1

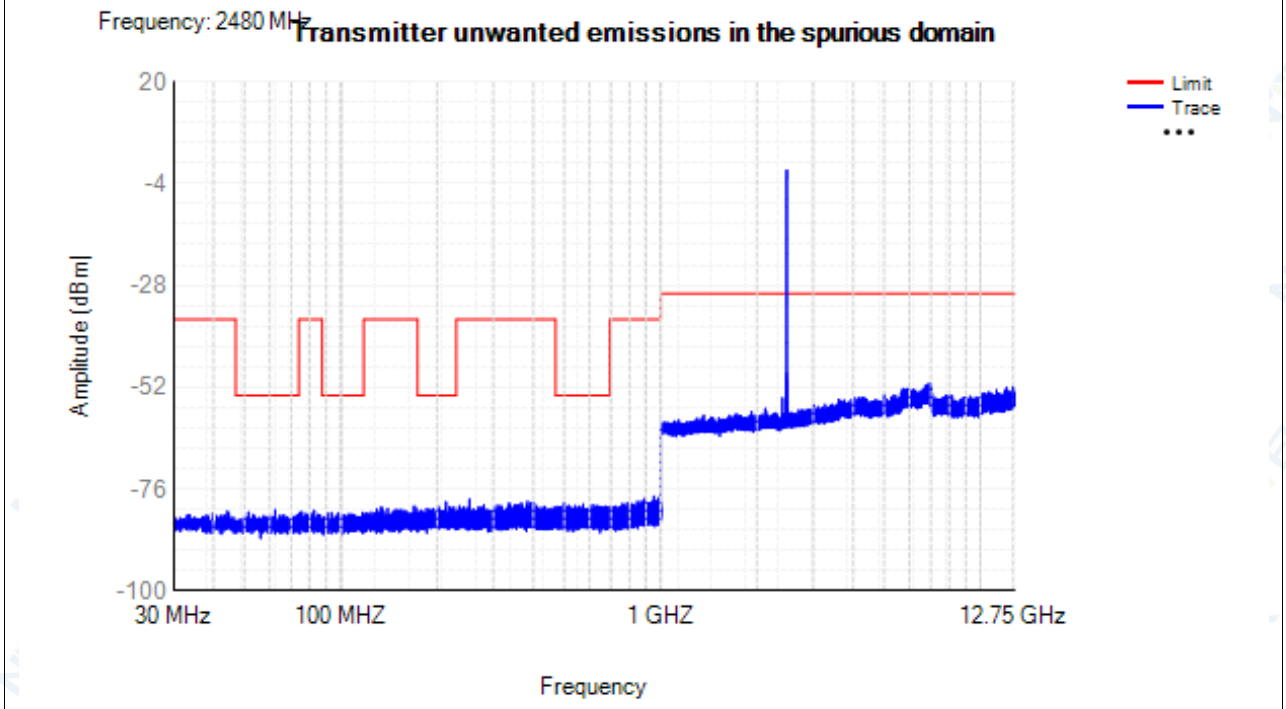


11.9 Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Spur Freq (MHz)	Peak (dBm)	RMS (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	30 -1000	919.45	-78.46	NA	-57	Pass
NVNT	1-DH5	2402	Ant1	1000 -12750	5909	-62.17	NA	-47	Pass
NVNT	1-DH5	2441	Ant1	30 -1000	938.1	-78.38	NA	-57	Pass
NVNT	1-DH5	2441	Ant1	1000 -12750	6974.5	-61.81	NA	-47	Pass
NVNT	1-DH5	2480	Ant1	30 -1000	974.55	-78.75	NA	-57	Pass
NVNT	1-DH5	2480	Ant1	1000 -12750	6792.5	-61.87	NA	-47	Pass
NVNT	2-DH5	2402	Ant1	30 -1000	989.2	-78.60	NA	-57	Pass
NVNT	2-DH5	2402	Ant1	1000 -12750	6856	-60.88	NA	-47	Pass
NVNT	2-DH5	2441	Ant1	30 -1000	963.35	-77.77	NA	-57	Pass
NVNT	2-DH5	2441	Ant1	1000 -12750	6892.5	-61.69	NA	-47	Pass
NVNT	2-DH5	2480	Ant1	30 -1000	981.95	-78.98	NA	-57	Pass
NVNT	2-DH5	2480	Ant1	1000 -12750	6894.5	-61.58	NA	-47	Pass
NVNT	3-DH5	2402	Ant1	30 -1000	871.5	-78.98	NA	-57	Pass
NVNT	3-DH5	2402	Ant1	1000 -12750	6796.5	-61.63	NA	-47	Pass
NVNT	3-DH5	2441	Ant1	30 -1000	836.85	-78.99	NA	-57	Pass
NVNT	3-DH5	2441	Ant1	1000 -12750	6910.5	-61.50	NA	-47	Pass
NVNT	3-DH5	2480	Ant1	30 -1000	953.9	-77.92	NA	-57	Pass
NVNT	3-DH5	2480	Ant1	1000 -12750	6840.5	-62.02	NA	-47	Pass


Test Graphs
Rx. Spurious NVNT 1-DH5 2402MHz Ant1

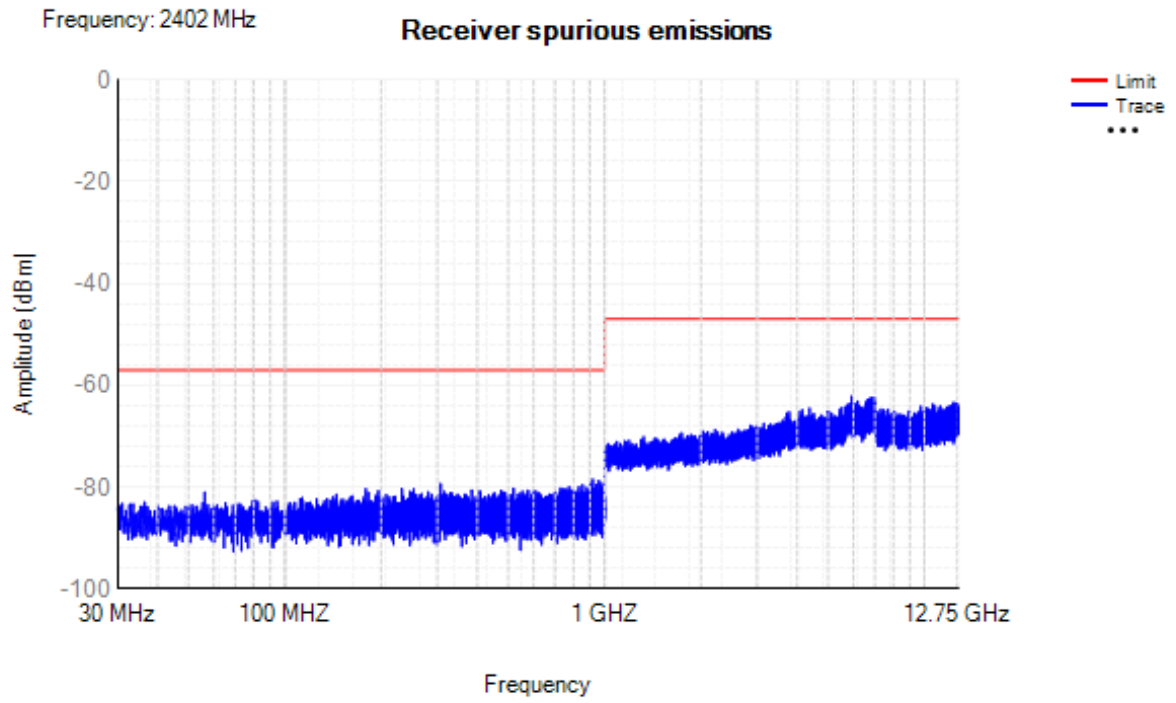


Rx. Spurious NVNT 1-DH5 2441MHz Ant1

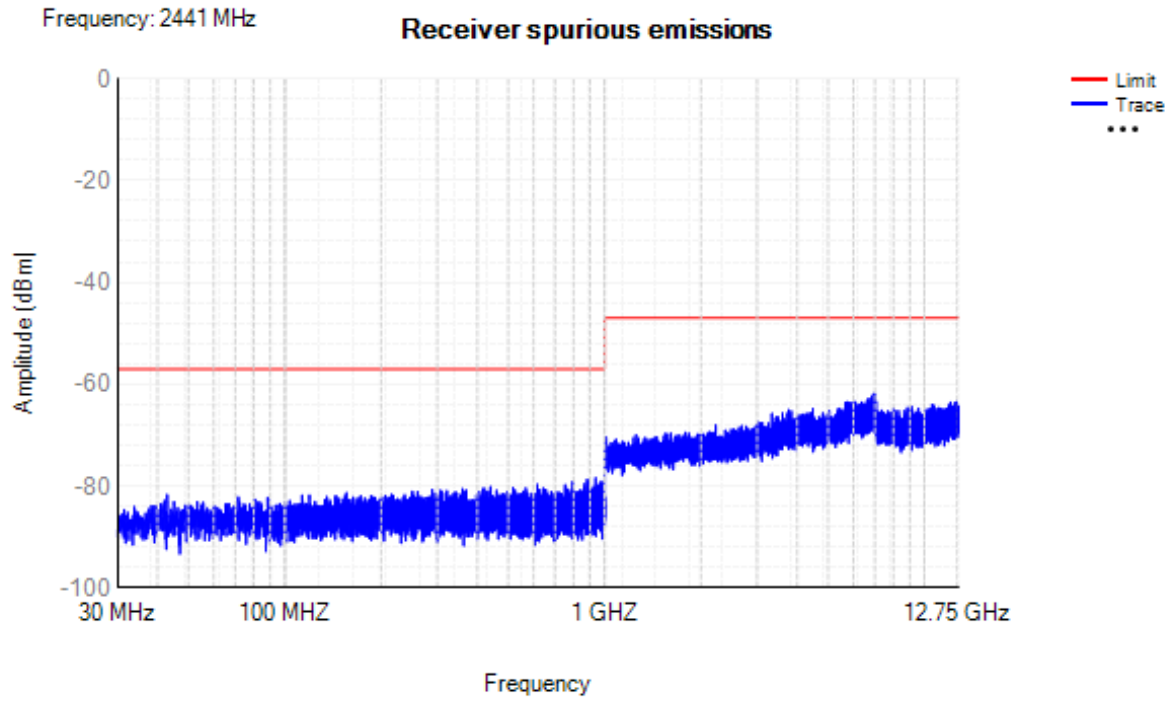


Rx. Spurious NVNT 1-DH5 2480MHz Ant1

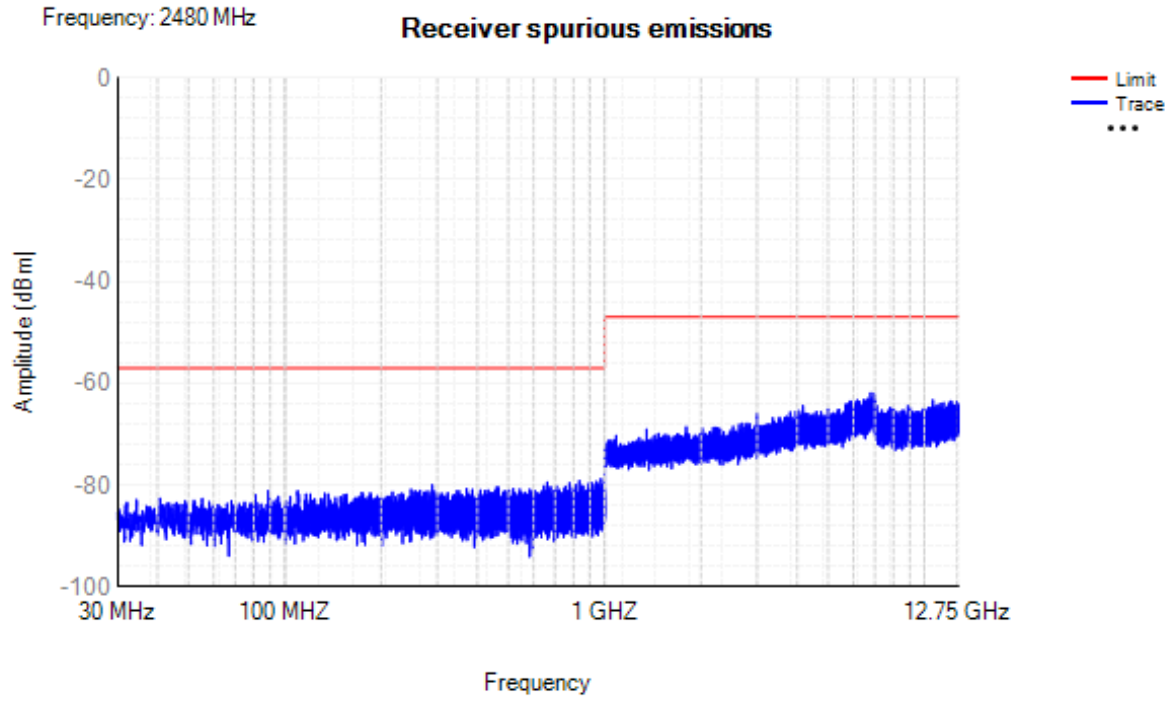


Rx. Spurious NVNT 2-DH5 2402MHz Ant1

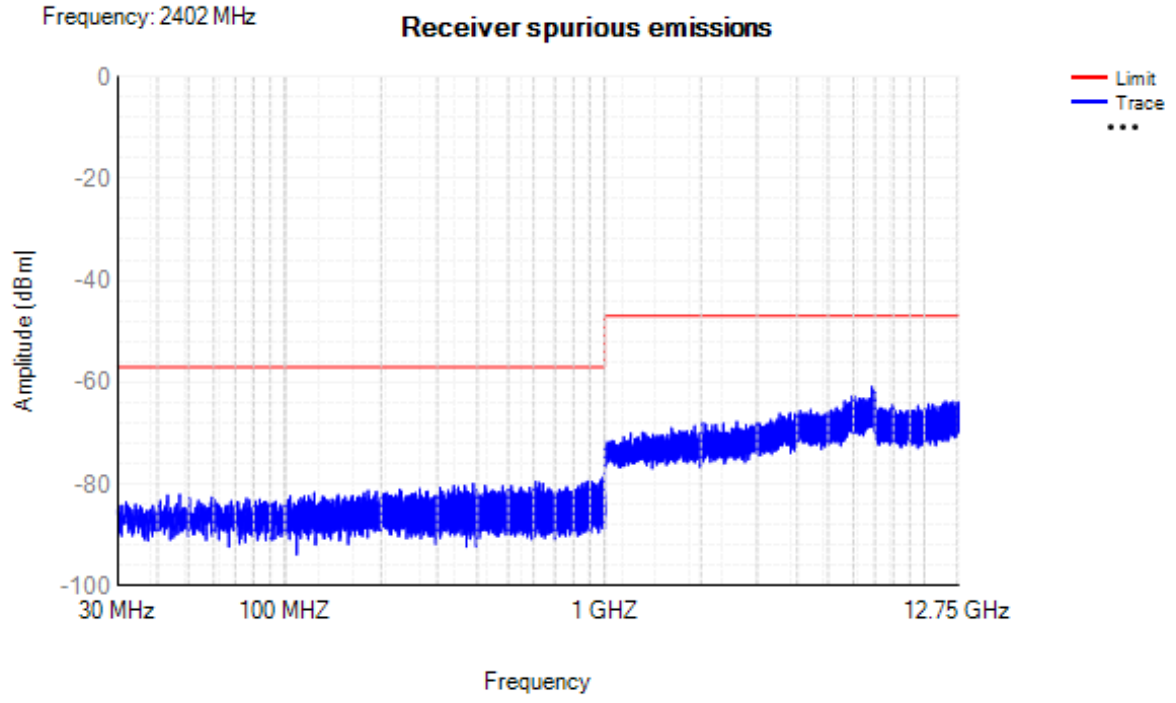


Rx. Spurious NVNT 2-DH5 2441MHz Ant1

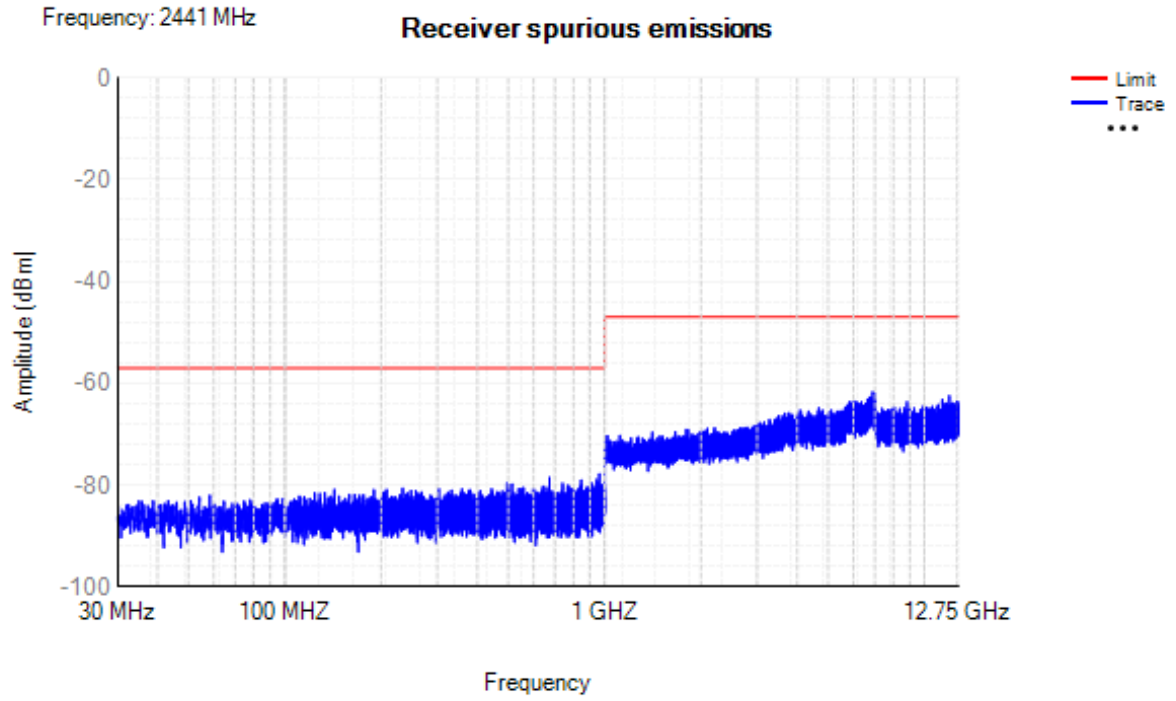


Rx. Spurious NVNT 2-DH5 2480MHz Ant1

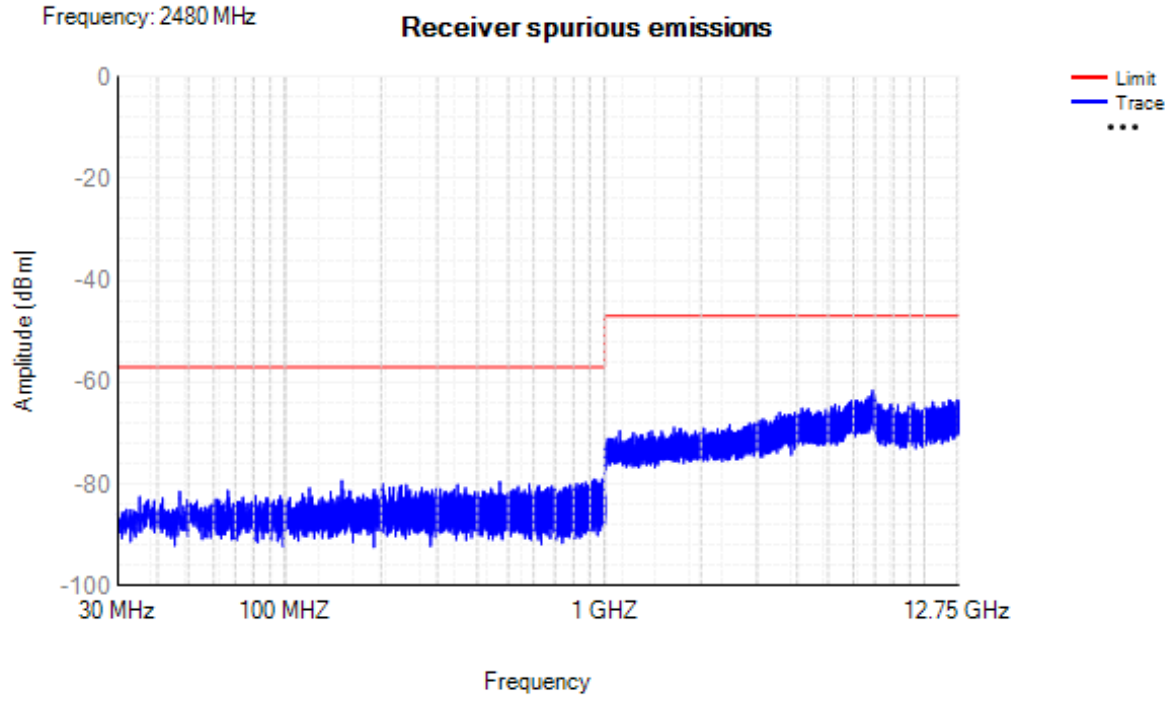


Rx. Spurious NVNT 3-DH5 2402MHz Ant1

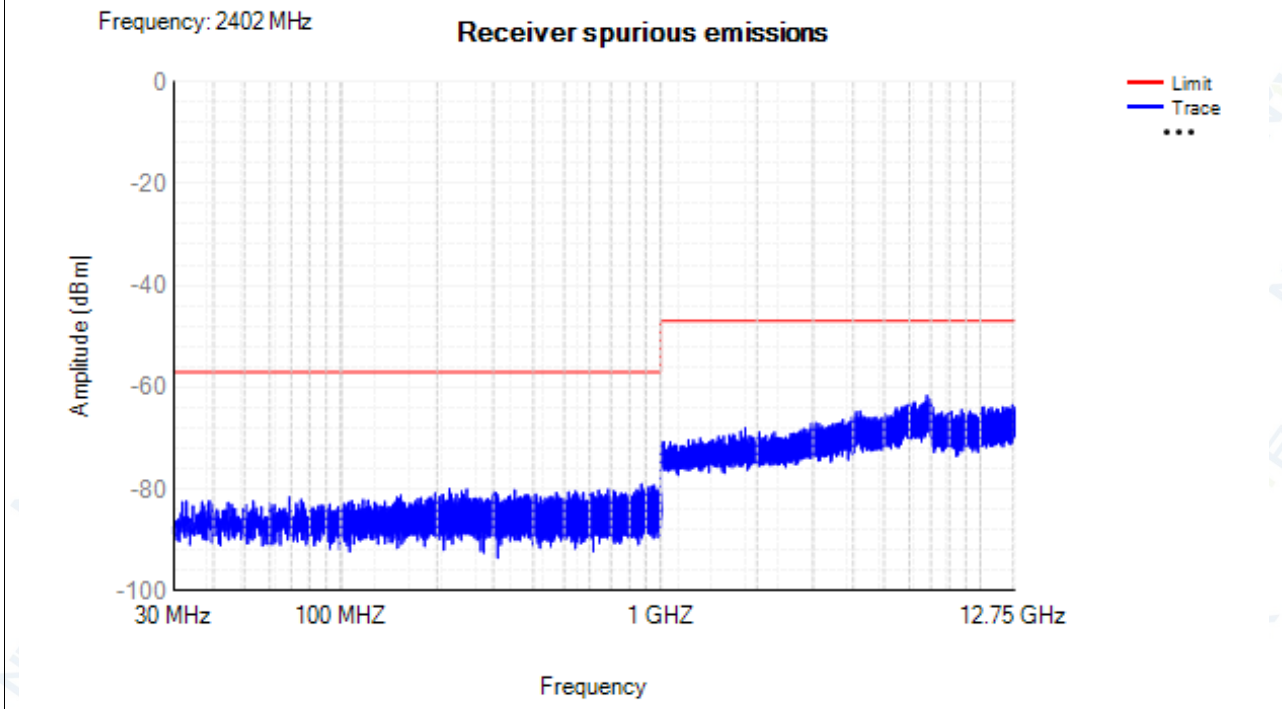

Rx. Spurious NVNT 3-DH5 2441MHz Ant1

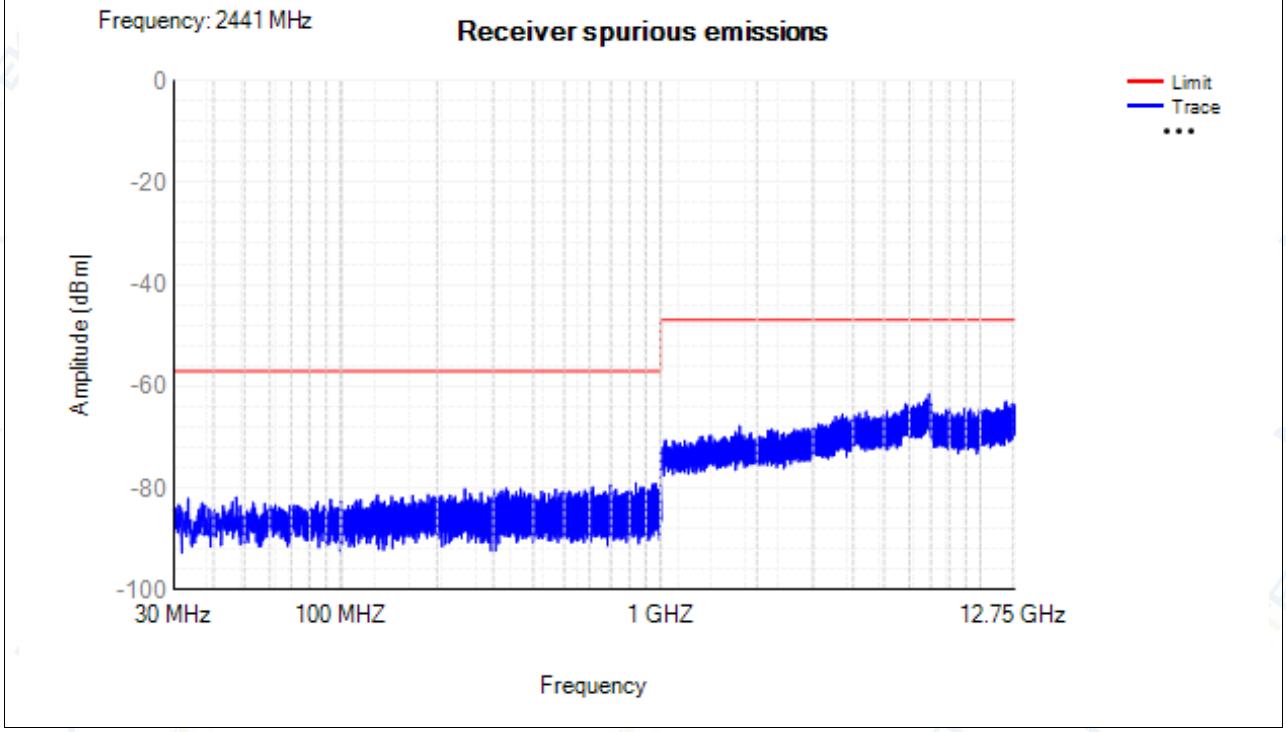

Rx. Spurious NVNT 3-DH5 2480MHz Ant1

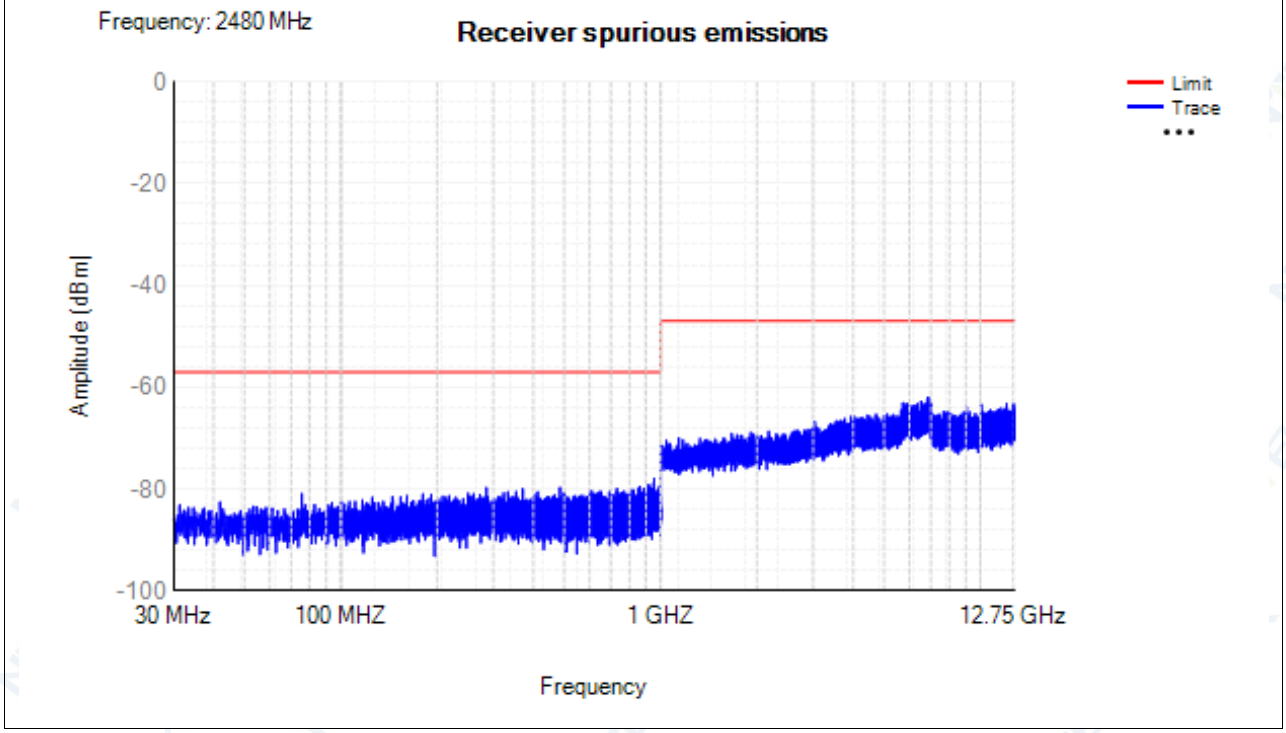


11.10 Hopping Sequence


Condition	Mode	Antenna	Hopping Number	Limit	Band Allocation (%)	Limit Band Allocation (%)	Verdict
NVNT	1-DH5	Ant1	79	15	95.4	70	Pass
NVNT	2-DH5	Ant1	79	15	96.2	70	Pass
NVNT	3-DH5	Ant1	79	15	96.2	70	Pass

Test Graphs


Hopping Seq. NVNT 1-DH5 2441MHz Ant1

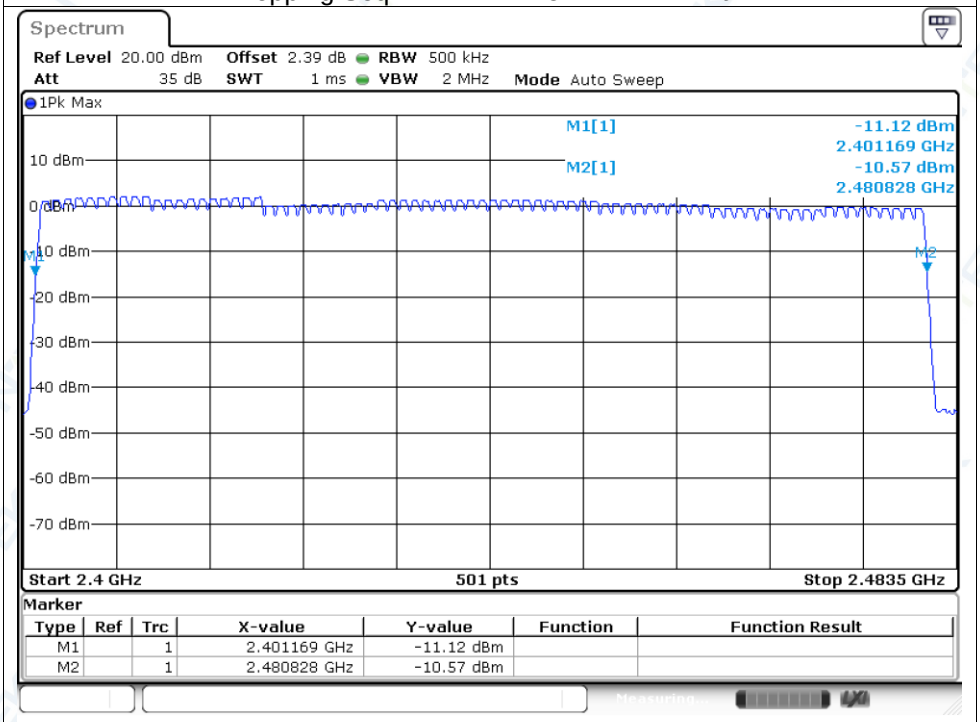

Hopping Seq. NVNT 2-DH5 2441MHz Ant1

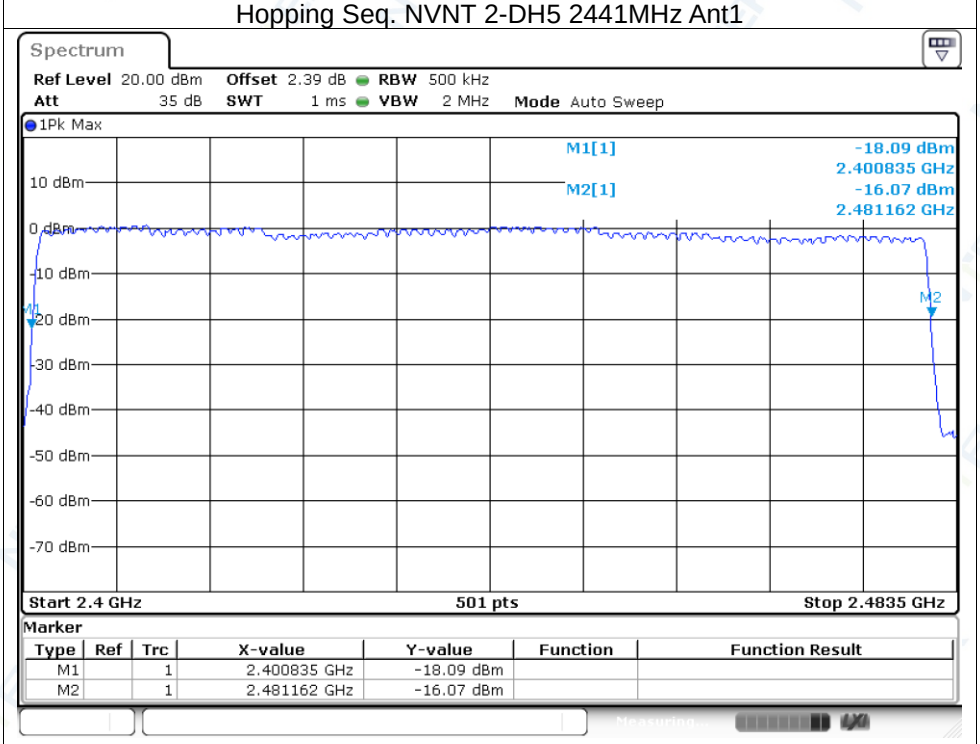



Hopping Seq. NVNT 3-DH5 2441MHz Ant1

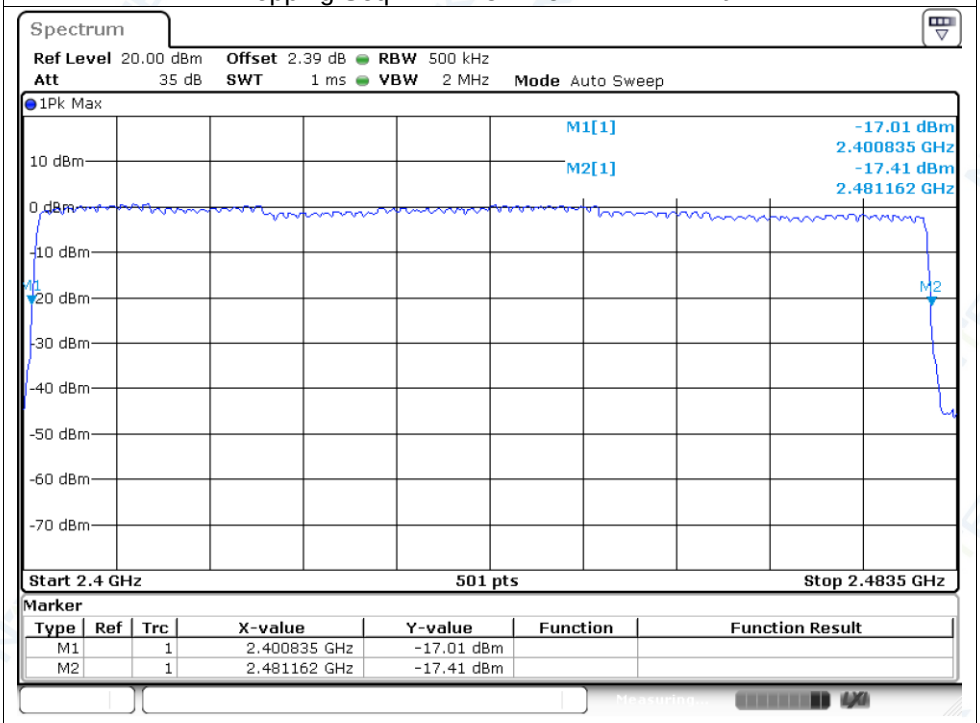

12. EUT TEST PHOTO

SPURIOUS EMISSIONS MEASUREMENT PHOTOS

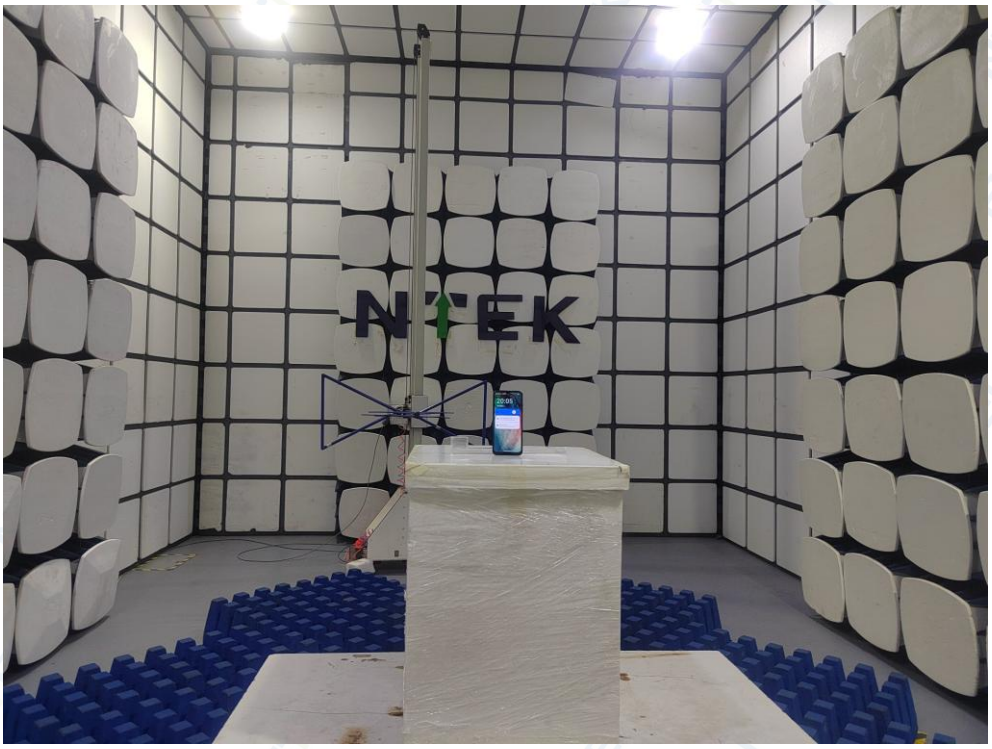

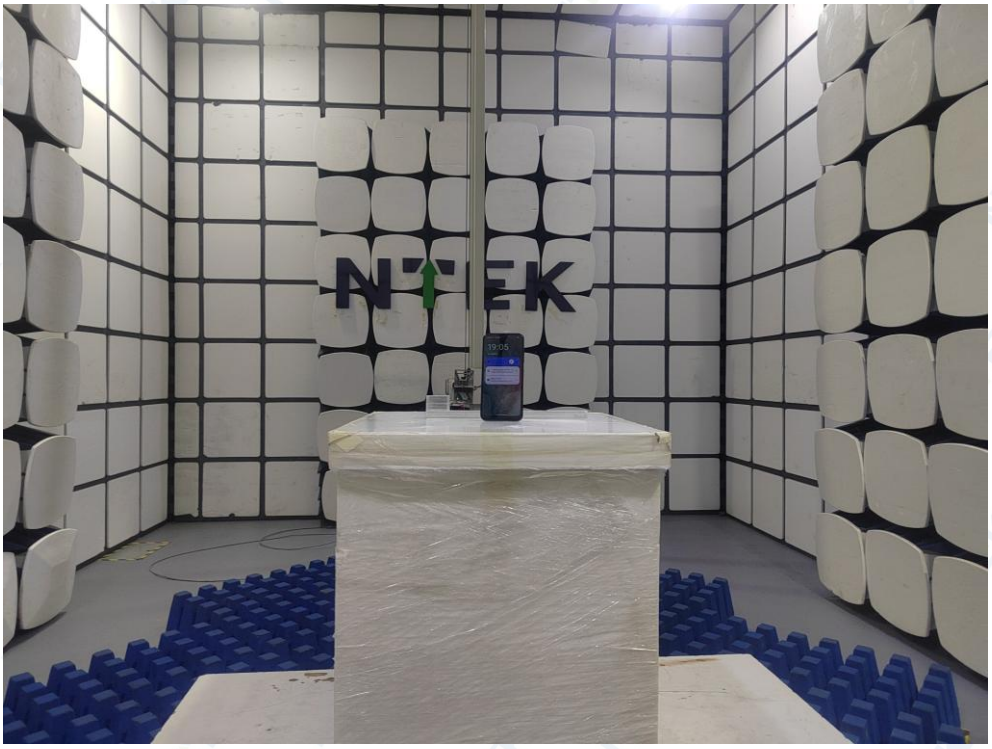

END OF REPORT