



TEST REPORT

Reference No...... : WTX26X05150601W002
Applicant : Shenzhen Youge Intelligent Co., Ltd
Address..... : Unit 702, unit 6, Taoyuanju 14 District, Taoyuan community, Xixiang street,
Bao'an District, Shenzhen
Manufacturer : The same as Applicant
Address..... : The same as Applicant
Product Name : Smart Watch Sleep TWS headset
Model No...... : X10PRO
Standards : **47 CFR FCC Part 15, Subpart B**
Date of Receipt sample : 2026-06-01
Date of Test..... : 2026-06-01 to 2026-06-25
Date of Issue : 2026-06-30
Test Report Form No. : WTX_FCC PART15B_001
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F, Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Mike Shi/Project Engineer

Approved by:

Jason Su/Manager



TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND OPERATION MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	11
3. CONDUCTED EMISSIONS	12
3.1 TEST PROCEDURE.....	12
3.2 BASIC TEST SETUP BLOCK DIAGRAM.....	12
3.3 ENVIRONMENTAL CONDITIONS	12
3.4 SUMMARY OF TEST RESULTS	12
4. RADIATED EMISSION	15
4.1 TEST PROCEDURE.....	15
4.2 BLOCK DIAGRAM OF TEST SETUP	15
4.3 TEST RECEIVER SETUP	16
4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	16
4.5 ENVIRONMENTAL CONDITIONS	16
4.6 SUMMARY OF TEST RESULTS	16
EXHIBIT 1 - EUT PHOTOGRAPHS.....	23
EXHIBIT 2 - EUT INTERNAL PHOTOGRAPHS.....	30
EXHIBIT 3 - TEST SETUP PHOTOGRAPHS.....	34
EXHIBIT 4 - USERS MANUAL	36



Report version

Version No.	Date of issue	Description
Rev.00	2026-06-30	Original
/	/	/

WALTEK



1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Smart Watch Sleep TWS headset
Trade Name:	callmusic
Model No.:	X10PRO
Adding Model(s):	/
<i>Note: The sample information is provided by the customer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	Charging port:DC5V Battery:DC3.8V
Battery Capacity:	240mAh
Rated Power:	/
Power Adapter Model:	/
Lowest Internal Frequency:	/
Highest Internal Frequency:	2480MHz
Classification of ITE:	Class B



1.2 Test Standards

The tests were performed according to following standards:

47 CFR FCC Part 15, Subpart B: Unintentional Radiators.

ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

ANSI C63.4a-2017: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Amendment 1: Test Site Validation

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.



1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	Power Supply Mode
TM1	Charging	Connect to the Adapter; AC120V 60Hz for adapter; and charging	AC120V
TM2	Normal working	Power by battery	Battery

EUT Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	With / Without Chip
DC Cable	0.6	Unshielded	Without Ferrite	/

Special Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	With / Without Chip
/	/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	/	MDY-08-EH	/



1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emission 1#	Conducted	@9kHz to 150kHz: $\pm 3.74\text{dB}$
		@150kHz to 30MHz: $\pm 3.34\text{dB}$
Conducted Emission 2#	Conducted	@9kHz to 150kHz: $\pm 3.74\text{dB}$
		@150kHz to 30MHz: $\pm 3.34\text{dB}$
Radiated Emissions chamber A	Radiated	@9kHz to 30MHz: $\pm 3.0\text{dB}$
		@30MHz to 1GHz: $\pm 5.70\text{dB}$
		@1GHz to 6GHz: $\pm 5.88\text{dB}$
		@6GHz to 18GHz: $\pm 5.96\text{dB}$
		@18GHz to 40GHz: $\pm 6.12\text{dB}$
Radiated Emissions chamber B	Radiated	@30MHz to 1GHz: $\pm 5.36\text{dB}$
Radiated Emissions chamber C	Radiated	@9kHz to 30MHz: $\pm 3.0\text{dB}$
		@30MHz to 1GHz: $\pm 5.28\text{dB}$
		@1GHz to 6GHz: $\pm 5.56\text{dB}$
		@6GHz to 18GHz: $\pm 5.72\text{dB}$
		@18GHz to 40GHz: $\pm 6.12\text{dB}$

WALTEK



1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
☐ Chamber A: Below 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2026-02-05	2027-02-04
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2026-02-05	2027-02-04
Amplifier	HP	8447F	2805A03475	2026-02-05	2027-02-04
Loop Antenna	Schwarz beck	FMZB 1516	9773	2026-02-05	2027-02-04
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2026-03-11	2029-03-10
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
☐ Chamber A: Above 1GHz					
Amplifier	C&D	PAP-1.0G18	14918	2026-02-05	2027-02-04
Horn Antenna	ETS	3117	00086197	2026-02-05	2027-02-04
Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
☐ Chamber B: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2026-02-05	2027-02-04
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
Amplifier	Agilent	8447D	2944A10457	2026-02-05	2027-02-04
Coaxial Cable	/	1.5MRFC-L WB3	/	2026-02-23	2027-02-22
Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
☒ Chamber C: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2026-02-05	2027-02-04
Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
Loop Antenna	Schwarz beck	FMZB 1516	9773	2026-02-05	2027-02-04
Amplifier	HP	8447F	2944A03869	2026-02-05	2027-02-04
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
☒ Chamber C: Above 1GHz					



EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2026-02-05	2027-02-04
Horn Antenna	POAM	RTF-118A	1820	2025-06-13	2027-06-12
Amplifier	Tonscend	TAP010180 50	AP22E80623 5	2026-02-05	2027-02-04
DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2026-02-10	2027-02-09
Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2026-02-05	2027-02-04
Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
☐ Conducted Room 1#					
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2026-02-05	2027-02-04
EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2025-11-25	2026-11-24
AC LISN	Schwarz beck	NSLK8126	8126-279	2026-02-23	2027-02-22
Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
Coaxial Cable	/	6MRFC-DP	/	2026-02-23	2027-02-22
☒ Conducted Room 2#					
EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2026-02-05	2027-02-04
LISN	Rohde & Schwarz	ENV 216	100097	2026-02-05	2027-02-04
Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22



Software List			
Description	Manufacturer	Model	Version
EMI Test Software/EZ-EMC (Radiated Emission A)	Farad	RA-03A1	1.1.4.2
EMI Test Software/EZ-EMC (Radiated Emission B)	Farad	RA-03A1	1.1.4.2
EMI Test Software/EZ-EMC (Radiated Emission C)	Farad	RA-03A1-2	1.1.4.2
EMI Test Software/EZ-EMC (Conducted Emission Room 1#)	Farad	3A1*CE-RE	1.1.4.3
EMI Test Software/EZ-EMC (Conducted Emission Room 2#)	Farad	3A1*CE-RE	1.1.4.3

*Remark: indicates software version used in the compliance certification testing.

WALTEK



2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.107(a) Conducted Emission	Compliant
§15.109(a) Radiated Emission	Compliant

N/A: not applicable

WALTEK




3. Conducted Emissions

3.1 Test Procedure

The test is conducted under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.2 Basic Test Setup Block Diagram

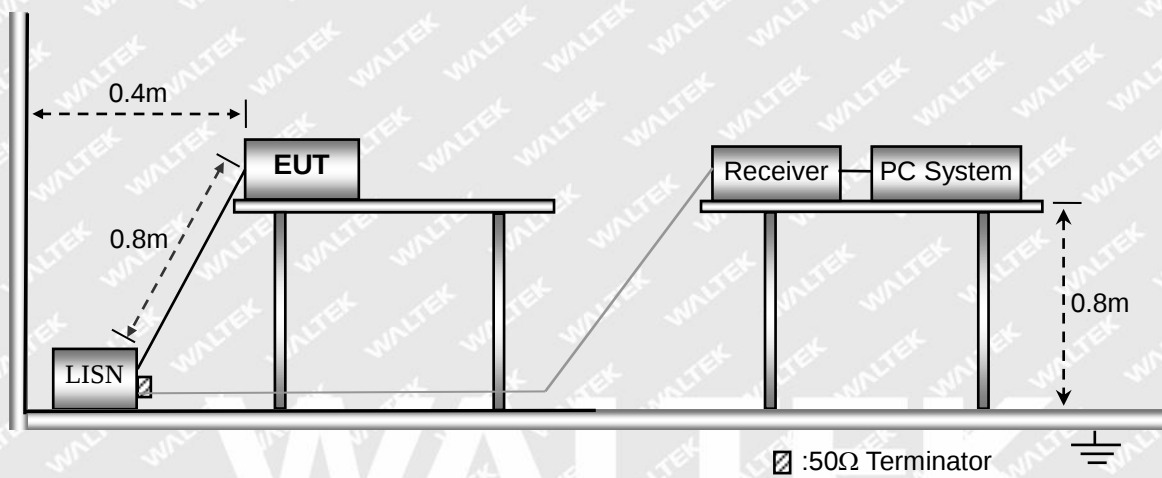

3.3 Environmental Conditions


Temperature:	24.5 °C
Relative Humidity:	51 %
ATM Pressure:	1014 mbar

3.4 Summary of Test Results

Please find the results below:




Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

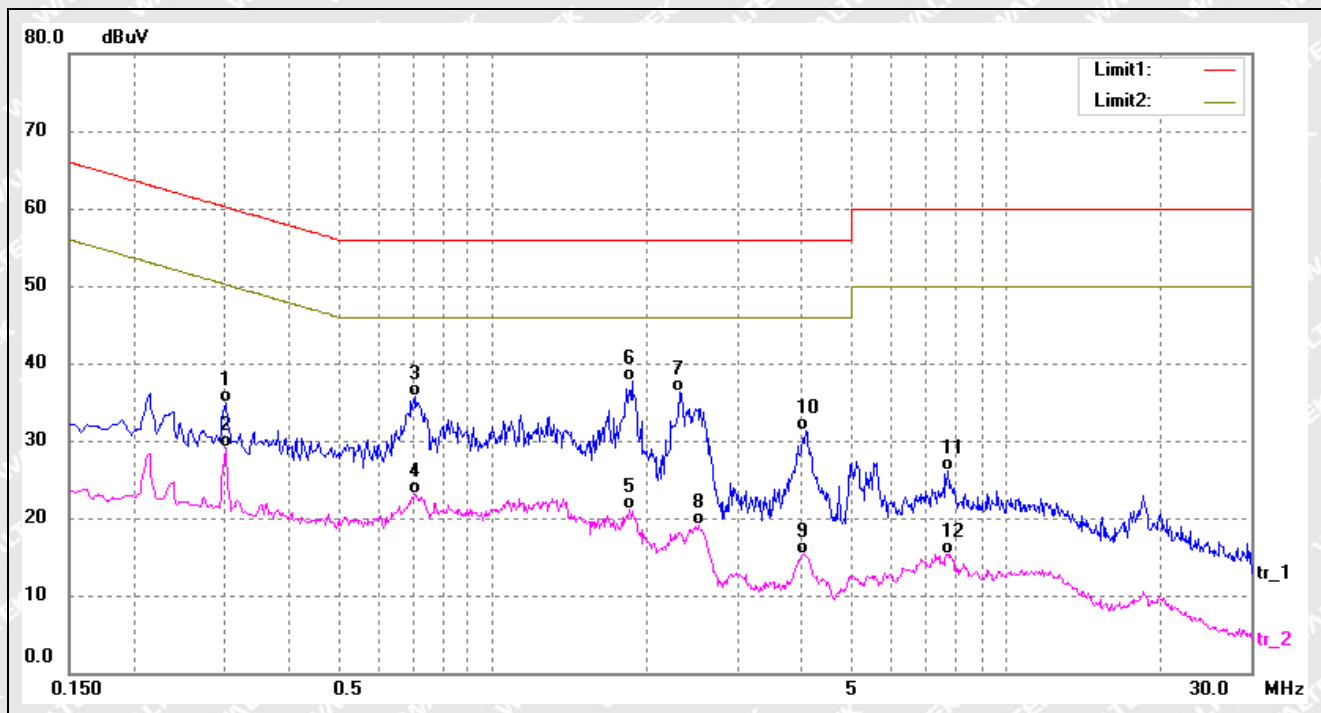

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3020	25.18	9.63	34.81	60.19	-25.38	QP
2	0.3020	19.40	9.63	29.03	50.19	-21.16	AVG
3	0.7100	25.92	9.74	35.66	56.00	-20.34	QP
4	0.7100	13.32	9.74	23.06	46.00	-22.94	AVG
5	1.8580	11.78	9.42	21.20	46.00	-24.80	AVG
6*	1.8740	28.27	9.41	37.68	56.00	-18.32	QP
7	2.3140	26.89	9.38	36.27	56.00	-19.73	QP
8	2.5140	9.74	9.38	19.12	46.00	-26.88	AVG
9	4.0420	5.94	9.46	15.40	46.00	-30.60	AVG
10	4.0780	21.92	9.47	31.39	56.00	-24.61	QP
11	7.7180	16.26	9.79	26.05	60.00	-33.95	QP
12	7.7180	5.53	9.79	15.32	50.00	-34.68	AVG



Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

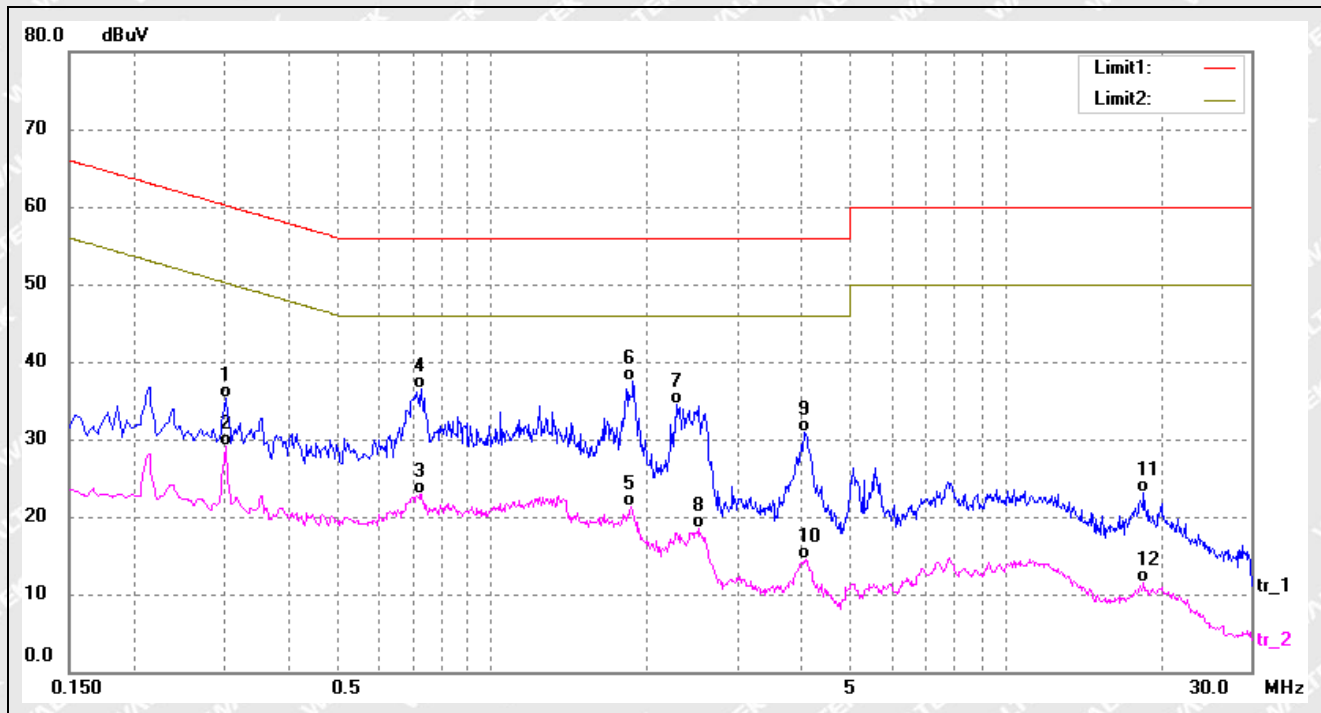

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3020	25.70	9.63	35.33	60.19	-24.86	QP
2	0.3020	19.41	9.63	29.04	50.19	-21.15	AVG
3	0.7260	13.12	9.74	22.86	46.00	-23.14	AVG
4	0.7300	26.74	9.74	36.48	56.00	-19.52	QP
5	1.8660	11.82	9.41	21.23	46.00	-24.77	AVG
6*	1.8780	28.10	9.41	37.51	56.00	-18.49	QP
7	2.2860	25.12	9.37	34.49	56.00	-21.51	QP
8	2.5180	9.17	9.38	18.55	46.00	-27.45	AVG
9	4.0700	21.46	9.47	30.93	56.00	-25.07	QP
10	4.0860	4.99	9.47	14.46	46.00	-31.54	AVG
11	18.5900	13.49	9.53	23.02	60.00	-36.98	QP
12	18.5900	1.95	9.53	11.48	50.00	-38.52	AVG


4. RADIATED EMISSION

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

4.2 Block Diagram of Test Setup

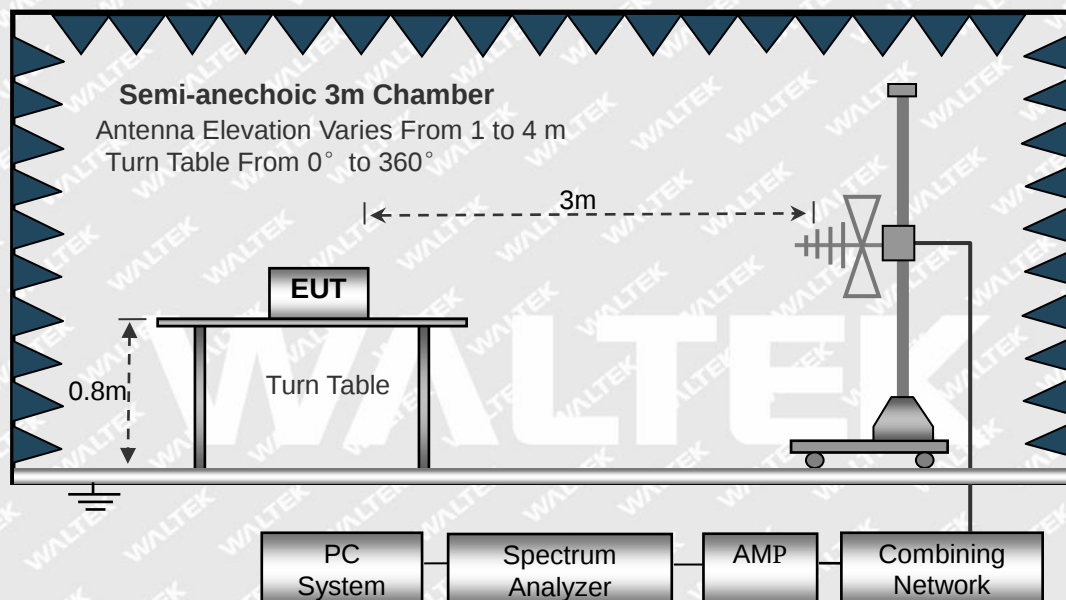



4.3 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10kHz,

VBW =30kHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120kHz,

VBW=300kHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\begin{aligned}\text{Corr. Ampl.} &= \text{Indicated Reading} + \text{Correct} \\ \text{Correct} &= \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}\end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.5 Environmental Conditions

Temperature:	24.6°C
Relative Humidity:	51 %
ATM Pressure:	1011 mbar


4.6 Summary of Test Results

Please find the results below:



Below 1GHz


Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

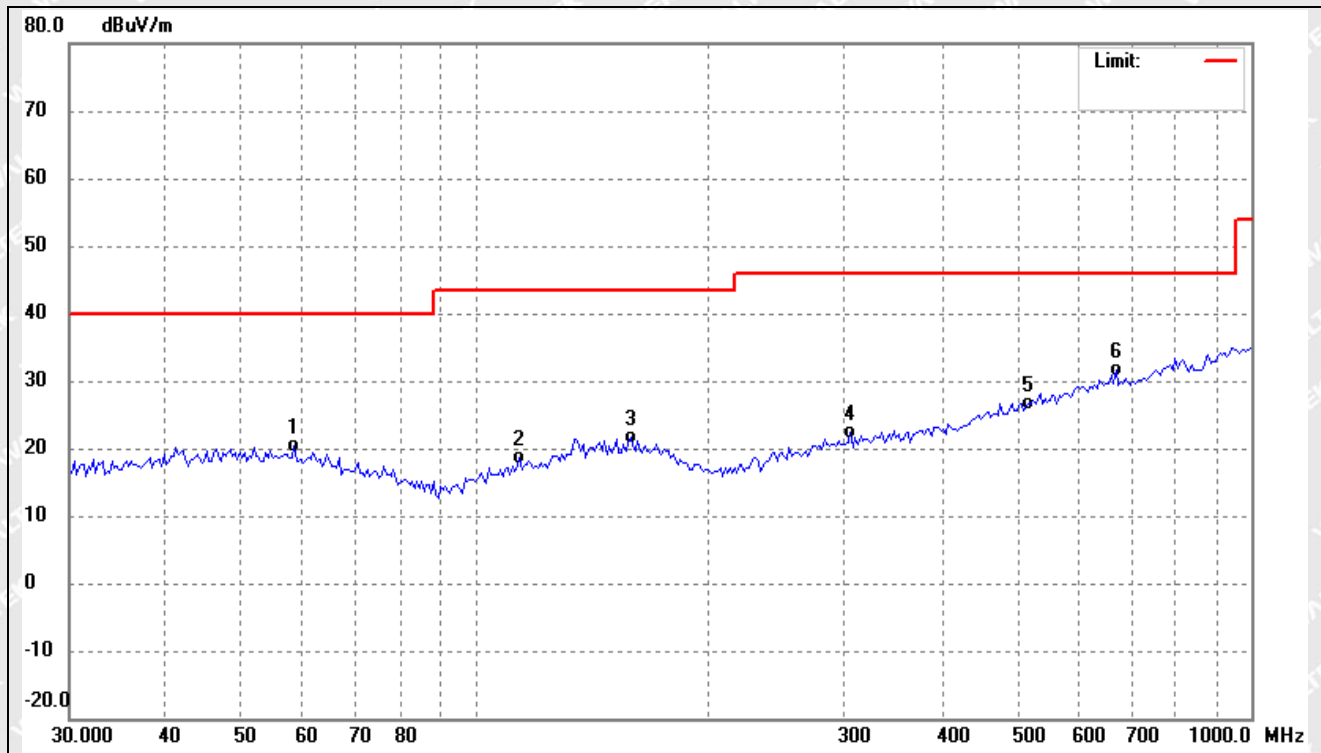

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	58.4855	28.98	-8.72	20.26	40.00	-19.74	-	-	QP
2	114.0184	29.54	-10.82	18.72	43.50	-24.78	-	-	QP
3	158.6399	29.97	-8.30	21.67	43.50	-21.83	-	-	QP
4	304.9548	30.63	-8.18	22.45	46.00	-23.55	-	-	QP
5	516.5651	29.79	-3.14	26.65	46.00	-19.35	-	-	QP
6	669.9523	31.53	0.00	31.53	46.00	-14.47	-	-	QP




Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

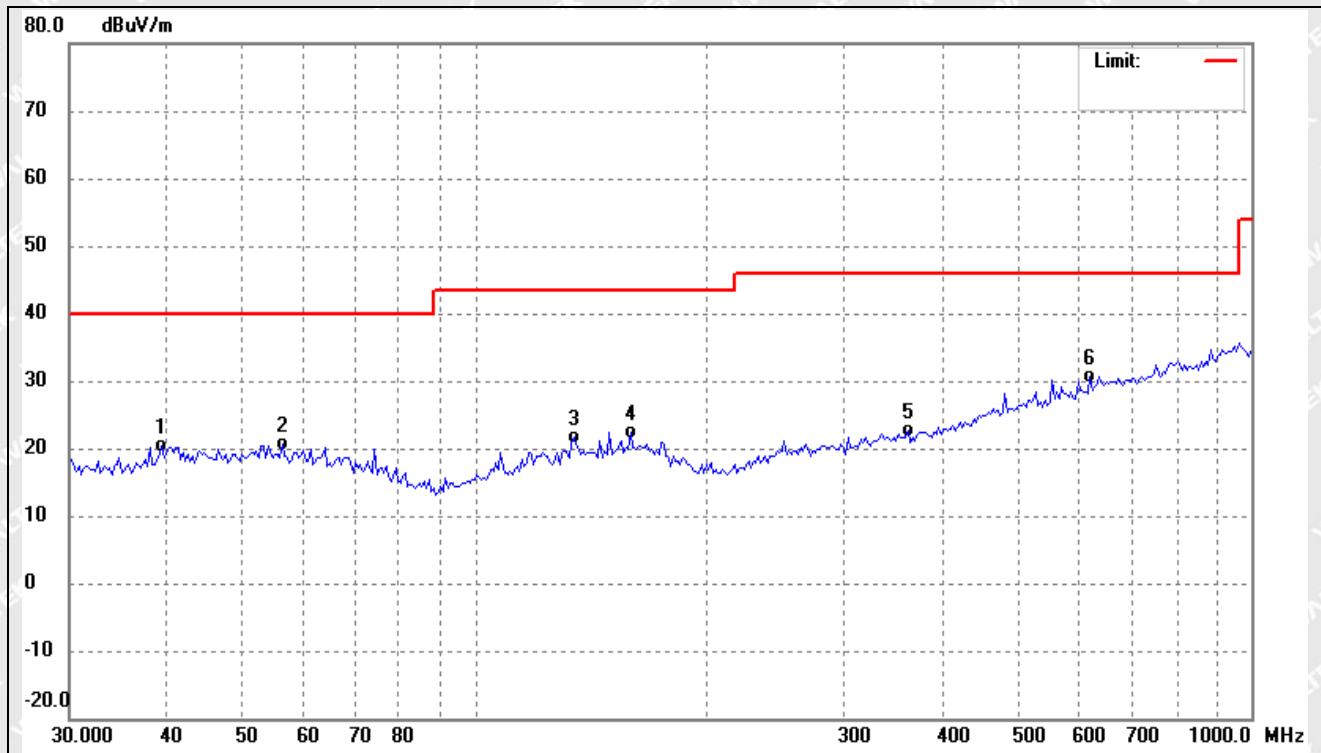

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.4588	29.20	-8.92	20.28	40.00	-19.72	-	-	QP
2	56.4662	29.17	-8.59	20.58	40.00	-19.42	-	-	QP
3	134.0194	30.99	-9.28	21.71	43.50	-21.79	-	-	QP
4	158.6399	30.77	-8.30	22.47	43.50	-21.03	-	-	QP
5	360.9775	29.86	-7.16	22.70	46.00	-23.30	-	-	QP
6	620.1167	31.47	-0.92	30.55	46.00	-15.45	-	-	QP




Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

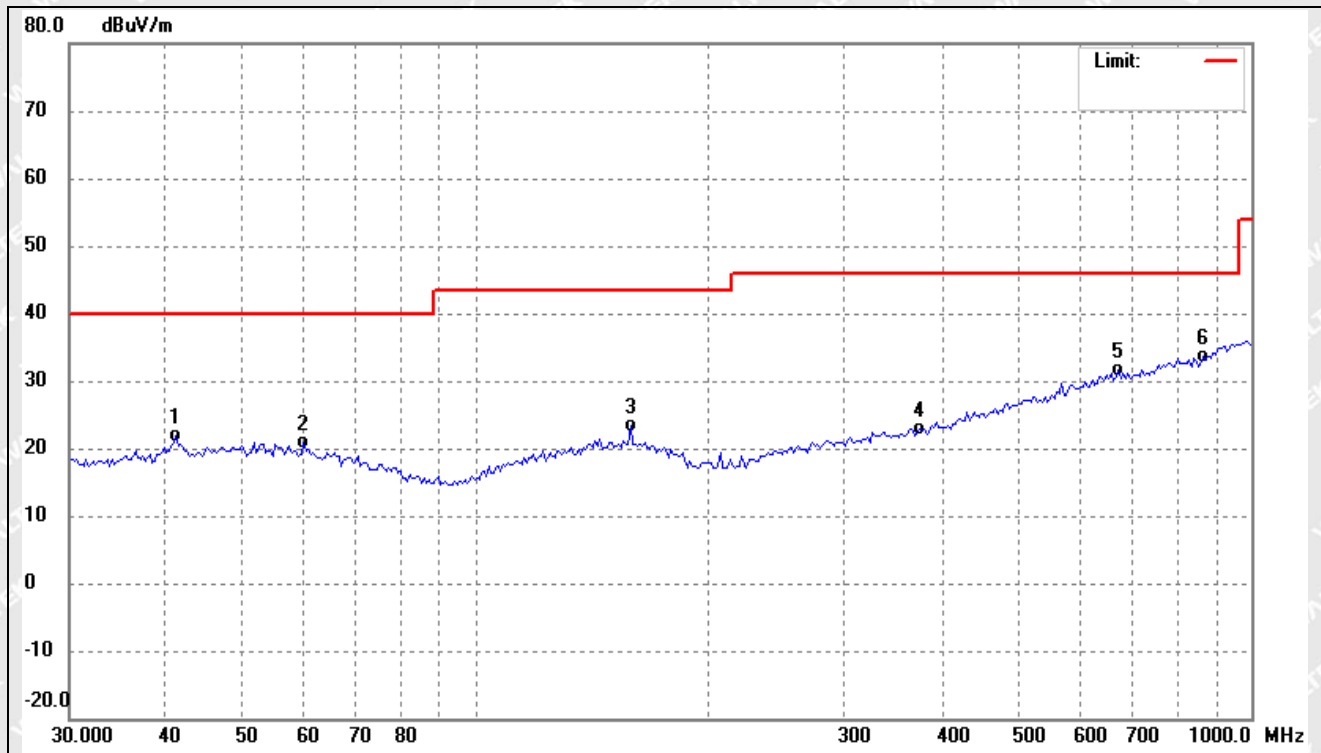

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.1581	30.54	-8.76	21.78	40.00	-18.22	-	-	QP
2	60.1528	29.68	-8.89	20.79	40.00	-19.21	-	-	QP
3	158.6399	31.69	-8.30	23.39	43.50	-20.11	-	-	QP
4	373.8861	29.78	-6.88	22.90	46.00	-23.10	-	-	QP
5	674.6768	31.59	0.04	31.63	46.00	-14.37	-	-	QP
6	868.8860	31.53	2.01	33.54	46.00	-12.46	-	-	QP



Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

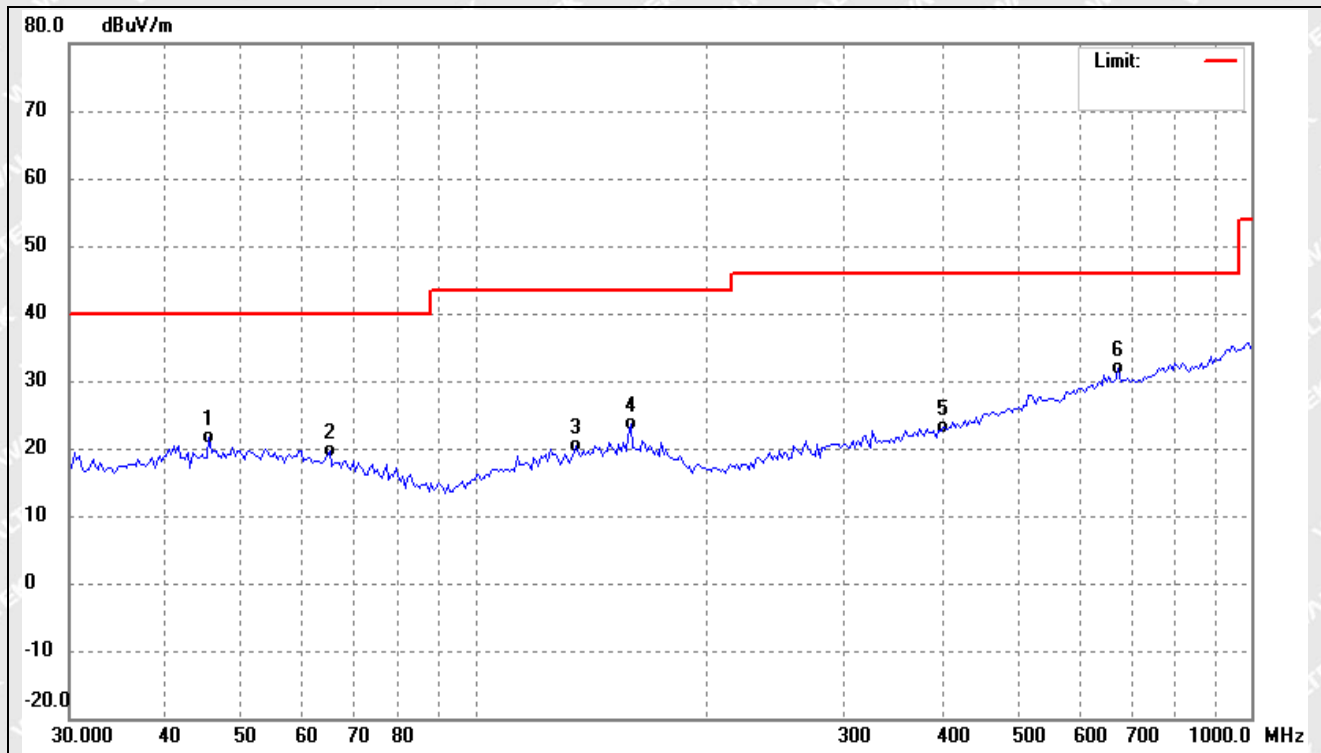


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.4130	29.88	-8.34	21.54	40.00	-18.46	-	-	QP
2	64.9869	29.24	-9.51	19.73	40.00	-20.27	-	-	QP
3	134.9645	29.55	-9.20	20.35	43.50	-23.15	-	-	QP
4	158.6399	31.89	-8.30	23.59	43.50	-19.91	-	-	QP
5	401.1050	29.40	-6.24	23.16	46.00	-22.84	-	-	QP
6	674.6768	31.87	0.04	31.91	46.00	-14.09	-	-	QP



Above 1GHz


Test mode:	TM2 (worst case)	Polarity:	Horizontal
------------	------------------	-----------	------------

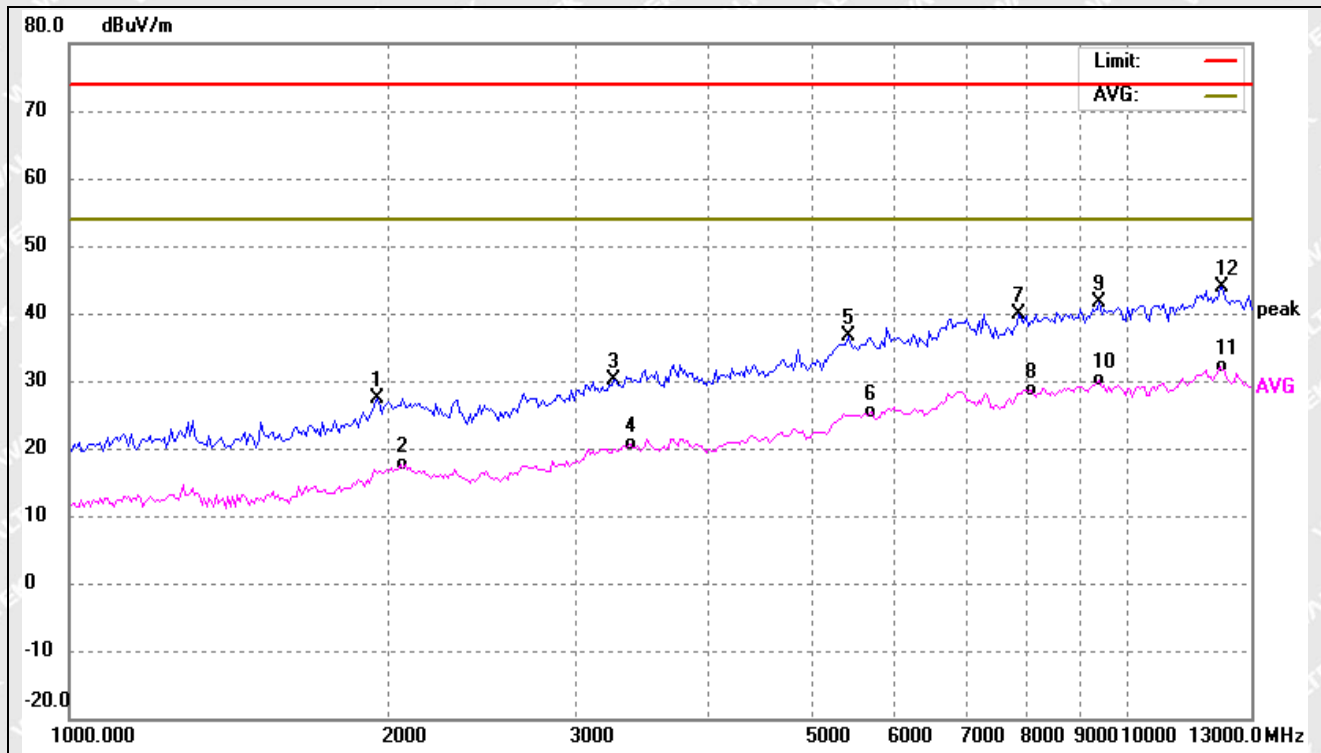

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	1950.768	46.92	-19.45	27.47	74.00	-46.53	-	-	peak
2	2053.663	36.04	-18.30	17.74	54.00	-36.26	-	-	AVG
3	3261.676	45.32	-15.20	30.12	74.00	-43.88	-	-	peak
4	3381.172	35.48	-14.88	20.60	54.00	-33.40	-	-	AVG
5	5425.548	46.24	-9.55	36.69	74.00	-37.31	-	-	peak
6	5682.439	33.97	-8.67	25.30	54.00	-28.70	-	-	AVG
7	7855.483	45.14	-5.33	39.81	74.00	-34.19	-	-	peak
8	8059.993	32.92	-4.21	28.71	54.00	-25.29	-	-	AVG
9	9355.626	44.87	-3.27	41.60	74.00	-32.40	-	-	peak
10	9355.626	33.50	-3.27	30.23	54.00	-23.77	-	-	AVG
11	12159.698	32.74	-0.54	32.20	54.00	-21.80	-	-	AVG
12	12222.362	44.61	-0.64	43.97	74.00	-30.03	-	-	peak



Test mode:	TM2 (worst case)	Polarity:	Vertical
------------	------------------	-----------	----------

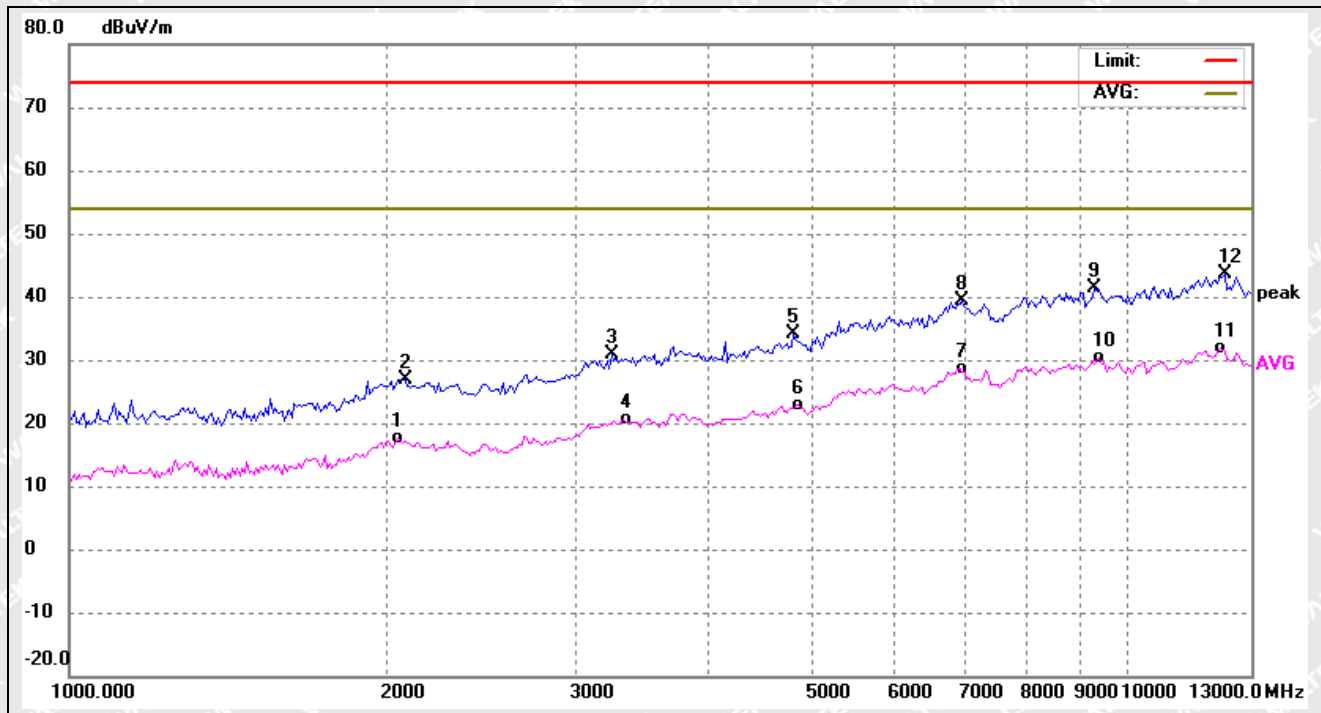

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	2043.134	36.04	-18.35	17.69	54.00	-36.31	-	-	AVG
2	2074.884	45.53	-18.60	26.93	74.00	-47.07	-	-	peak
3	3244.953	46.11	-15.23	30.88	74.00	-43.12	-	-	peak
4	3329.433	35.64	-15.06	20.58	54.00	-33.42	-	-	AVG
5	4820.583	46.02	-11.95	34.07	74.00	-39.93	-	-	peak
6	4870.395	34.69	-11.77	22.92	54.00	-31.08	-	-	AVG
7	6908.188	33.77	-5.15	28.62	54.00	-25.38	-	-	AVG
8	6943.788	44.58	-5.28	39.30	74.00	-34.70	-	-	peak
9	9259.940	45.00	-3.73	41.27	74.00	-32.73	-	-	peak
10	9355.626	33.56	-3.27	30.29	54.00	-23.71	-	-	AVG
11	12159.698	32.47	-0.54	31.93	54.00	-22.07	-	-	AVG
12	12285.349	44.58	-0.90	43.68	74.00	-30.32	-	-	peak

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.



EXHIBIT 1 - EUT PHOTOGRAPHS

EUT View 1



EUT View 2





EUT View 3




EUT View 4





EUT View 5

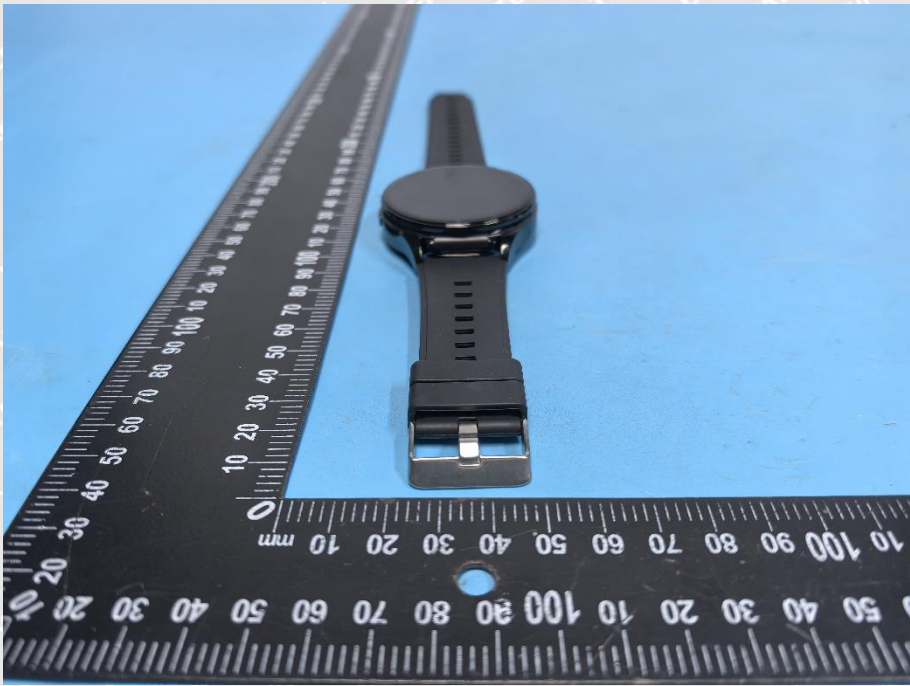

EUT View 6





EUT View 7




EUT View 8





EUT View 9

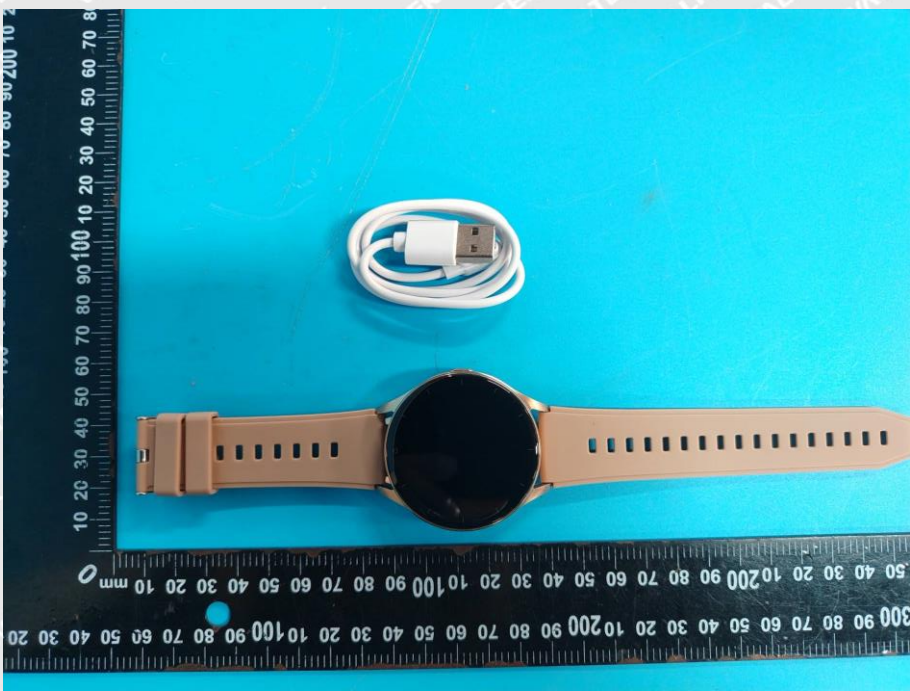

EUT View 10





EUT View 11



EUT View 12





EUT View 13




EUT View 14






EXHIBIT 2 - EUT INTERNAL PHOTOGRAPHS

**EUT Housing and
Board View 1**

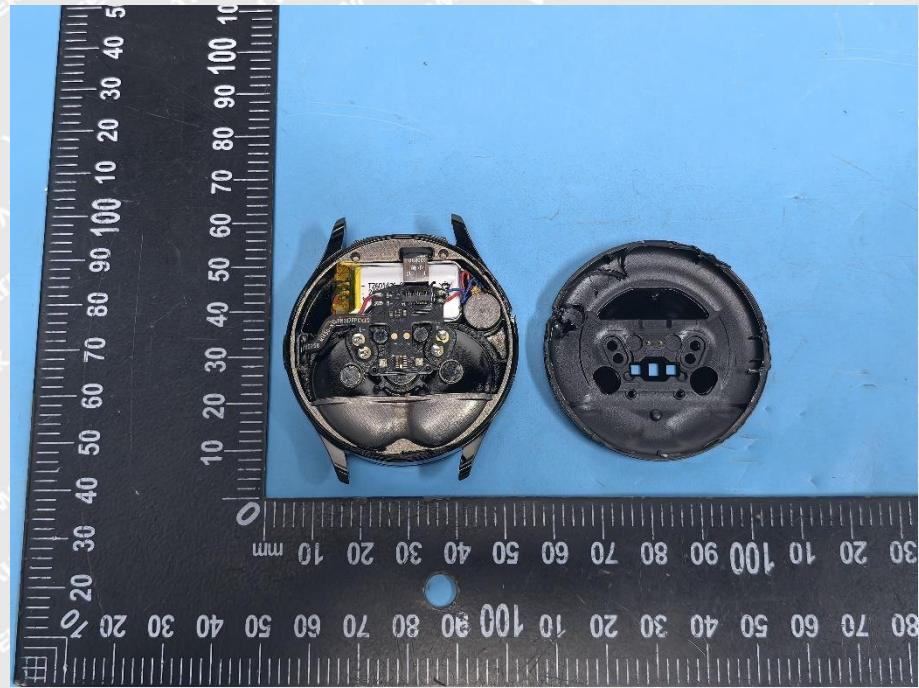

**EUT Housing and
Board View 2**

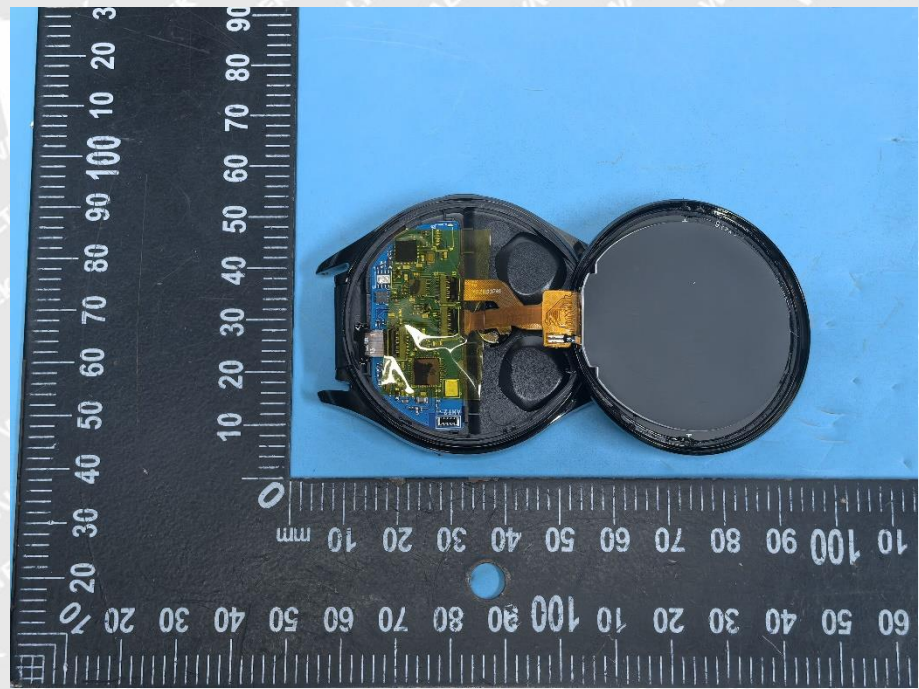




Solder
Board-Component
View 1




Solder
Board-Component
View 2

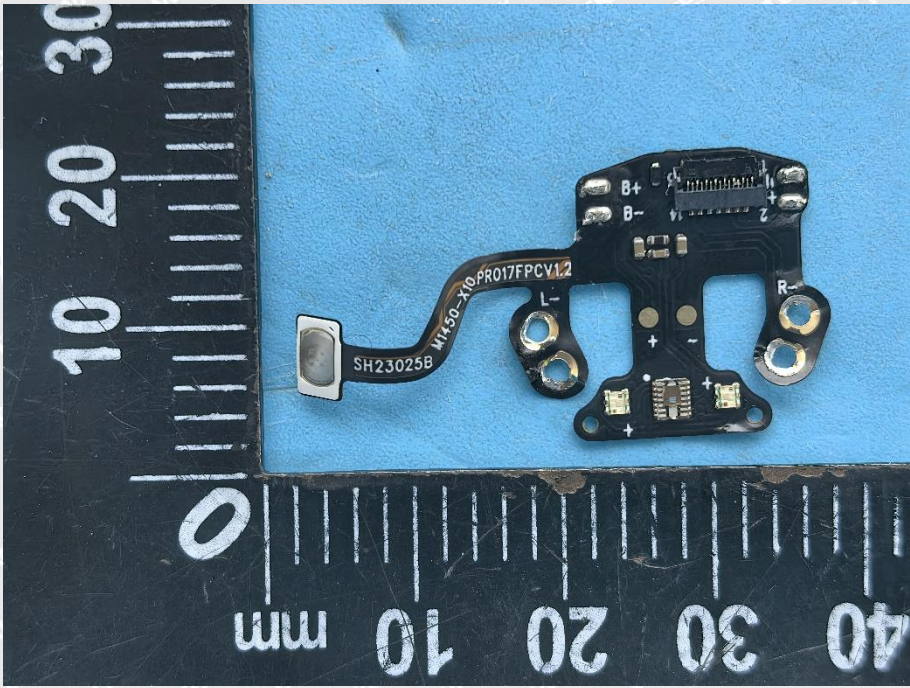




Solder
Board-Component
View 3

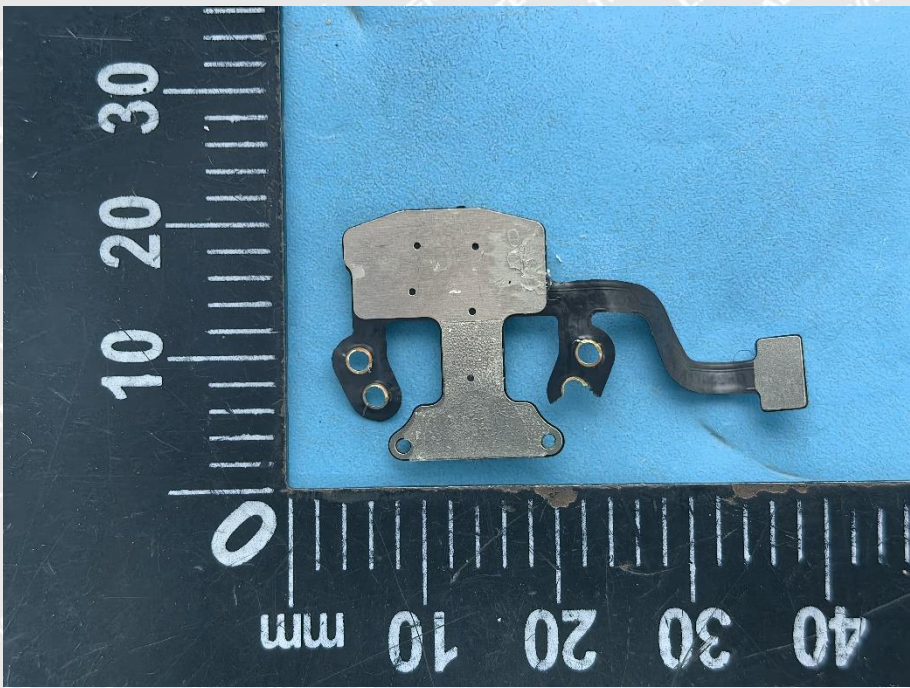


Solder
Board-Component
View 4

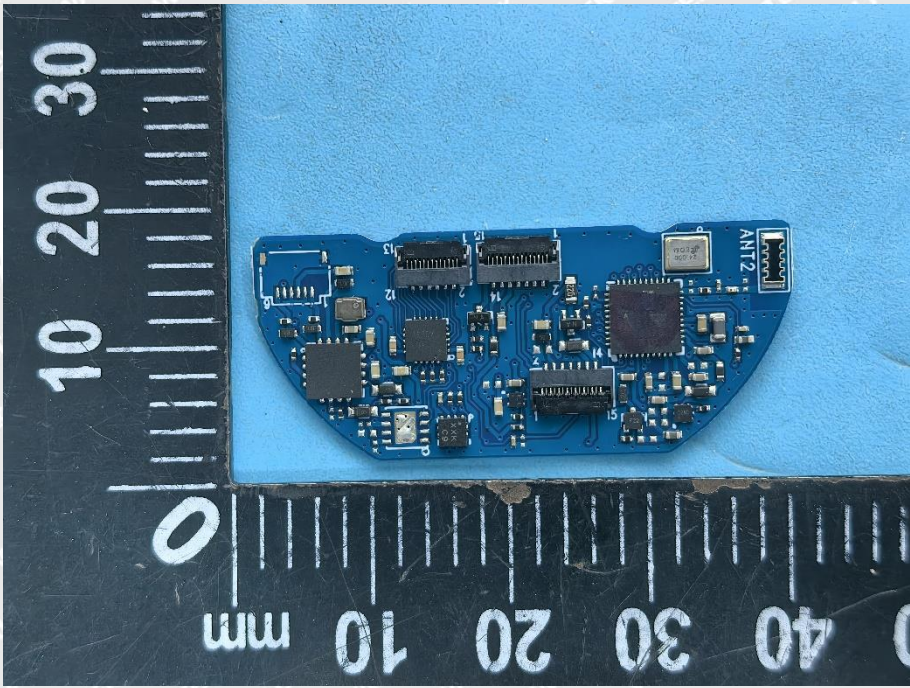



**Solder
Board-Component
View 5**

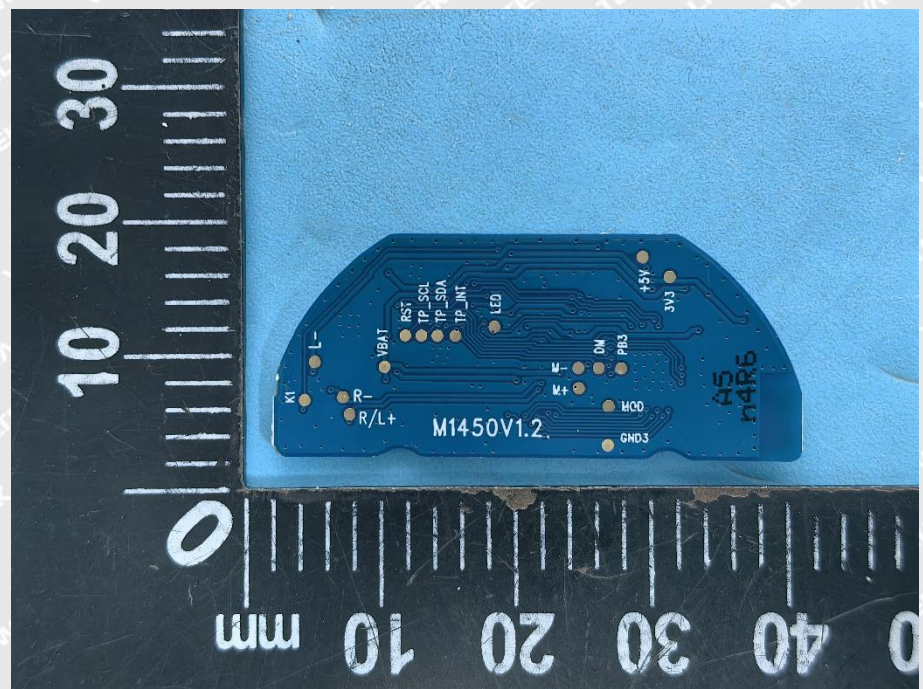

WALTEK



EXHIBIT 3 - TEST SETUP PHOTOGRAPHS

**Conducted Emission
Test Setup**



**Radiation Emission
Test View (30MHz to
1GHz)**





**Radiation Emission
Test View (Above
1GHz)**



WALTEK



EXHIBIT 4 - USERS MANUAL

Information to Users

According to the FCC Part 15.19, 15.21, and 15.105 rules, for this EUT, the instructions or operation manual furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

***** END OF REPORT *****