

CE SAR EVALUATION REPORT

**In accordance with the requirements of
EN50360, EN50566, EN62209-1/-2, EN62479 and COUNCIL
RECOMMENDATION 1999/519/EC**

Product Name : Mobile Phone

Trademark : ulefone

Model Name : GQ5010

Family Model : Armor Mini 20T Pro, Armor Mini 20 Pro,
Armor Mini 20 Ultra, Armor Mini 20T Ultra

Report No. : S24070203401001

Prepared for

Shenzhen Gotron Electronic CO.,LTD.
7B01, Building A, Block 1, Anhongji Tianyao Plaza, Longhua District, Shenzhen City,
Guangdong Province China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1&5/F, Building C, 1&2/F, Building E, Fenda Science Park, Sanwei Community,
Hangcheng Street, Baoan District, Shenzhen ,Guangdong, China
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name.....: Shenzhen Gotron Electronic CO.,LTD.
Address: 7B01, Building A, Block 1, Anhongji Tianyao Plaza, Longhua District,
Shenzhen City, Guangdong Province China
Manufacturer's Name: Shenzhen Gotron Electronic CO.,LTD.
Address: 7B01, Building A, Block 1, Anhongji Tianyao Plaza, Longhua District,
Shenzhen City, Guangdong Province China
Product description
Product name: Mobile Phone
Trademark: ulefone
Model and/or type reference ..: GQ5010
Family Model.....: Armor Mini 20T Pro, Armor Mini 20 Pro, Armor Mini 20 Ultra, Armor Mini
20T Ultra
EN 50360:2017;
EN 50566:2017;
Standards: EN 62209-1:2016;
EN 62209-2:2010;
EN 62479:2010;

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in EN62209. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in COUNCIL 1999/519/EC. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Test Sample Number S240702034001

Date of Test

Date (s) of performance of tests Jul. 05, 2024 ~ Jul. 20, 2024

Date of Issue..... Aug. 31, 2024

Test Result..... **Pass**

Prepared
By :


Allen Liu
(Project Engineer)

Reviewed
By :


Aaron Cheng
(Supervisor)

Approved
By :


Alex Li
(Manager)

※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Aug. 31, 2024	Allen Liu

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits.....	6
1.2. Statement of Compliance	7
1.3. EUT Description	7
1.4. Test specification(s)	10
1.5. Ambient Condition.....	10
2. SAR Measurement System	11
2.1. SATIMO SAR Measurement Set-up Diagram	11
2.2. Robot	12
2.3. E-Field Probe.....	13
2.3.1. E-Field Probe Calibration	13
2.4. SAM phantoms	14
2.4.1. Technical Data	15
2.5. Device Holder	16
2.6. Test Equipment List	17
3. SAR Measurement Procedures	19
3.1. Power Reference	19
3.2. Area scan & Zoom scan.....	19
3.3. Description of interpolation/extrapolation scheme	20
3.4. Volumetric Scan	20
3.5. Power Drift	20
4. System Verification Procedure	21
4.1. Tissue Verification	21
4.1.1. Tissue Dielectric Parameter Check Results	22
4.2. System Verification Procedure	23
4.2.1. System Verification Results	24
5. SAR Measurement Uncertainty	25
6. RF Exposure Positions	27
6.1. Ear and handset reference point	27
6.2. Definition of the cheek position	27
6.3. Definition of the tilt position	28
6.4. Body-worn device	29
7. RF Output Power	30
7.1. GSM Conducted Power	30
7.2. WCDMA Conducted Power	31
7.3. LTE Conducted Power	32
7.4. NR Output Power.....	36
7.5. WLAN & Bluetooth Output Power	47
7.6. NFC Assessment.....	49

8. Assessment of the compliance of low power equipment.....	49
9. SAR Results	49
9.1. SAR measurement results	49
9.1.1. SAR measurement Result of GSM900.....	49
9.1.2. SAR measurement Result of GSM1800.....	50
9.1.3. SAR measurement Result of WCDMA Band 1	51
9.1.4. SAR measurement Result of WCDMA Band 8	52
9.1.5. SAR measurement Result of LTE Band 1	53
9.1.6. SAR measurement Result of LTE Band 3	54
9.1.7. SAR measurement Result of LTE Band 7	55
9.1.8. SAR measurement Result of LTE Band 8	55
9.1.9. SAR measurement Result of LTE Band 20	56
9.1.10. SAR measurement Result of LTE Band 28	57
9.1.11. SAR measurement Result of LTE Band 40	58
9.1.12. SAR measurement Result of NR SA n1	59
9.1.13. SAR measurement Result of NR SA n3	60
9.1.14. SAR measurement Result of NR SA n8.....	61
9.1.15. SAR measurement Result of NR SA n20.....	62
9.1.16. SAR measurement Result of NR SA n28.....	63
9.1.17. SAR measurement Result of NR SA n38.....	64
9.1.18. SAR measurement Result of NR SA n77.....	65
9.1.19. SAR measurement Result of NR SA n78.....	66
9.1.20. SAR measurement Result of WLAN 2.4G	67
9.1.21. SAR measurement Result of WLAN 5.2G	68
9.1.22. SAR measurement Result of WLAN 5.8G	69
9.2. Simultaneous Transmission Analysis	70
9.3. Exposure Conditions	71
10. Appendix A. Photo documentation	73
11. Appendix B. System Check Plots.....	75
12. Appendix C. Plots of High SAR Measurement.....	100
13. Appendix D. Calibration Certificate	190

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	10.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	2.0	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 10 gram of tissue defined as a tissue volume in the shape of a cube.

SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE

HEAD AND TRUNK LIMIT

2.0 W/kg AND MEMBER LIMIT 4.0 W/kg

APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for GQ5010 are as follows.

RF Exposure Conditions	Max SAR Value(W/kg)		
	10-g Head	10-g Body & Hotspot (Separation distance of 5mm)	10-g Member DAS (See note ³) (Separation distance of 0mm)
	0.321	0.790	1.492
Max Simultaneous Tx	0.611	1.200	2.150

NOTE: 1. The Max Simultaneous Tx is calculated based on the same configuration and test position.

2. This device is in compliance with Specific Absorption Rate (SAR) for general population / uncontrolled exposure limits (2.0 W/kg for head and body, 4.0 W/kg for member) specified in COUNCIL RECOMMENDATION 1999/519/EC, and had been tested in accordance with the measurement methods and procedures specified in EN 62209-1:2016 & EN 62209-2:2010.

3. The member DAS, It is only an assessment required by the ANFR (Sell to France).

1.3. EUT Description

Device Information	
Product Name	Mobile Phone
Trademark	ulefone
Model Name	GQ5010
Family Model	Armor Mini 20T Pro, Armor Mini 20 Pro, Armor Mini 20 Ultra, Armor Mini 20T Ultra
Model Difference	All models are the same circuit and RF module, except for model names.
Device Phase	Identical Prototype
Exposure Category	General population / Uncontrolled environment
Antenna Type	IFA Antenna
Battery Information	DC 3.87V, 6200mAh, 23.994Wh
Hardware version	N/A
Software version	N/A
Device Operating Configurations	
Supporting Mode(s)	GSM 900/1800, WCDMA Band 1/8, LTE Band 1/3/7/8/20/28/40, NR SA n1/n3/n8/n20/n28/n38/n77/n78, WLAN 2.4G/5G, Bluetooth, GPS,FM,NFC
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16-QAM), NR(DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM CP-OFDM:QPSK/16-QAM/64QAM/256QAM),WLAN(DSSS/OFDM), WLAN(DSSS/OFDM), Bluetooth(GFSK, $\pi/4$ -DQPSK, 8DPSK) ,

	GPS(BPSK),FM(FM),NFC(ASK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 900	880-915	925-960
	GSM 1800	1710-1785	1805-1880
	WCDMA Band 1	1920-1980	2110-2170
	WCDMA Band 8	880-915	925-960
	LTE Band 1	1920-1980	2110-2170
	LTE Band 3	1710-1785	1805-1880
	LTE Band 7	2500-2570	2620-2690
	LTE Band 8	880- 915	925– 960
	LTE Band 20	832-862	791-821
	LTE Band 28	703-748	758-803
	LTE Band 40	2300-2400	
	NR n1	1920-1980	2110-2170
	NR n3	1710-1785	1805-1880
	NR n8	880-915	925-960
	NR n20	832-862	791-821
	NR n28	703-748	758-803
	NR n38	2570-2620	
	NR n77	3300-4200	
	NR n78	3300-3800	
	WLAN 2.4G	2412-2472	
	WLAN 5.2G	5180-5240	
	WLAN 5.8G	5745-5825	
	Bluetooth	2402-2480	
	NFC	13.56	
	FM	N/A	87.5-108
	GPS	N/A	1575.42
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
Power Class	4, tested with power level 5(GSM 900)		
	1, tested with power level 0(GSM 1800)		
	3, tested with power control “all 1”(WCDMA Band 1)		
	3, tested with power control “all 1”(WCDMA Band 8)		
	3, tested with power control all Max.(LTE Band 1)		

3, tested with power control all Max.(LTE Band 3)
3, tested with power control all Max.(LTE Band 7)
3, tested with power control all Max.(LTE Band 8)
3, tested with power control all Max.(LTE Band 20)
3, tested with power control all Max.(LTE Band 28)
3, tested with power control all Max.(LTE Band 40)
3, tested with power control all Max.(NR SA 1)
3, tested with power control all Max.(NR SA 3)
3, tested with power control all Max.(NR SA 8)
3, tested with power control all Max.(NR SA 20)
3, tested with power control all Max.(NR SA 28)
3, tested with power control all Max.(NR SA 38)
3, tested with power control all Max.(NR SA 77)
3, tested with power control all Max.(NR SA 78)

1.4. Test specification(s)


EN 50360:2017	Product standard to demonstrate the compliance of wireless communication devices, with the basic restrictions and exposure limit values related to human exposure to electromagnetic fields in the frequency range from 300 MHz to 6 GHz: devices used next to the ear
EN 50566:2017	Product standard to demonstrate the compliance of wireless communication devices with the basic restrictions and exposure limit values related to human exposure to electromagnetic fields in the frequency range from 30 MHz to 6 GHz: hand-held and body mounted devices in close proximity to the human body
EN 62209-1:2016	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz)
EN 62209-2:2010	Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR) in the head and body for 30MHz to 6GHz Handheld and Body-Mounted Devices used in close proximity to the body
EN 62479:2010	Assessment of the compliance of low-power electronic and electrical equipment with the restrictions related to human exposure to electromagnetic fields(10 MHz to 300 GHz)

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

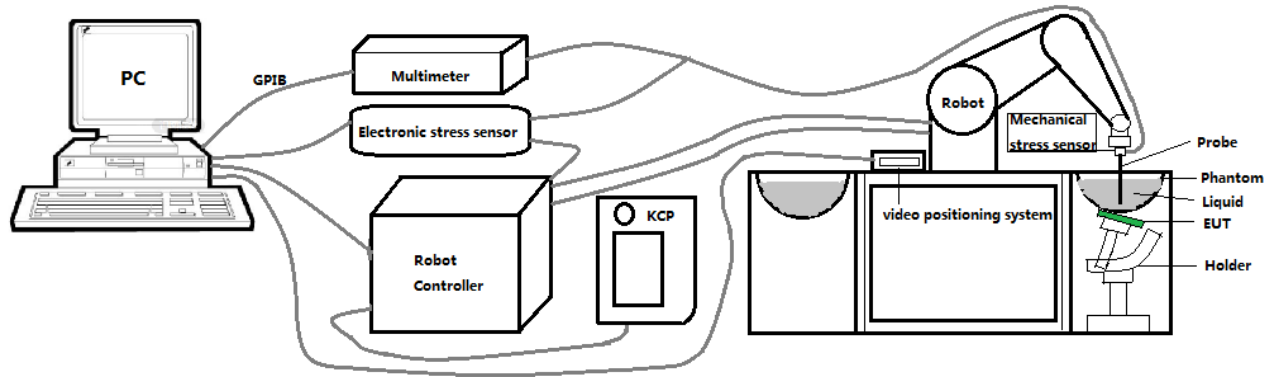

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe 3423-EPGO-426 with following specifications is used



- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 2.5 mm
- Distance between probe tip and sensor center: 1 mm
- Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
- Probe linearity: ± 0.06 dB
- Axial isotropy: ± 0.01 dB
- Hemispherical Isotropy: ± 0.01 dB
- Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
- Lower detection limit: 8mW/kg

Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms

Photo of SAM phantom SN 16/15 SAM119




The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by mobile phones.

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 μm .

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

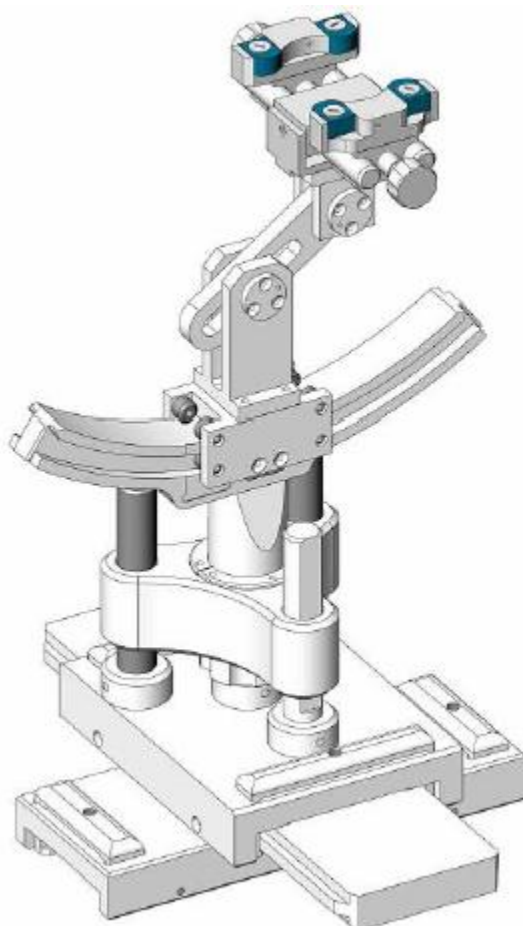

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	3423-EPGO-426	Sep. 18, 2023	Sep. 17, 2024
☒	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Feb. 22, 2024	Feb. 21, 2027
☐	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Feb. 22, 2024	Feb. 21, 2027
☒	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Feb. 22, 2024	Feb. 21, 2027
☒	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Feb. 22, 2024	Feb. 21, 2027
☐	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Feb. 22, 2024	Feb. 21, 2027
☒	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Feb. 22, 2024	Feb. 21, 2027
☒	MVG	2300 MHz Dipole	SID2300	SN 03/16 DIP 2G300-358	Feb. 22, 2024	Feb. 21, 2027
☒	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Feb. 22, 2024	Feb. 21, 2027
☒	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Feb. 22, 2024	Feb. 21, 2027
☒	MVG	3500 MHz Dipole	SID3500	SN 09/12 DIP 3G500-360	Oct. 15, 2022	Oct. 14, 2025
☒	MVG	3700 MHz Dipole	SID3700	SN 09/12 DIP 3G/700-361	Oct. 15 2022	Oct. 14 2025
☒	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Feb. 22, 2024	Feb. 21, 2027
☒	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
☒	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
☒	R&S	Universal radio communication	CMU200	105747	Apr. 26, 2024	Apr. 25, 2025

		tester				
☒	R&S	Wideband radio communication tester	CMW500	103917	Apr. 26, 2024	Apr. 25, 2025
☒	HP	Network Analyzer	8753D	3410J01136	Apr. 26, 2024	Apr. 25, 2025
☒	Agilent	MXG Vector Signal Generator	N5182A	MY47070317	Apr. 25, 2024	Apr. 24, 2025
☒	Agilent	Power meter	E4419B	MY45102538	Apr. 25, 2024	Apr. 24, 2025
☒	Agilent	Power sensor	E9301A	MY41495644	Apr. 25, 2024	Apr. 24, 2025
☒	Agilent	Power sensor	E9301A	US39212148	Apr. 25, 2024	Apr. 24, 2025
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Apr. 26, 2024	Apr. 25, 2027
☒	N/A	Thermometer	N/A	LES-085	Mar. 27, 2023	Mar. 26, 2026
☒	MVG	SAM Phantom	SSM2	SN 16/15 SAM119	NCR	NCR
☒	MVG	Device Holder	SMPPD	SN 16/15 MSH100	NCR	NCR

Measurement Software

Manufacturer	Software Name	Software Version
SATIMO	OpenSAR	V4_02_31

3. SAR Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the middle channel.
- (b) Keep EUT to radiate maximum output power or 100% duty factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as setup photos demonstrates.
- (e) Set scan area, grid size and other setting on the OPENSAR software.
- (f) Measure SAR transmitting at the middle channel for all applicable exposure positions.
- (g) Identify the exposure position and device configuration resulting the highest SAR
- (h) Measure SAR at the lowest and highest channels at the worst exposure position and device configuration.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful for multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scan to calculate the SAR value of the combined measurement as it is defined in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.

4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue								
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5000
Water	34.40	34.40	34.40	55.36	55.36	71.88	71.88	71.88	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	17.24
DGBE	0.00	0.00	0.00	13.84	13.84	7.99	7.99	7.99	0.00

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

Photo of Liquid depth for Head Position	Photo of Liquid depth for Body Position
	

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r ($\pm 5\%$)	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Head 750	750	41.96 (39.86~44.06)	0.89 (0.85~0.93)	40.72	0.90	21.9 °C	Jul. 14, 2024
Head 900	900	41.50 (39.43~43.58)	0.97 (0.92~1.02)	41.27	0.99	21.0 °C	Jul. 15, 2024
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.93	1.37	21.7 °C	Jul. 09, 2024
Head 2000	2000	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.71	1.43	21.8 °C	Jul. 12, 2024
Head 2300	2300	39.47 (37.50~41.44)	1.66 (1.58~1.74)	39.41	1.64	21.4 °C	Jul. 13, 2024
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	37.69	1.77	21.5 °C	Jul. 05, 2024
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	38.88	1.98	21.4 °C	Jul. 06, 2024
Head 3500	3500	37.93 (36.04~39.82)	2.91 (2.77~3.05)	37.87	2.87	21.0 °C	Jul. 16, 2024
Head 3700	3700	37.70 (35.82~39.59)	3.12 (2.97~3.27)	37.33	3.09	21.0 °C	Jul. 17, 2024
Head 4200	4200	37.10 (35.25~38.96)	3.63 (3.45~3.81)	37.81	3.54	21.5 °C	Jul. 20, 2024
Head 5200	5200	36.00 (34.20~37.80)	4.66 (4.43~4.89)	34.58	4.53	21.5 °C	Jul. 10, 2024
Head 5800	5800	35.30 (33.54~37.07)	5.27 (5.01~5.53)	34.01	5.18	21.9 °C	Jul. 11, 2024

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

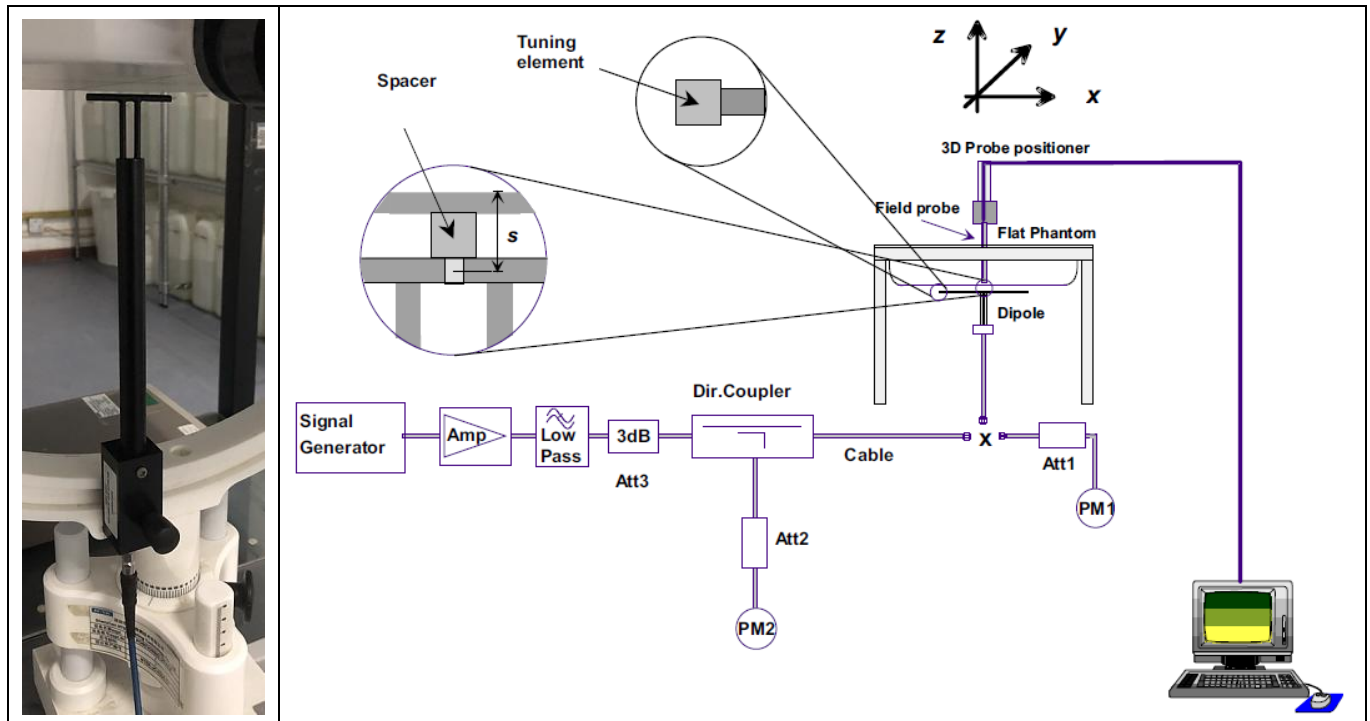

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) ($\pm 10\%$)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
750MHz	8.60 (7.74~9.46)	5.78 (5.20~6.36)	8.74	6.07	21.9 °C	Jul. 14, 2024
900MHz	10.63 (9.57~11.69)	7.01 (6.31~7.71)	11.39	7.03	21.0 °C	Jul. 15, 2024
1800MHz	37.06 (33.35~40.77)	20.01 (18.01~22.01)	34.87	18.85	21.7 °C	Jul. 09, 2024
2000MHz	38.27 (34.44~42.10)	19.79 (17.81~21.77)	37.43	19.95	21.8 °C	Jul. 12, 2024
2300MHz	50.63 (45.57~55.69)	23.51 (21.16~25.86)	54.26	24.31	21.4 °C	Jul. 13, 2024
2450MHz	50.05 (45.05~55.06)	23.80 (21.42~26.18)	53.06	25.49	21.5 °C	Jul. 05, 2024
2600MHz	54.16 (48.74~59.58)	24.85 (22.37~27.34)	54.81	25.80	21.4 °C	Jul. 06, 2024
3500MHz	67.18 (60.47~73.89)	24.50 (22.05~26.95)	69.82	25.38	21.0 °C	Jul. 16, 2024
3700MHz	66.30 (59.67~72.93)	24.16 (22.96~26.57)	63.29	25.01	21.0 °C	Jul. 17, 2024
4200MHz	66.88 (60.19~73.57)	22.81 (20.53~25.09)	61.78	24.87	21.5 °C	Jul. 20, 2024
5200MHz	162.59 (146.33~178.85)	56.21 (50.59~61.83)	170.90	61.18	21.5 °C	Jul. 10, 2024
5800MHz	182.20 (163.98~200.42)	61.32 (55.19~67.45)	165.19	57.29	21.9 °C	Jul. 11, 2024

5. SAR Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2003. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Uncertainty Component	Tol. (±%)	Prob. Dist.	Div.	Ci (1 g)	Ci (10 g)	1 g Ui (±%)	10 g Ui (±%)	Vi
Measurement System□								
Probe Calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	√3	0.97	0.97	1.98	1.98	∞
Hemispherical Isotropy	5.9	R	√3	0.28	0.28	0.96	0.96	∞
Boundary Effect	1	R	√3	1	1	0.58	0.58	∞
Linearity	4.7	R	√3	1	1	2.71	2.71	∞
System Detection Limits	1	R	√3	1	1	0.58	0.58	∞
Modulation response	3	N	1	1	1	3.00	3.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	√3	1	1	0.00	0.00	∞
Integration Time	1.4	R	√3	1	1	0.81	0.81	∞
RF Ambient Conditions - Noise	3	R	√3	1	1	1.73	1.73	∞
RF Ambient Conditions - Reflections	3	R	√3	1	1	1.73	1.73	∞
Probe Positioner Mechanical Tolerance	1.4	R	√3	1	1	0.81	0.81	∞
Probe Positioning with respect to Phantom Shell	1.4	R	√3	1	1	0.81	0.81	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	2.3	R	√3	1	1	1.33	1.33	∞
Test sample Related								
Test Sample Positioning	2.6	N	1	1	1	2.60	2.60	11
Device Holder Uncertainty	3	N	1	1	1	3.00	3.00	7
Output Power Variation - SAR drift measurement	5	R	√3	1	1	2.89	2.89	∞
SAR scaling	2	R	√3	1	1	1.15	1.15	∞
Phantom and Tissue Parameters□								
Phantom Uncertainty (shape and thickness tolerances)	4	R	√3	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation (in permittivity and conductivity)	2	N	1	1	0.84	2.00	1.68	∞
Liquid Conductivity (temperature uncertainty)	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid conductivity - measurement uncertainty	1.59	N	1	0.23	0.26	0.37	0.41	99

Liquid permittivity (temperature uncertainty)	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid permittivity - measurement uncertainty	1.65	N	1	0.23	0.26	0.38	0.43	99
Combined Standard Uncertainty		RSS				10.19	10.02	
Expanded Uncertainty (95% Confidence interval)		k				20.38	20.04	

6. RF Exposure Positions

6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.



Fig 6.1.1 Front, back, and side views of SAM phantom

6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the

N-F line.

- While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

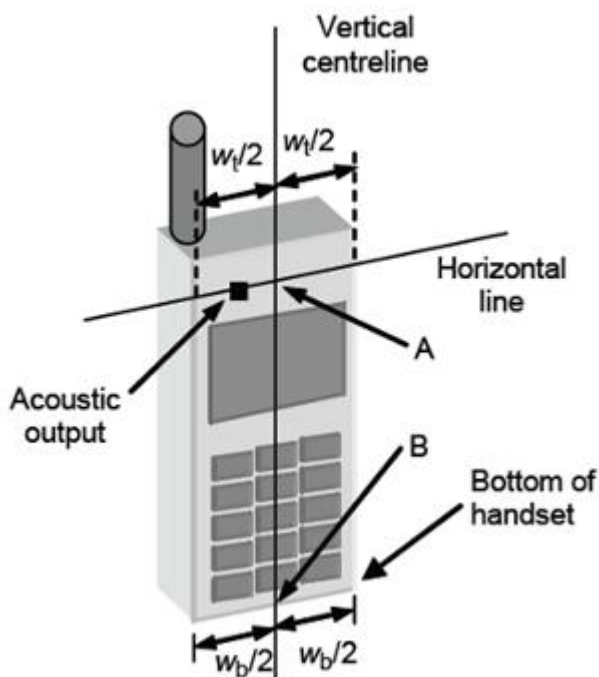


Fig 6.2.1 Handset vertical and horizontal reference lines—"fixed case"

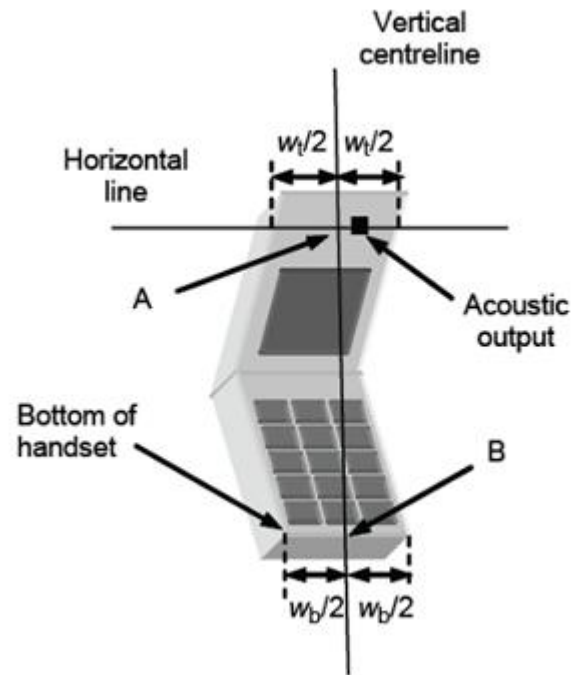


Fig 6.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

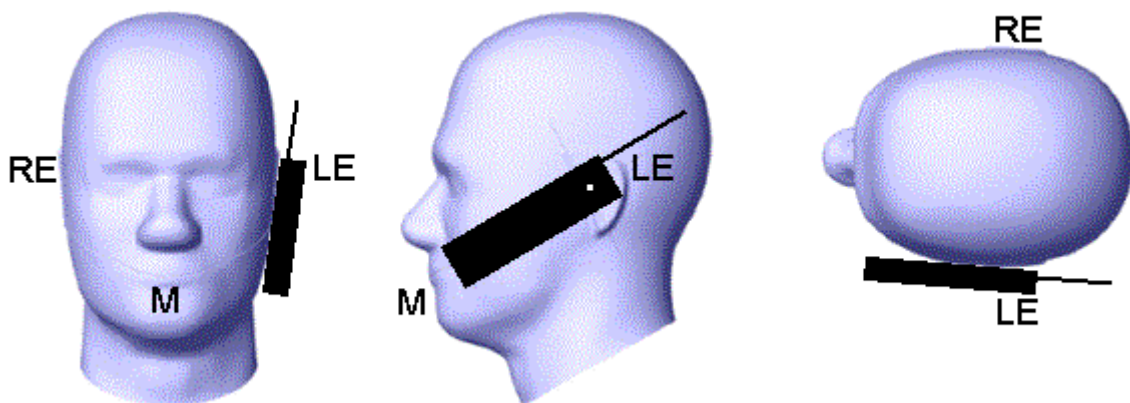


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

6.3. Definition of the tilt position

- While maintaining the orientation of the handset, retract the handset parallel to the reference plane

far enough away from the phantom to enable a rotation of the device by 15 degree.

2. Rotate the Handset around the horizontal line by 15 degree (see Figure 6.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.

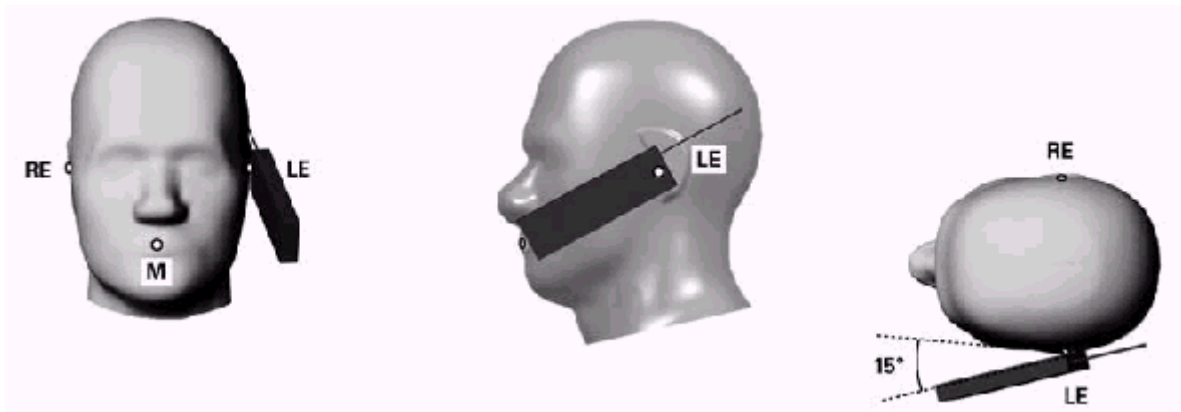


Figure 6.3.1 – Tilt position of the wireless device on the left side of SAM

6.4. Body-worn device

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer. The device shall be positioned as intended at the distance to the outer surface of the phantom that corresponds to the specified distance (See figure 6.1). Adjust the distance between the device surface and the flat phantom to 5mm.

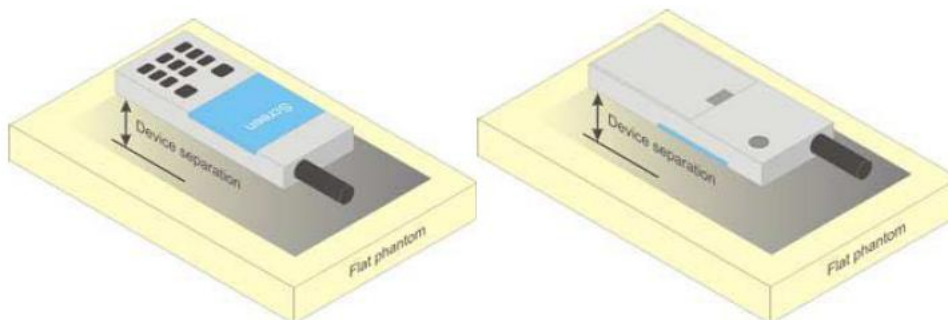


Figure 6.1 – Test positions for Body-worn device

7. RF Output Power

7.1. GSM Conducted Power

Band GSM900	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	975	38	124	Tune-up	975	38	124
Frequency (MHz)		880.2	897.6	914.8		880.2	897.6	914.8
GSM (GMSK)	32.50	32.47	32.25	32.47	23.47	23.44	23.22	23.44
GPRS(GMSK,1 Tx slot)	33.00	32.53	32.28	32.47	23.97	23.50	23.25	23.44
GPRS(GMSK,2 Tx slot)	32.00	31.93	31.66	31.88	25.98	25.91	25.64	25.86
GPRS(GMSK,3 Tx slot)	30.50	30.39	30.14	30.32	26.24	26.13	25.88	26.06
GPRS(GMSK,4 Tx slot)	29.50	29.18	28.94	29.12	26.49	26.17	25.93	26.11
EGPRS(8PSK,1 Tx slot)	27.00	26.64	26.43	26.12	17.97	17.61	17.40	17.09
EGPRS(8PSK,2 Tx slot)	26.50	26.20	25.92	25.66	20.48	20.18	19.90	19.64
EGPRS(8PSK,3 Tx slot)	24.00	23.67	23.34	23.19	19.74	19.41	19.08	18.93
EGPRS(8PSK,4 Tx slot)	22.50	22.31	22.06	21.85	19.49	19.30	19.05	18.84
Band GSM1800	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	698	885	Tune-up	512	698	885
Frequency (MHz)		1710.2	1747.4	1784.8		1710.2	1747.4	1784.8
GSM (GMSK)	30.50	30.07	29.70	29.64	21.47	21.04	20.67	20.61
GPRS(GMSK,1 Tx slot)	30.50	30.33	29.92	29.85	21.47	21.30	20.89	20.82
GPRS(GMSK,2 Tx slot)	30.00	29.79	29.35	29.25	23.98	23.77	23.33	23.23
GPRS(GMSK,3 Tx slot)	28.50	28.03	27.58	27.56	24.24	23.77	23.32	23.30
GPRS(GMSK,4 Tx slot)	27.50	27.06	26.49	26.46	24.49	24.05	23.48	23.45
EGPRS(8PSK,1 Tx slot)	26.00	25.51	25.98	25.98	16.97	16.48	16.95	16.95
EGPRS(8PSK,2 Tx slot)	26.00	25.02	25.48	25.55	19.98	19.00	19.46	19.53
EGPRS(8PSK,3 Tx slot)	25.00	24.18	24.63	24.69	20.74	19.92	20.37	20.43
EGPRS(8PSK,4 Tx slot)	24.50	23.60	24.15	24.18	21.49	20.59	21.14	21.17

Note: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots. The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9.03 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6.02 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3.01 dB

7.2. WCDMA Conducted Power

WCDMA Band1	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	9612	9750	9888
Frequency (MHz)		1922.4	1950	1977.6
RMC12.2K	24.00	23.45	23.60	23.63
HSDPA Sub 1	23.00	22.61	22.63	22.68
HSDPA Sub 2	22.50	22.19	22.02	22.47
HSDPA Sub 3	22.00	21.16	21.04	21.52
HSDPA Sub 4	21.50	21.11	21.29	21.20
HSUPA Sub 1	22.50	22.42	22.44	22.48
HSUPA Sub 2	23.00	22.58	22.46	22.48
HSUPA Sub 3	21.50	21.47	21.20	21.24
HSUPA Sub 4	23.00	22.57	22.57	22.61
HSUPA Sub 5	22.50	22.04	21.71	22.12
WCDMA Band 8	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	2712	2788	2863
Frequency (MHz)		882.4	897.6	912.6
RMC12.2K	23.50	23.29	23.31	23.30
HSDPA Sub 1	22.50	22.31	22.33	22.34
HSDPA Sub 2	22.50	21.97	21.80	22.18
HSDPA Sub 3	21.00	20.63	20.95	20.99
HSDPA Sub 4	21.00	20.90	20.95	20.86
HSUPA Sub 1	22.50	21.86	22.20	22.19
HSUPA Sub 2	22.50	22.33	22.29	22.18
HSUPA Sub 3	21.50	20.37	21.11	21.10
HSUPA Sub 4	22.50	22.35	22.34	22.32
HSUPA Sub 5	22.00	20.86	21.73	21.46

7.3. LTE Conducted Power

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Tune-up	Power (dBm)
Band1	5	18025	1	#0	QPSK	23.50	23.33
Band1	5	18025	8	#0	QPSK	23.50	23.27
Band1	5	18025	25	#0	QPSK	23.50	22.32
Band1	5	18300	1	#0	QPSK	23.50	21.83
Band1	5	18300	8	#0	QPSK	23.50	21.67
Band1	5	18300	25	#0	QPSK	23.50	21.45
Band1	5	18575	1	#0	QPSK	23.50	21.96
Band1	5	18575	8	#0	QPSK	23.50	21.79
Band1	5	18575	25	#0	QPSK	23.50	21.76
Band1	20	18100	1	#0	QPSK	23.50	22.74
Band1	20	18100	18	#0	QPSK	23.50	22.78
Band1	20	18100	100	#0	QPSK	23.50	21.96
Band1	20	18300	1	#0	QPSK	23.50	22.20
Band1	20	18300	18	#0	QPSK	23.50	22.04
Band1	20	18300	100	#0	QPSK	23.50	21.63
Band1	20	18500	1	#0	QPSK	23.50	22.08
Band1	20	18500	18	#0	QPSK	23.50	22.02
Band1	20	18500	100	#0	QPSK	23.50	21.41
Band20	5	24175	1	#0	QPSK	24.50	24.06
Band20	5	24175	8	#0	QPSK	24.50	24.05
Band20	5	24175	25	#0	QPSK	24.50	23.24
Band20	5	24300	1	#0	QPSK	24.50	23.98
Band20	5	24300	8	#0	QPSK	24.50	23.97
Band20	5	24300	25	#0	QPSK	24.50	23.13
Band20	5	24425	1	#0	QPSK	24.50	23.99
Band20	5	24425	8	#0	QPSK	24.50	24.04
Band20	5	24425	25	#0	QPSK	24.50	23.16
Band20	20	24250	1	#0	QPSK	24.50	23.92
Band20	20	24250	18	#0	QPSK	24.50	24.07
Band20	20	24250	100	#0	QPSK	24.50	23.13
Band20	20	24300	1	#0	QPSK	24.50	24.07
Band20	20	24300	18	#0	QPSK	24.50	24.08
Band20	20	24300	100	#0	QPSK	24.50	23.09
Band20	20	24350	1	#0	QPSK	24.50	24.10

Band20	20	24350	18	#0	QPSK	24.50	24.05
Band20	20	24350	100	#0	QPSK	24.50	23.12
Band28	3	27225	1	#0	QPSK	24.50	23.90
Band28	3	27225	1	#Max	QPSK	24.50	23.86
Band28	3	27225	4	#0	QPSK	24.50	23.89
Band28	3	27225	4	#Max	QPSK	24.50	23.86
Band28	3	27375	1	#0	QPSK	24.50	23.95
Band28	3	27375	1	#Max	QPSK	24.50	23.88
Band28	3	27375	4	#0	QPSK	24.50	23.93
Band28	3	27375	4	#Max	QPSK	24.50	23.94
Band28	3	27525	1	#0	QPSK	24.50	23.94
Band28	3	27525	1	#Max	QPSK	24.50	23.96
Band28	3	27525	4	#0	QPSK	24.50	23.95
Band28	3	27525	4	#Max	QPSK	24.50	23.99
Band28	5	27235	1	#0	QPSK	24.50	23.95
Band28	5	27235	1	#Max	QPSK	24.50	23.84
Band28	5	27235	8	#0	QPSK	24.50	23.93
Band28	5	27235	8	#Max	QPSK	24.50	23.93
Band28	5	27385	1	#0	QPSK	24.50	23.97
Band28	5	27385	1	#Max	QPSK	24.50	23.96
Band28	5	27385	8	#0	QPSK	24.50	24.00
Band28	5	27385	8	#Max	QPSK	24.50	23.97
Band28	5	27515	1	#0	QPSK	24.50	24.08
Band28	5	27515	1	#Max	QPSK	24.50	24.00
Band28	5	27515	8	#0	QPSK	24.50	24.06
Band28	5	27515	8	#Max	QPSK	24.50	24.01
Band28	20	27310	1	#0	QPSK	24.50	24.04
Band28	20	27310	1	#Max	QPSK	24.50	23.94
Band28	20	27310	18	#0	QPSK	24.50	23.91
Band28	20	27310	18	#Max	QPSK	24.50	23.91
Band28	20	27460	1	#0	QPSK	24.50	24.00
Band28	20	27460	1	#Max	QPSK	24.50	24.00
Band28	20	27460	18	#0	QPSK	24.50	24.02
Band28	20	27460	18	#Max	QPSK	24.50	24.02
Band28	20	27440	1	#0	QPSK	24.50	23.95
Band28	20	27440	1	#Max	QPSK	24.50	23.99
Band28	20	27440	18	#0	QPSK	24.50	23.97
Band28	20	27440	18	#Max	QPSK	24.50	23.96
Band3	1.4	19207	1	#0	QPSK	24.00	23.75

Band3	1.4	19207	5	#0	QPSK	24.00	23.65
Band3	1.4	19207	6	#0	QPSK	24.00	22.73
Band3	1.4	19575	1	#0	QPSK	24.00	23.63
Band3	1.4	19575	5	#0	QPSK	24.00	23.50
Band3	1.4	19575	6	#0	QPSK	24.00	22.54
Band3	1.4	19943	1	#0	QPSK	24.00	23.78
Band3	1.4	19943	5	#0	QPSK	24.00	23.57
Band3	1.4	19943	6	#0	QPSK	24.00	22.65
Band3	5	19225	1	#0	QPSK	24.00	23.74
Band3	5	19225	8	#0	QPSK	24.00	23.77
Band3	5	19225	25	#0	QPSK	24.00	22.77
Band3	5	19575	1	#0	QPSK	24.00	23.67
Band3	5	19575	8	#0	QPSK	24.00	23.62
Band3	5	19575	25	#0	QPSK	24.00	22.61
Band3	5	19925	1	#0	QPSK	24.00	23.63
Band3	5	19925	8	#0	QPSK	24.00	23.62
Band3	5	19925	25	#0	QPSK	24.00	22.66
Band3	20	19300	1	#0	QPSK	24.00	23.77
Band3	20	19300	18	#0	QPSK	24.00	23.75
Band3	20	19300	100	#0	QPSK	24.00	22.62
Band3	20	19575	1	#0	QPSK	24.00	23.54
Band3	20	19575	18	#0	QPSK	24.00	23.59
Band3	20	19575	100	#0	QPSK	24.00	22.54
Band3	20	19850	1	#0	QPSK	24.00	23.06
Band3	20	19850	18	#0	QPSK	24.00	23.17
Band3	20	19850	100	#0	QPSK	24.00	22.49
Band40	5	38675	1	#0	QPSK	24.50	23.92
Band40	5	38675	8	#0	QPSK	24.50	23.92
Band40	5	38675	25	#0	QPSK	24.50	22.93
Band40	5	39150	1	#0	QPSK	24.50	24.27
Band40	5	39150	8	#0	QPSK	24.50	24.23
Band40	5	39150	25	#0	QPSK	24.50	23.18
Band40	5	39625	1	#0	QPSK	24.50	23.88
Band40	5	39625	8	#0	QPSK	24.50	23.91
Band40	5	39625	25	#0	QPSK	24.50	22.98
Band40	20	38750	1	#0	QPSK	24.50	24.00
Band40	20	38750	18	#0	QPSK	24.50	23.99
Band40	20	38750	100	#0	QPSK	24.50	22.80
Band40	20	39150	1	#0	QPSK	24.50	24.29

Band40	20	39150	18	#0	QPSK	24.50	24.26
Band40	20	39150	100	#0	QPSK	24.50	23.16
Band40	20	39550	1	#0	QPSK	24.50	24.30
Band40	20	39550	18	#0	QPSK	24.50	24.14
Band40	20	39550	100	#0	QPSK	24.50	22.92
Band7	5	20775	1	#0	QPSK	24.50	24.49
Band7	5	20775	8	#0	QPSK	24.50	24.47
Band7	5	20775	25	#0	QPSK	24.50	23.47
Band7	5	21100	1	#0	QPSK	24.50	24.08
Band7	5	21100	8	#0	QPSK	24.50	24.14
Band7	5	21100	25	#0	QPSK	24.50	23.16
Band7	5	21425	1	#0	QPSK	24.50	23.92
Band7	5	21425	8	#0	QPSK	24.50	24.05
Band7	5	21425	25	#0	QPSK	24.50	23.18
Band7	20	20850	1	#0	QPSK	24.50	24.47
Band7	20	20850	18	#0	QPSK	24.50	24.43
Band7	20	20850	100	#0	QPSK	24.50	23.43
Band7	20	21100	1	#0	QPSK	24.50	24.22
Band7	20	21100	18	#0	QPSK	24.50	24.14
Band7	20	21100	100	#0	QPSK	24.50	23.16
Band7	20	21350	1	#0	QPSK	24.50	24.16
Band7	20	21350	18	#0	QPSK	24.50	24.02
Band7	20	21350	100	#0	QPSK	24.50	22.93
Band8	1.4	21457	1	#0	QPSK	24.00	23.69
Band8	1.4	21457	5	#0	QPSK	24.00	23.69
Band8	1.4	21457	6	#0	QPSK	24.00	22.86
Band8	1.4	21625	1	#0	QPSK	24.00	23.84
Band8	1.4	21625	5	#0	QPSK	24.00	23.75
Band8	1.4	21625	6	#0	QPSK	24.00	22.89
Band8	1.4	21793	1	#0	QPSK	24.00	23.48
Band8	1.4	21793	5	#0	QPSK	24.00	23.29
Band8	1.4	21793	6	#0	QPSK	24.00	22.90
Band8	5	21475	1	#0	QPSK	24.00	23.73
Band8	5	21475	8	#0	QPSK	24.00	23.74
Band8	5	21475	25	#0	QPSK	24.00	22.93
Band8	5	21625	1	#0	QPSK	24.00	23.89
Band8	5	21625	8	#0	QPSK	24.00	23.91
Band8	5	21625	25	#0	QPSK	24.00	22.98
Band8	5	21775	1	#0	QPSK	24.00	23.79

Band8	5	21775	8	#0	QPSK	24.00	23.80
Band8	5	21775	25	#0	QPSK	24.00	22.97
Band8	10	21500	1	#0	QPSK	24.00	23.78
Band8	10	21500	12	#0	QPSK	24.00	23.77
Band8	10	21500	50	#0	QPSK	24.00	22.90
Band8	10	21625	1	#0	QPSK	24.00	23.88
Band8	10	21625	12	#0	QPSK	24.00	23.87
Band8	10	21625	50	#0	QPSK	24.00	22.95
Band8	10	21750	1	#0	QPSK	24.00	23.87
Band8	10	21750	12	#0	QPSK	24.00	23.89
Band8	10	21750	50	#0	QPSK	24.00	22.93

7.4. NR Output Power

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Tune-up	Power (dBm)
n1	30	10	385000	12@6	DFT_BPSK	24.50	23.85
n1	30	10	385000	1@1	DFT_BPSK	24.50	23.58
n1	30	10	385000	1@22	DFT_BPSK	24.50	23.92
n1	30	10	385000	12@6	DFT_QPSK	24.50	23.95
n1	30	10	385000	1@1	DFT_QPSK	24.50	23.77
n1	30	10	385000	1@22	DFT_QPSK	24.50	23.89
n1	30	10	390000	12@6	DFT_BPSK	24.50	23.53
n1	30	10	390000	1@1	DFT_BPSK	24.50	23.52
n1	30	10	390000	1@22	DFT_BPSK	24.50	23.30
n1	30	10	390000	12@6	DFT_QPSK	24.50	23.41
n1	30	10	390000	1@1	DFT_QPSK	24.50	23.42
n1	30	10	390000	1@22	DFT_QPSK	24.50	23.25
n1	30	10	395000	12@6	DFT_BPSK	24.50	23.92
n1	30	10	395000	1@1	DFT_BPSK	24.50	23.92
n1	30	10	395000	1@22	DFT_BPSK	24.50	23.41
n1	30	10	395000	12@6	DFT_QPSK	24.50	23.81
n1	30	10	395000	1@1	DFT_QPSK	24.50	23.85
n1	30	10	395000	1@22	DFT_QPSK	24.50	23.38
n1	30	25	386500	32@16	DFT_BPSK	24.50	23.06
n1	30	25	386500	1@1	DFT_BPSK	24.50	23.90
n1	30	25	386500	1@63	DFT_BPSK	24.50	23.94
n1	30	25	386500	32@16	DFT_QPSK	24.50	24.06
n1	30	25	386500	1@1	DFT_QPSK	24.50	23.75

n1	30	25	386500	1@63	DFT_QPSK	24.50	23.78
n1	30	25	390000	32@16	DFT_BPSK	24.50	24.07
n1	30	25	390000	1@1	DFT_BPSK	24.50	23.94
n1	30	25	390000	1@63	DFT_BPSK	24.50	24.22
n1	30	25	390000	32@16	DFT_QPSK	24.50	23.90
n1	30	25	390000	1@1	DFT_QPSK	24.50	23.79
n1	30	25	390000	1@63	DFT_QPSK	24.50	24.09
n1	30	25	393500	32@16	DFT_BPSK	24.50	24.27
n1	30	25	393500	1@1	DFT_BPSK	24.50	23.79
n1	30	25	393500	1@63	DFT_BPSK	24.50	23.97
n1	30	25	393500	32@16	DFT_QPSK	24.50	24.28
n1	30	25	393500	1@1	DFT_QPSK	24.50	23.64
n1	30	25	393500	1@63	DFT_QPSK	24.50	23.76
n1	30	50	389000	64@32	DFT_BPSK	24.50	24.25
n1	30	50	389000	1@1	DFT_BPSK	24.50	23.88
n1	30	50	389000	1@131	DFT_BPSK	24.50	24.28
n1	30	50	389000	64@32	DFT_QPSK	24.50	24.10
n1	30	50	389000	1@1	DFT_QPSK	24.50	23.71
n1	30	50	389000	1@131	DFT_QPSK	24.50	24.11
n1	30	50	390000	64@32	DFT_BPSK	24.50	24.03
n1	30	50	390000	1@1	DFT_BPSK	24.50	23.98
n1	30	50	390000	1@131	DFT_BPSK	24.50	24.22
n1	30	50	390000	64@32	DFT_QPSK	24.50	23.88
n1	30	50	390000	1@1	DFT_QPSK	24.50	23.74
n1	30	50	390000	1@131	DFT_QPSK	24.50	24.10
n1	30	50	391000	64@32	DFT_BPSK	24.50	23.97
n1	30	50	391000	1@1	DFT_BPSK	24.50	23.88
n1	30	50	391000	1@131	DFT_BPSK	24.50	23.88
n1	30	50	391000	64@32	DFT_QPSK	24.50	23.86
n1	30	50	391000	1@1	DFT_QPSK	24.50	23.71
n1	30	50	391000	1@131	DFT_QPSK	24.50	23.78
n20	30	10	167400	12@6	DFT_BPSK	24.50	23.81
n20	30	10	167400	1@1	DFT_BPSK	24.50	23.75
n20	30	10	167400	1@22	DFT_BPSK	24.50	23.74
n20	30	10	167400	12@6	DFT_QPSK	24.50	23.77
n20	30	10	167400	1@1	DFT_QPSK	24.50	23.70
n20	30	10	167400	1@22	DFT_QPSK	24.50	23.71
n20	30	10	169400	12@6	DFT_BPSK	24.50	23.90
n20	30	10	169400	1@1	DFT_BPSK	24.50	23.90

n20	30	10	169400	1@22	DFT_BPSK	24.50	24.00
n20	30	10	169400	12@6	DFT_QPSK	24.50	23.92
n20	30	10	169400	1@1	DFT_QPSK	24.50	23.86
n20	30	10	169400	1@22	DFT_QPSK	24.50	23.97
n20	30	10	171400	12@6	DFT_BPSK	24.50	24.03
n20	30	10	171400	1@1	DFT_BPSK	24.50	24.04
n20	30	10	171400	1@22	DFT_BPSK	24.50	23.96
n20	30	10	171400	12@6	DFT_QPSK	24.50	24.05
n20	30	10	171400	1@1	DFT_QPSK	24.50	23.98
n20	30	10	171400	1@22	DFT_QPSK	24.50	23.87
n20	30	15	167900	18@9	DFT_BPSK	24.50	23.83
n20	30	15	167900	1@1	DFT_BPSK	24.50	23.72
n20	30	15	167900	1@36	DFT_BPSK	24.50	23.95
n20	30	15	167900	18@9	DFT_QPSK	24.50	23.83
n20	30	15	167900	1@1	DFT_QPSK	24.50	23.72
n20	30	15	167900	1@36	DFT_QPSK	24.50	23.90
n20	30	15	169400	18@9	DFT_BPSK	24.50	24.09
n20	30	15	169400	1@1	DFT_BPSK	24.50	23.79
n20	30	15	169400	1@36	DFT_BPSK	24.50	24.02
n20	30	15	169400	18@9	DFT_QPSK	24.50	24.00
n20	30	15	169400	1@1	DFT_QPSK	24.50	23.72
n20	30	15	169400	1@36	DFT_QPSK	24.50	24.05
n20	30	15	170900	18@9	DFT_BPSK	24.50	24.09
n20	30	15	170900	1@1	DFT_BPSK	24.50	23.95
n20	30	15	170900	1@36	DFT_BPSK	24.50	24.01
n20	30	15	170900	18@9	DFT_QPSK	24.50	24.14
n20	30	15	170900	1@1	DFT_QPSK	24.50	23.92
n20	30	15	170900	1@36	DFT_QPSK	24.50	23.96
n20	30	20	168400	25@12	DFT_BPSK	24.50	23.90
n20	30	20	168400	1@1	DFT_BPSK	24.50	23.74
n20	30	20	168400	1@49	DFT_BPSK	24.50	24.01
n20	30	20	168400	25@12	DFT_QPSK	24.50	24.04
n20	30	20	168400	1@1	DFT_QPSK	24.50	23.65
n20	30	20	168400	1@49	DFT_QPSK	24.50	23.96
n20	30	20	169400	25@12	DFT_BPSK	24.50	24.01
n20	30	20	169400	1@1	DFT_BPSK	24.50	23.66
n20	30	20	169400	1@49	DFT_BPSK	24.50	24.03
n20	30	20	169400	25@12	DFT_QPSK	24.50	24.13
n20	30	20	169400	1@1	DFT_QPSK	24.50	23.66

n20	30	20	169400	1@49	DFT_QPSK	24.50	24.02
n20	30	20	170400	25@12	DFT_BPSK	24.50	24.13
n20	30	20	170400	1@1	DFT_BPSK	24.50	23.90
n20	30	20	170400	1@49	DFT_BPSK	24.50	23.96
n20	30	20	170400	25@12	DFT_QPSK	24.50	24.21
n20	30	20	170400	1@1	DFT_QPSK	24.50	23.86
n20	30	20	170400	1@49	DFT_QPSK	24.50	24.02
n28	30	10	141600	12@6	DFT_BPSK	24.50	23.85
n28	30	10	141600	1@1	DFT_BPSK	24.50	23.85
n28	30	10	141600	1@22	DFT_BPSK	24.50	23.84
n28	30	10	141600	12@6	DFT_QPSK	24.50	23.91
n28	30	10	141600	1@1	DFT_QPSK	24.50	23.87
n28	30	10	141600	1@22	DFT_QPSK	24.50	23.93
n28	30	10	145100	12@6	DFT_BPSK	24.50	23.96
n28	30	10	145100	1@1	DFT_BPSK	24.50	23.95
n28	30	10	145100	1@22	DFT_BPSK	24.50	23.83
n28	30	10	145100	12@6	DFT_QPSK	24.50	23.93
n28	30	10	145100	1@1	DFT_QPSK	24.50	23.83
n28	30	10	145100	1@22	DFT_QPSK	24.50	23.73
n28	30	10	148600	12@6	DFT_BPSK	24.50	24.00
n28	30	10	148600	1@1	DFT_BPSK	24.50	23.89
n28	30	10	148600	1@22	DFT_BPSK	24.50	24.02
n28	30	10	148600	12@6	DFT_QPSK	24.50	24.01
n28	30	10	148600	1@1	DFT_QPSK	24.50	23.88
n28	30	10	148600	1@22	DFT_QPSK	24.50	23.97
n28	30	15	142100	18@9	DFT_BPSK	24.50	23.97
n28	30	15	142100	1@1	DFT_BPSK	24.50	23.85
n28	30	15	142100	1@36	DFT_BPSK	24.50	23.94
n28	30	15	142100	18@9	DFT_QPSK	24.50	23.96
n28	30	15	142100	1@1	DFT_QPSK	24.50	23.77
n28	30	15	142100	1@36	DFT_QPSK	24.50	23.96
n28	30	15	145100	18@9	DFT_BPSK	24.50	24.01
n28	30	15	145100	1@1	DFT_BPSK	24.50	23.91
n28	30	15	145100	1@36	DFT_BPSK	24.50	23.82
n28	30	15	145100	18@9	DFT_QPSK	24.50	24.01
n28	30	15	145100	1@1	DFT_QPSK	24.50	23.89
n28	30	15	145100	1@36	DFT_QPSK	24.50	23.68
n28	30	15	148100	18@9	DFT_BPSK	24.50	24.05
n28	30	15	148100	1@1	DFT_BPSK	24.50	23.93

n28	30	15	148100	1@36	DFT_BPSK	24.50	24.09
n28	30	15	148100	18@9	DFT_QPSK	24.50	24.03
n28	30	15	148100	1@1	DFT_QPSK	24.50	23.76
n28	30	15	148100	1@36	DFT_QPSK	24.50	23.99
n28	30	30	143600	36@18	DFT_BPSK	24.50	23.53
n28	30	30	143600	1@1	DFT_BPSK	24.50	23.26
n28	30	30	143600	1@76	DFT_BPSK	24.50	23.31
n28	30	30	143600	36@18	DFT_QPSK	24.50	23.56
n28	30	30	143600	1@1	DFT_QPSK	24.50	23.25
n28	30	30	143600	1@76	DFT_QPSK	24.50	23.21
n28	30	30	145100	36@18	DFT_BPSK	24.50	23.52
n28	30	30	145100	1@1	DFT_BPSK	24.50	23.44
n28	30	30	145100	1@76	DFT_BPSK	24.50	23.37
n28	30	30	145100	36@18	DFT_QPSK	24.50	23.53
n28	30	30	145100	1@1	DFT_QPSK	24.50	23.42
n28	30	30	145100	1@76	DFT_QPSK	24.50	23.35
n28	30	30	146600	36@18	DFT_BPSK	24.50	23.51
n28	30	30	146600	1@1	DFT_BPSK	24.50	23.54
n28	30	30	146600	1@76	DFT_BPSK	24.50	23.55
n28	30	30	146600	36@18	DFT_QPSK	24.50	23.48
n28	30	30	146600	1@1	DFT_QPSK	24.50	23.55
n28	30	30	146600	1@76	DFT_QPSK	24.50	23.53
n3	30	10	343000	12@6	DFT_BPSK	24.50	24.09
n3	30	10	343000	1@1	DFT_BPSK	24.50	23.98
n3	30	10	343000	1@22	DFT_BPSK	24.50	24.07
n3	30	10	343000	12@6	DFT_QPSK	24.50	24.09
n3	30	10	343000	1@1	DFT_QPSK	24.50	23.83
n3	30	10	343000	1@22	DFT_QPSK	24.50	23.84
n3	30	10	349500	12@6	DFT_BPSK	24.50	24.29
n3	30	10	349500	1@1	DFT_BPSK	24.50	24.25
n3	30	10	349500	1@22	DFT_BPSK	24.50	24.22
n3	30	10	349500	12@6	DFT_QPSK	24.50	24.22
n3	30	10	349500	1@1	DFT_QPSK	24.50	23.93
n3	30	10	349500	1@22	DFT_QPSK	24.50	23.98
n3	30	10	356000	12@6	DFT_BPSK	24.50	24.22
n3	30	10	356000	1@1	DFT_BPSK	24.50	24.16
n3	30	10	356000	1@22	DFT_BPSK	24.50	24.20
n3	30	10	356000	12@6	DFT_QPSK	24.50	24.16
n3	30	10	356000	1@1	DFT_QPSK	24.50	23.90

n3	30	10	356000	1@22	DFT_QPSK	24.50	23.86
n3	30	20	344000	25@12	DFT_BPSK	24.50	24.13
n3	30	20	344000	1@1	DFT_BPSK	24.50	23.97
n3	30	20	344000	1@49	DFT_BPSK	24.50	24.13
n3	30	20	344000	25@12	DFT_QPSK	24.50	24.28
n3	30	20	344000	1@1	DFT_QPSK	24.50	23.80
n3	30	20	344000	1@49	DFT_QPSK	24.50	23.92
n3	30	20	349500	25@12	DFT_BPSK	24.50	24.34
n3	30	20	349500	1@1	DFT_BPSK	24.50	24.23
n3	30	20	349500	1@49	DFT_BPSK	24.50	24.17
n3	30	20	349500	25@12	DFT_QPSK	24.50	24.42
n3	30	20	349500	1@1	DFT_QPSK	24.50	23.95
n3	30	20	349500	1@49	DFT_QPSK	24.50	24.05
n3	30	20	355000	25@12	DFT_BPSK	24.50	24.30
n3	30	20	355000	1@1	DFT_BPSK	24.50	24.16
n3	30	20	355000	1@49	DFT_BPSK	24.50	24.14
n3	30	20	355000	25@12	DFT_QPSK	24.50	24.43
n3	30	20	355000	1@1	DFT_QPSK	24.50	23.80
n3	30	20	355000	1@49	DFT_QPSK	24.50	23.91
n3	30	30	345000	36@18	DFT_BPSK	24.50	24.10
n3	30	30	345000	1@1	DFT_BPSK	24.50	24.10
n3	30	30	345000	1@76	DFT_BPSK	24.50	24.32
n3	30	30	345000	36@18	DFT_QPSK	24.50	24.17
n3	30	30	345000	1@1	DFT_QPSK	24.50	23.91
n3	30	30	345000	1@76	DFT_QPSK	24.50	23.99
n3	30	30	349500	36@18	DFT_BPSK	24.50	24.32
n3	30	30	349500	1@1	DFT_BPSK	24.50	24.26
n3	30	30	349500	1@76	DFT_BPSK	24.50	24.30
n3	30	30	349500	36@18	DFT_QPSK	24.50	24.32
n3	30	30	349500	1@1	DFT_QPSK	24.50	24.02
n3	30	30	349500	1@76	DFT_QPSK	24.50	24.05
n3	30	30	354000	36@18	DFT_BPSK	24.50	24.21
n3	30	30	354000	1@1	DFT_BPSK	24.50	24.23
n3	30	30	354000	1@76	DFT_BPSK	24.50	24.12
n3	30	30	354000	36@18	DFT_QPSK	24.50	24.23
n3	30	30	354000	1@1	DFT_QPSK	24.50	23.98
n3	30	30	354000	1@76	DFT_QPSK	24.50	23.92
n38	30	10	515000	12@6	DFT_BPSK	25.00	24.43
n38	30	10	515000	1@1	DFT_BPSK	25.00	24.38

n38	30	10	515000	1@22	DFT_BPSK	25.00	24.46
n38	30	10	515000	12@6	DFT_QPSK	25.00	24.51
n38	30	10	515000	1@1	DFT_QPSK	25.00	24.45
n38	30	10	515000	1@22	DFT_QPSK	25.00	24.50
n38	30	10	519000	12@6	DFT_BPSK	25.00	24.74
n38	30	10	519000	1@1	DFT_BPSK	25.00	24.63
n38	30	10	519000	1@22	DFT_BPSK	25.00	24.65
n38	30	10	519000	12@6	DFT_QPSK	25.00	24.75
n38	30	10	519000	1@1	DFT_QPSK	25.00	24.78
n38	30	10	519000	1@22	DFT_QPSK	25.00	24.77
n38	30	10	523000	12@6	DFT_BPSK	25.00	24.68
n38	30	10	523000	1@1	DFT_BPSK	25.00	24.58
n38	30	10	523000	1@22	DFT_BPSK	25.00	24.81
n38	30	10	523000	12@6	DFT_QPSK	25.00	24.72
n38	30	10	523000	1@1	DFT_QPSK	25.00	24.68
n38	30	10	523000	1@22	DFT_QPSK	25.00	24.86
n38	30	15	515500	18@9	DFT_BPSK	25.00	24.49
n38	30	15	515500	1@1	DFT_BPSK	25.00	24.34
n38	30	15	515500	1@36	DFT_BPSK	25.00	24.57
n38	30	15	515500	18@9	DFT_QPSK	25.00	24.50
n38	30	15	515500	1@1	DFT_QPSK	25.00	24.43
n38	30	15	515500	1@36	DFT_QPSK	25.00	24.60
n38	30	15	519000	18@9	DFT_BPSK	25.00	24.77
n38	30	15	519000	1@1	DFT_BPSK	25.00	24.62
n38	30	15	519000	1@36	DFT_BPSK	25.00	24.61
n38	30	15	519000	18@9	DFT_QPSK	25.00	24.74
n38	30	15	519000	1@1	DFT_QPSK	25.00	24.66
n38	30	15	519000	1@36	DFT_QPSK	25.00	24.67
n38	30	15	522500	18@9	DFT_BPSK	25.00	24.66
n38	30	15	522500	1@1	DFT_BPSK	25.00	24.53
n38	30	15	522500	1@36	DFT_BPSK	25.00	24.79
n38	30	15	522500	18@9	DFT_QPSK	25.00	24.68
n38	30	15	522500	1@1	DFT_QPSK	25.00	24.60
n38	30	15	522500	1@36	DFT_QPSK	25.00	24.88
n38	30	20	516000	25@12	DFT_BPSK	25.00	24.47
n38	30	20	516000	1@1	DFT_BPSK	25.00	24.32
n38	30	20	516000	1@49	DFT_BPSK	25.00	24.70
n38	30	20	516000	25@12	DFT_QPSK	25.00	24.51
n38	30	20	516000	1@1	DFT_QPSK	25.00	24.38

n38	30	20	516000	1@49	DFT_QPSK	25.00	24.71
n38	30	20	519000	25@12	DFT_BPSK	25.00	24.85
n38	30	20	519000	1@1	DFT_BPSK	25.00	24.56
n38	30	20	519000	1@49	DFT_BPSK	25.00	24.68
n38	30	20	519000	25@12	DFT_QPSK	25.00	24.75
n38	30	20	519000	1@1	DFT_QPSK	25.00	24.58
n38	30	20	519000	1@49	DFT_QPSK	25.00	24.68
n38	30	20	522000	25@12	DFT_BPSK	25.00	24.76
n38	30	20	522000	1@1	DFT_BPSK	25.00	24.53
n38	30	20	522000	1@49	DFT_BPSK	25.00	24.80
n38	30	20	522000	25@12	DFT_QPSK	25.00	24.72
n38	30	20	522000	1@1	DFT_QPSK	25.00	24.56
n38	30	20	522000	1@49	DFT_QPSK	25.00	24.83
n77	30	10	620334	12@6	DFT_BPSK	28.00	26.94
n77	30	10	620334	1@1	DFT_BPSK	28.00	26.94
n77	30	10	620334	1@22	DFT_BPSK	28.00	26.87
n77	30	10	620334	12@6	DFT_QPSK	28.00	26.96
n77	30	10	620334	1@1	DFT_QPSK	28.00	27.00
n77	30	10	620334	1@22	DFT_QPSK	28.00	26.97
n77	30	10	650000	12@6	DFT_BPSK	28.00	27.38
n77	30	10	650000	1@1	DFT_BPSK	28.00	27.40
n77	30	10	650000	1@22	DFT_BPSK	28.00	27.43
n77	30	10	650000	12@6	DFT_QPSK	28.00	27.43
n77	30	10	650000	1@1	DFT_QPSK	28.00	27.62
n77	30	10	650000	1@22	DFT_QPSK	28.00	27.66
n77	30	10	679666	12@6	DFT_BPSK	28.00	27.68
n77	30	10	679666	1@1	DFT_BPSK	28.00	27.72
n77	30	10	679666	1@22	DFT_BPSK	28.00	27.69
n77	30	10	679666	12@6	DFT_QPSK	28.00	27.70
n77	30	10	679666	1@1	DFT_QPSK	28.00	27.96
n77	30	10	679666	1@22	DFT_QPSK	28.00	27.93
n77	30	50	621668	64@32	DFT_BPSK	28.00	27.05
n77	30	50	621668	1@1	DFT_BPSK	28.00	26.89
n77	30	50	621668	1@131	DFT_BPSK	28.00	26.83
n77	30	50	621668	64@32	DFT_QPSK	28.00	27.05
n77	30	50	621668	1@1	DFT_QPSK	28.00	27.02
n77	30	50	621668	1@131	DFT_QPSK	28.00	26.99
n77	30	50	650000	64@32	DFT_BPSK	28.00	27.56
n77	30	50	650000	1@1	DFT_BPSK	28.00	27.26

n77	30	50	650000	1@131	DFT_BPSK	28.00	27.39
n77	30	50	650000	64@32	DFT_QPSK	28.00	27.62
n77	30	50	650000	1@1	DFT_QPSK	28.00	27.19
n77	30	50	650000	1@131	DFT_QPSK	28.00	27.63
n77	30	50	678332	64@32	DFT_BPSK	28.00	27.85
n77	30	50	678332	1@1	DFT_BPSK	28.00	27.72
n77	30	50	678332	1@131	DFT_BPSK	28.00	27.98
n77	30	50	678332	64@32	DFT_QPSK	28.00	27.92
n77	30	50	678332	1@1	DFT_QPSK	28.00	27.71
n77	30	50	678332	1@131	DFT_QPSK	28.00	27.48
n77	30	100	623334	135@67	DFT_BPSK	28.00	26.97
n77	30	100	623334	1@1	DFT_BPSK	28.00	26.92
n77	30	100	623334	1@271	DFT_BPSK	28.00	26.84
n77	30	100	623334	135@67	DFT_QPSK	28.00	26.96
n77	30	100	623334	1@1	DFT_QPSK	28.00	27.04
n77	30	100	623334	1@271	DFT_QPSK	28.00	27.03
n77	30	100	650000	135@67	DFT_BPSK	28.00	27.44
n77	30	100	650000	1@1	DFT_BPSK	28.00	27.13
n77	30	100	650000	1@271	DFT_BPSK	28.00	27.75
n77	30	100	650000	135@67	DFT_QPSK	28.00	27.49
n77	30	100	650000	1@1	DFT_QPSK	28.00	27.07
n77	30	100	650000	1@271	DFT_QPSK	28.00	27.74
n77	30	100	676666	135@67	DFT_BPSK	28.00	27.61
n77	30	100	676666	1@1	DFT_BPSK	28.00	27.60
n77	30	100	676666	1@271	DFT_BPSK	28.00	27.94
n77	30	100	676666	135@67	DFT_QPSK	28.00	27.63
n77	30	100	676666	1@1	DFT_QPSK	28.00	27.69
n77	30	100	676666	1@271	DFT_QPSK	28.00	27.71
n78	30	10	620334	12@6	DFT_BPSK	27.50	26.46
n78	30	10	620334	1@1	DFT_BPSK	27.50	26.31
n78	30	10	620334	1@22	DFT_BPSK	27.50	26.40
n78	30	10	620334	12@6	DFT_QPSK	27.50	26.48
n78	30	10	620334	1@1	DFT_QPSK	27.50	26.42
n78	30	10	620334	1@22	DFT_QPSK	27.50	26.44
n78	30	10	636666	12@6	DFT_BPSK	27.50	26.72
n78	30	10	636666	1@1	DFT_BPSK	27.50	26.58
n78	30	10	636666	1@22	DFT_BPSK	27.50	26.64
n78	30	10	636666	12@6	DFT_QPSK	27.50	26.76
n78	30	10	636666	1@1	DFT_QPSK	27.50	26.61

n78	30	10	636666	1@22	DFT_QPSK	27.50	26.67
n78	30	10	653000	12@6	DFT_BPSK	27.50	27.13
n78	30	10	653000	1@1	DFT_BPSK	27.50	26.96
n78	30	10	653000	1@22	DFT_BPSK	27.50	27.01
n78	30	10	653000	12@6	DFT_QPSK	27.50	27.13
n78	30	10	653000	1@1	DFT_QPSK	27.50	27.13
n78	30	10	653000	1@22	DFT_QPSK	27.50	27.18
n78	30	50	621668	64@32	DFT_BPSK	27.50	26.55
n78	30	50	621668	1@1	DFT_BPSK	27.50	26.14
n78	30	50	621668	1@131	DFT_BPSK	27.50	26.22
n78	30	50	621668	64@32	DFT_QPSK	27.50	26.56
n78	30	50	621668	1@1	DFT_QPSK	27.50	26.17
n78	30	50	621668	1@131	DFT_QPSK	27.50	26.20
n78	30	50	636666	64@32	DFT_BPSK	27.50	26.70
n78	30	50	636666	1@1	DFT_BPSK	27.50	26.25
n78	30	50	636666	1@131	DFT_BPSK	27.50	26.19
n78	30	50	636666	64@32	DFT_QPSK	27.50	26.74
n78	30	50	636666	1@1	DFT_QPSK	27.50	26.18
n78	30	50	636666	1@131	DFT_QPSK	27.50	26.14
n78	30	50	651666	64@32	DFT_BPSK	27.50	27.23
n78	30	50	651666	1@1	DFT_BPSK	27.50	26.68
n78	30	50	651666	1@131	DFT_BPSK	27.50	26.96
n78	30	50	651666	64@32	DFT_QPSK	27.50	27.24
n78	30	50	651666	1@1	DFT_QPSK	27.50	26.70
n78	30	50	651666	1@131	DFT_QPSK	27.50	27.00
n78	30	100	623334	135@67	DFT_BPSK	27.50	26.53
n78	30	100	623334	1@1	DFT_BPSK	27.50	25.99
n78	30	100	623334	1@271	DFT_BPSK	27.50	25.99
n78	30	100	623334	135@67	DFT_QPSK	27.50	27.02
n78	30	100	623334	1@1	DFT_QPSK	27.50	25.95
n78	30	100	623334	1@271	DFT_QPSK	27.50	25.97
n78	30	100	636666	135@67	DFT_BPSK	27.50	27.16
n78	30	100	636666	1@1	DFT_BPSK	27.50	25.88
n78	30	100	636666	1@271	DFT_BPSK	27.50	26.14
n78	30	100	636666	135@67	DFT_QPSK	27.50	27.17
n78	30	100	636666	1@1	DFT_QPSK	27.50	25.90
n78	30	100	636666	1@271	DFT_QPSK	27.50	25.64
n78	30	100	650000	135@67	DFT_BPSK	27.50	27.20
n78	30	100	650000	1@1	DFT_BPSK	27.50	25.68

n78	30	100	650000	1@271	DFT_BPSK	27.50	26.55
n78	30	100	650000	135@67	DFT_QPSK	27.50	27.20
n78	30	100	650000	1@1	DFT_QPSK	27.50	25.67
n78	30	100	650000	1@271	DFT_QPSK	27.50	26.59
n8	30	10	177000	12@6	DFT_BPSK	24.50	24.07
n8	30	10	177000	1@1	DFT_BPSK	24.50	24.15
n8	30	10	177000	1@22	DFT_BPSK	24.50	24.02
n8	30	10	177000	12@6	DFT_QPSK	24.50	24.14
n8	30	10	177000	1@1	DFT_QPSK	24.50	24.10
n8	30	10	177000	1@22	DFT_QPSK	24.50	23.99
n8	30	10	179500	12@6	DFT_BPSK	24.50	23.75
n8	30	10	179500	1@1	DFT_BPSK	24.50	23.82
n8	30	10	179500	1@22	DFT_BPSK	24.50	23.70
n8	30	10	179500	12@6	DFT_QPSK	24.50	23.69
n8	30	10	179500	1@1	DFT_QPSK	24.50	23.85
n8	30	10	179500	1@22	DFT_QPSK	24.50	23.77
n8	30	10	182000	12@6	DFT_BPSK	24.50	23.83
n8	30	10	182000	1@1	DFT_BPSK	24.50	23.75
n8	30	10	182000	1@22	DFT_BPSK	24.50	23.96
n8	30	10	182000	12@6	DFT_QPSK	24.50	23.76
n8	30	10	182000	1@1	DFT_QPSK	24.50	23.90
n8	30	10	182000	1@22	DFT_QPSK	24.50	24.02
n8	30	15	177500	18@9	DFT_BPSK	24.50	23.98
n8	30	15	177500	1@1	DFT_BPSK	24.50	24.13
n8	30	15	177500	1@36	DFT_BPSK	24.50	23.95
n8	30	15	177500	18@9	DFT_QPSK	24.50	24.04
n8	30	15	177500	1@1	DFT_QPSK	24.50	24.02
n8	30	15	177500	1@36	DFT_QPSK	24.50	23.85
n8	30	15	179500	18@9	DFT_BPSK	24.50	23.86
n8	30	15	179500	1@1	DFT_BPSK	24.50	23.91
n8	30	15	179500	1@36	DFT_BPSK	24.50	23.77
n8	30	15	179500	18@9	DFT_QPSK	24.50	23.89
n8	30	15	179500	1@1	DFT_QPSK	24.50	23.86
n8	30	15	179500	1@36	DFT_QPSK	24.50	23.70
n8	30	15	181500	18@9	DFT_BPSK	24.50	23.94
n8	30	15	181500	1@1	DFT_BPSK	24.50	23.72
n8	30	15	181500	1@36	DFT_BPSK	24.50	23.98
n8	30	15	181500	18@9	DFT_QPSK	24.50	23.92
n8	30	15	181500	1@1	DFT_QPSK	24.50	23.73

n8	30	15	181500	1@36	DFT_QPSK	24.50	24.03
n8	30	20	178000	25@12	DFT_BPSK	24.50	24.00
n8	30	20	178000	1@1	DFT_BPSK	24.50	24.03
n8	30	20	178000	1@49	DFT_BPSK	24.50	23.92
n8	30	20	178000	25@12	DFT_QPSK	24.50	24.04
n8	30	20	178000	1@1	DFT_QPSK	24.50	24.04
n8	30	20	178000	1@49	DFT_QPSK	24.50	23.79
n8	30	20	179500	25@12	DFT_BPSK	24.50	23.95
n8	30	20	179500	1@1	DFT_BPSK	24.50	23.94
n8	30	20	179500	1@49	DFT_BPSK	24.50	23.88
n8	30	20	179500	25@12	DFT_QPSK	24.50	24.00
n8	30	20	179500	1@1	DFT_QPSK	24.50	23.84
n8	30	20	179500	1@49	DFT_QPSK	24.50	23.83
n8	30	20	181000	25@12	DFT_BPSK	24.50	23.85
n8	30	20	181000	1@1	DFT_BPSK	24.50	23.83
n8	30	20	181000	1@49	DFT_BPSK	24.50	24.00
n8	30	20	181000	25@12	DFT_QPSK	24.50	23.97
n8	30	20	181000	1@1	DFT_QPSK	24.50	23.82
n8	30	20	181000	1@49	DFT_QPSK	24.50	23.98

7.5. WLAN & Bluetooth Output Power

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11b	1	2412	16.00	14.85
	7	2442	16.00	15.74
	13	2472	16.00	14.29
802.11g	1	2412	14.00	13.04
	7	2442	14.00	13.52
	13	2472	14.00	12.36
802.11n (HT20)	1	2412	13.50	12.95
	7	2442	13.50	13.43
	13	2472	13.50	12.30
802.11n (HT40)	3	2422	14.00	13.22
	7	2442	14.00	13.62
	11	2462	14.00	12.98

NOTE: Power measurement results of WLAN 2.4G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	36	5180	12.00	11.75
	40	5200	12.00	11.46
	48	5240	12.00	11.35
802.11n HT20	36	5180	12.00	11.88
	40	5200	12.00	11.21
	48	5240	12.00	10.90
802.11n HT40	38	5190	13.00	12.61
	46	5230	13.00	12.17
802.11ac VHT20	36	5180	12.50	12.09
	40	5200	12.50	11.35
	48	5240	12.50	11.81
802.11ac VHT40	38	5190	12.50	12.44
	46	5230	12.50	12.06
802.11ac VHT80	42	5210	13.00	12.59

NOTE: Power measurement results of WLAN 5.2G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	149	5745	9.50	9.04
	157	5785	9.50	8.66
	165	5825	9.50	8.09
802.11n HT20	149	5745	9.00	8.80
	157	5785	9.00	8.52
	165	5825	9.00	8.42
802.11n HT40	151	5755	9.50	9.06
	159	5795	9.50	8.07
802.11ac VHT20	149	5745	9.00	8.59
	157	5785	9.00	8.42
	165	5825	9.00	7.66
802.11ac VHT40	151	5755	9.00	8.84
	159	5795	9.00	8.20
802.11ac VHT80	155	5775	8.50	8.45

NOTE: Power measurement results of WLAN 5.8G.

BR+EDR	Data Rates	Tune - up(dBm)	Output Power (dBm)
--------	------------	----------------	--------------------

	GFSK DH5	8.50	8.13
	Pi/4 DQPSK DH5	5.50	5.32
	8DPSK DH5	5.50	5.31

BLE	Channel	Tune - up	Output Power (dBm)	
			1M	2M
	0CH	-5.00	-5.56	-5.23
	19CH	-3.00	-3.79	-3.83
	39CH	-5.00	-5.40	-5.35

NOTE: Power measurement results of Bluetooth. Refer to EN 62479, the available power of this EUT is 8.50dBm (7.08mW), the power is less than the low-power exclusion level defined in 4.2 (P max: 20mW), So Bluetooth stand-alone SAR is not required

7.6. NFC Assessment

NFC	Frequency (MHz)	H-Field(dBuA/m)@3m	Output Power (dBm)	Output Power (mW)	Limits (mW)
	13.56MHz	16.34	0.00	1.00	20

NOTE: Refer to COUNCIL RECOMMENDATION 1999/519/EC, the available H-Field of this EUT is 0.00Bm (1.00mW), the power is less than the low-power exclusion level defined in 4.2 (P max: 20mW), So Bluetooth stand-alone SAR is not required

8. Assessment of the compliance of low power equipment

According to EN 62479 Clause 4.1& 4.2, these require does not apply to the receivers that has no transmit. So, GPS and FM is compliance.

9. SAR Results

9.1. SAR measurement results

9.1.1. SAR measurement Result of GSM900

Test Position	Test channel /Freq.	Test Mode	Separation distance (mm)	SAR Value (W/kg)		Power Drift (±5%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 10-g (W/Kg)	Date
				1-g	10-g					
Head										
Left Cheek	38/897.6	GPRS(GMSK 4TS)	0	0.216	0.188	-1.94	28.94	29.50	0.214	2024/7/15

Left Tilt 15 Degree	38/897.6	GPRS(GMSK 4TS)	0	0.124	0.103	-2.62	28.94	29.50	0.117	2024/7/15
Right Cheek	38/897.6	GPRS(GMSK 4TS)	0	0.187	0.160	0.65	28.94	29.50	0.182	2024/7/15
Right Tilt 15 Degree	38/897.6	GPRS(GMSK 4TS)	0	0.089	0.076	-0.17	28.94	29.50	0.086	2024/7/15
Left Cheek	975/880.2	GPRS(GMSK 4TS)	0	0.200	0.174	0.53	29.18	29.50	0.187	2024/7/15
Left Cheek	124/914.8	GPRS(GMSK 4TS)	0	0.189	0.160	-2.65	29.12	29.50	0.175	2024/7/15
Extremity										
Front Side	38/897.6	GPRS(GMSK 4TS)	0	0.331	0.208	-0.19	28.94	29.50	0.237	2024/7/15
Back Side	38/897.6	GPRS(GMSK 4TS)	0	0.543	0.360	3.35	28.94	29.50	0.410	2024/7/15
Left Side	38/897.6	GPRS(GMSK 4TS)	0	0.228	0.144	-3.61	28.94	29.50	0.164	2024/7/15
Right Side	38/897.6	GPRS(GMSK 4TS)	0	0.125	0.081	2.13	28.94	29.50	0.092	2024/7/15
Top Side	38/897.6	GPRS(GMSK 4TS)	0	0.011	0.009	2.38	28.94	29.50	0.010	2024/7/15
Bottom Side	38/897.6	GPRS(GMSK 4TS)	0	0.337	0.212	-2.68	28.94	29.50	0.241	2024/7/15
Back Side	975/880.2	GPRS(GMSK 4TS)	0	0.510	0.325	-3.86	29.18	29.50	0.350	2024/7/15
Back Side	124/914.8	GPRS(GMSK 4TS)	0	0.451	0.296	-2.45	29.12	29.50	0.323	2024/7/15
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	38/897.6	GPRS(GMSK 4TS)	5	0.299	0.192	-3.65	28.94	29.50	0.218	2024/7/15

9.1.2. SAR measurement Result of GSM1800

Test Position	Test channel /Freq.	Test Mode	Separation distance (mm)	SAR Value (W/kg)		Power Drift (±5%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 10-g (W/Kg)	Date
				1-g	10-g					
Head										
Left Cheek	698/1747.4	GPRS(GMSK 4TS)	0	0.366	0.227	-1.37	26.49	27.50	0.286	2024/7/09

Left Tilt 15 Degree	698/1747.4	GPRS(GMSK 4TS)	0	0.212	0.128	-2.47	26.49	27.50	0.162	2024/7/09
Right Cheek	698/1747.4	GPRS(GMSK 4TS)	0	0.331	0.197	-0.55	26.49	27.50	0.249	2024/7/09
Right Tilt 15 Degree	698/1747.4	GPRS(GMSK 4TS)	0	0.151	0.089	3.68	26.49	27.50	0.112	2024/7/09
Left Cheek	512/1710.2	GPRS(GMSK 4TS)	0	0.322	0.194	0.90	27.06	27.50	0.215	2024/7/09
Left Cheek	885/1784.8	GPRS(GMSK 4TS)	0	0.321	0.189	-2.45	26.46	27.50	0.240	2024/7/09
Extremity										
Front Side	698/1747.4	GPRS(GMSK 4TS)	0	0.974	0.508	-3.68	26.49	27.50	0.641	2024/7/09
Back Side	698/1747.4	GPRS(GMSK 4TS)	0	1.596	0.833	-0.92	26.49	27.50	1.051	2024/7/09
Left Side	698/1747.4	GPRS(GMSK 4TS)	0	0.686	0.347	2.92	26.49	27.50	0.438	2024/7/09
Right Side	698/1747.4	GPRS(GMSK 4TS)	0	0.399	0.204	-0.78	26.49	27.50	0.257	2024/7/09
Top Side	698/1747.4	GPRS(GMSK 4TS)	0	0.048	0.025	0.45	26.49	27.50	0.032	2024/7/09
Bottom Side	698/1747.4	GPRS(GMSK 4TS)	0	1.021	0.528	1.23	26.49	27.50	0.666	2024/7/09
Back Side	512/1710.2	GPRS(GMSK 4TS)	0	1.500	0.767	-3.31	27.06	27.50	0.849	2024/7/09
Back Side	885/1784.8	GPRS(GMSK 4TS)	0	1.341	0.665	-2.92	26.46	27.50	0.845	2024/7/09
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	698/1747.4	GPRS(GMSK 4TS)	5	0.990	0.506	-2.48	26.49	27.50	0.638	2024/7/09

9.1.3. SAR measurement Result of WCDMA Band 1

Test Position	Test channel /Freq	Test Mode	Separation distance (mm)	SAR Value (W/kg)		Power Drift (±5%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 10-g (W/Kg)	Date
				1-g	10-g					
				Head						
Left Cheek	9750/1950	RMC12.2K	0	0.105	0.064	2.88	23.60	24.00	0.070	2024/7/12
Left Tilt 15 Degree	9750/1950	RMC12.2K	0	0.058	0.034	-3.43	23.60	24.00	0.037	2024/7/12
Right Cheek	9750/1950	RMC12.2K	0	0.096	0.057	2.03	23.60	24.00	0.062	2024/7/12

Right Tilt 15 Degree	9750/1950	RMC12.2K	0	0.043	0.025	-1.43	23.60	24.00	0.027	2024/7/12
Left Cheek	9612/1922.4	RMC12.2K	0	0.096	0.057	-2.45	23.45	24.00	0.065	2024/7/12
Left Cheek	9888/1977.6	RMC12.2K	0	0.093	0.056	-0.35	23.63	24.00	0.061	2024/7/12
Extremity										
Front Side	9750/1950	RMC12.2K	0	0.426	0.213	-1.94	23.60	24.00	0.234	2024/7/12
Back Side	9750/1950	RMC12.2K	0	0.665	0.332	-1.67	23.60	24.00	0.364	2024/7/12
Left Side	9750/1950	RMC12.2K	0	0.279	0.138	-2.04	23.60	24.00	0.151	2024/7/12
Right Side	9750/1950	RMC12.2K	0	0.133	0.064	1.76	23.60	24.00	0.070	2024/7/12
Top Side	9750/1950	RMC12.2K	0	0.027	0.013	3.07	23.60	24.00	0.014	2024/7/12
Bottom Side	9750/1950	RMC12.2K	0	0.426	0.206	2.85	23.60	24.00	0.226	2024/7/12
Back Side	9612/1922.4	RMC12.2K	0	0.625	0.300	3.37	23.45	24.00	0.341	2024/7/12
Back Side	9888/1977.6	RMC12.2K	0	0.552	0.273	-3.57	23.63	24.00	0.297	2024/7/12
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	9750/1950	RMC12.2K	5	0.412	0.206	-0.91	23.60	24.00	0.226	2024/7/12

9.1.4. SAR measurement Result of WCDMA Band 8

Test Position	Test channel /Freq	Test Mode	Separation distance (mm)	SAR Value (W/kg)		Power Drift (±5%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 10-g (W/Kg)	Date
				1-g	10-g					
Head										
Left Cheek	2788/897.6	RMC12.2K	0	0.149	0.130	-0.48	23.31	23.50	0.136	2024/7/15
Left Tilt 15 Degree	2788/897.6	RMC12.2K	0	0.078	0.065	3.08	23.31	23.50	0.068	2024/7/15
Right Cheek	2788/897.6	RMC12.2K	0	0.140	0.117	4.69	23.31	23.50	0.122	2024/7/15
Right Tilt 15 Degree	2788/897.6	RMC12.2K	0	0.070	0.058	0.09	23.31	23.50	0.061	2024/7/15
Left Cheek	2712/882.4	RMC12.2K	0	0.136	0.116	1.08	23.29	23.50	0.122	2024/7/15
Left Cheek	2863/912.6	RMC12.2K	0	0.138	0.118	2.91	23.30	23.50	0.124	2024/7/15
Extremity										
Front Side	2788/897.6	RMC12.2K	0	0.277	0.190	-0.93	23.31	23.50	0.198	2024/7/15
Back Side	2788/897.6	RMC12.2K	0	0.440	0.315	-0.96	23.31	23.50	0.329	2024/7/15
Left Side	2788/897.6	RMC12.2K	0	0.185	0.127	-2.84	23.31	23.50	0.133	2024/7/15
Right Side	2788/897.6	RMC12.2K	0	0.092	0.063	0.25	23.31	23.50	0.066	2024/7/15
Top Side	2788/897.6	RMC12.2K	0	0.018	0.016	0.35	23.31	23.50	0.017	2024/7/15
Bottom Side	2788/897.6	RMC12.2K	0	0.264	0.180	2.60	23.31	23.50	0.188	2024/7/15
Back Side	2712/882.4	RMC12.2K	0	0.418	0.293	-0.24	23.29	23.50	0.308	2024/7/15
Back Side	2863/912.6	RMC12.2K	0	0.361	0.246	2.12	23.30	23.50	0.258	2024/7/15
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	2788/897.6	RMC12.2K	5	0.264	0.187	-1.20	23.31	23.50	0.195	2024/7/15

9.1.5. SAR measurement Result of LTE Band 1

Test Position	Test channel /Freq.	Test Mode	Separation distance (mm)	SAR Value (W/kg)		Power Drift (±5%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 10-g (W/Kg)	Date
				1-g	10-g					
Head										
Left Cheek	18300/1950	20M QPSK(1,0)	0	0.388	0.238	2.39	22.20	23.50	0.321	2024/7/12
Left Tilt 15 Degree	18300/1950	20M QPSK(1,0)	0	0.197	0.118	-2.20	22.20	23.50	0.159	2024/7/12
Right Cheek	18300/1950	20M QPSK(1,0)	0	0.353	0.208	2.91	22.20	23.50	0.281	2024/7/12
Right Tilt 15 Degree	18300/1950	20M QPSK(1,0)	0	0.182	0.112	-1.46	22.20	23.50	0.151	2024/7/12
Left Cheek	18100/1930	20M QPSK(1,0)	0	0.334	0.195	0.14	22.74	23.50	0.232	2024/7/12
Left Cheek	18500/1970	20M QPSK(1,0)	0	0.348	0.207	-1.49	22.08	23.50	0.287	2024/7/12
Extremity										
Front Side	18300/1950	20M QPSK(1,0)	0	1.291	0.654	-1.76	22.20	23.50	0.882	2024/7/12
Back Side	18300/1950	20M QPSK(1,0)	0	2.117	1.106	-0.52	22.20	23.50	1.492	2024/7/12
Left Side	18300/1950	20M QPSK(1,0)	0	0.910	0.461	-2.23	22.20	23.50	0.622	2024/7/12
Right Side	18300/1950	20M QPSK(1,0)	0	0.487	0.244	1.63	22.20	23.50	0.329	2024/7/12
Top Side	18300/1950	20M QPSK(1,0)	0	0.106	0.055	0.05	22.20	23.50	0.074	2024/7/12
Bottom Side	18300/1950	20M QPSK(1,0)	0	1.355	0.687	-3.05	22.20	23.50	0.927	2024/7/12
Back Side	18100/1930	20M QPSK(1,0)	0	2.011	1.030	-1.01	22.74	23.50	1.227	2024/7/12
Back Side	18500/1970	20M QPSK(1,0)	0	1.736	0.871	-3.08	22.08	23.50	1.208	2024/7/12
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	18300/1950	20M QPSK(1,0)	5	1.122	0.586	-2.67	22.20	23.50	0.790	2024/7/12

9.1.6. SAR measurement Result of LTE Band 3

Test Position	Test channel /Freq.	Test Mode	Separation distance (mm)	SAR Value (W/kg)		Power Drift (±5%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 10-g (W/Kg)	Date
				1-g	10-g					
Head										
Left Cheek	19575/1747.5	20M QPSK(1,0)	0	0.437	0.269	-0.08	23.54	24.00	0.299	2024/7/09
Left Tilt 15 Degree	19575/1747.5	20M QPSK(1,0)	0	0.253	0.153	-2.46	23.54	24.00	0.170	2024/7/09
Right Cheek	19575/1747.5	20M QPSK(1,0)	0	0.406	0.237	-2.21	23.54	24.00	0.263	2024/7/09
Right Tilt 15 Degree	19575/1747.5	20M QPSK(1,0)	0	0.200	0.121	-2.69	23.54	24.00	0.135	2024/7/09
Left Cheek	19300/1720	20M QPSK(1,0)	0	0.394	0.238	0.40	23.77	24.00	0.251	2024/7/09
Left Cheek	19850/1775	20M QPSK(1,0)	0	0.396	0.240	-1.18	23.06	24.00	0.298	2024/7/09
Extremity										
Front Side	19575/1747.5	20M QPSK(1,0)	0	1.262	0.642	1.51	23.54	24.00	0.714	2024/7/09
Back Side	19575/1747.5	20M QPSK(1,0)	0	2.104	1.115	-1.94	23.54	24.00	1.240	2024/7/09
Left Side	19575/1747.5	20M QPSK(1,0)	0	0.842	0.446	3.76	23.54	24.00	0.496	2024/7/09
Right Side	19575/1747.5	20M QPSK(1,0)	0	0.505	0.262	-0.08	23.54	24.00	0.291	2024/7/09
Top Side	19575/1747.5	20M QPSK(1,0)	0	0.105	0.055	2.95	23.54	24.00	0.061	2024/7/09
Bottom Side	19575/1747.5	20M QPSK(1,0)	0	1.326	0.675	1.49	23.54	24.00	0.750	2024/7/09
Back Side	19300/1720	20M QPSK(1,0)	0	1.999	1.028	-0.69	23.77	24.00	1.084	2024/7/09
Back Side	19850/1775	20M QPSK(1,0)	0	1.683	0.865	3.14	23.06	24.00	1.074	2024/7/09
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	19575/1747.5	20M QPSK(1,0)	5	1.347	0.692	-0.66	23.54	24.00	0.769	2024/7/09

9.1.7. SAR measurement Result of LTE Band 7

Test Position	Test channel /Freq.	Test Mode	Separation distance (mm)	SAR Value (W/kg)		Power Drift (±5%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 10-g (W/Kg)	Date
				1-g	10-g					
Head										
Left Cheek	21100/2535	20M QPSK(1,0)	0	0.237	0.119	-0.18	24.22	24.50	0.127	2024/7/06
Left Tilt 15 Degree	21100/2535	20M QPSK(1,0)	0	0.131	0.065	4.37	24.22	24.50	0.069	2024/7/06
Right Cheek	21100/2535	20M QPSK(1,0)	0	0.204	0.101	0.74	24.22	24.50	0.108	2024/7/06
Right Tilt 15 Degree	21100/2535	20M QPSK(1,0)	0	0.100	0.048	-2.15	24.22	24.50	0.051	2024/7/06
Left Cheek	20850/2510	20M QPSK(1,0)	0	0.223	0.112	3.62	24.47	24.50	0.113	2024/7/06
Left Cheek	21350/2560	20M QPSK(1,0)	0	0.225	0.111	0.05	24.16	24.50	0.120	2024/7/06
Extremity										
Front Side	21100/2535	20M QPSK(1,0)	0	0.764	0.326	3.95	24.22	24.50	0.348	2024/7/06
Back Side	21100/2535	20M QPSK(1,0)	0	1.232	0.553	-0.62	24.22	24.50	0.590	2024/7/06
Left Side	21100/2535	20M QPSK(1,0)	0	0.493	0.210	-1.95	24.22	24.50	0.224	2024/7/06
Right Side	21100/2535	20M QPSK(1,0)	0	0.283	0.121	1.30	24.22	24.50	0.129	2024/7/06
Top Side	21100/2535	20M QPSK(1,0)	0	0.049	0.022	-1.58	24.22	24.50	0.023	2024/7/06
Bottom Side	21100/2535	20M QPSK(1,0)	0	0.788	0.336	-1.52	24.22	24.50	0.358	2024/7/06
Back Side	20850/2510	20M QPSK(1,0)	0	1.170	0.515	2.15	24.47	24.50	0.519	2024/7/06
Back Side	21350/2560	20M QPSK(1,0)	0	0.998	0.426	-0.11	24.16	24.50	0.461	2024/7/06
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	21100/2535	20M QPSK(1,0)	5	0.739	0.325	-1.42	24.22	24.50	0.347	2024/7/06

9.1.8. SAR measurement Result of LTE Band 8

Test Position	Test channel /Freq.	Test Mode	Separation distance (mm)	SAR Value (W/kg)		Power Drift (±5%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 10-g (W/Kg)	Date
				1-g	10-g					
Head										
Left Cheek	21625/897.5	10M QPSK(1,0)	0	0.124	0.110	1.69	23.88	24.00	0.113	2024/7/15
Left Tilt 15 Degree	21625/897.5	10M QPSK(1,0)	0	0.068	0.060	5.32	23.88	24.00	0.062	2024/7/15
Right Cheek	21625/897.5	10M QPSK(1,0)	0	0.107	0.090	2.43	23.88	24.00	0.093	2024/7/15
Right Tilt 15 Degree	21625/897.5	10M QPSK(1,0)	0	0.057	0.049	1.04	23.88	24.00	0.050	2024/7/15
Left Cheek	21500/885	10M QPSK(1,0)	0	0.106	0.094	-3.37	23.78	24.00	0.099	2024/7/15
Left Cheek	21750/910	10M QPSK(1,0)	0	0.108	0.096	1.45	23.87	24.00	0.099	2024/7/15
Extremity										
Front Side	21625/897.5	10M QPSK(1,0)	0	0.332	0.219	-0.42	23.88	24.00	0.225	2024/7/15
Back Side	21625/897.5	10M QPSK(1,0)	0	0.510	0.340	-0.10	23.88	24.00	0.350	2024/7/15
Left Side	21625/897.5	10M QPSK(1,0)	0	0.224	0.143	3.58	23.88	24.00	0.147	2024/7/15
Right Side	21625/897.5	10M QPSK(1,0)	0	0.107	0.068	2.72	23.88	24.00	0.070	2024/7/15
Top Side	21625/897.5	10M QPSK(1,0)	0	0.015	0.013	-0.14	23.88	24.00	0.013	2024/7/15
Bottom Side	21625/897.5	10M QPSK(1,0)	0	0.316	0.204	-3.80	23.88	24.00	0.210	2024/7/15
Back Side	21500/885	10M QPSK(1,0)	0	0.485	0.320	1.74	23.78	24.00	0.337	2024/7/15
Back Side	21750/910	10M QPSK(1,0)	0	0.428	0.280	2.01	23.87	24.00	0.289	2024/7/15
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	21625/897.5	10M QPSK(1,0)	5	0.316	0.211	-0.44	23.88	24.00	0.217	2024/7/15

9.1.9. SAR measurement Result of LTE Band 20

Test Position	Test channel /Freq.	Test Mode	Separation distance (mm)	SAR Value (W/kg)		Power Drift (±5%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 10-g (W/Kg)	Date
				1-g	10-g					
Head										
Left Cheek	24300/847	20M QPSK(1,0)	0	0.213	0.186	2.05	24.07	24.50	0.205	2024/7/15
Left Tilt 15 Degree	24300/847	20M QPSK(1,0)	0	0.124	0.104	1.25	24.07	24.50	0.115	2024/7/15
Right Cheek	24300/847	20M QPSK(1,0)	0	0.191	0.158	1.90	24.07	24.50	0.174	2024/7/15
Right Tilt 15 Degree	24300/847	20M QPSK(1,0)	0	0.098	0.082	1.16	24.07	24.50	0.091	2024/7/15
Left Cheek	24250/842	20M QPSK(1,0)	0	0.201	0.172	-1.20	23.92	24.50	0.197	2024/7/15
Left Cheek	24350/852	20M QPSK(1,0)	0	0.187	0.162	-0.62	24.10	24.50	0.178	2024/7/15
Extremity										
Front Side	24300/847	20M QPSK(1,0)	0	0.614	0.403	3.98	24.07	24.50	0.445	2024/7/15
Back Side	24300/847	20M QPSK(1,0)	0	0.944	0.620	-0.24	24.07	24.50	0.685	2024/7/15
Left Side	24300/847	20M QPSK(1,0)	0	0.425	0.265	-3.96	24.07	24.50	0.293	2024/7/15
Right Side	24300/847	20M QPSK(1,0)	0	0.189	0.118	1.67	24.07	24.50	0.130	2024/7/15
Top Side	24300/847	20M QPSK(1,0)	0	0.038	0.025	2.13	24.07	24.50	0.028	2024/7/15
Bottom Side	24300/847	20M QPSK(1,0)	0	0.566	0.361	1.45	24.07	24.50	0.399	2024/7/15
Back Side	24250/842	20M QPSK(1,0)	0	0.887	0.583	-3.05	23.92	24.50	0.666	2024/7/15
Back Side	24350/852	20M QPSK(1,0)	0	0.802	0.511	1.56	24.10	24.50	0.560	2024/7/15
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	24300/847	20M QPSK(1,0)	5	0.585	0.377	-0.84	24.07	24.50	0.416	2024/7/15

9.1.10. SAR measurement Result of LTE Band 28

Test Position	Test	Test Mode	Separation	SAR Value	Power	Conducted	Tune-up	Scaled	Date
---------------	------	-----------	------------	-----------	-------	-----------	---------	--------	------

	channel /Freq.		distance (mm)	(W/kg)		Drift (±5%)	Power (dBm)	Power (dBm)	SAR 10-g (W/Kg)	
				1-g	10-g					
Head										
Left Cheek	27460/728	20M QPSK(1,0)	0	0.226	0.207	1.35	24.00	24.50	0.232	2024/7/14
Left Tilt 15 Degree	27460/728	20M QPSK(1,0)	0	0.134	0.122	-2.62	24.00	24.50	0.137	2024/7/14
Right Cheek	27460/728	20M QPSK(1,0)	0	0.200	0.178	-3.46	24.00	24.50	0.200	2024/7/14
Right Tilt 15 Degree	27460/728	20M QPSK(1,0)	0	0.101	0.088	-2.97	24.00	24.50	0.099	2024/7/14
Left Cheek	27310/713	20M QPSK(1,0)	0	0.200	0.183	-4.40	24.04	24.50	0.203	2024/7/14
Left Cheek	27560/738	20M QPSK(1,0)	0	0.195	0.170	0.81	23.95	24.50	0.193	2024/7/14
Extremity										
Front Side	27460/728	20M QPSK(1,0)	0	0.722	0.449	3.92	24.00	24.50	0.504	2024/7/14
Back Side	27460/728	20M QPSK(1,0)	0	1.203	0.748	-0.53	24.00	24.50	0.839	2024/7/14
Left Side	27460/728	20M QPSK(1,0)	0	0.481	0.284	-3.62	24.00	24.50	0.319	2024/7/14
Right Side	27460/728	20M QPSK(1,0)	0	0.277	0.172	2.89	24.00	24.50	0.193	2024/7/14
Top Side	27460/728	20M QPSK(1,0)	0	0.060	0.037	-0.06	24.00	24.50	0.042	2024/7/14
Bottom Side	27460/728	20M QPSK(1,0)	0	0.734	0.434	-0.08	24.00	24.50	0.487	2024/7/14
Back Side	27310/713	20M QPSK(1,0)	0	1.131	0.689	1.52	24.04	24.50	0.766	2024/7/14
Back Side	27560/738	20M QPSK(1,0)	0	0.974	0.581	0.32	23.95	24.50	0.659	2024/7/14
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	27460/728	20M QPSK(1,0)	5	0.722	0.431	-2.91	24.00	24.50	0.484	2024/7/14

9.1.11. SAR measurement Result of LTE Band 40

Test Position	Test	Test Mode	Separation	SAR Value	Power	Conducted	Tune-up	Scaled	Date
---------------	------	-----------	------------	-----------	-------	-----------	---------	--------	------

	channel /Freq.		distance (mm)	(W/kg)		Drift (±5%)	Power (dBm)	Power (dBm)	SAR 10-g (W/Kg)	
				1-g	10-g					
Head										
Left Cheek	39150/2350	20M QPSK(1,0)	0	0.062	0.036	2.82	24.29	24.50	0.038	2024/7/13
Left Tilt 15 Degree	39150/2350	20M QPSK(1,0)	0	0.036	0.020	1.71	24.29	24.50	0.021	2024/7/13
Right Cheek	39150/2350	20M QPSK(1,0)	0	0.053	0.029	2.76	24.29	24.50	0.030	2024/7/13
Right Tilt 15 Degree	39150/2350	20M QPSK(1,0)	0	0.027	0.016	0.88	24.29	24.50	0.017	2024/7/13
Left Cheek	38750/2310	20M QPSK(1,0)	0	0.058	0.032	1.60	24.00	24.50	0.036	2024/7/13
Left Cheek	39550/2390	20M QPSK(1,0)	0	0.053	0.031	-0.34	24.30	24.50	0.032	2024/7/13
Extremity										
Front Side	39150/2350	20M QPSK(1,0)	0	0.353	0.229	-1.96	24.29	24.50	0.240	2024/7/13
Back Side	39150/2350	20M QPSK(1,0)	0	0.543	0.360	3.35	24.29	24.50	0.378	2024/7/13
Left Side	39150/2350	20M QPSK(1,0)	0	0.228	0.148	-3.03	24.29	24.50	0.155	2024/7/13
Right Side	39150/2350	20M QPSK(1,0)	0	0.027	0.018	1.45	24.29	24.50	0.019	2024/7/13
Top Side	39150/2350	20M QPSK(1,0)	0	0.076	0.050	1.77	24.29	24.50	0.052	2024/7/13
Bottom Side	39150/2350	20M QPSK(1,0)	0	0.027	0.017	-2.58	24.29	24.50	0.018	2024/7/13
Back Side	38750/2310	20M QPSK(1,0)	0	0.505	0.335	0.94	24.00	24.50	0.376	2024/7/13
Back Side	39550/2390	20M QPSK(1,0)	0	0.434	0.282	0.64	24.30	24.50	0.295	2024/7/13
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	39150/2350	20M QPSK(1,0)	5	0.348	0.224	2.31	24.29	24.50	0.235	2024/7/13

9.1.12. SAR measurement Result of NR SA n1

Test Position	Test channel	Test Mode	Separation	SAR Value	Power	Conducted	Tune-up	Scaled	Date
---------------	--------------	-----------	------------	-----------	-------	-----------	---------	--------	------

	/Freq.		distance (mm)	(W/kg)		Drift (±5%)	Power (dBm)	Power (dBm)	SAR 10-g (W/Kg)	
				1-g	10-g					
Head										
Left Cheek	390000/1950	30kHz 50M QPSK(1,1)	0	0.100	0.061	-0.57	23.74	24.50	0.073	2024/7/12
Left Tilt 15 Degree	390000/1950	30kHz 50M QPSK(1,1)	0	0.055	0.033	-0.02	23.74	24.50	0.039	2024/7/12
Right Cheek	390000/1950	30kHz 50M QPSK(1,1)	0	0.090	0.054	-0.24	23.74	24.50	0.064	2024/7/12
Right Tilt 15 Degree	390000/1950	30kHz 50M QPSK(1,1)	0	0.045	0.027	-4.10	23.74	24.50	0.032	2024/7/12
Left Cheek	389000/1945	30kHz 50M QPSK(1,1)	0	0.094	0.056	-2.89	23.71	24.50	0.067	2024/7/12
Left Cheek	391000/1955	30kHz 50M QPSK(1,1)	0	0.093	0.055	-2.22	23.71	24.50	0.066	2024/7/12
Extremity										
Front Side	390000/1950	30kHz 50M QPSK(1,1)	0	0.339	0.165	-2.70	23.74	24.50	0.197	2024/7/12
Back Side	390000/1950	30kHz 50M QPSK(1,1)	0	0.556	0.282	-0.45	23.74	24.50	0.336	2024/7/12
Left Side	390000/1950	30kHz 50M QPSK(1,1)	0	0.239	0.119	1.69	23.74	24.50	0.142	2024/7/12
Right Side	390000/1950	30kHz 50M QPSK(1,1)	0	0.011	0.009	-3.47	23.74	24.50	0.011	2024/7/12
Top Side	390000/1950	30kHz 50M QPSK(1,1)	0	0.056	0.027	3.66	23.74	24.50	0.032	2024/7/12
Bottom Side	390000/1950	30kHz 50M QPSK(1,1)	0	0.017	0.015	-1.74	23.74	24.50	0.018	2024/7/12
Back Side	389000/1945	30kHz 50M QPSK(1,1)	0	0.528	0.257	2.19	23.71	24.50	0.308	2024/7/12
Back Side	391000/1955	30kHz 50M QPSK(1,1)	0	0.473	0.238	2.75	23.71	24.50	0.285	2024/7/12
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	390000/1950	30kHz 50M QPSK(1,1)	5	0.350	0.169	-0.55	23.74	24.50	0.201	2024/7/12

9.1.13. SAR measurement Result of NR SA n3

Test Position	Test channel	Test Mode	Separation	SAR Value	Power	Conducted	Tune-up	Scaled	Date
---------------	--------------	-----------	------------	-----------	-------	-----------	---------	--------	------

	/Freq.		distance (mm)	(W/kg)		Drift (±5%)	Power (dBm)	Power (dBm)	SAR 10-g (W/Kg)	
				1-g	10-g					
Head										
Left Cheek	349500/1747.5	30kHz 30M QPSK(1,1)	0	0.234	0.142	1.83	24.02	24.50	0.159	2024/7/09
Left Tilt 15 Degree	349500/1747.5	30kHz 30M QPSK(1,1)	0	0.124	0.073	1.33	24.02	24.50	0.082	2024/7/09
Right Cheek	349500/1747.5	30kHz 30M QPSK(1,1)	0	0.199	0.118	-0.77	24.02	24.50	0.132	2024/7/09
Right Tilt 15 Degree	349500/1747.5	30kHz 30M QPSK(1,1)	0	0.104	0.062	-3.29	24.02	24.50	0.069	2024/7/09
Left Cheek	345000/1725	30kHz 30M QPSK(1,1)	0	0.210	0.124	0.63	23.91	24.50	0.142	2024/7/09
Left Cheek	354000/1770	30kHz 30M QPSK(1,1)	0	0.222	0.135	-2.49	23.98	24.50	0.152	2024/7/09
Extremity										
Front Side	349500/1747.5	30kHz 30M QPSK(1,1)	0	0.975	0.416	-1.37	24.02	24.50	0.465	2024/7/09
Back Side	349500/1747.5	30kHz 30M QPSK(1,1)	0	1.573	0.707	2.06	24.02	24.50	0.790	2024/7/09
Left Side	349500/1747.5	30kHz 30M QPSK(1,1)	0	0.645	0.275	1.81	24.02	24.50	0.307	2024/7/09
Right Side	349500/1747.5	30kHz 30M QPSK(1,1)	0	0.063	0.027	0.80	24.02	24.50	0.030	2024/7/09
Top Side	349500/1747.5	30kHz 30M QPSK(1,1)	0	0.189	0.083	-1.72	24.02	24.50	0.093	2024/7/09
Bottom Side	349500/1747.5	30kHz 30M QPSK(1,1)	0	0.047	0.020	-3.35	24.02	24.50	0.022	2024/7/09
Back Side	345000/1725	30kHz 30M QPSK(1,1)	0	1.447	0.618	1.22	23.91	24.50	0.708	2024/7/09
Back Side	354000/1770	30kHz 30M QPSK(1,1)	0	1.321	0.570	0.96	23.98	24.50	0.643	2024/7/09
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	349500/1747.5	30kHz 30M QPSK(1,1)	5	0.944	0.403	1.90	24.02	24.50	0.450	2024/7/09

9.1.14. SAR measurement Result of NR SA n8

Test Position	Test channel	Test Mode	Separation	SAR Value	Power	Conducted	Tune-up	Scaled	Date
---------------	--------------	-----------	------------	-----------	-------	-----------	---------	--------	------

	/Freq.		distance (mm)	(W/kg)		Drift (±5%)	Power (dBm)	Power (dBm)	SAR 10-g (W/Kg)	
				1-g	10-g					
Head										
Left Cheek	179500/897.5	30kHz 20M QPSK(1,1)	0	0.201	0.175	1.83	23.84	24.50	0.204	2024/7/15
Left Tilt 15 Degree	179500/897.5	30kHz 20M QPSK(1,1)	0	0.112	0.093	3.17	23.84	24.50	0.108	2024/7/15
Right Cheek	179500/897.5	30kHz 20M QPSK(1,1)	0	0.188	0.164	-2.55	23.84	24.50	0.191	2024/7/15
Right Tilt 15 Degree	179500/897.5	30kHz 20M QPSK(1,1)	0	0.090	0.075	1.20	23.84	24.50	0.087	2024/7/15
Left Cheek	178000/890	30kHz 20M QPSK(1,1)	0	0.186	0.157	4.23	24.04	24.50	0.175	2024/7/15
Left Cheek	181000/905	30kHz 20M QPSK(1,1)	0	0.174	0.144	0.03	23.82	24.50	0.168	2024/7/15
Extremity										
Front Side	179500/897.5	30kHz 20M QPSK(1,1)	0	0.227	0.142	0.67	23.84	24.50	0.165	2024/7/15
Back Side	179500/897.5	30kHz 20M QPSK(1,1)	0	0.366	0.239	-1.31	23.84	24.50	0.278	2024/7/15
Left Side	179500/897.5	30kHz 20M QPSK(1,1)	0	0.150	0.094	3.35	23.84	24.50	0.109	2024/7/15
Right Side	179500/897.5	30kHz 20M QPSK(1,1)	0	0.022	0.014	-2.09	23.84	24.50	0.016	2024/7/15
Top Side	179500/897.5	30kHz 20M QPSK(1,1)	0	0.051	0.033	-0.14	23.84	24.50	0.038	2024/7/15
Bottom Side	179500/897.5	30kHz 20M QPSK(1,1)	0	0.015	0.013	0.46	23.84	24.50	0.015	2024/7/15
Back Side	178000/890	30kHz 20M QPSK(1,1)	0	0.348	0.223	-0.36	24.04	24.50	0.248	2024/7/15
Back Side	181000/905	30kHz 20M QPSK(1,1)	0	0.296	0.186	-0.56	23.82	24.50	0.218	2024/7/15
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	179500/897.5	30kHz 20M QPSK(1,1)	5	0.231	0.151	3.36	23.84	24.50	0.176	2024/7/15

9.1.15. SAR measurement Result of NR SA n20

Test Position	Test	Test Mode	Separation	SAR Value	Power	Conducted	Tune-up	Scaled	Date
---------------	------	-----------	------------	-----------	-------	-----------	---------	--------	------

	channel /Freq.		distance (mm)	(W/kg)		Drift (±5%)	Power (dBm)	Power (dBm)	SAR 10-g (W/Kg)	
				1-g	10-g					
Head										
Left Cheek	169400/847	30kHz 20M QPSK(1,1)	0	0.156	0.133	0.04	23.66	24.50	0.161	2024/7/15
Left Tilt 15 Degree	169400/847	30kHz 20M QPSK(1,1)	0	0.083	0.070	5.36	23.66	24.50	0.085	2024/7/15
Right Cheek	169400/847	30kHz 20M QPSK(1,1)	0	0.137	0.111	-0.12	23.66	24.50	0.135	2024/7/15
Right Tilt 15 Degree	169400/847	30kHz 20M QPSK(1,1)	0	0.075	0.062	-1.11	23.66	24.50	0.075	2024/7/15
Left Cheek	168400/842	30kHz 20M QPSK(1,1)	0	0.148	0.120	1.23	23.65	24.50	0.146	2024/7/15
Left Cheek	170400/852	30kHz 20M QPSK(1,1)	0	0.139	0.115	0.13	23.86	24.50	0.133	2024/7/15
Extremity										
Front Side	169400/847	30kHz 20M QPSK(1,1)	0	0.412	0.256	-2.04	23.66	24.50	0.311	2024/7/15
Back Side	169400/847	30kHz 20M QPSK(1,1)	0	0.665	0.435	-1.10	23.66	24.50	0.528	2024/7/15
Left Side	169400/847	30kHz 20M QPSK(1,1)	0	0.299	0.196	2.35	23.66	24.50	0.238	2024/7/15
Right Side	169400/847	30kHz 20M QPSK(1,1)	0	0.027	0.018	-1.00	23.66	24.50	0.022	2024/7/15
Top Side	169400/847	30kHz 20M QPSK(1,1)	0	0.093	0.059	-2.72	23.66	24.50	0.072	2024/7/15
Bottom Side	169400/847	30kHz 20M QPSK(1,1)	0	0.007	0.005	0.41	23.66	24.50	0.006	2024/7/15
Back Side	168400/842	30kHz 20M QPSK(1,1)	0	0.632	0.413	-0.81	23.65	24.50	0.502	2024/7/15
Back Side	170400/852	30kHz 20M QPSK(1,1)	0	0.539	0.338	1.55	23.86	24.50	0.392	2024/7/15
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	169400/847	30kHz 20M QPSK(1,1)	5	0.432	0.271	3.98	23.66	24.50	0.329	2024/7/15

9.1.16. SAR measurement Result of NR SA n28

Test Position	Test channel	Test Mode	Separation	SAR Value	Power	Conducted	Tune-up	Scaled	Date
---------------	--------------	-----------	------------	-----------	-------	-----------	---------	--------	------

	/Freq.		distance (mm)	(W/kg)		Drift (±5%)	Power (dBm)	Power (dBm)	SAR 10-g (W/Kg)	
				1-g	10-g					
Head										
Left Cheek	145100/725.5	30kHz 20M QPSK(1,1)	0	0.147	0.130	1.41	23.42	24.50	0.167	2024/7/14
Left Tilt 15 Degree	145100/725.5	30kHz 20M QPSK(1,1)	0	0.084	0.074	-2.02	23.42	24.50	0.095	2024/7/14
Right Cheek	145100/725.5	30kHz 20M QPSK(1,1)	0	0.135	0.118	2.71	23.42	24.50	0.151	2024/7/14
Right Tilt 15 Degree	145100/725.5	30kHz 20M QPSK(1,1)	0	0.068	0.057	0.96	23.42	24.50	0.073	2024/7/14
Left Cheek	143600/718	30kHz 20M QPSK(1,1)	0	0.138	0.117	-1.52	23.25	24.50	0.156	2024/7/14
Left Cheek	146600/733	30kHz 20M QPSK(1,1)	0	0.128	0.113	1.08	23.55	24.50	0.141	2024/7/14
Extremity										
Front Side	145100/725.5	30kHz 20M QPSK(1,1)	0	0.474	0.306	2.69	23.42	24.50	0.392	2024/7/14
Back Side	145100/725.5	30kHz 20M QPSK(1,1)	0	0.765	0.514	-2.77	23.42	24.50	0.659	2024/7/14
Left Side	145100/725.5	30kHz 20M QPSK(1,1)	0	0.329	0.219	-3.96	23.42	24.50	0.281	2024/7/14
Right Side	145100/725.5	30kHz 20M QPSK(1,1)	0	0.023	0.015	0.33	23.42	24.50	0.019	2024/7/14
Top Side	145100/725.5	30kHz 20M QPSK(1,1)	0	0.092	0.061	2.28	23.42	24.50	0.078	2024/7/14
Bottom Side	145100/725.5	30kHz 20M QPSK(1,1)	0	0.008	0.006	3.37	23.42	24.50	0.008	2024/7/14
Back Side	143600/718	30kHz 20M QPSK(1,1)	0	0.704	0.464	-0.11	23.25	24.50	0.619	2024/7/14
Back Side	146600/733	30kHz 20M QPSK(1,1)	0	0.650	0.432	-3.37	23.55	24.50	0.538	2024/7/14
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	145100/725.5	30kHz 20M QPSK(1,1)	5	0.490	0.323	0.46	23.42	24.50	0.414	2024/7/14

9.1.17. SAR measurement Result of NR SA n38

Test Position	Test channel	Test Mode	Separation	SAR Value	Power	Conducted	Tune-up	Scaled	Date
---------------	--------------	-----------	------------	-----------	-------	-----------	---------	--------	------

	/Freq.		distance (mm)	(W/kg)		Drift (±5%)	Power (dBm)	Power (dBm)	SAR 10-g (W/Kg)	
				1-g	10-g					
Head										
Left Cheek	519000/2595	30kHz 20M QPSK(1,1)	0	0.206	0.107	1.35	24.58	25.00	0.118	2024/7/06
Left Tilt 15 Degree	519000/2595	30kHz 20M QPSK(1,1)	0	0.123	0.063	-2.17	24.58	25.00	0.069	2024/7/06
Right Cheek	519000/2595	30kHz 20M QPSK(1,1)	0	0.187	0.093	-2.38	24.58	25.00	0.102	2024/7/06
Right Tilt 15 Degree	519000/2595	30kHz 20M QPSK(1,1)	0	0.103	0.051	-3.01	24.58	25.00	0.056	2024/7/06
Left Cheek	516000/2580	30kHz 20M QPSK(1,1)	0	0.190	0.096	1.32	24.38	25.00	0.111	2024/7/06
Left Cheek	522000/2610	30kHz 20M QPSK(1,1)	0	0.195	0.099	-1.37	24.56	25.00	0.110	2024/7/06
Extremity										
Back Side	519000/2595	30kHz 20M QPSK(1,1)	0	0.589	0.243	-0.58	24.58	25.00	0.268	2024/7/06
Front Side	519000/2595	30kHz 20M QPSK(1,1)	0	0.966	0.415	3.30	24.58	25.00	0.457	2024/7/06
Left Side	519000/2595	30kHz 20M QPSK(1,1)	0	0.425	0.181	3.16	24.58	25.00	0.199	2024/7/06
Right Side	519000/2595	30kHz 20M QPSK(1,1)	0	0.029	0.012	3.61	24.58	25.00	0.013	2024/7/06
Top Side	519000/2595	30kHz 20M QPSK(1,1)	0	0.048	0.021	-0.67	24.58	25.00	0.023	2024/7/06
Bottom Side	519000/2595	30kHz 20M QPSK(1,1)	0	0.029	0.012	-2.35	24.58	25.00	0.013	2024/7/06
Back Side	516000/2580	30kHz 20M QPSK(1,1)	0	0.898	0.370	1.01	24.38	25.00	0.427	2024/7/06
Back Side	522000/2610	30kHz 20M QPSK(1,1)	0	0.937	0.399	2.04	24.56	25.00	0.442	2024/7/06
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	519000/2595	30kHz 20M QPSK(1,1)	5	0.618	0.263	3.39	24.58	25.00	0.290	2024/7/06

9.1.18. SAR measurement Result of NR SA n77

Test Position	Test channel	Test Mode	Separation	SAR Value	Power	Conducted	Tune-up	Scaled	Date
---------------	--------------	-----------	------------	-----------	-------	-----------	---------	--------	------

	/Freq.		distance (mm)	(W/kg)		Drift (±5%)	Power (dBm)	Power (dBm)	SAR 10-g (W/Kg)	
				1-g	10-g					
Head										
Left Cheek	650000/3750	30kHz 100M QPSK(1,1)	0	0.309	0.129	-4.94	27.07	28.00	0.160	2024/7/17
Left Tilt 15 Degree	650000/3750	30kHz 100M QPSK(1,1)	0	0.165	0.065	4.42	27.07	28.00	0.081	2024/7/17
Right Cheek	650000/3750	30kHz 100M QPSK(1,1)	0	0.278	0.110	4.65	27.07	28.00	0.136	2024/7/17
Right Tilt 15 Degree	650000/3750	30kHz 100M QPSK(1,1)	0	0.133	0.054	0.15	27.07	28.00	0.067	2024/7/17
Left Cheek	623334/3350.01	30kHz 100M QPSK(1,1)	0	0.280	0.116	-1.99	27.04	28.00	0.145	2024/7/17
Left Cheek	676666/4149.99	30kHz 100M QPSK(1,1)	0	0.267	0.107	2.28	27.69	28.00	0.115	2024/7/17
Extremity										
Front Side	650000/3750	30kHz 100M QPSK(1,1)	0	0.253	0.096	1.31	27.07	28.00	0.119	2024/7/17
Back Side	650000/3750	30kHz 100M QPSK(1,1)	0	0.395	0.150	3.28	27.07	28.00	0.186	2024/7/17
Left Side	650000/3750	30kHz 100M QPSK(1,1)	0	0.166	0.062	0.05	27.07	28.00	0.077	2024/7/17
Right Side	650000/3750	30kHz 100M QPSK(1,1)	0	0.020	0.018	0.71	27.07	28.00	0.022	2024/7/17
Top Side	650000/3750	30kHz 100M QPSK(1,1)	0	0.055	0.020	3.48	27.07	28.00	0.025	2024/7/17
Bottom Side	650000/3750	30kHz 100M QPSK(1,1)	0	0.024	0.009	3.83	27.07	28.00	0.011	2024/7/17
Back Side	623334/3350.01	30kHz 100M QPSK(1,1)	0	0.375	0.137	-2.93	27.04	28.00	0.171	2024/7/17
Back Side	676666/4149.99	30kHz 100M QPSK(1,1)	0	0.324	0.123	0.24	27.69	28.00	0.132	2024/7/17
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	650000/3750	30kHz 100M QPSK(1,1)	5	0.237	0.087	3.03	27.07	28.00	0.108	2024/7/17

9.1.19. SAR measurement Result of NR SA n78

Test Position	Test channel	Test Mode	Separation	SAR Value	Power	Conducted	Tune-up	Scaled	Date
---------------	--------------	-----------	------------	-----------	-------	-----------	---------	--------	------

	/Freq.		distance (mm)	(W/kg)		Drift (±5%)	Power (dBm)	Power (dBm)	SAR 10-g (W/Kg)	
				1-g	10-g					
Head										
Left Cheek	636666/3549.99	30kHz 100M QPSK(1,1)	0	0.174	0.078	-1.22	25.90	27.50	0.113	2024/7/16
Left Tilt 15 Degree	636666/3549.99	30kHz 100M QPSK(1,1)	0	0.100	0.043	4.25	25.90	27.50	0.062	2024/7/16
Right Cheek	636666/3549.99	30kHz 100M QPSK(1,1)	0	0.163	0.070	4.38	25.90	27.50	0.101	2024/7/16
Right Tilt 15 Degree	636666/3549.99	30kHz 100M QPSK(1,1)	0	0.086	0.037	4.50	25.90	27.50	0.053	2024/7/16
Left Cheek	623334/3350.01	30kHz 100M QPSK(1,1)	0	0.148	0.064	-0.20	25.95	27.50	0.091	2024/7/16
Left Cheek	650000/3750	30kHz 100M QPSK(1,1)	0	0.163	0.071	0.90	25.67	27.50	0.108	2024/7/16
Extremity										
Front Side	636666/3549.99	30kHz 100M QPSK(1,1)	0	0.135	0.056	-1.75	25.90	27.50	0.081	2024/7/16
Back Side	636666/3549.99	30kHz 100M QPSK(1,1)	0	0.221	0.096	-1.32	25.90	27.50	0.139	2024/7/16
Left Side	636666/3549.99	30kHz 100M QPSK(1,1)	0	0.099	0.042	-0.95	25.90	27.50	0.061	2024/7/16
Right Side	636666/3549.99	30kHz 100M QPSK(1,1)	0	0.009	0.007	0.57	25.90	27.50	0.010	2024/7/16
Top Side	636666/3549.99	30kHz 100M QPSK(1,1)	0	0.029	0.012	-0.86	25.90	27.50	0.017	2024/7/16
Bottom Side	636666/3549.99	30kHz 100M QPSK(1,1)	0	0.007	0.005	1.08	25.90	27.50	0.007	2024/7/16
Back Side	623334/3350.01	30kHz 100M QPSK(1,1)	0	0.206	0.088	-1.81	25.95	27.50	0.126	2024/7/16
Back Side	650000/3750	30kHz 100M QPSK(1,1)	0	0.186	0.080	1.12	25.67	27.50	0.122	2024/7/16
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	636666/3549.99	30kHz 100M QPSK(1,1)	5	0.139	0.057	1.59	25.90	27.50	0.082	2024/7/16

9.1.20. SAR measurement Result of WLAN 2.4G

Test Position	Test	Test	Separation	SAR Value	Power	Conducted	Tune-up	Scaled	Date
---------------	------	------	------------	-----------	-------	-----------	---------	--------	------

	channel /Freq.	Mode	distance (mm)	(W/kg)		Drift (±5%)	Power (dBm)	Power (dBm)	SAR 10-g (W/Kg)	
				1-g	10-g					
Head										
Left Cheek	7/2442	802.11 b	0	0.084	0.043	-3.48	15.74	16.00	0.046	2024/7/05
Left Tilt 15 Degree	7/2442	802.11 b	0	0.050	0.025	0.65	15.74	16.00	0.027	2024/7/05
Right Cheek	7/2442	802.11 b	0	0.072	0.036	-2.60	15.74	16.00	0.038	2024/7/05
Right Tilt 15 Degree	7/2442	802.11 b	0	0.036	0.018	0.65	15.74	16.00	0.019	2024/7/05
Left Cheek	1/2412	802.11 b	0	0.066	0.030	3.01	14.85	16.00	0.039	2024/7/05
Left Cheek	13/2472	802.11 b	0	0.065	0.029	-3.57	14.29	16.00	0.043	2024/7/05
Extremity										
Front Side	7/2442	802.11 b	0	0.102	0.047	0.87	15.74	16.00	0.050	2024/7/05
Back Side	7/2442	802.11 b	0	0.162	0.074	-0.96	15.74	16.00	0.079	2024/7/05
Left Side	7/2442	802.11 b	0	0.018	0.016	-1.86	15.74	16.00	0.017	2024/7/05
Right Side	7/2442	802.11 b	0	0.089	0.039	-0.69	15.74	16.00	0.041	2024/7/05
Top Side	7/2442	802.11 b	0	0.122	0.055	-2.69	15.74	16.00	0.058	2024/7/05
Bottom Side	7/2442	802.11 b	0	0.005	0.003	2.79	15.74	16.00	0.003	2024/7/05
Back Side	1/2412	802.11 b	0	0.133	0.058	-2.43	14.85	16.00	0.076	2024/7/05
Back Side	13/2472	802.11 b	0	0.130	0.050	2.20	14.29	16.00	0.074	2024/7/05
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	7/2442	802.11 b	5	0.100	0.045	1.60	15.74	16.00	0.048	2024/7/05

9.1.21. SAR measurement Result of WLAN 5.2G

Test Position	Test	Test Mode	Separation	SAR Value	Power	Conducted	Tune-up	Scaled	Date
---------------	------	-----------	------------	-----------	-------	-----------	---------	--------	------

9.1.22. SAR measurement Result of WLAN 5.8G

Test Position	Test channel /Freq	Test Mode	Separation distance (mm)	SAR Value (W/kg)		Power Drift (±5%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 10-g (W/Kg)	Date
				1-g	10-g					
Head										

Left Cheek	151/5755	802.11 n HT40	0	0.464	0.155	2.93	9.06	9.50	0.172	2024/7/11
Left Tilt 15 Degree	151/5755	802.11 n HT40	0	0.247	0.080	-1.08	9.06	9.50	0.089	2024/7/11
Right Cheek	151/5755	802.11 n HT40	0	0.407	0.135	-4.46	9.06	9.50	0.149	2024/7/11
Right Tilt 15 Degree	151/5755	802.11 n HT40	0	0.191	0.063	1.70	9.06	9.50	0.070	2024/7/11
Left Cheek	159/5795	802.11 n HT40	0	0.414	0.121	4.90	8.07	9.50	0.168	2024/7/11
Extremity										
Front Side	151/5755	802.11 n HT40	0	0.250	0.086	-3.39	9.06	9.50	0.095	2024/7/11
Back Side	151/5755	802.11 n HT40	0	0.404	0.146	-0.96	9.06	9.50	0.162	2024/7/11
Left Side	151/5755	802.11 n HT40	0	0.044	0.016	2.00	9.06	9.50	0.018	2024/7/11
Right Side	151/5755	802.11 n HT40	0	0.210	0.073	3.89	9.06	9.50	0.081	2024/7/11
Top Side	151/5755	802.11 n HT40	0	0.291	0.103	2.35	9.06	9.50	0.114	2024/7/11
Bottom Side	151/5755	802.11 n HT40	0	0.016	0.014	-3.08	9.06	9.50	0.015	2024/7/11
Back Side	159/5795	802.11 n HT40	0	0.376	0.116	-1.85	8.07	9.50	0.161	2024/7/11
Body & Hotspot with 5mm (Worst-case position for 0mm)										
Back Side	157/5785	802.11 n HT40	5	0.250	0.086	-2.07	8.07	9.50	0.120	2024/7/11

9.2. Simultaneous Transmission Analysis

Refer to EN 62209-2:2010 Annex K, the secondary transmitter SAR test exclusion thresholds are determined by:

$$P_{\text{available}} = P_{\text{th,m}} \left(\frac{\text{SAR}_{\text{lim}} - \text{SAR}_1}{\text{SAR}_{\text{lim}}} \right)$$

$P_{\text{th,m}}$ is the threshold exclusion power level taken from Annex B of EN 62479.

Mode	P_{max} (dBm)	P_{max} (mW)	$P_{\text{th,m}}$ (mW)	SAR_{lim} (W/Kg)	SAR_1 (W/Kg)	Calculation Result (mW)	Simultaneous Transmission Exclusion
------	---------------------------	--------------------------	---------------------------	-------------------------------------	--------------------------	----------------------------	---

Bluetooth	8.50	7.08	20	2	0.79	12.1	YES
Bluetooth	8.50	7.08	40	4	1.492	25.08	YES

9.3. Exposure Conditions

Exposure Position		WWAN Band	WLAN Band	Simultaneous Tx SAR(W/Kg)
		SAR(W/Kg)	SAR(W/Kg)	
Head	Left Cheek	0.321	0.172	0.493
	Left Tilt 15 Degree	0.170	0.089	0.259
	Right Cheek	0.281	0.149	0.430
	Right Tilt 15 Degree	0.151	0.070	0.221
Member	Front Side	0.882	0.215	1.097
	Back Side	1.492	0.216	1.708
	Left Side	0.622	0.027	0.649
	Right Side	0.329	0.114	0.443
	Top Side	0.093	0.144	0.237
	Bottom Side	0.927	0.015	0.942
Body&Hotspot	Left Side	0.790	0.120	0.910
	Right Side	0.321	0.172	0.493
	Top Side	0.170	0.089	0.259
	Back Side	0.281	0.149	0.430






Exposure Position		LTE Band1	SA n38	WLAN Band	Simultaneous Tx SAR(W/Kg)
		SAR(W/Kg)	SAR(W/Kg)	SAR(W/Kg)	
Head	Left Cheek	0.321	0.118	0.172	0.611
	Left Tilt 15 Degree	0.159	0.069	0.089	0.317
	Right Cheek	0.281	0.102	0.149	0.532
	Right Tilt 15	0.151	0.056	0.070	0.277

	Degree				
Member	Front Side	0.882	0.457	0.215	1.554
	Back Side	1.492	0.442	0.216	2.150
	Left Side	0.622	0.199	0.027	0.848
	Right Side	0.329	0.013	0.114	0.456
	Top Side	0.074	0.023	0.144	0.241
	Bottom Side	0.927	0.013	0.015	0.955
Body&Hotspot	Back Side	0.790	0.290	0.120	1.200

NOTE: The Simultaneous Tx is calculated based on the same configuration and test position.

10. Appendix A. Photo documentation

Test Positions

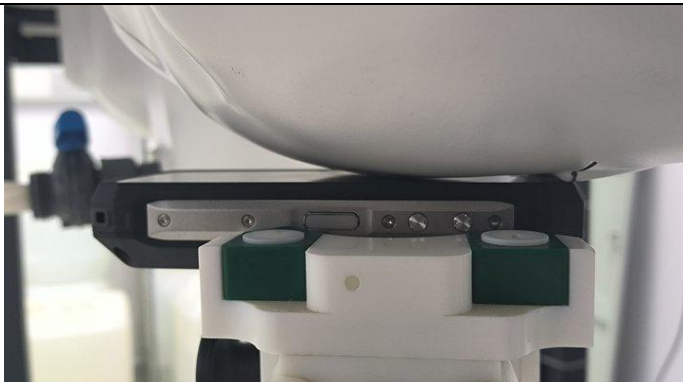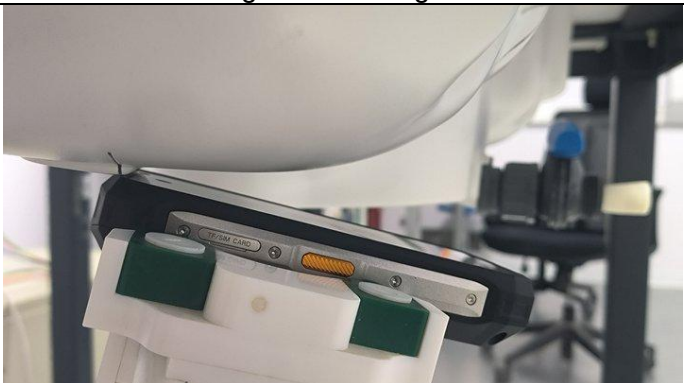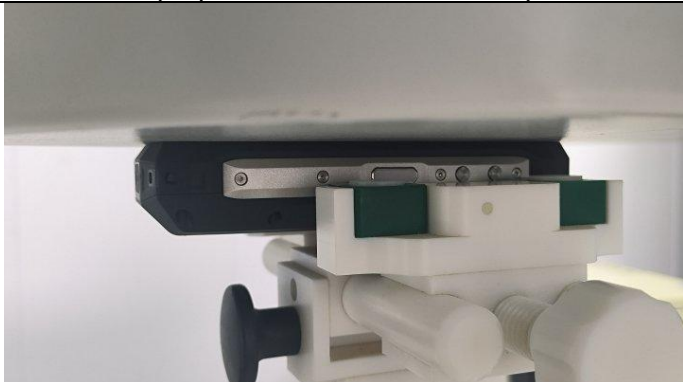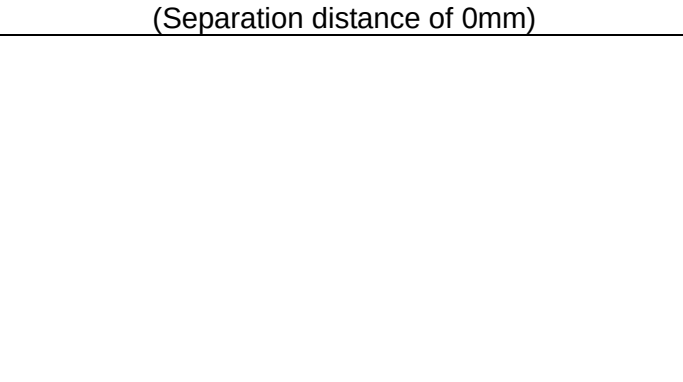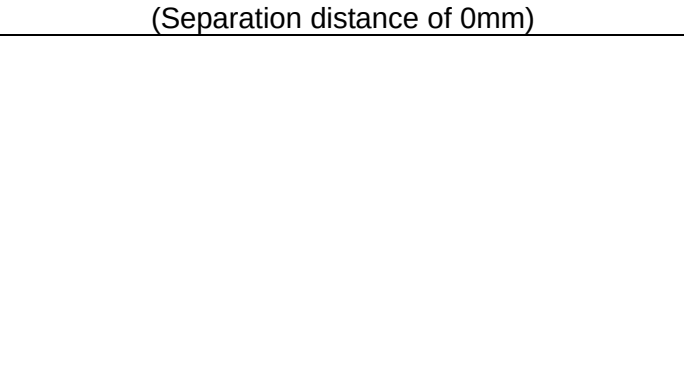Left Cheek	Left Tilt 15 Degree
	
Right Cheek	Right Tilt 15 Degree
	
Front Side (Separation distance of 0mm)	Back Side (Separation distance of 0mm)
	
Left Side (Separation distance of 0mm)	Right Side (Separation distance of 0mm)
	



Top Side
(Separation distance of 0mm)



Bottom Side
(Separation distance of 0mm)



Back Side
(Separation distance of 5mm)



11. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - 750MHz
MEASUREMENT 2 System Performance Check - 900MHz
MEASUREMENT 3 System Performance Check - 1800MHz
MEASUREMENT 4 System Performance Check - 2000MHz
MEASUREMENT 5 System Performance Check - 2300MHz
MEASUREMENT 6 System Performance Check - 2450MHz
MEASUREMENT 7 System Performance Check - 2600MHz
MEASUREMENT 8 System Performance Check - 3500MHz
MEASUREMENT 9 System Performance Check - 3700MHz
MEASUREMENT 10 System Performance Check - 4200MHz
MEASUREMENT 11 System Performance Check - 5200MHz
MEASUREMENT 12 System Performance Check - 5800MHz

MEASUREMENT 1


Date of measurement: 14/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW750</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.37</u>

B. SAR Measurement Results



Frequency (MHz)	750.000000
Relative permittivity (real part)	40.722003
Relative permittivity (imaginary part)	21.666004
Conductivity (S/m)	0.902750
Variation (%)	2.470000

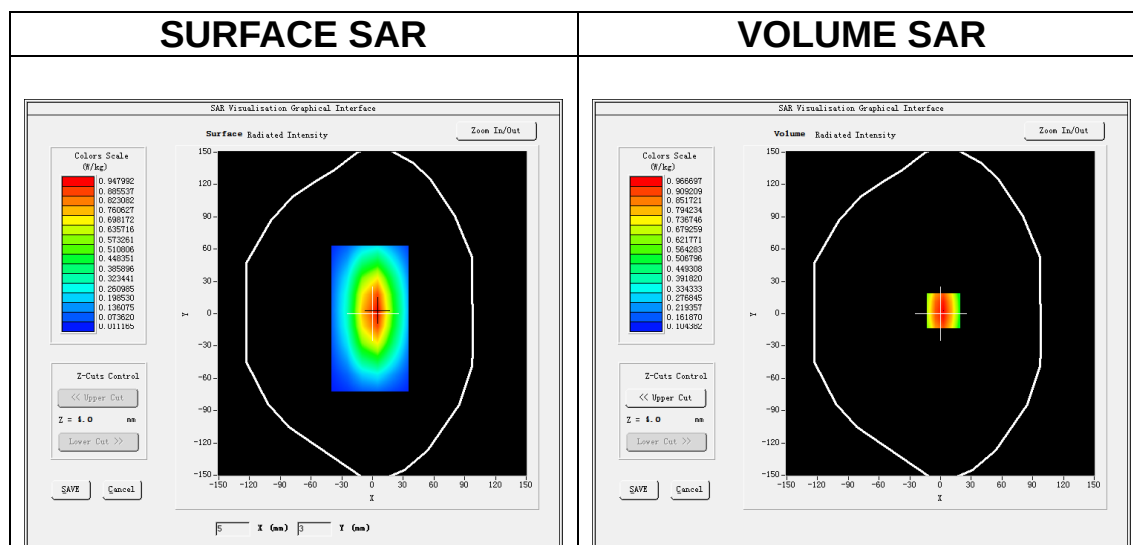

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.607366
SAR 1g (W/Kg)	0.874029

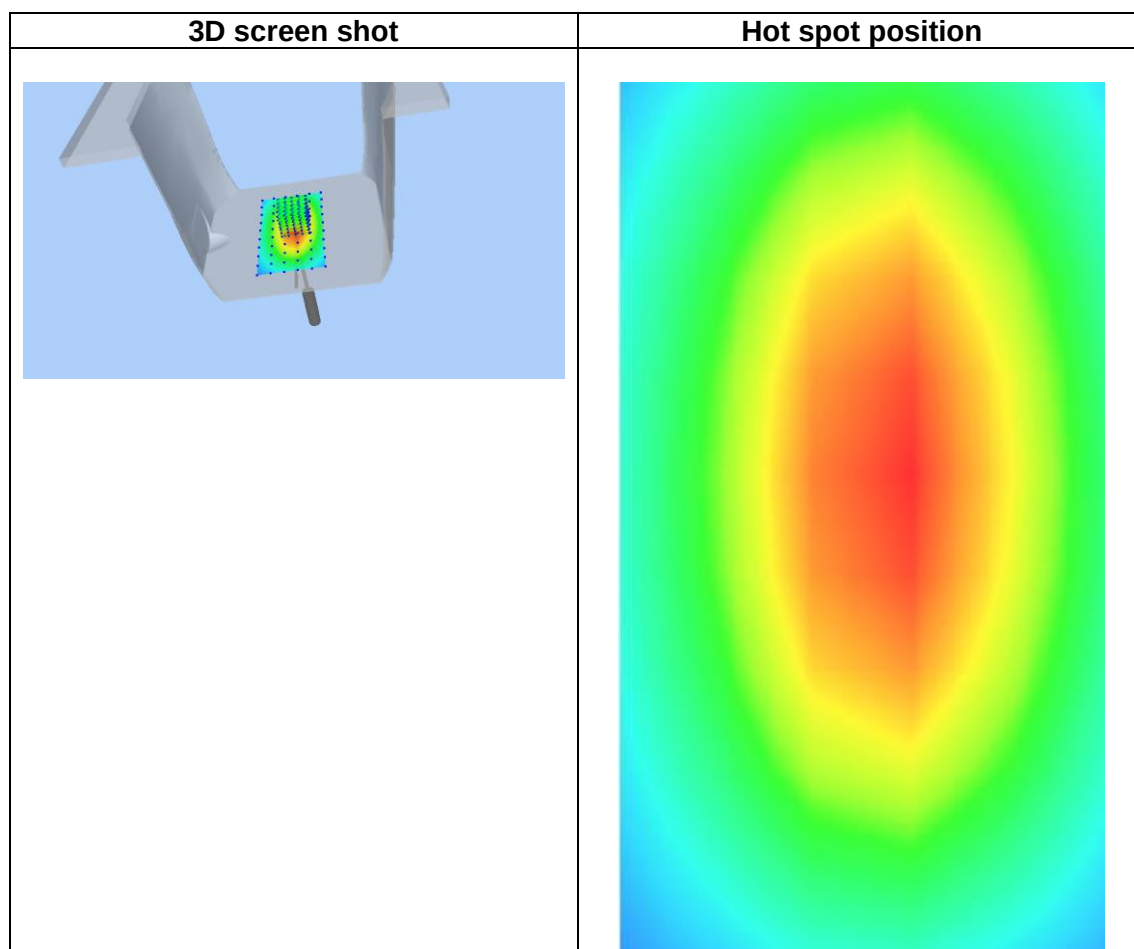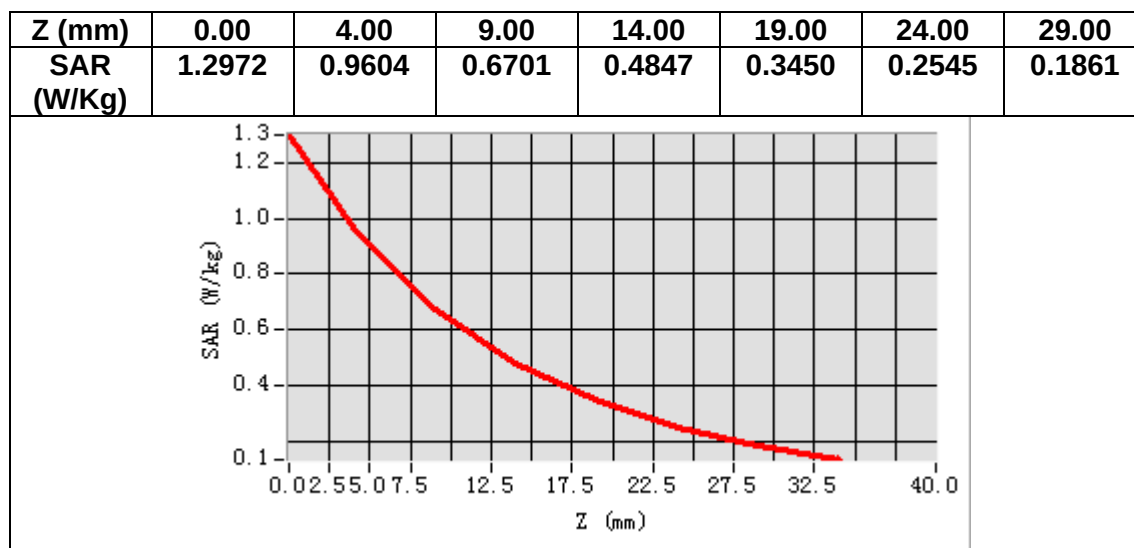

MEASUREMENT 2

Date of measurement: 15/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.23</u>


B. SAR Measurement Results

Frequency (MHz)	900.000000
Relative permittivity (real part)	41.267585
Relative permittivity (imaginary part)	19.797423
Conductivity (S/m)	0.989871
Variation (%)	2.380000

SURFACE SAR

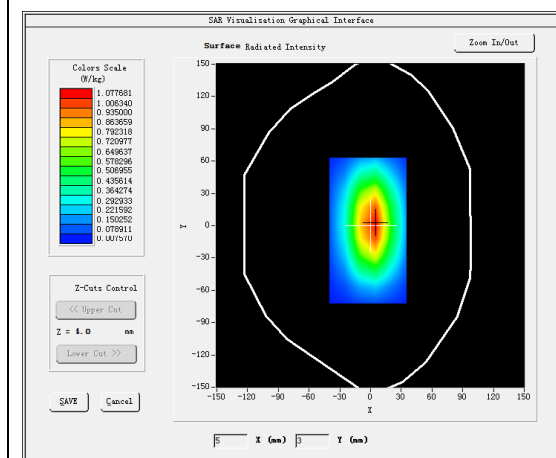


VOLUME SAR

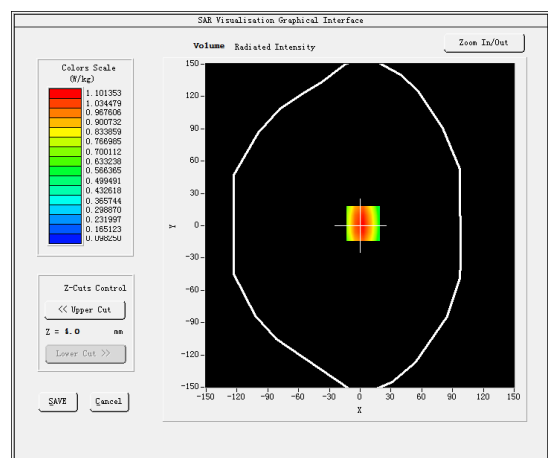


Maximum location: X=3.00, Y=3.00

SAR Peak: 1.90 W/kg


SAR 10g (W/Kg)	0.703256
SAR 1g (W/Kg)	1.139186

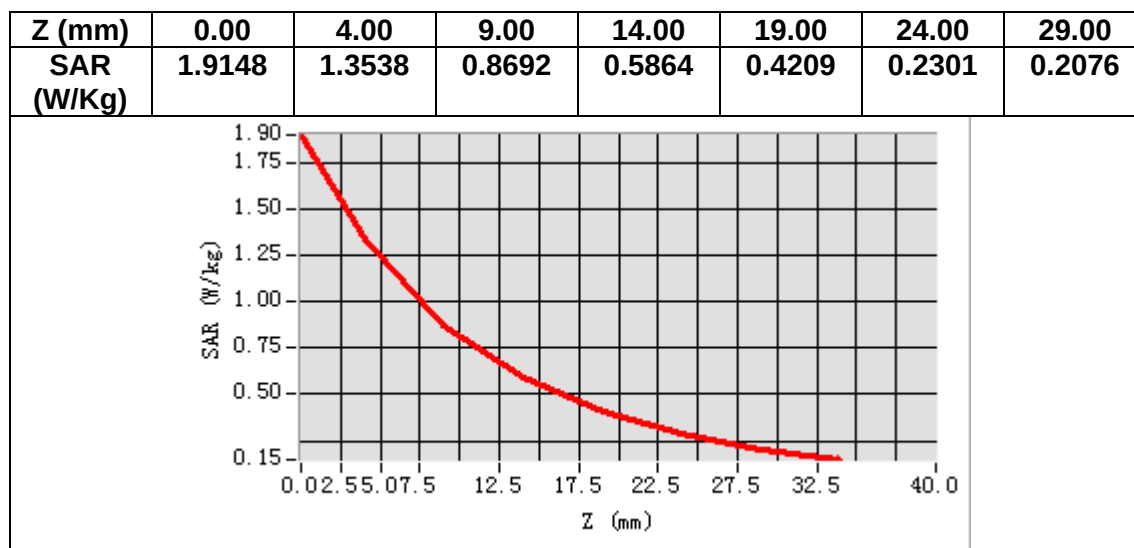

3D screen shot

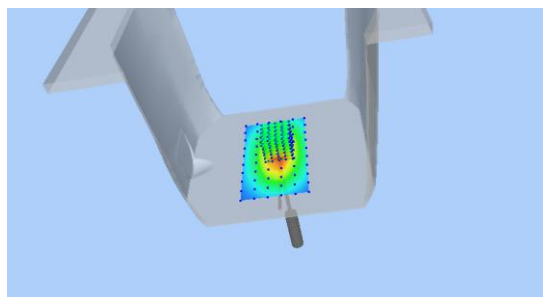

Hot spot position

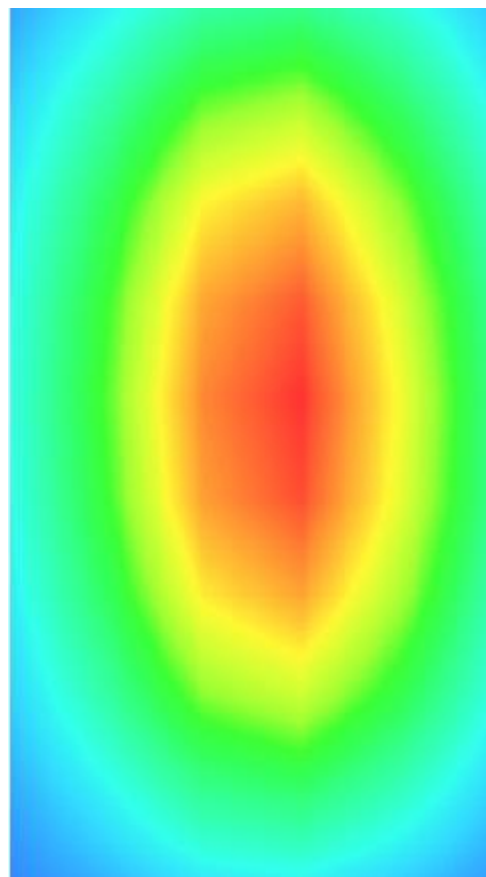

MEASUREMENT 3


Date of measurement: 9/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>

B. SAR Measurement Results



Frequency (MHz)	1800.000000
Relative permittivity (real part)	38.930183
Relative permittivity (imaginary part)	13.747547
Conductivity (S/m)	1.374755
Variation (%)	-0.250000

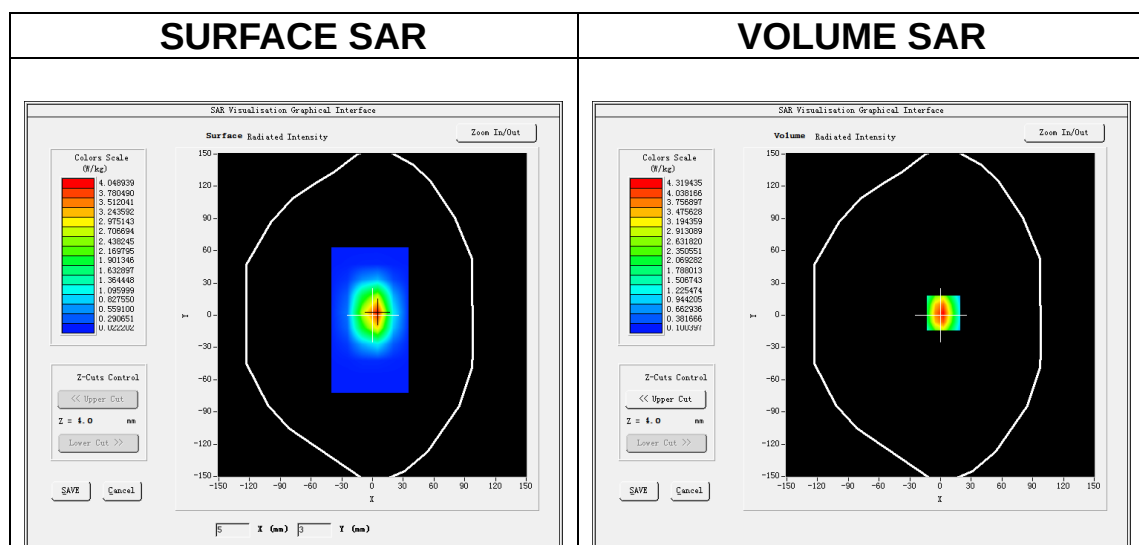

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	1.885050
SAR 1g (W/Kg)	3.487166

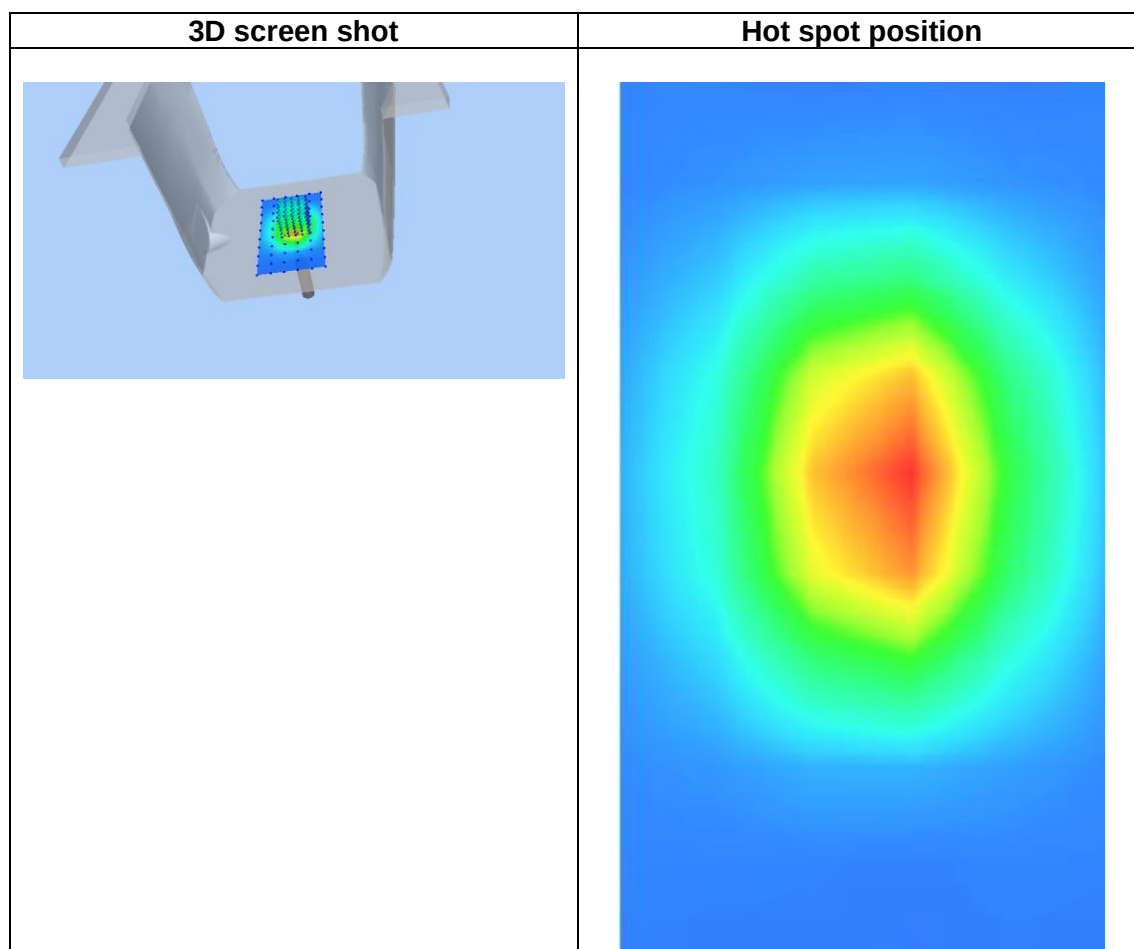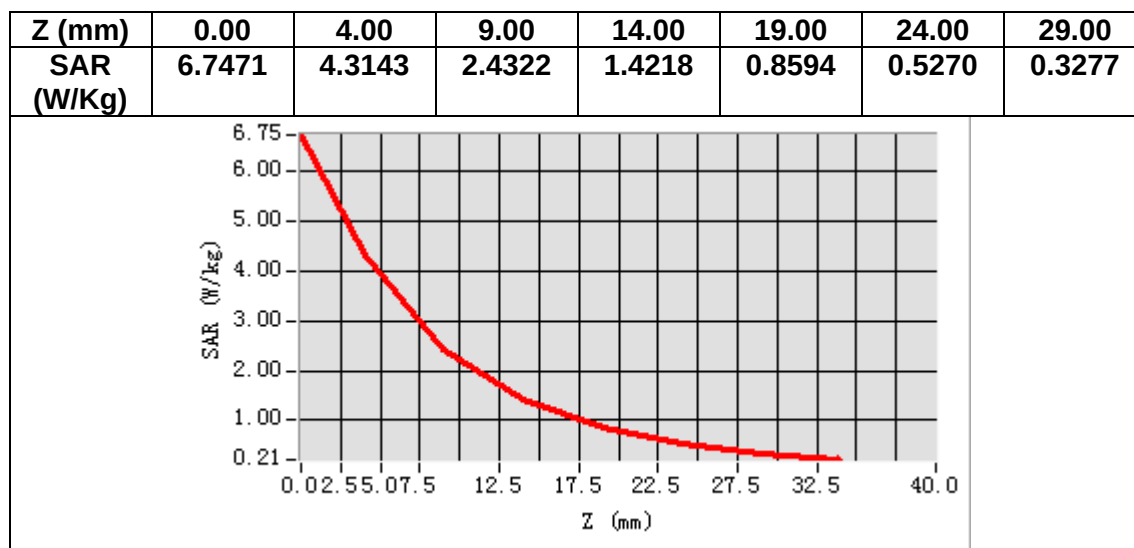

MEASUREMENT 4


Date of measurement: 12/7/2024

A. Experimental conditions.



<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2000</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.83</u>

B. SAR Measurement Results

Frequency (MHz)	2000.000000
Relative permittivity (real part)	38.710816
Relative permittivity (imaginary part)	12.887350
Conductivity (S/m)	1.431928
Variation (%)	-2.980000

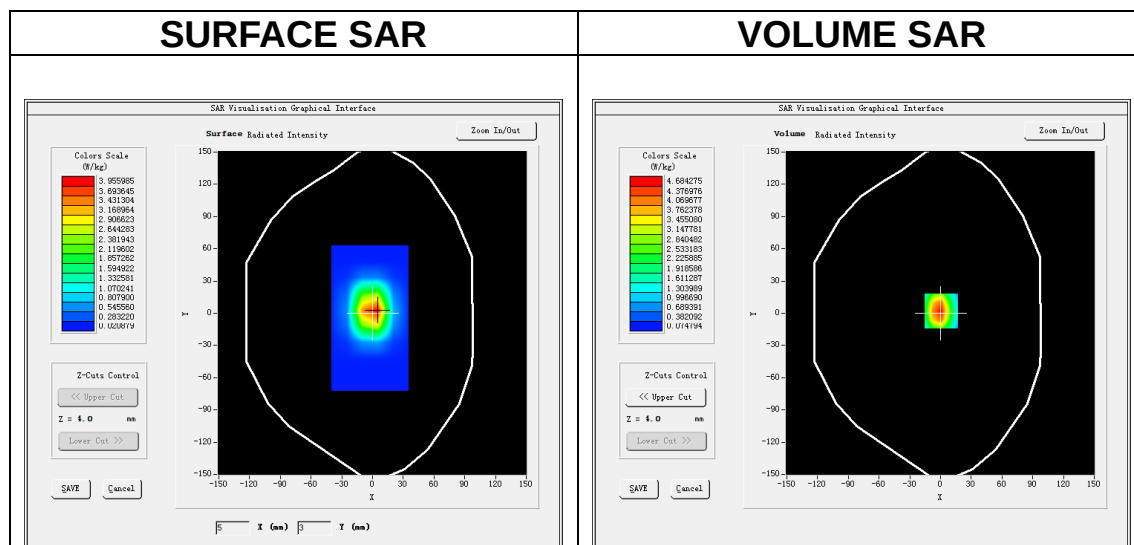

SAR 10g (W/Kg)	1.995323
SAR 1g (W/Kg)	3.743153

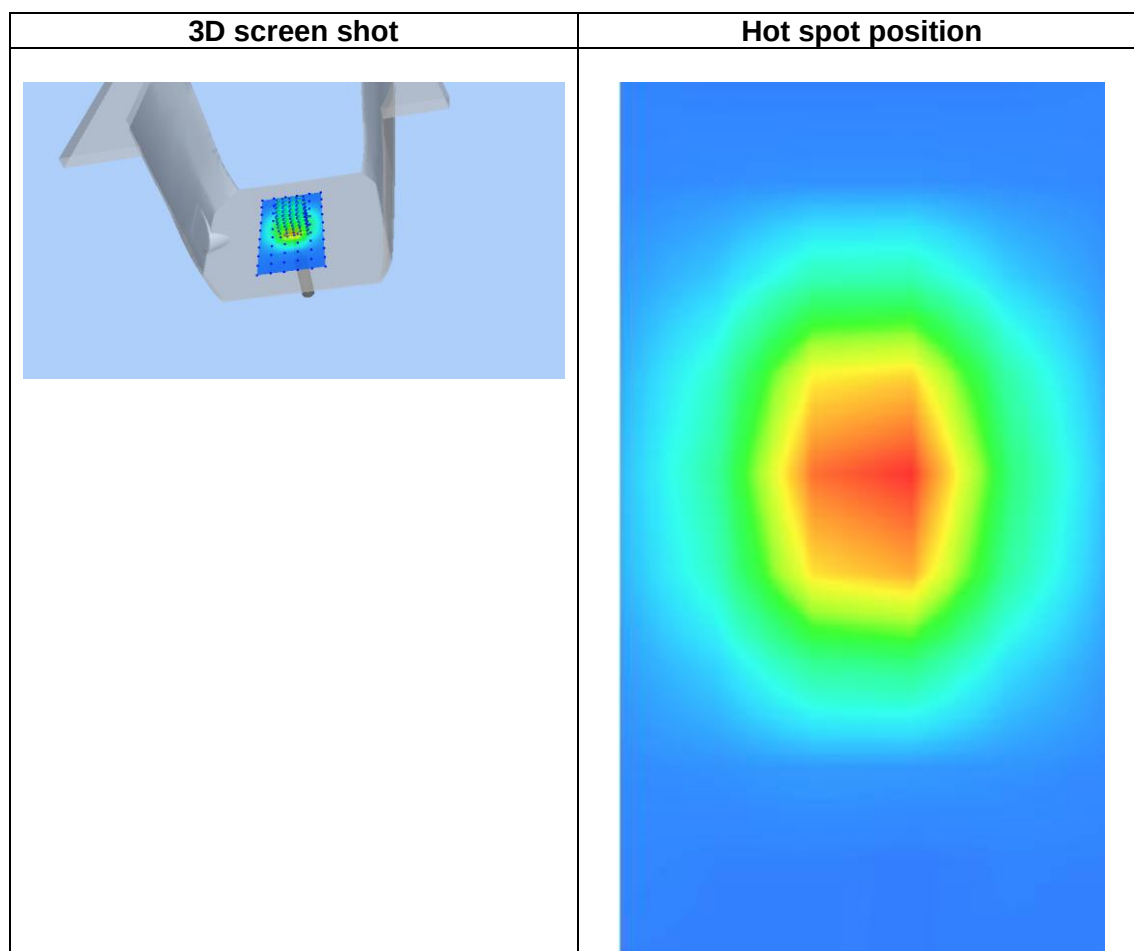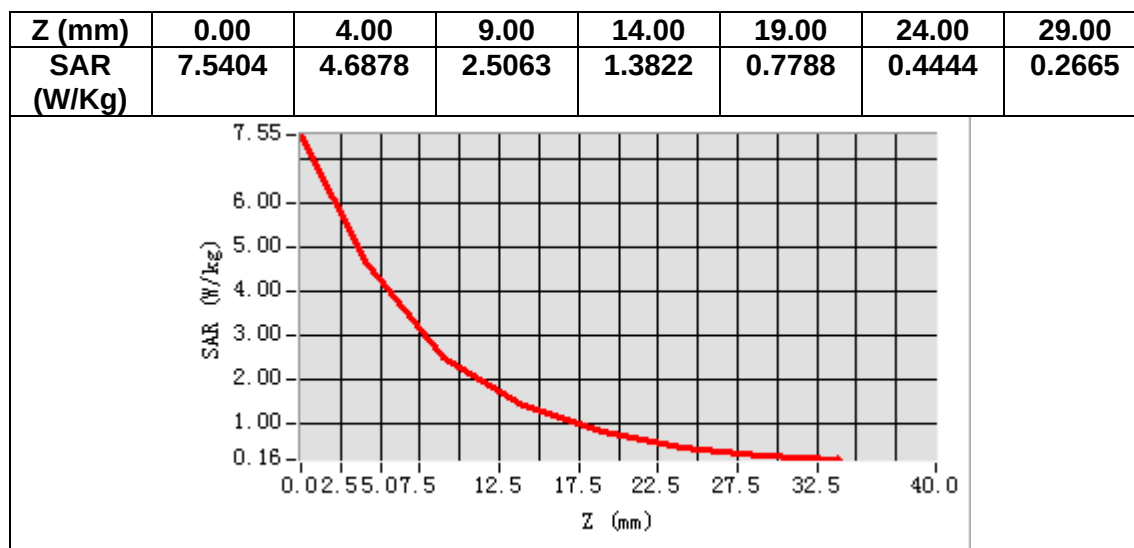

MEASUREMENT 5

Date of measurement: 13/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2300</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.81</u>


B. SAR Measurement Results

Frequency (MHz)	2300.000000
Relative permittivity (real part)	39.405731
Relative permittivity (imaginary part)	12.804919
Conductivity (S/m)	1.636184
Variation (%)	-0.030000

SURFACE SAR

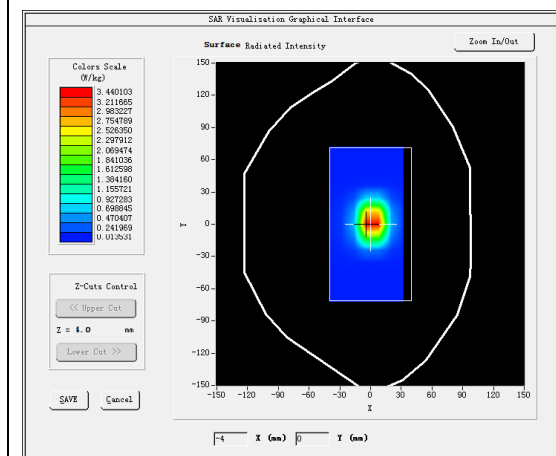



VOLUME SAR

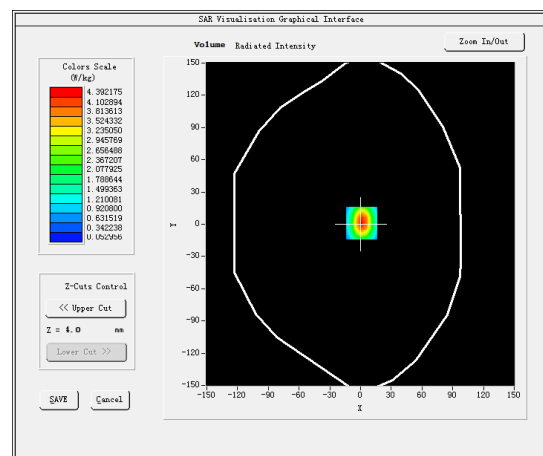

Maximum location: X=1.00, Y=1.00

SAR Peak: 7.04 W/kg

SAR 10g (W/Kg)	2.431218
SAR 1g (W/Kg)	5.426073

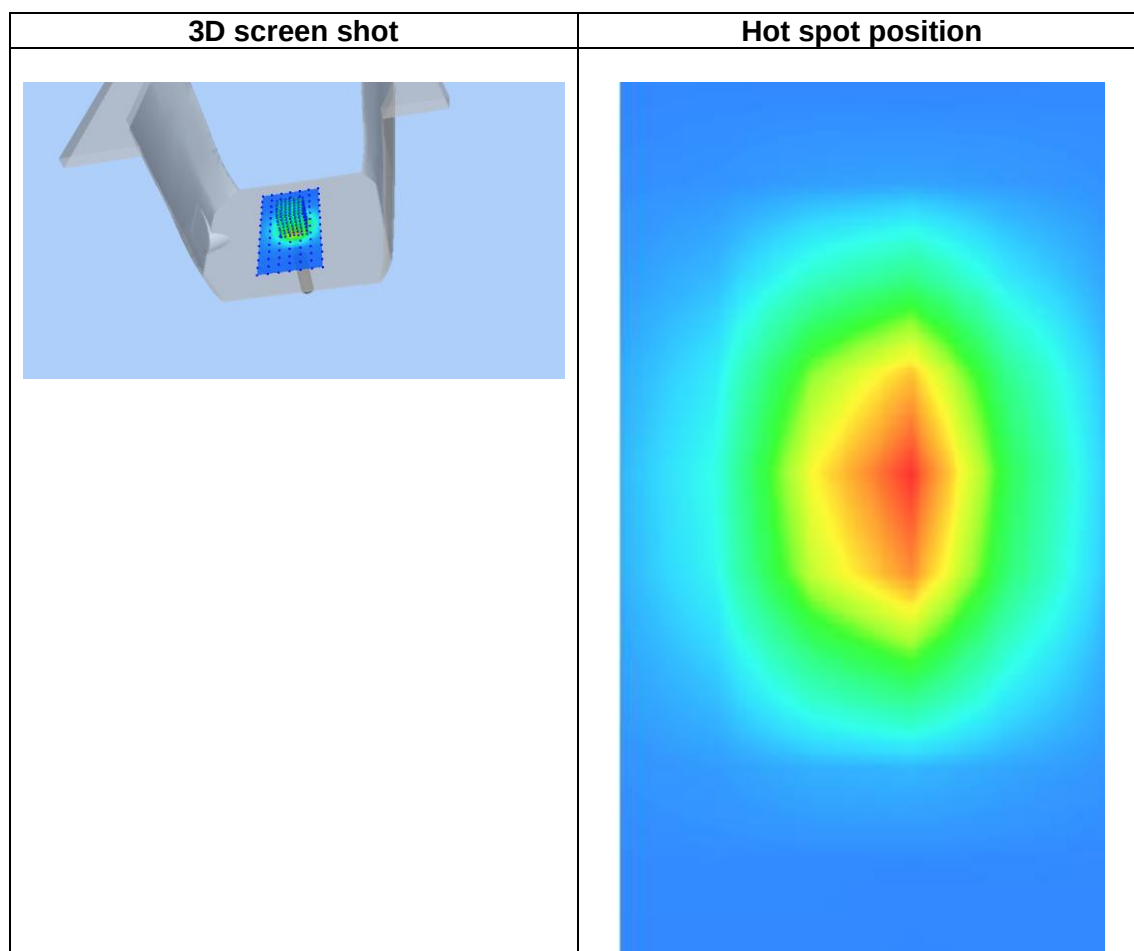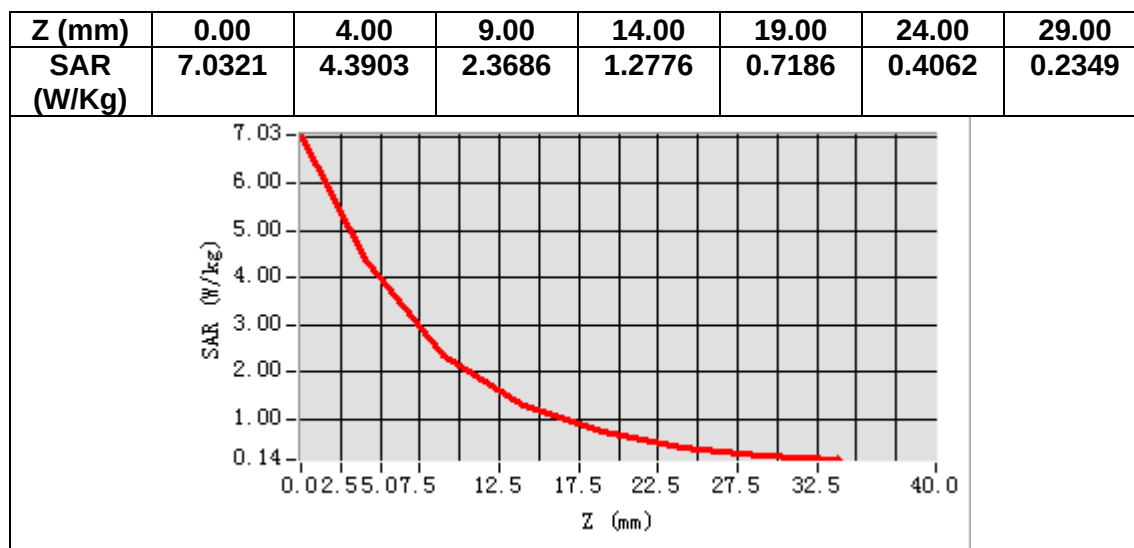

MEASUREMENT 6

Date of measurement: 5/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.85</u>


B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	37.691465
Relative permittivity (imaginary part)	12.968121
Conductivity (S/m)	1.765105
Variation (%)	-3.110000

SURFACE SAR

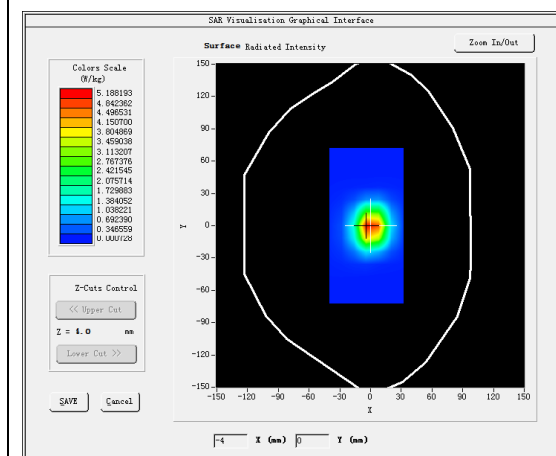



VOLUME SAR

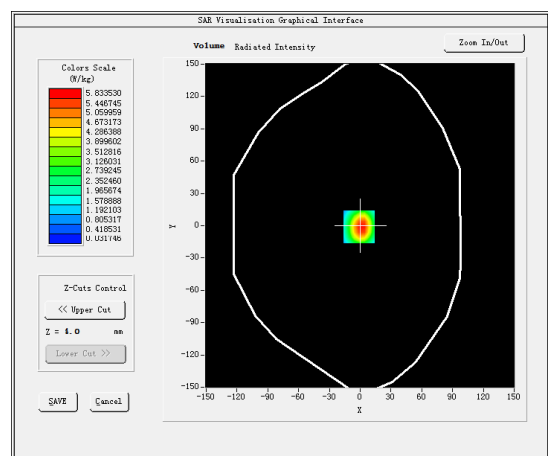

Maximum location: X=-1.00, Y=-1.00

SAR Peak: 9.83 W/kg

SAR 10g (W/Kg)	2.549207
SAR 1g (W/Kg)	5.306123

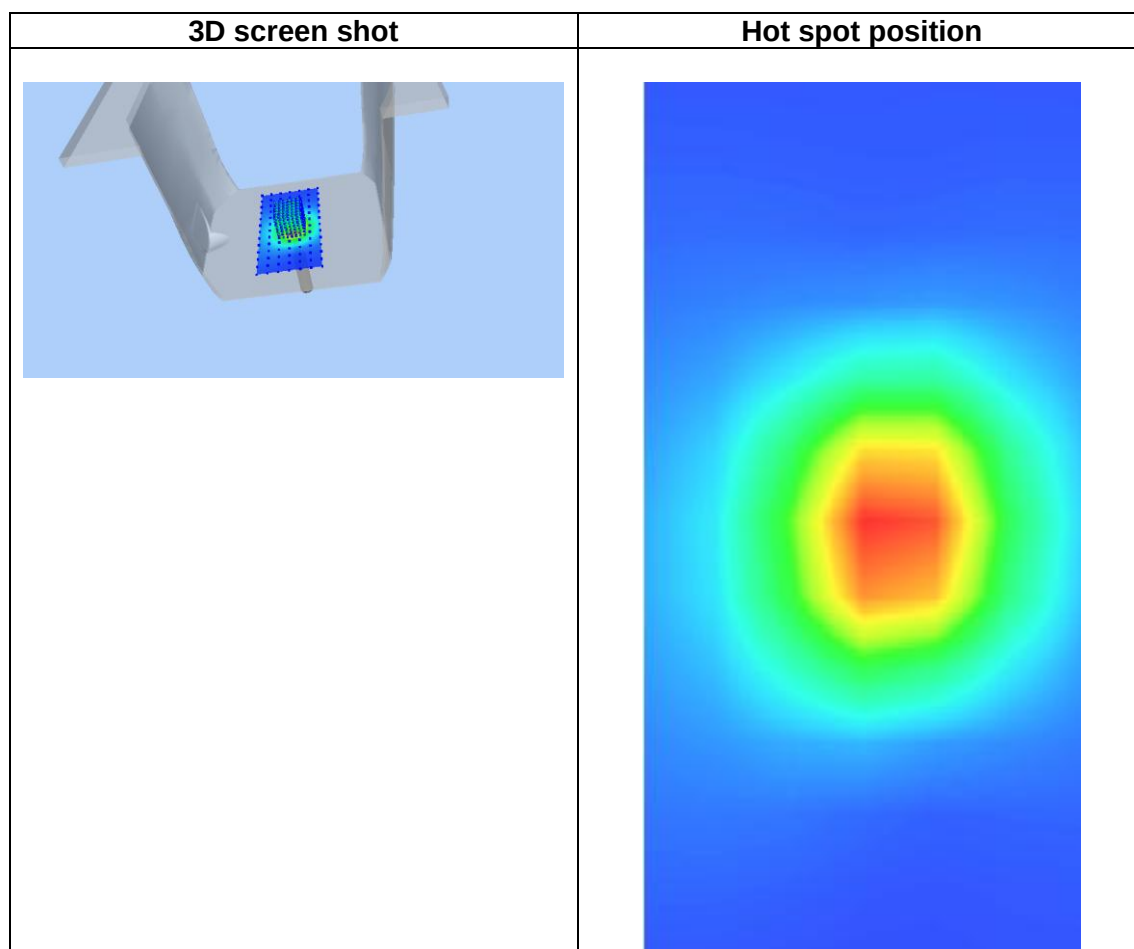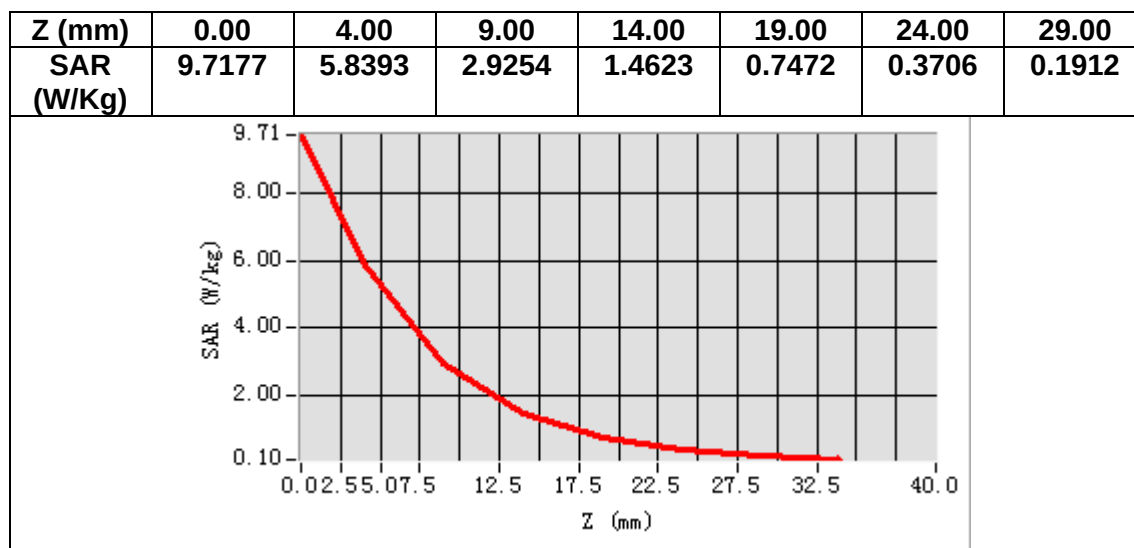

MEASUREMENT 7


Date of measurement: 6/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.65</u>

B. SAR Measurement Results



Frequency (MHz)	2600.000000
Relative permittivity (real part)	38.878442
Relative permittivity (imaginary part)	13.731472
Conductivity (S/m)	1.983435
Variation (%)	-3.550000

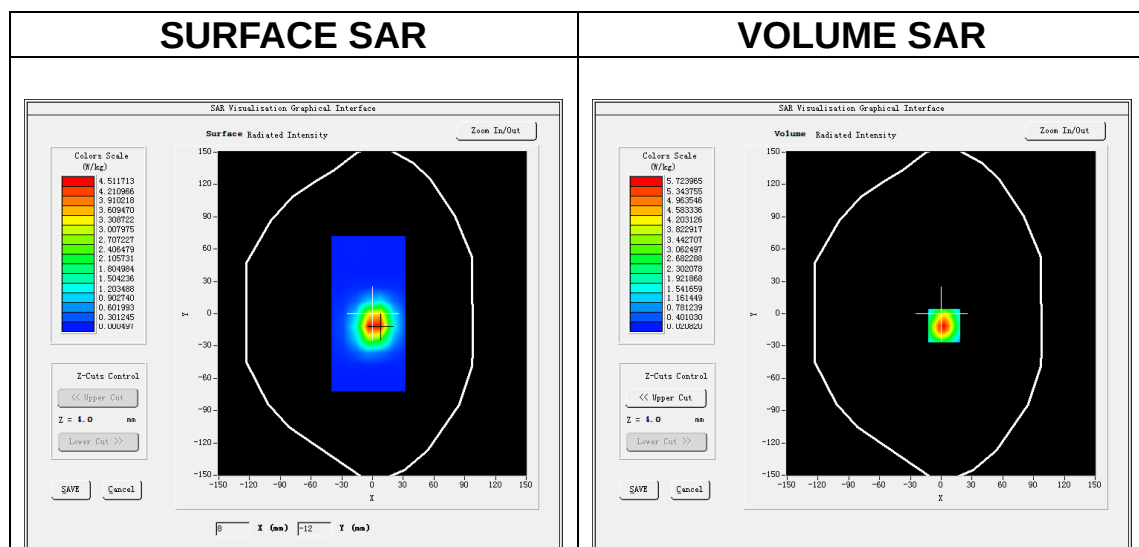

Maximum location: X=3.00, Y=-11.00

SAR Peak: 10.29 W/kg

SAR 10g (W/Kg)	2.580082
SAR 1g (W/Kg)	5.481251

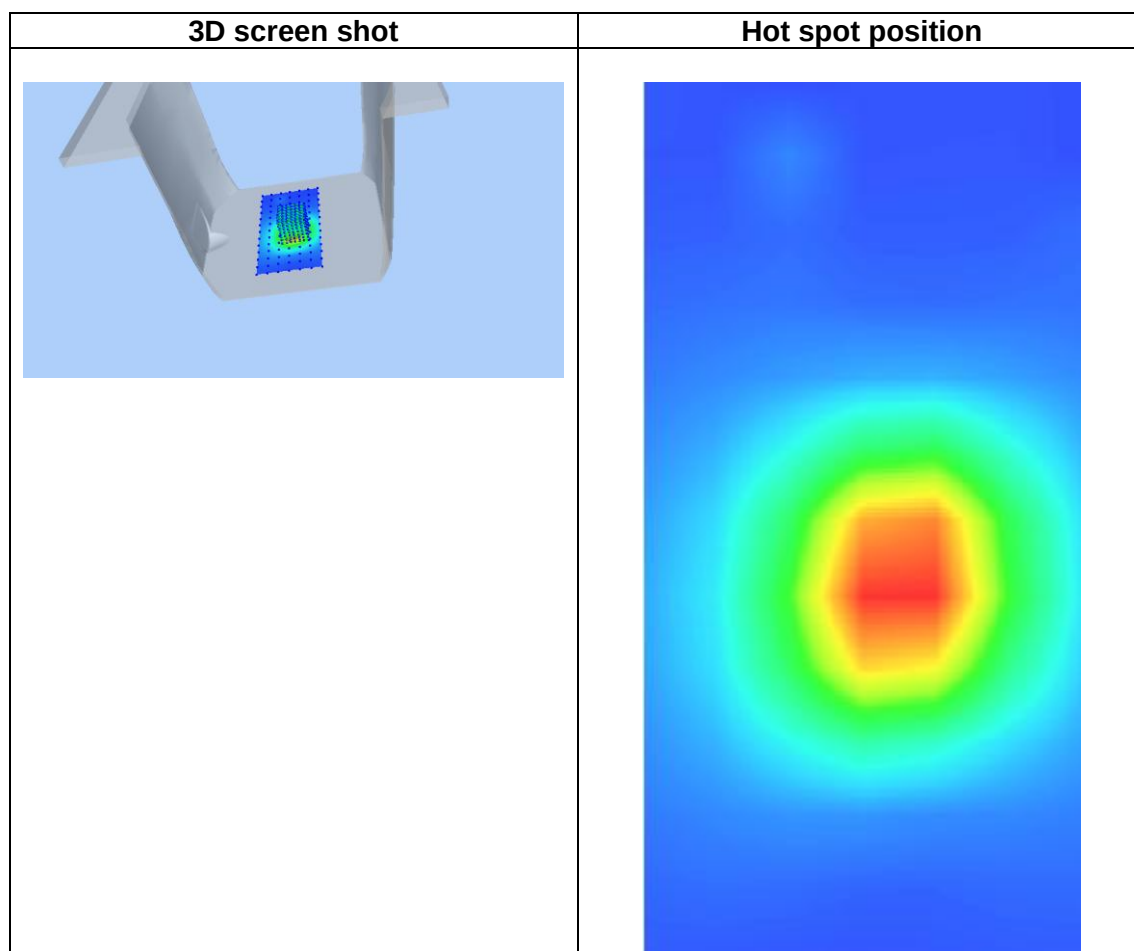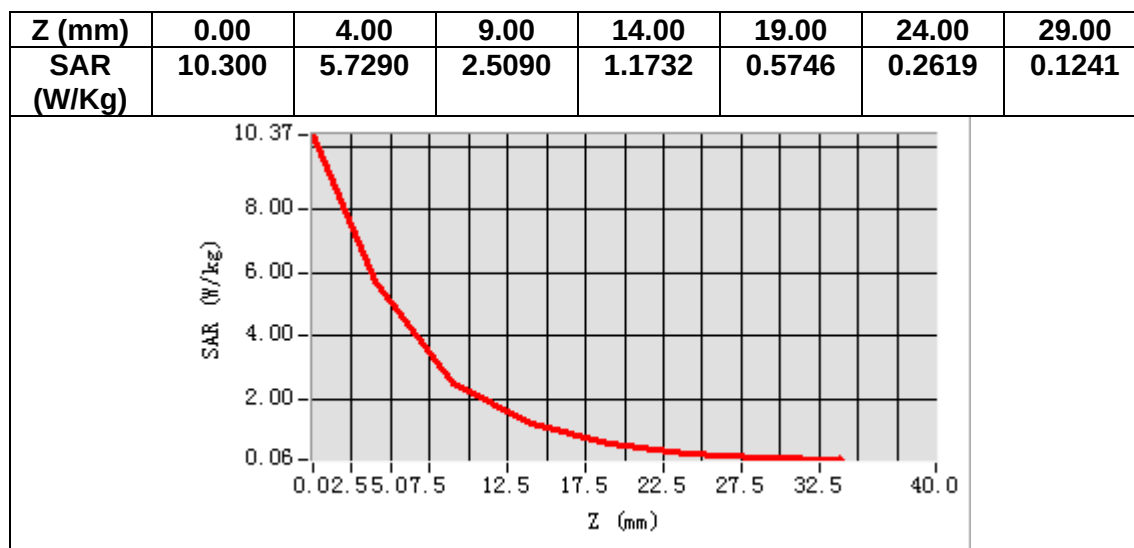

MEASUREMENT 8


Date of measurement: 16/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW3500</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.20</u>

B. SAR Measurement Results



Frequency (MHz)	3500.000000
Relative permittivity (real part)	37.866993
Relative permittivity (imaginary part)	14.742304
Conductivity (S/m)	2.866559
Variation (%)	2.360000

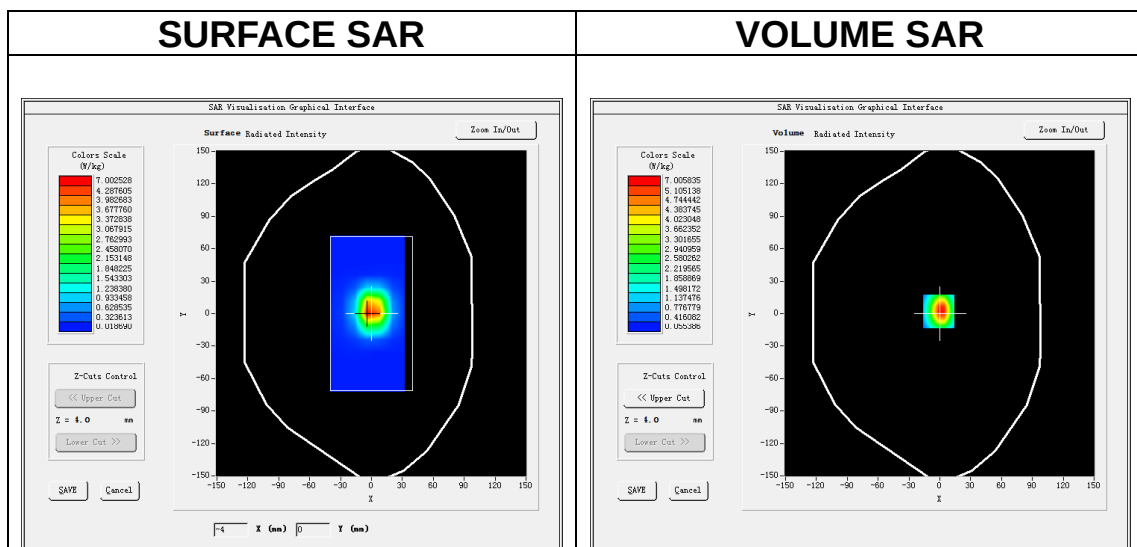

Maximum location: X=-1.00, Y=2.00

SAR Peak: 9.07 W/kg

SAR 10g (W/Kg)	2.538292
SAR 1g (W/Kg)	6.982098

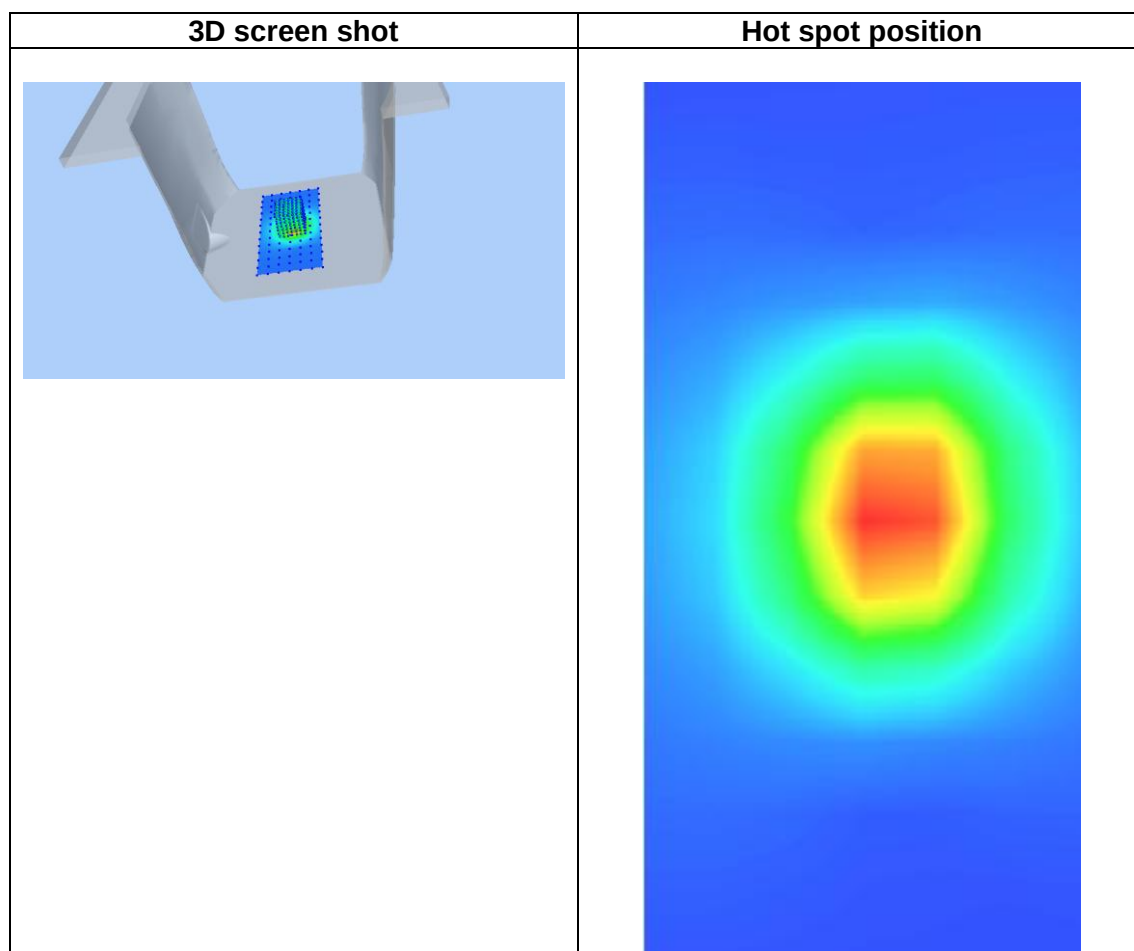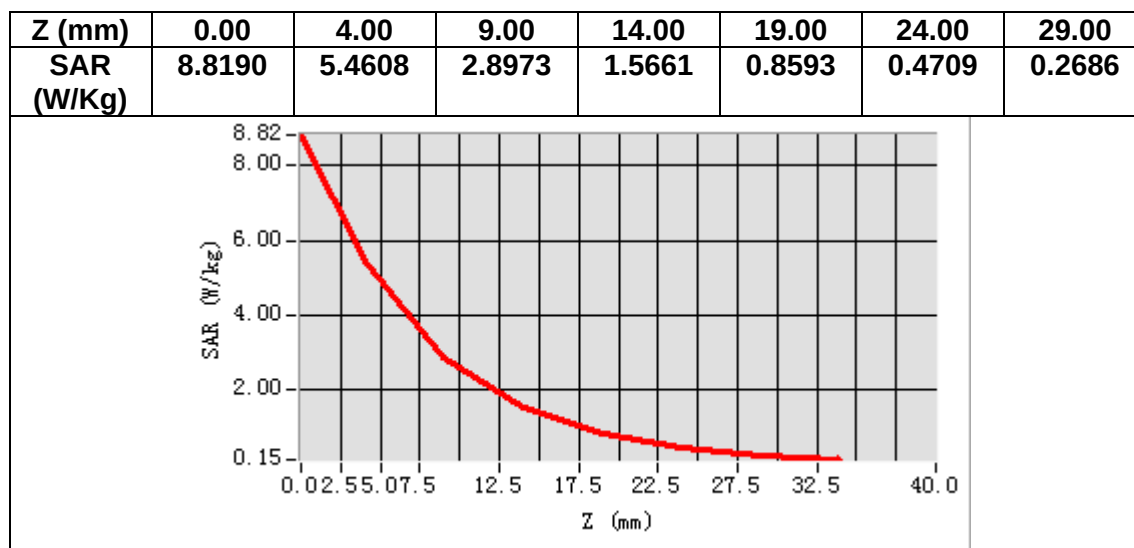

MEASUREMENT 9


Date of measurement: 17/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW3700</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.11</u>

B. SAR Measurement Results



Frequency (MHz)	3700.000000
Relative permittivity (real part)	37.327163
Relative permittivity (imaginary part)	15.052182
Conductivity (S/m)	3.094060
Variation (%)	-2.520000

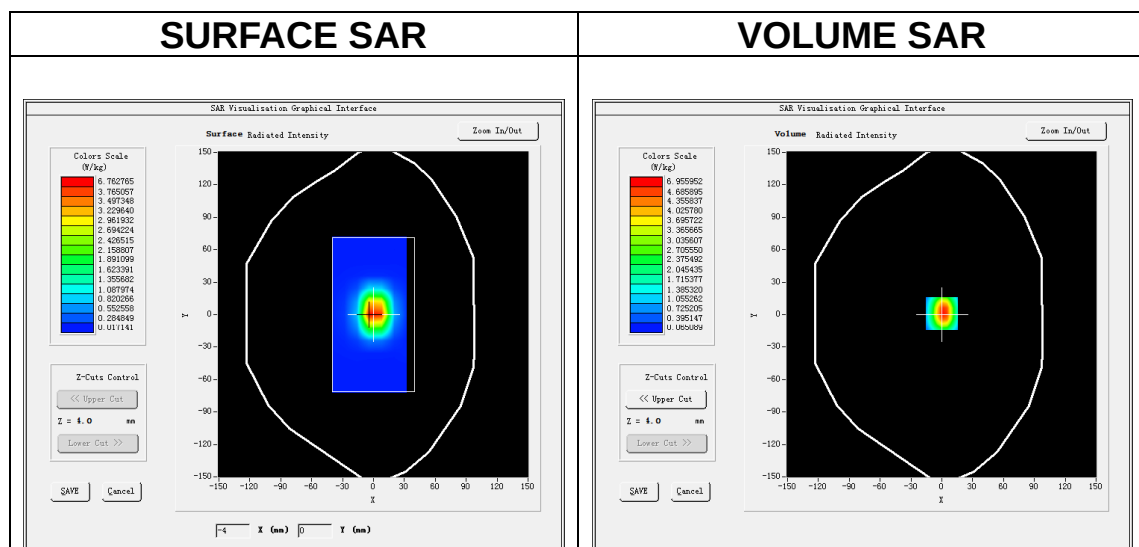

Maximum location: X=0.00, Y=1.00

SAR Peak: 8.14 W/kg

SAR 10g (W/Kg)	2.501146
SAR 1g (W/Kg)	6.329398

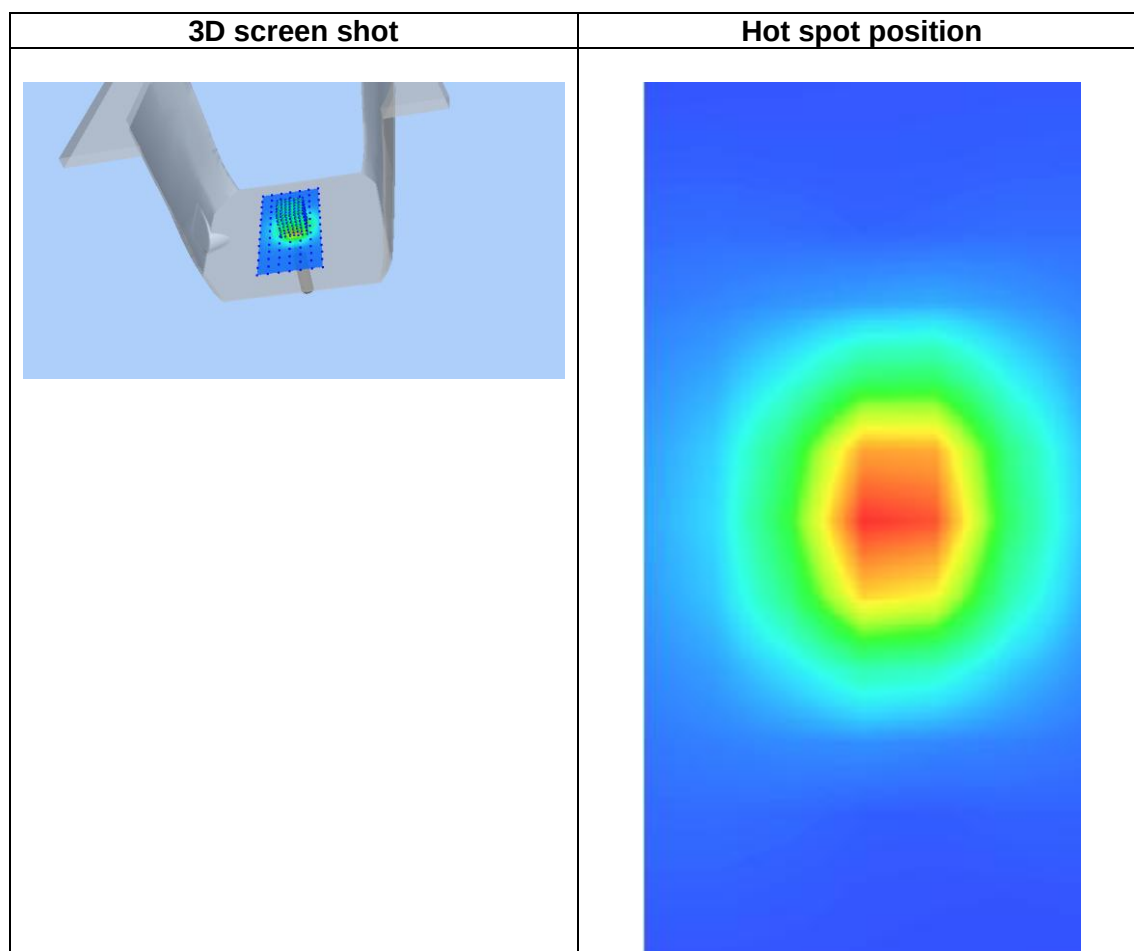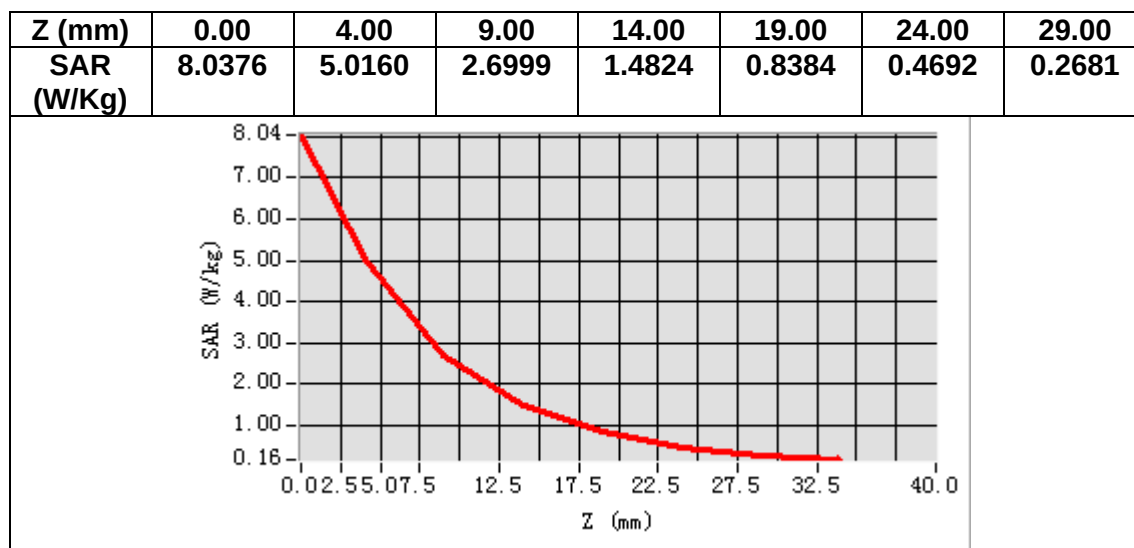

MEASUREMENT 10


Date of measurement: 20/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW4200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.40</u>

B. SAR Measurement Results



Frequency (MHz)	4200.000000
Relative permittivity (real part)	37.813665
Relative permittivity (imaginary part)	15.163438
Conductivity (S/m)	3.538136
Variation (%)	-2.740000

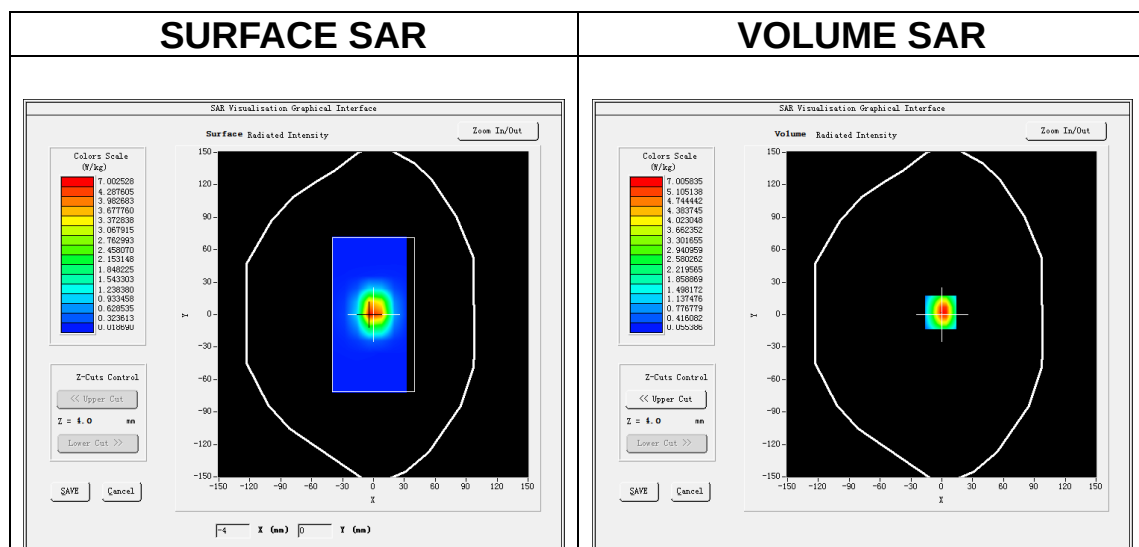

Maximum location: X=-1.00, Y=2.00

SAR Peak: 9.07 W/kg

SAR 10g (W/Kg)	2.487137
SAR 1g (W/Kg)	6.178351

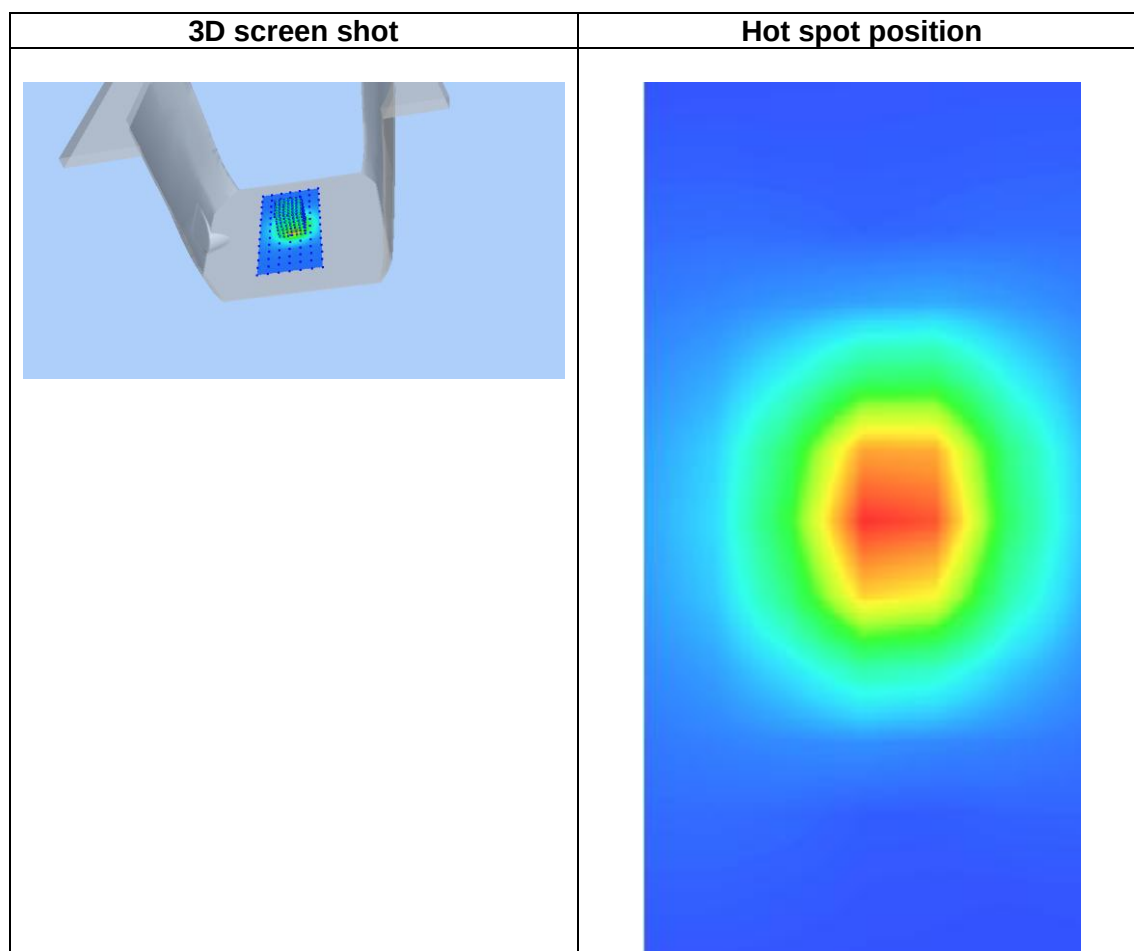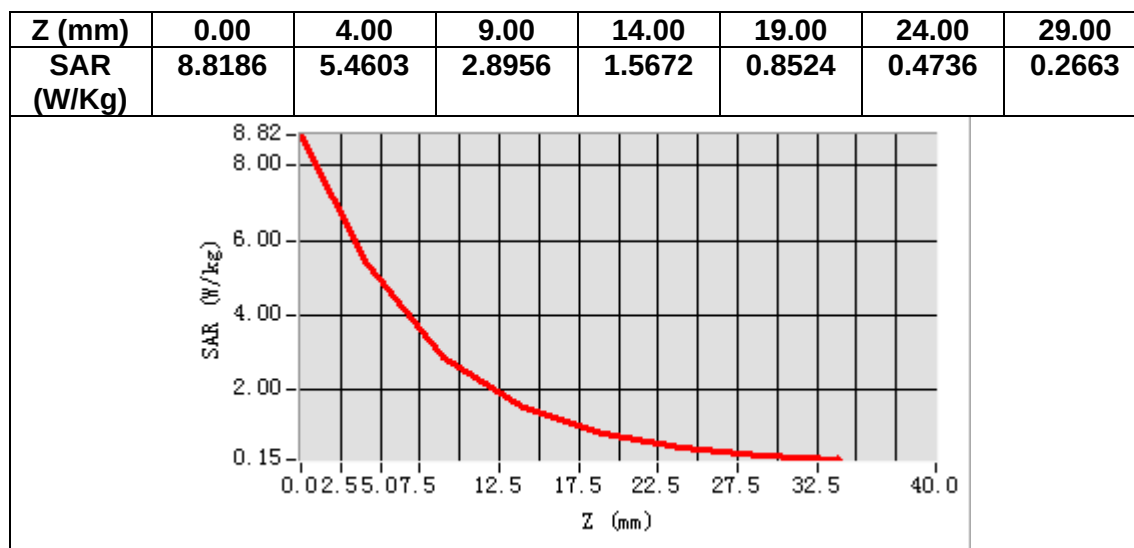

MEASUREMENT 11


Date of measurement: 10/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.07</u>

B. SAR Measurement Results



Frequency (MHz)	5200.000000
Relative permittivity (real part)	34.578385
Relative permittivity (imaginary part)	15.678512
Conductivity (S/m)	4.529348
Variation (%)	2.800000

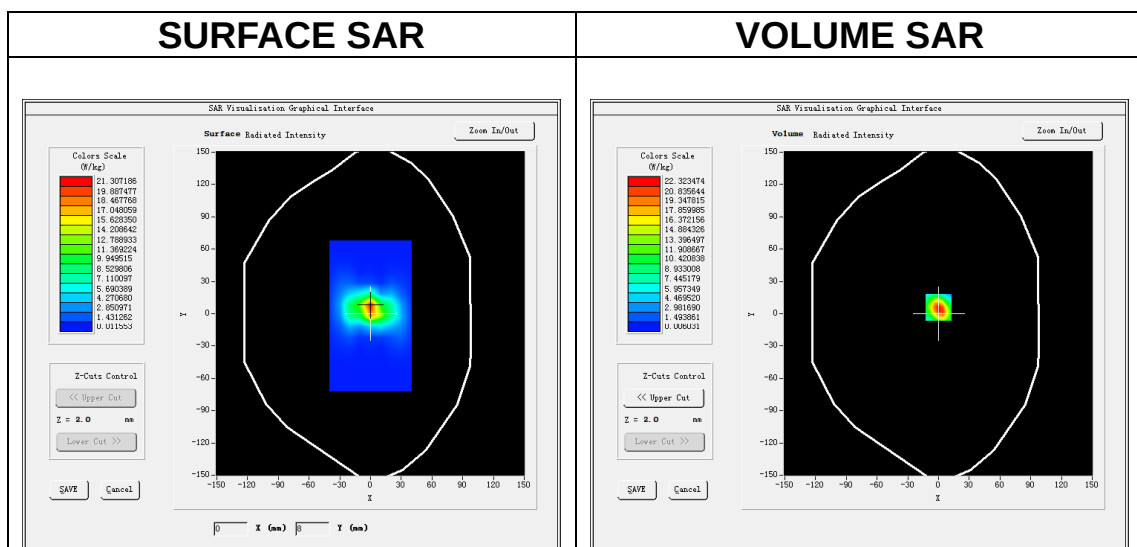

Maximum location: X=0.00, Y=6.00

SAR Peak: 40.06 W/kg

SAR 10g (W/Kg)	6.118162
SAR 1g (W/Kg)	17.090032

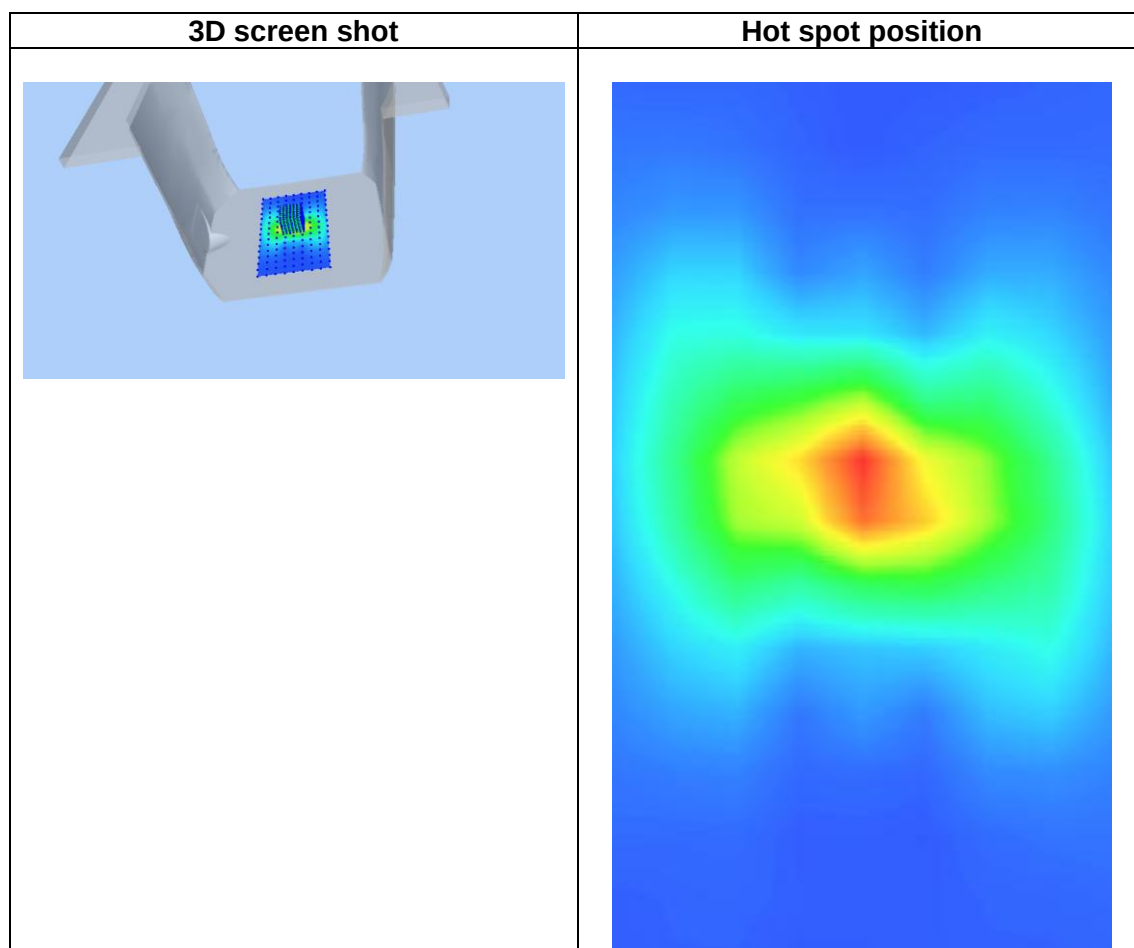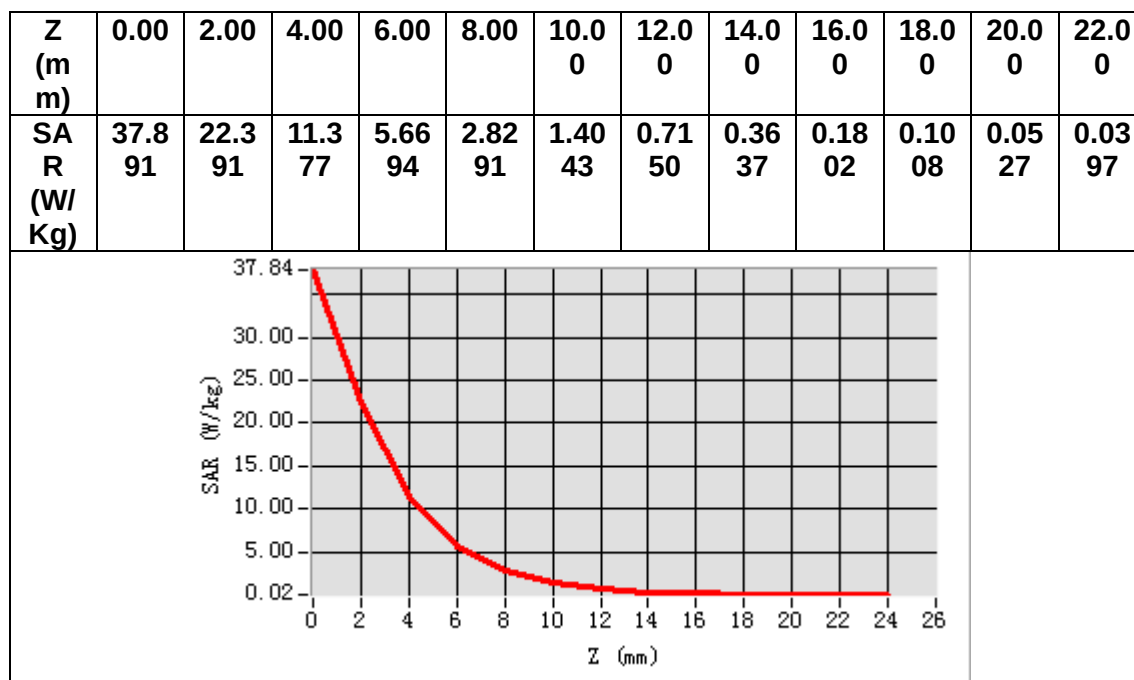

MEASUREMENT 12


Date of measurement: 11/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.04</u>

B. SAR Measurement Results



Frequency (MHz)	5800.000000
Relative permittivity (real part)	34.009535
Relative permittivity (imaginary part)	16.065283
Conductivity (S/m)	5.176591
Variation (%)	-0.500000

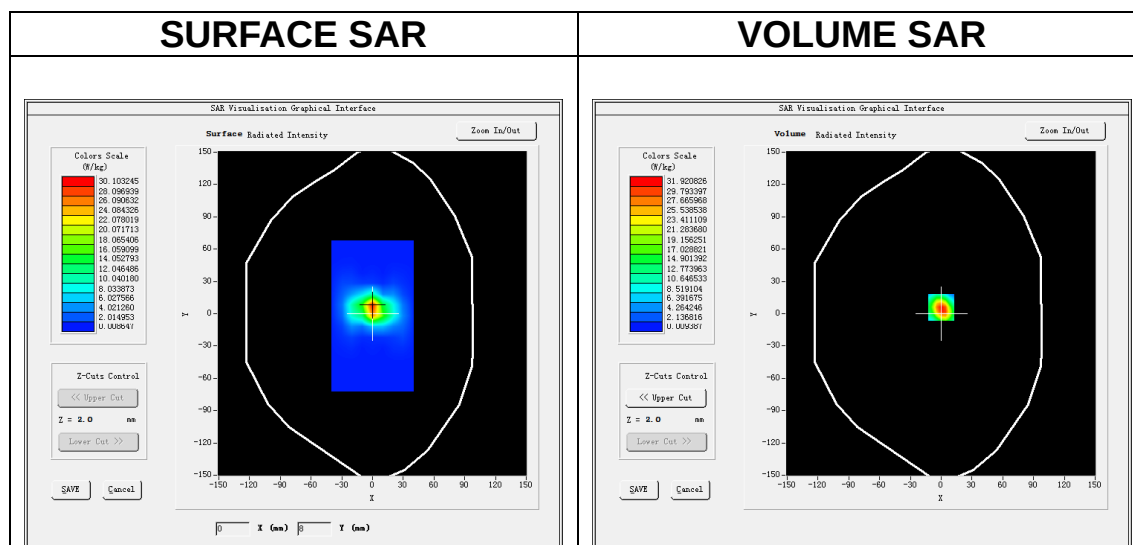

Maximum location: X=0.00, Y=6.00

SAR Peak: 57.37 W/kg

SAR 10g (W/Kg)	5.729228
SAR 1g (W/Kg)	16.519190

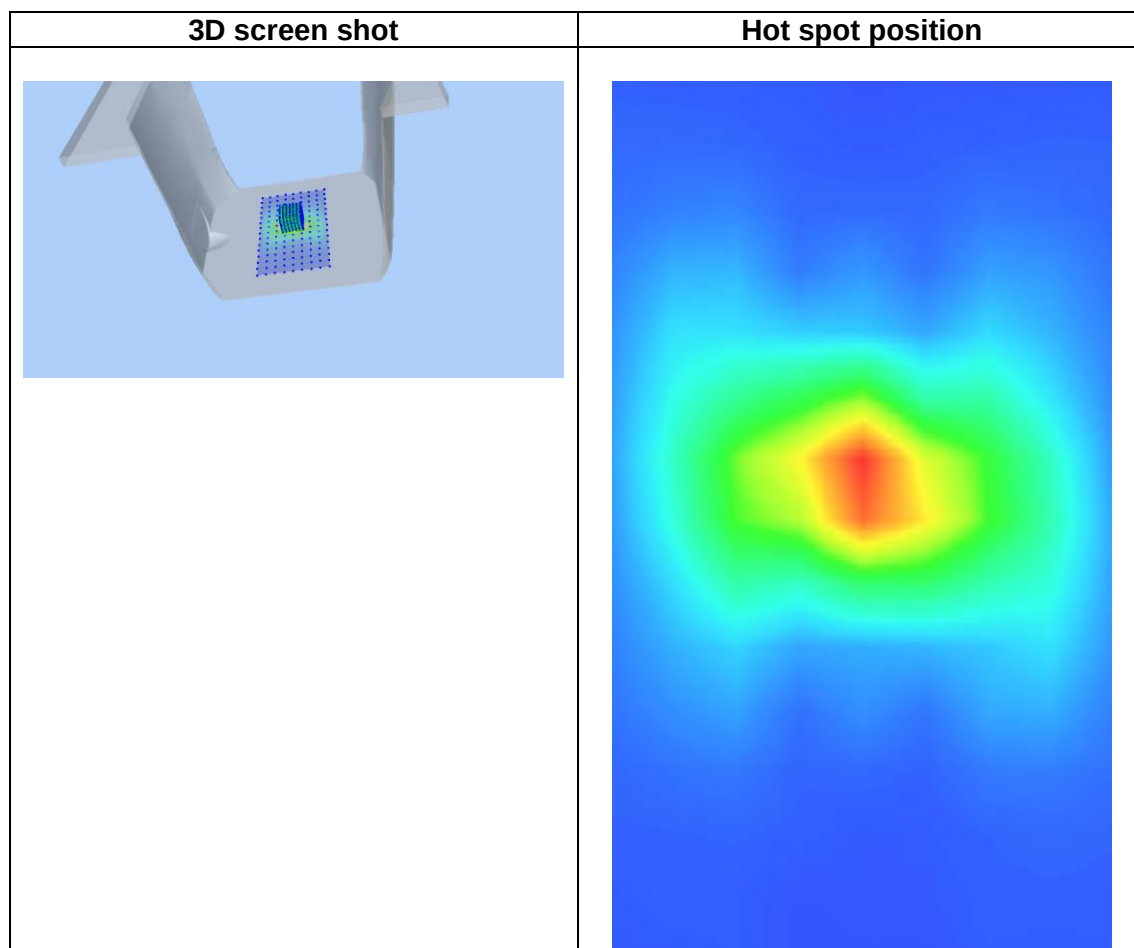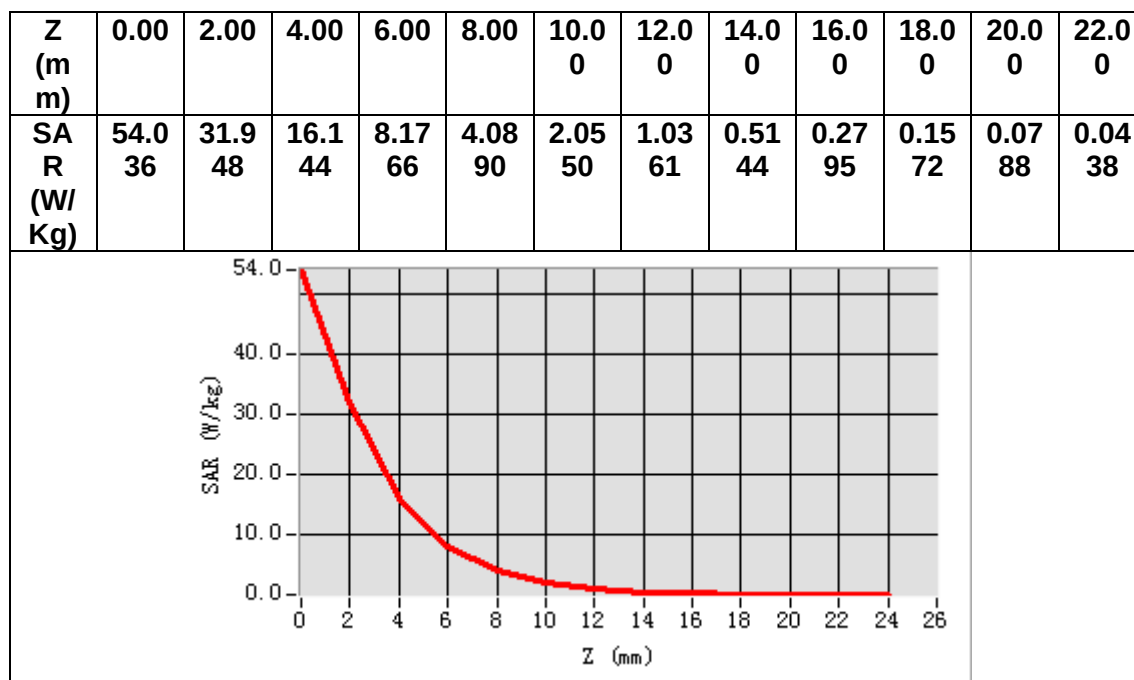

12. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1 GSM 900 Head
MEASUREMENT 2 GSM 900 Extremity
MEASUREMENT 3 GSM 1800 Head
MEASUREMENT 4 GSM 1800 Extremity
MEASUREMENT 5 WCDMA Band 1 Head
MEASUREMENT 6 WCDMA Band 1 Extremity
MEASUREMENT 7 WCDMA Band 8 Head
MEASUREMENT 8 WCDMA Band 8 Extremity
MEASUREMENT 9 ANT1 WLAN 5.2G Head
MEASUREMENT 10 WLAN 5.8G Head
MEASUREMENT 11 WLAN 5.2G Extremity
MEASUREMENT 12 WLAN 5.8G Extremity
MEASUREMENT 13 WLAN 2.4G Head
MEASUREMENT 14 WLAN 2.4G Extremity
MEASUREMENT 15 LTE Band 1 Head
MEASUREMENT 16 LTE Band 1 Extremity
MEASUREMENT 17 LTE Band 3 Head
MEASUREMENT 18 LTE Band 3 Extremity
MEASUREMENT 19 LTE Band 7 Head
MEASUREMENT 20 LTE Band 7 Extremity
MEASUREMENT 21 LTE Band 8 Head
MEASUREMENT 22 LTE Band 8 Extremity
MEASUREMENT 23 LTE Band 20 Head
MEASUREMENT 24 LTE Band 20 Extremity
MEASUREMENT 25 LTE Band 40 Head
MEASUREMENT 26 LTE Band 40 Extremity
MEASUREMENT 27 LTE Band 28 Head
MEASUREMENT 28 LTE Band 28 Extremity
MEASUREMENT 29 NR SA n1 Head
MEASUREMENT 30 NR SA n1 Extremity
MEASUREMENT 31 NR SA n28 Head
MEASUREMENT 32 NR SA n28 Extremity
MEASUREMENT 33 NR SA n77 Head
MEASUREMENT 34 NR SA n77 Extremity
MEASUREMENT 35 NR SA n78 Head
MEASUREMENT 36 NR SA n78 Extremity

MEASUREMENT 37 NR SA n3 Head
MEASUREMENT 38 NR SA n3 Extremity
MEASUREMENT 39 NR SA n38 Head
MEASUREMENT 40 NR SA n38 Extremity
MEASUREMENT 41 NR SA n8 Head
MEASUREMENT 42 NR SA n8 Extremity
MEASUREMENT 43 NR SA n20 Head
MEASUREMENT 44 NR SA n20 Extremity

MEASUREMENT 1

Date of measurement: 15/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>
<u>ConvF</u>	<u>2.23</u>

B. SAR Measurement Results

Frequency (MHz)	897.600000
Relative permittivity (real part)	41.347946
Relative permittivity (imaginary part)	19.851242
Conductivity (S/m)	0.989915
Variation (%)	-1.940000



SURFACE SAR

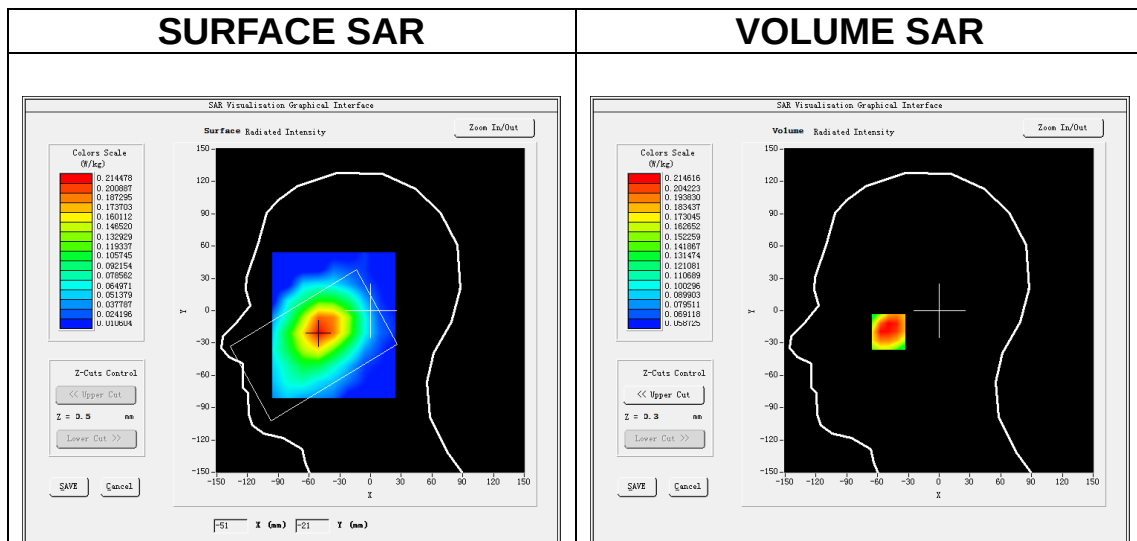

Maximum location: X=-49.00, Y=-19.00

SAR Peak: 0.23 W/kg

SAR 10g (W/Kg)	0.187702
SAR 1g (W/Kg)	0.216404

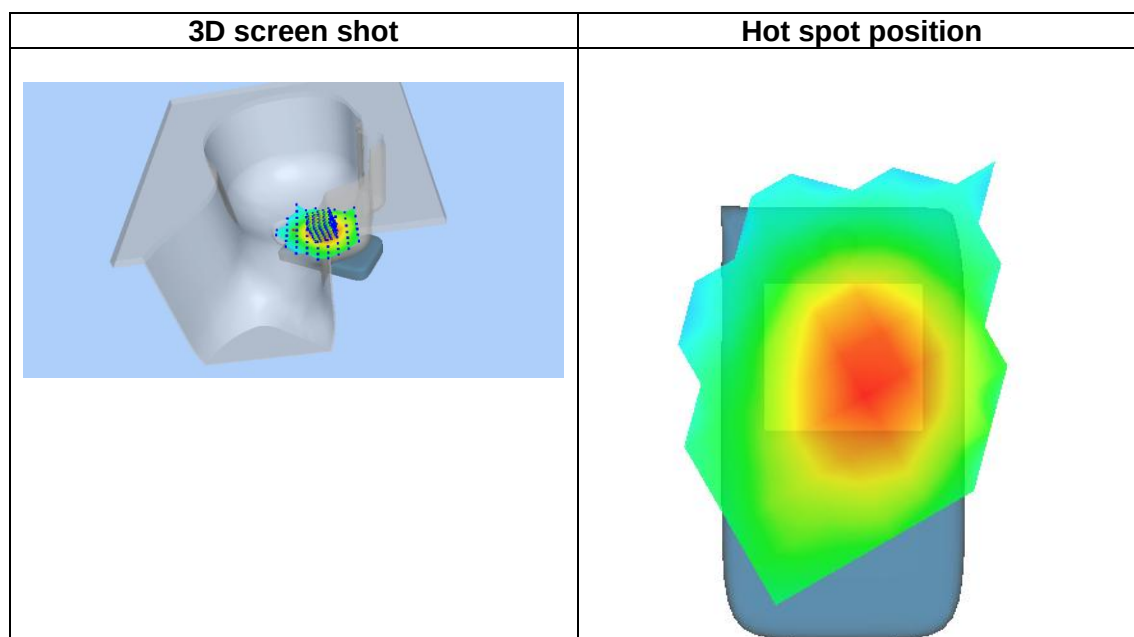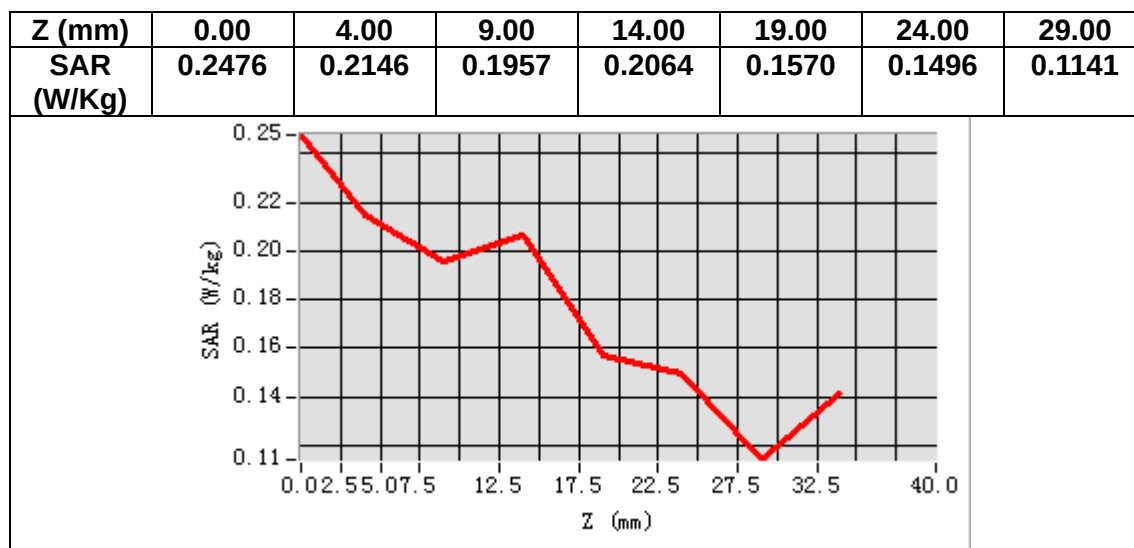

MEASUREMENT 2

Date of measurement: 15/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>
<u>ConvF</u>	<u>2.23</u>


B. SAR Measurement Results

Frequency (MHz)	897.600000
Relative permittivity (real part)	41.347946
Relative permittivity (imaginary part)	19.851242
Conductivity (S/m)	0.989915
Variation (%)	3.350000

SURFACE SAR

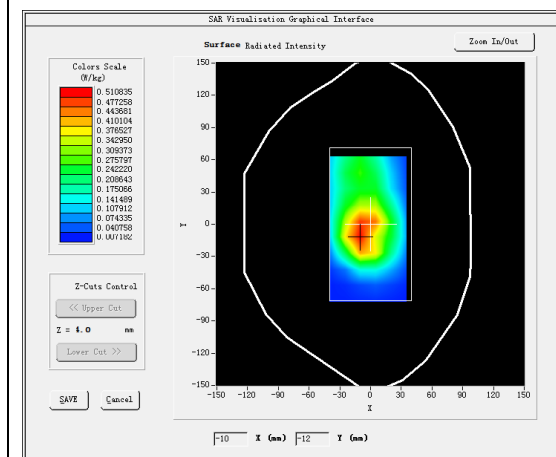



VOLUME SAR

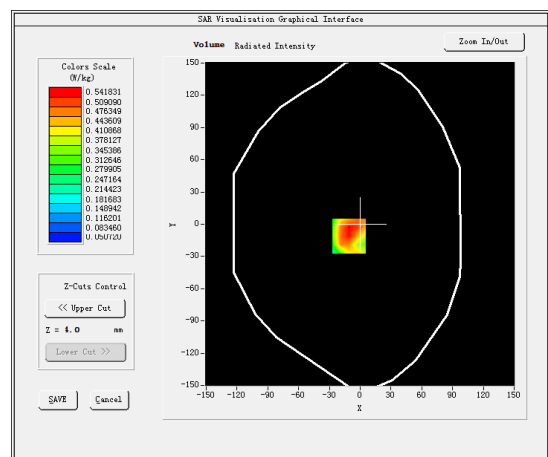

Maximum location: X=-11.00, Y=-11.00

SAR Peak: 0.80 W/kg

SAR 10g (W/Kg)	0.360260
SAR 1g (W/Kg)	0.542693

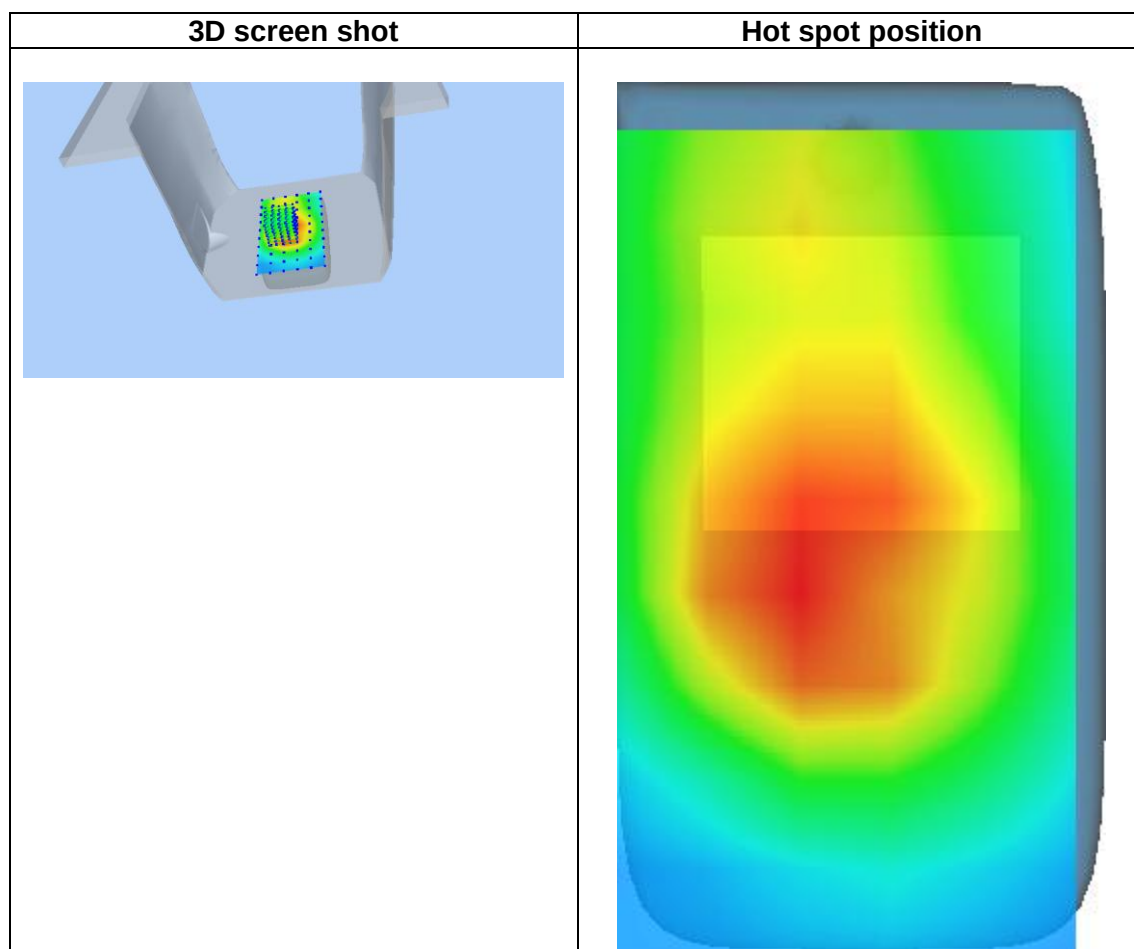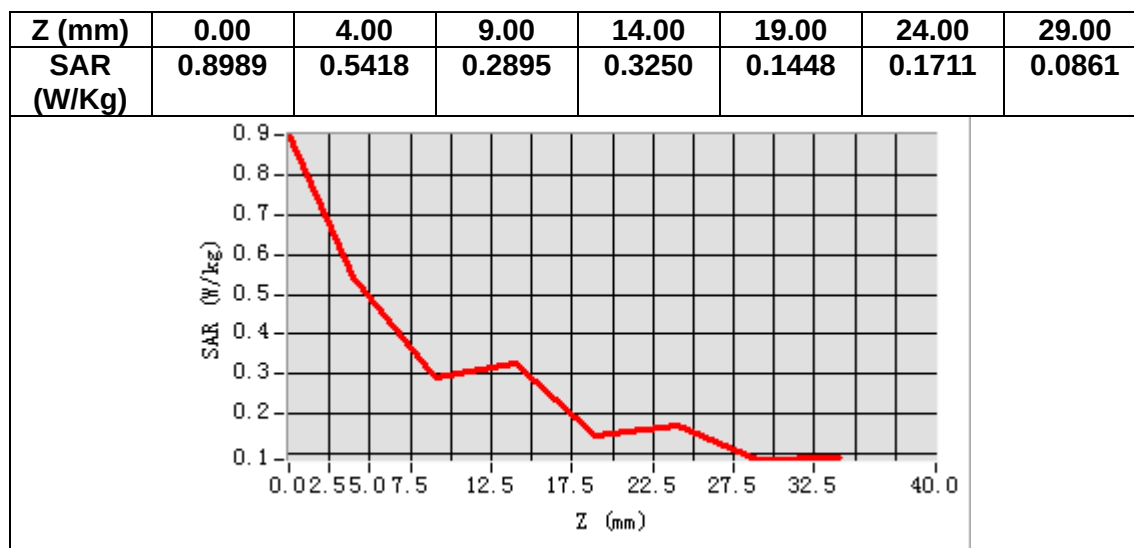

MEASUREMENT 3

Date of measurement: 9/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM1800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>
<u>ConvF</u>	<u>2.45</u>


B. SAR Measurement Results

Frequency (MHz)	1747.400000
Relative permittivity (real part)	39.284641
Relative permittivity (imaginary part)	13.715427
Conductivity (S/m)	1.331463
Variation (%)	-1.370000

SURFACE SAR

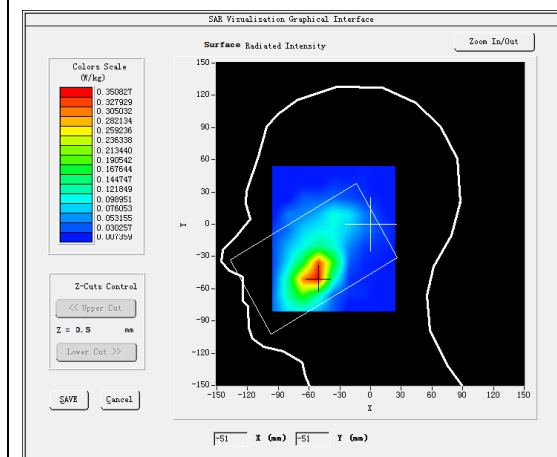



VOLUME SAR

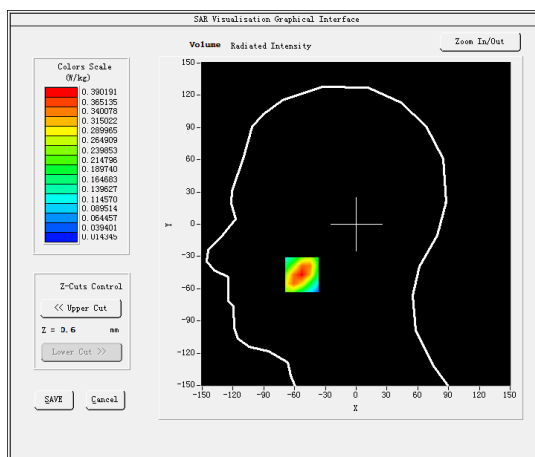

Maximum location: X=-53.00, Y=-47.00

SAR Peak: 0.52 W/kg

SAR 10g (W/Kg)	0.227129
SAR 1g (W/Kg)	0.366076

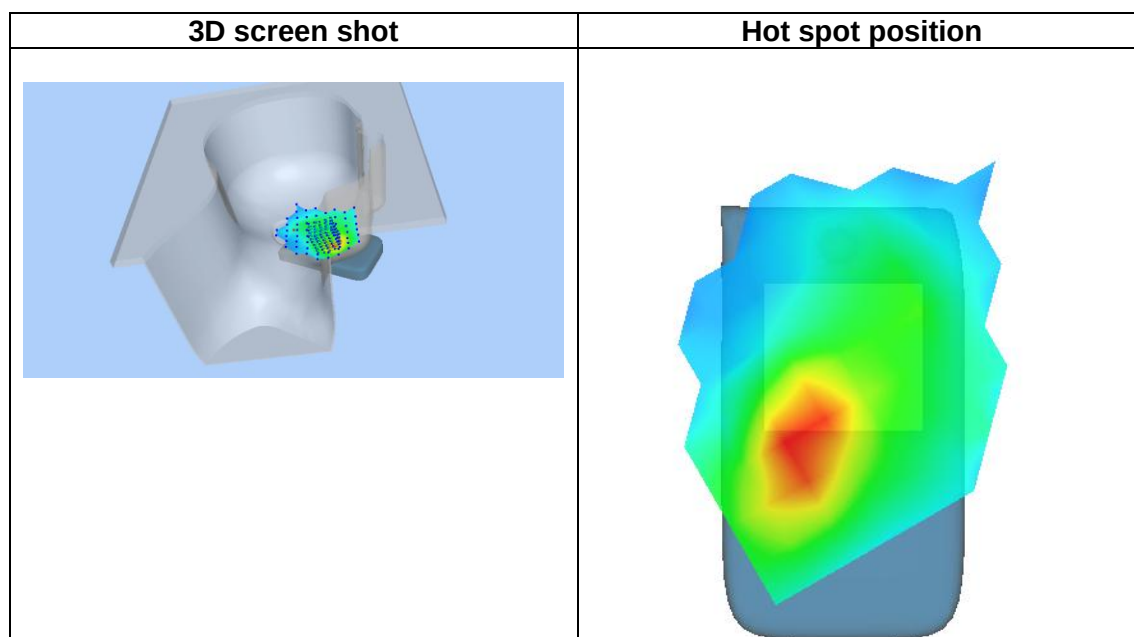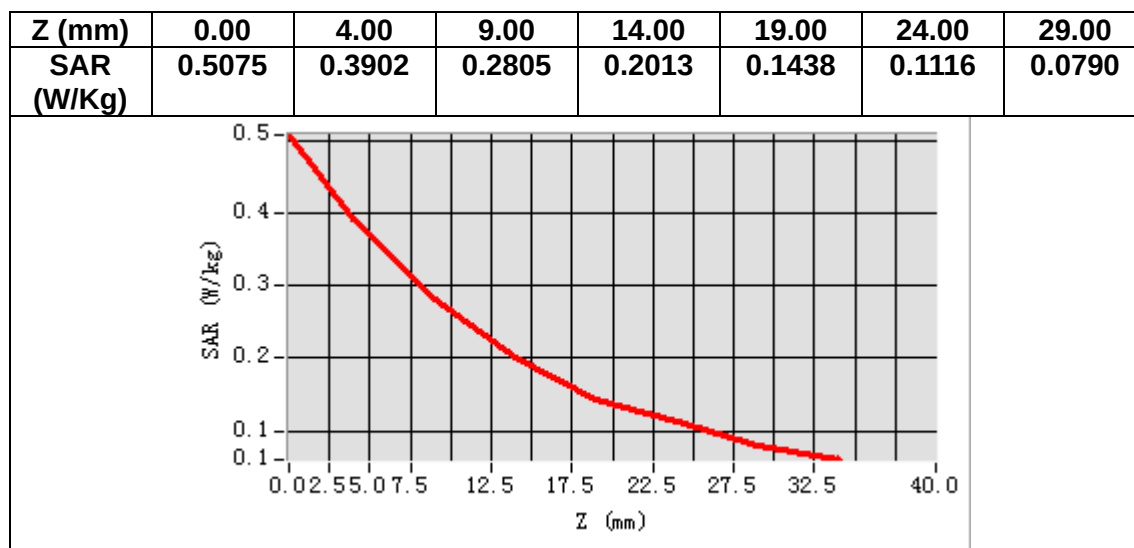

MEASUREMENT 4


Date of measurement: 9/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>
<u>ConvF</u>	<u>2.45</u>

B. SAR Measurement Results



Frequency (MHz)	1747.400000
Relative permittivity (real part)	39.284641
Relative permittivity (imaginary part)	13.715427
Conductivity (S/m)	1.331463
Variation (%)	-0.920000

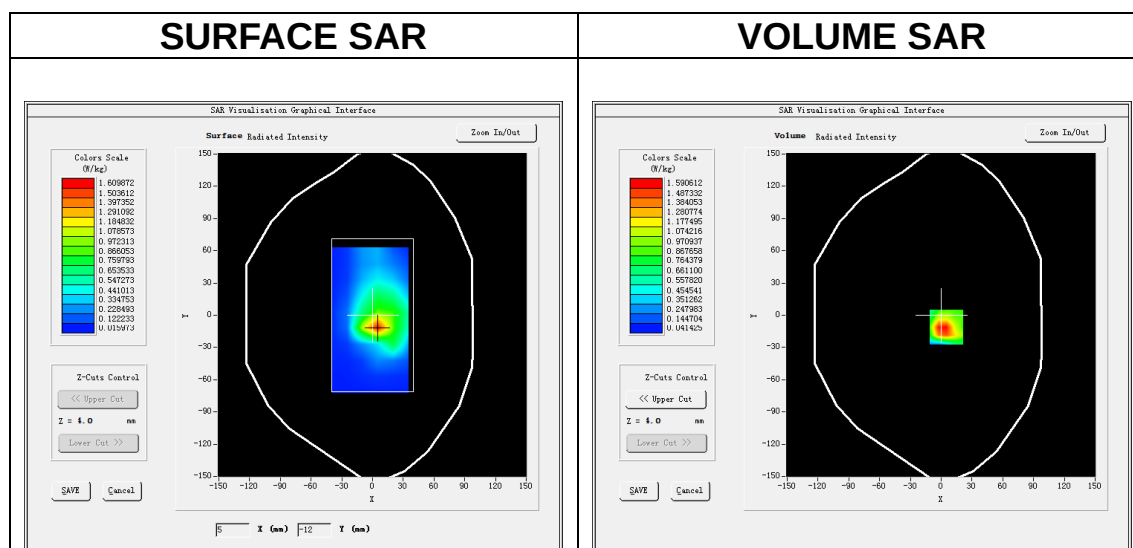

Maximum location: X=5.00, Y=-11.00

SAR Peak: 2.59 W/kg

SAR 10g (W/Kg)	0.833487
SAR 1g (W/Kg)	1.596472

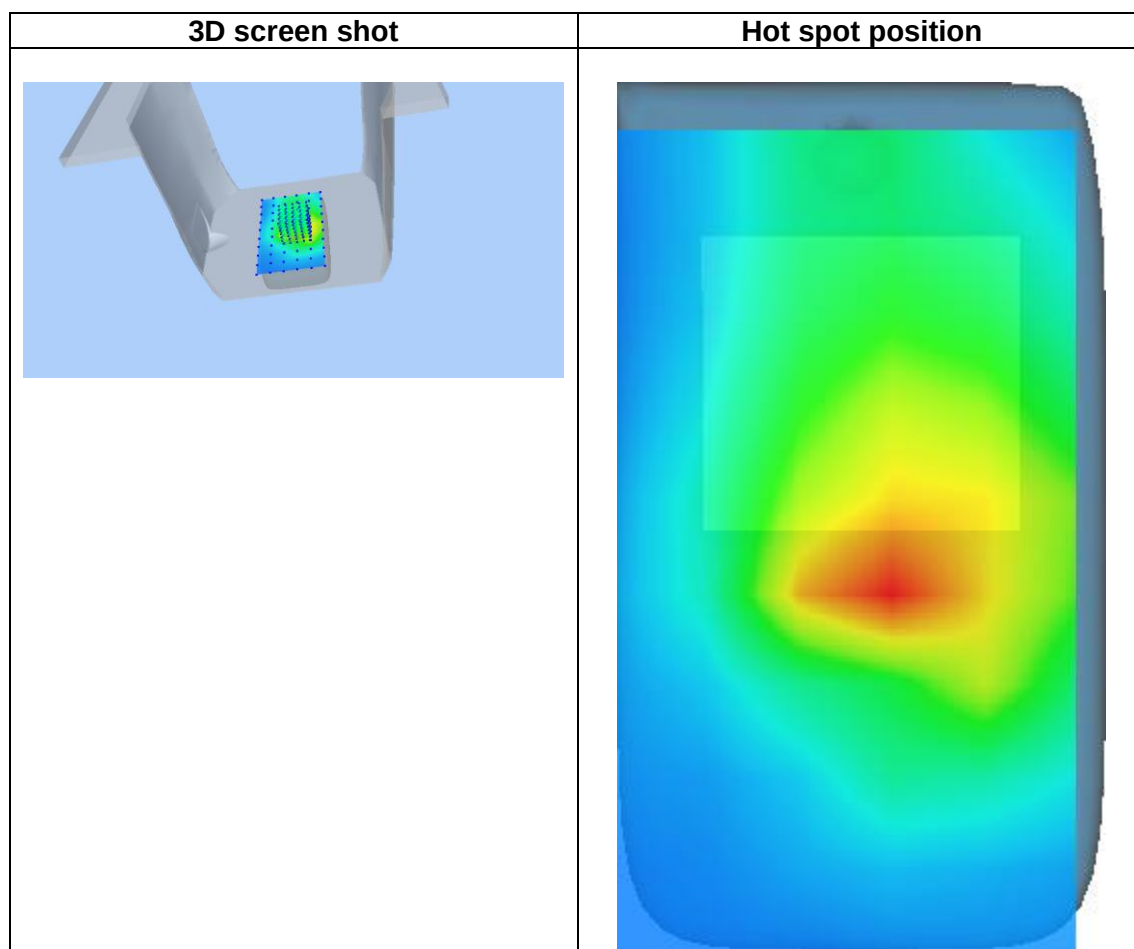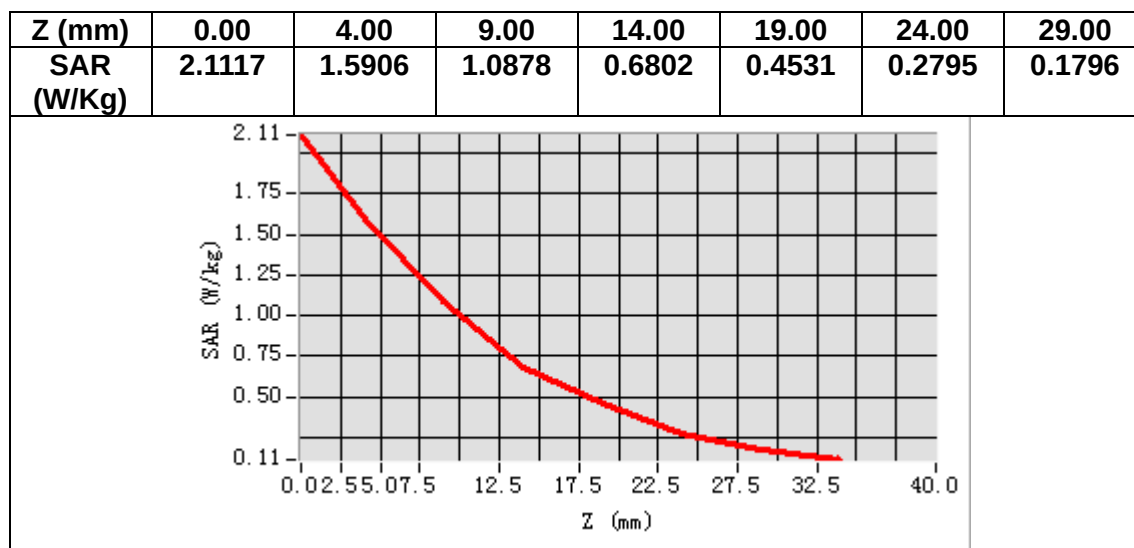

MEASUREMENT 5

Date of measurement: 12/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band1 UMTS</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.83</u>


B. SAR Measurement Results

Frequency (MHz)	1950.000000
Relative permittivity (real part)	38.843918
Relative permittivity (imaginary part)	12.847650
Conductivity (S/m)	1.391829
Variation (%)	2.880000

SURFACE SAR

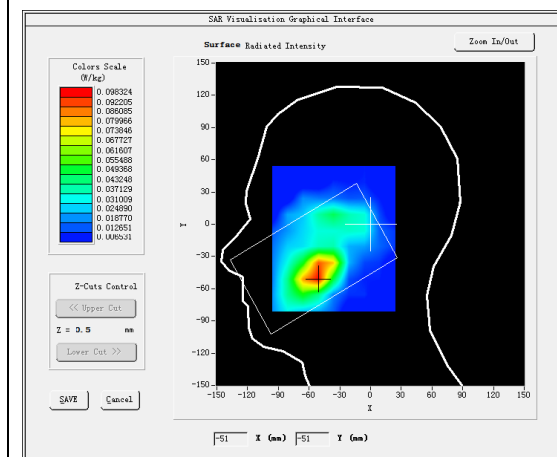



VOLUME SAR

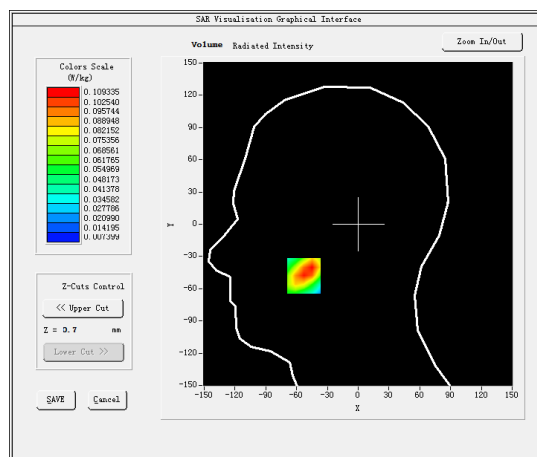

Maximum location: X=-53.00, Y=-48.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.063740
SAR 1g (W/Kg)	0.105190

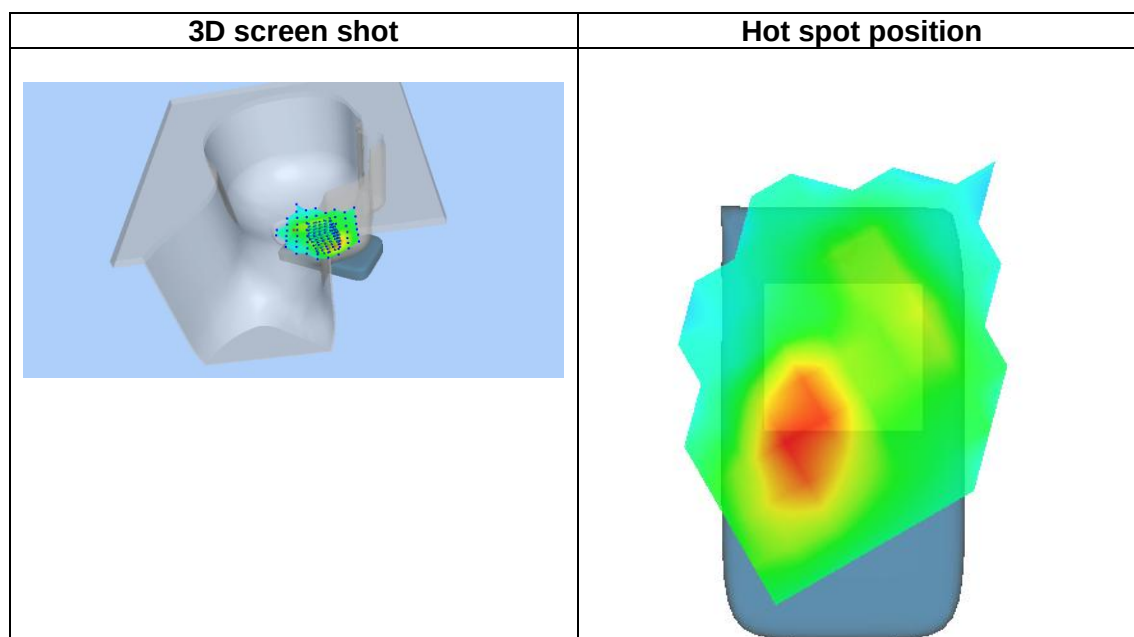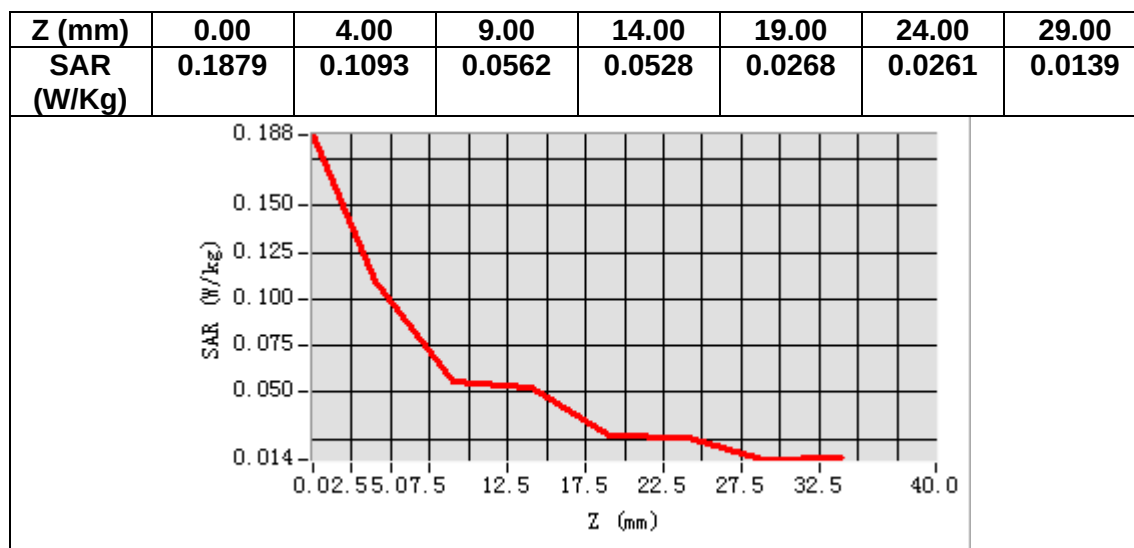

MEASUREMENT 6


Date of measurement: 12/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band1 UMTS</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.83</u>

B. SAR Measurement Results



Frequency (MHz)	1950.000000
Relative permittivity (real part)	38.843918
Relative permittivity (imaginary part)	12.847650
Conductivity (S/m)	1.391829
Variation (%)	-1.670000

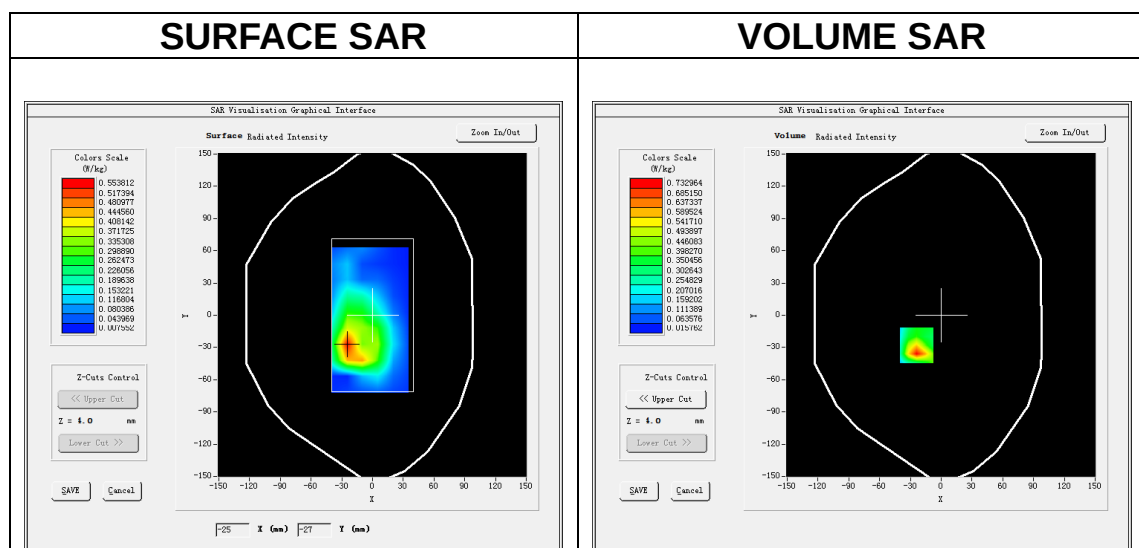

Maximum location: X=-24.00, Y=-28.00

SAR Peak: 1.18 W/kg

SAR 10g (W/Kg)	0.332185
SAR 1g (W/Kg)	0.664710

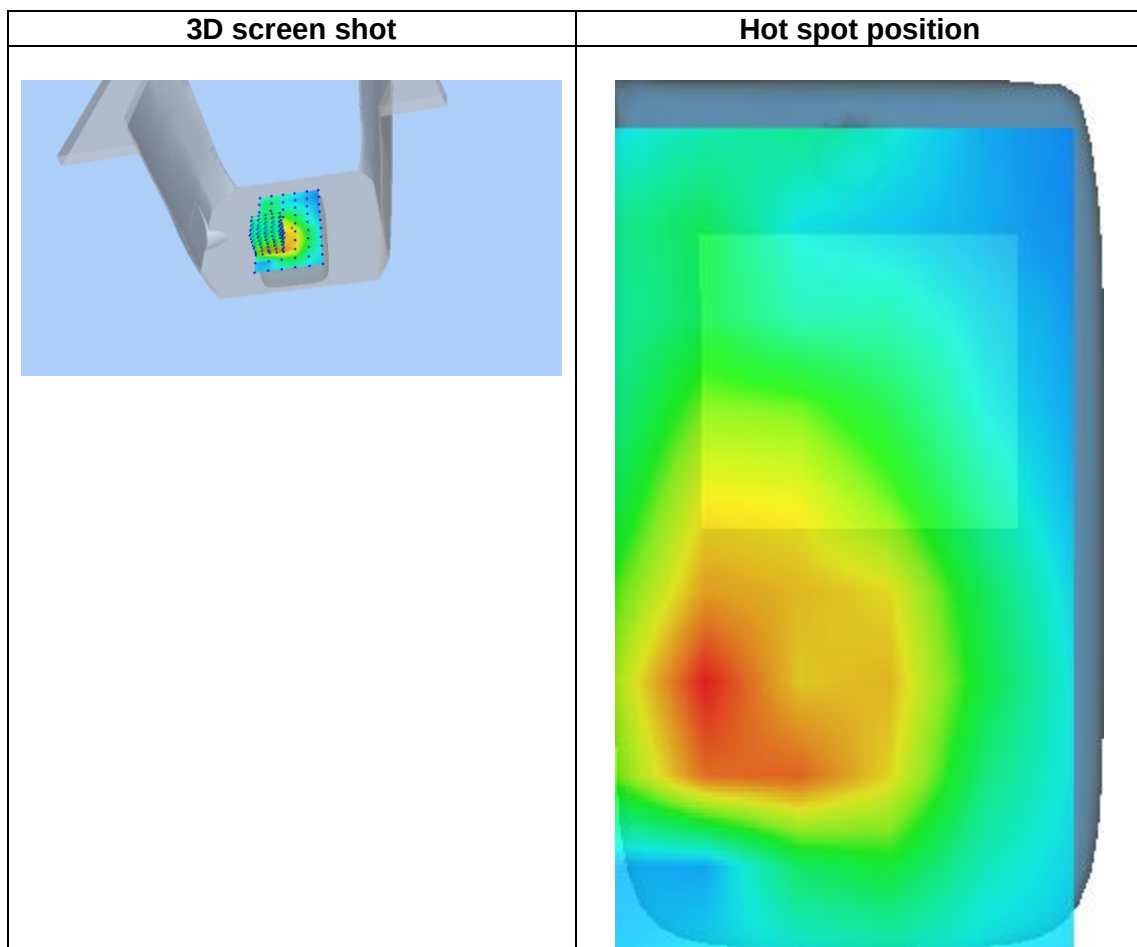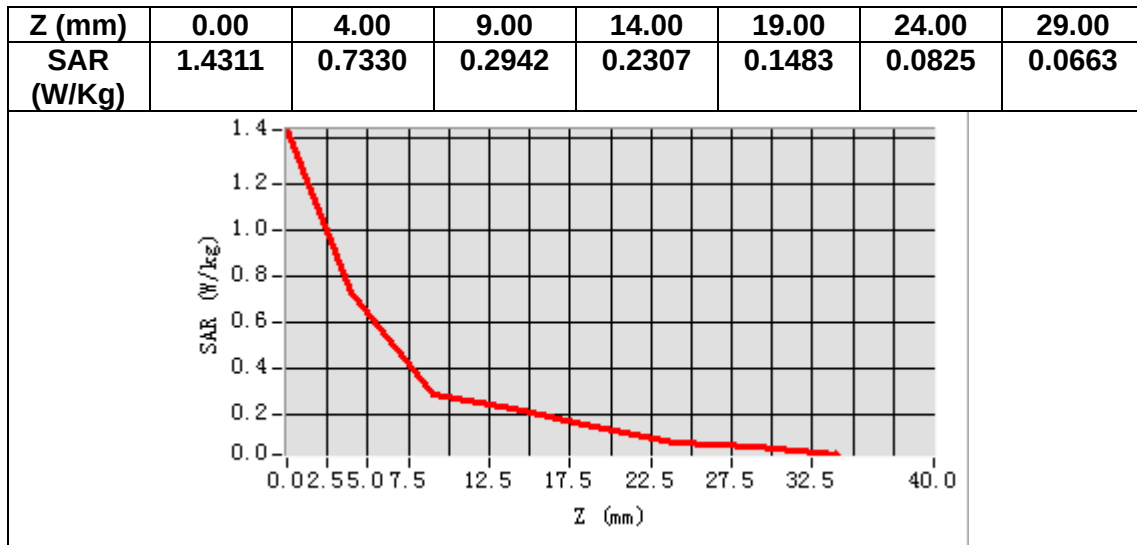

MEASUREMENT 7


Date of measurement: 15/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band8 WCDMA900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.23</u>

B. SAR Measurement Results



Frequency (MHz)	897.600000
Relative permittivity (real part)	41.347946
Relative permittivity (imaginary part)	19.851242
Conductivity (S/m)	0.989915
Variation (%)	-0.480000

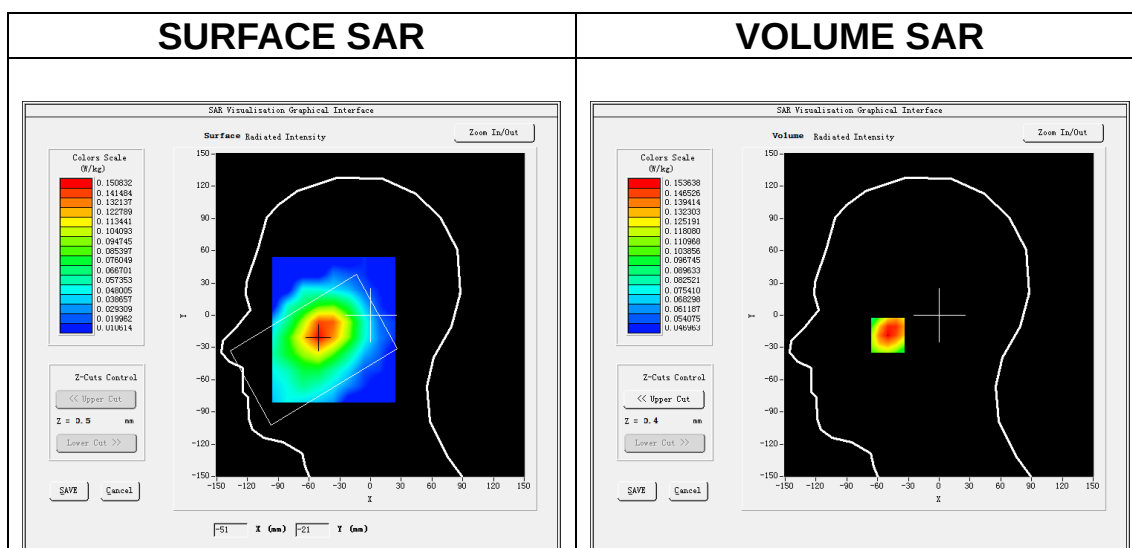

Maximum location: X=-50.00, Y=-18.00

SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.130469
SAR 1g (W/Kg)	0.148878

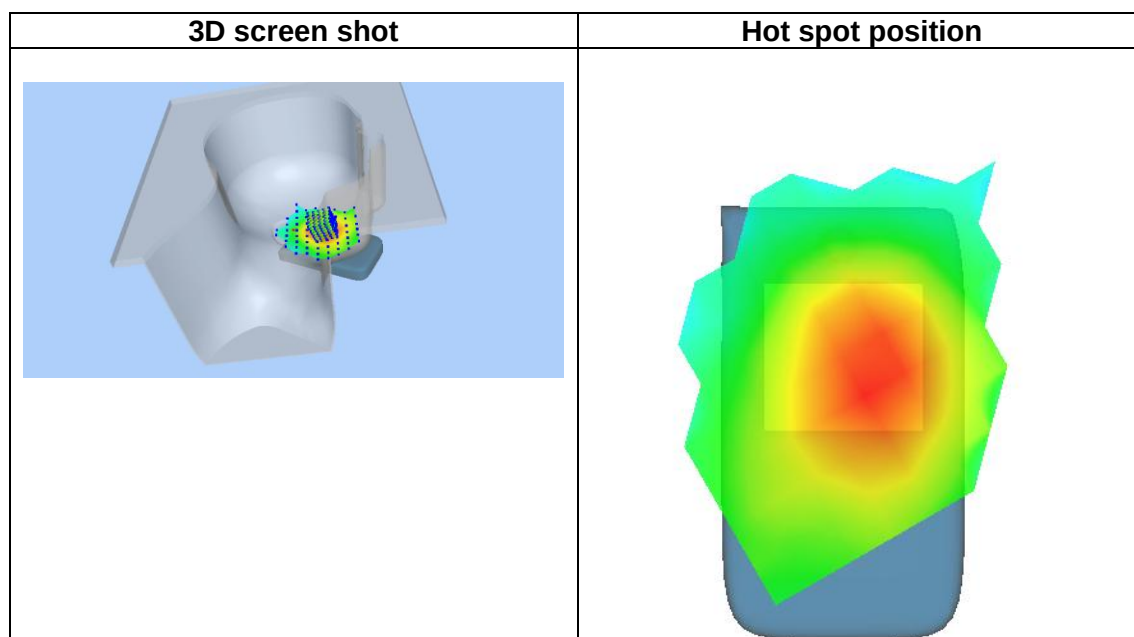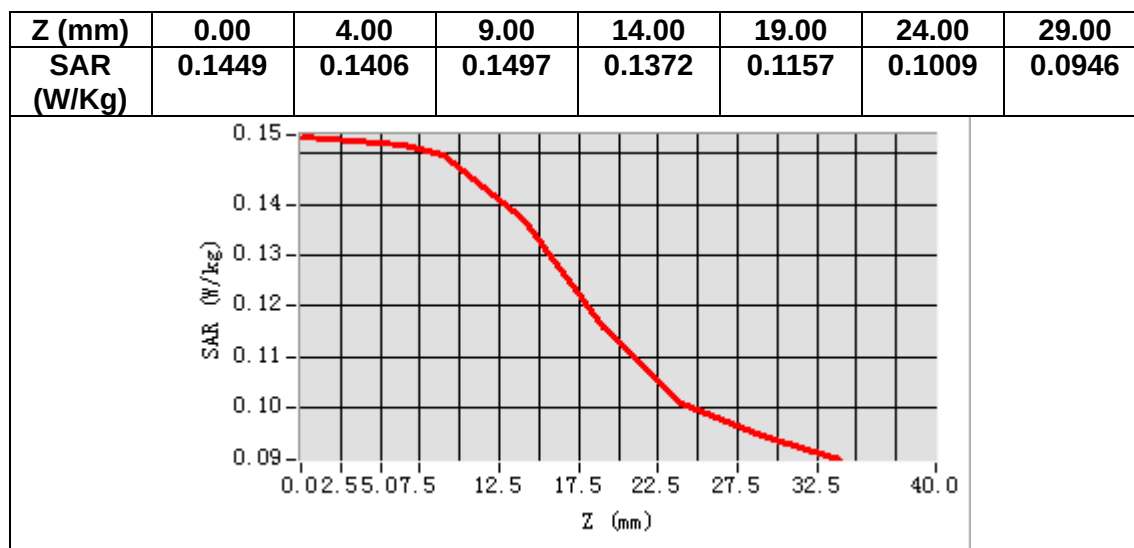

MEASUREMENT 8

Date of measurement: 15/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band8 WCDMA900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.23</u>


B. SAR Measurement Results

Frequency (MHz)	897.600000
Relative permittivity (real part)	41.347946
Relative permittivity (imaginary part)	19.851242
Conductivity (S/m)	0.989915
Variation (%)	-0.960000

SURFACE SAR

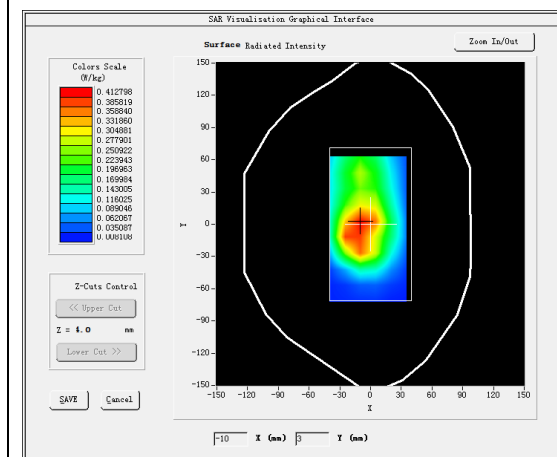


VOLUME SAR

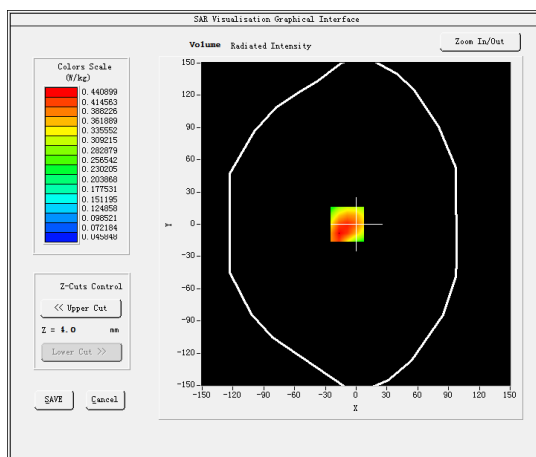


Maximum location: X=-9.00, Y=0.00

SAR Peak: 0.62 W/kg


SAR 10g (W/Kg)	0.315482
SAR 1g (W/Kg)	0.439592

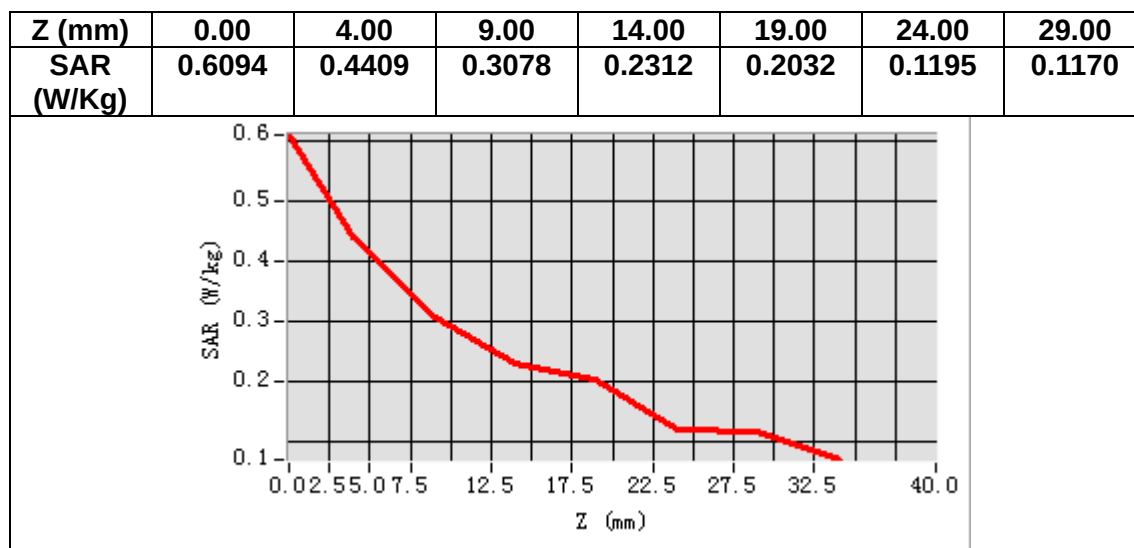

3D screen shot

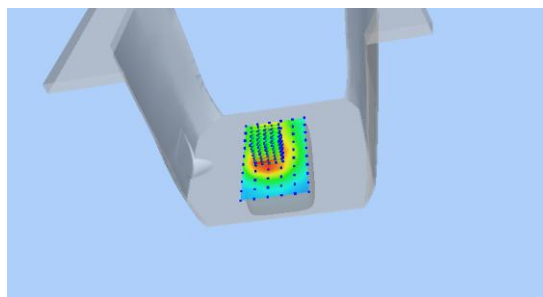

Hot spot position

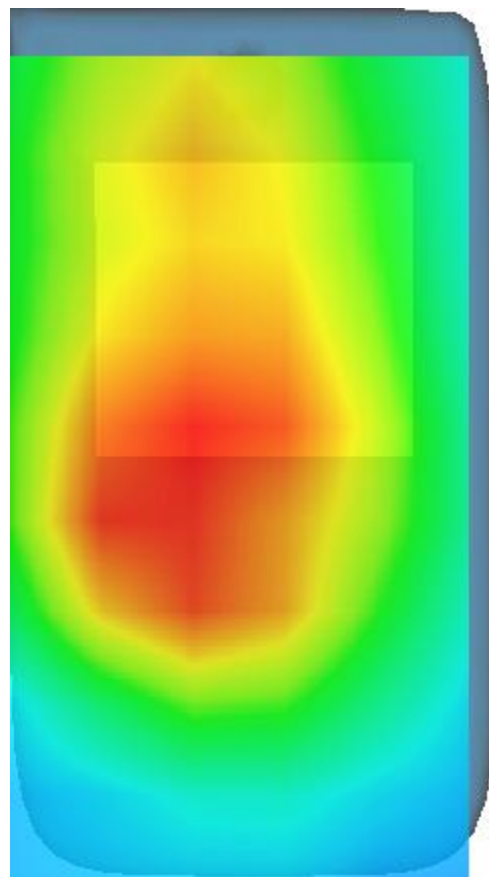

MEASUREMENT 9


Date of measurement: 10/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11n U-NII</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>IEEE802.11n (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.07</u>

B. SAR Measurement Results



Frequency (MHz)	5190.000000
Relative permittivity (real part)	34.492683
Relative permittivity (imaginary part)	15.484935
Conductivity (S/m)	4.464822
Variation (%)	-2.310000

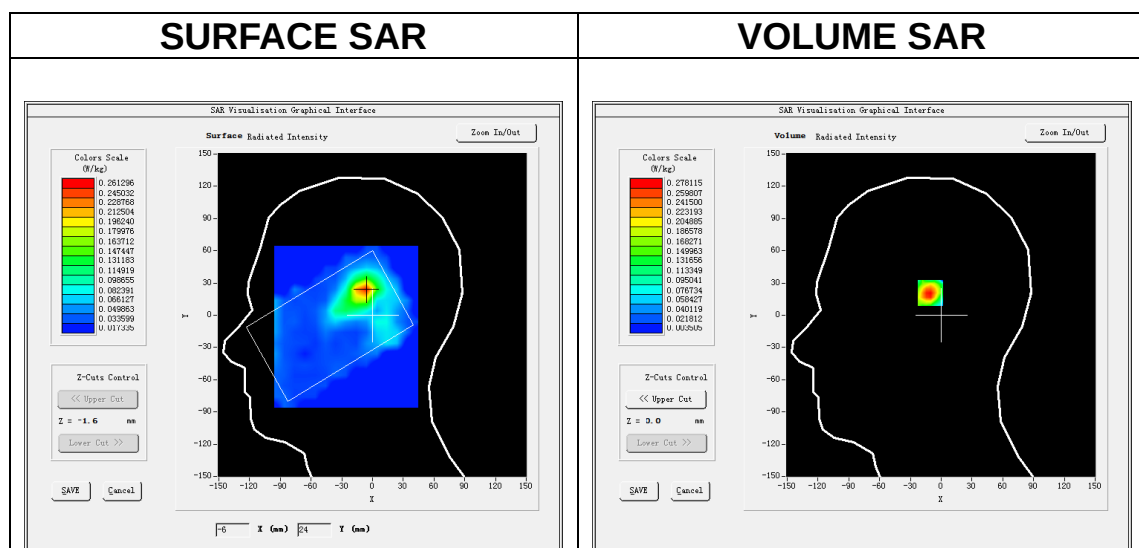

Maximum location: X=-7.00, Y=23.00

SAR Peak: 0.76 W/kg

SAR 10g (W/Kg)	0.112438
SAR 1g (W/Kg)	0.281974

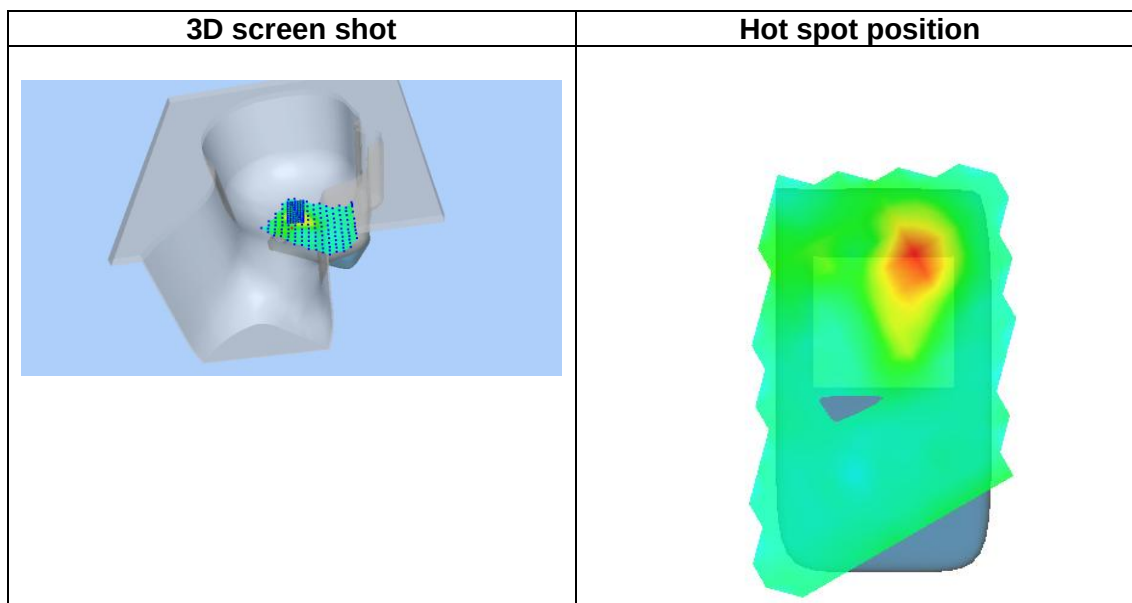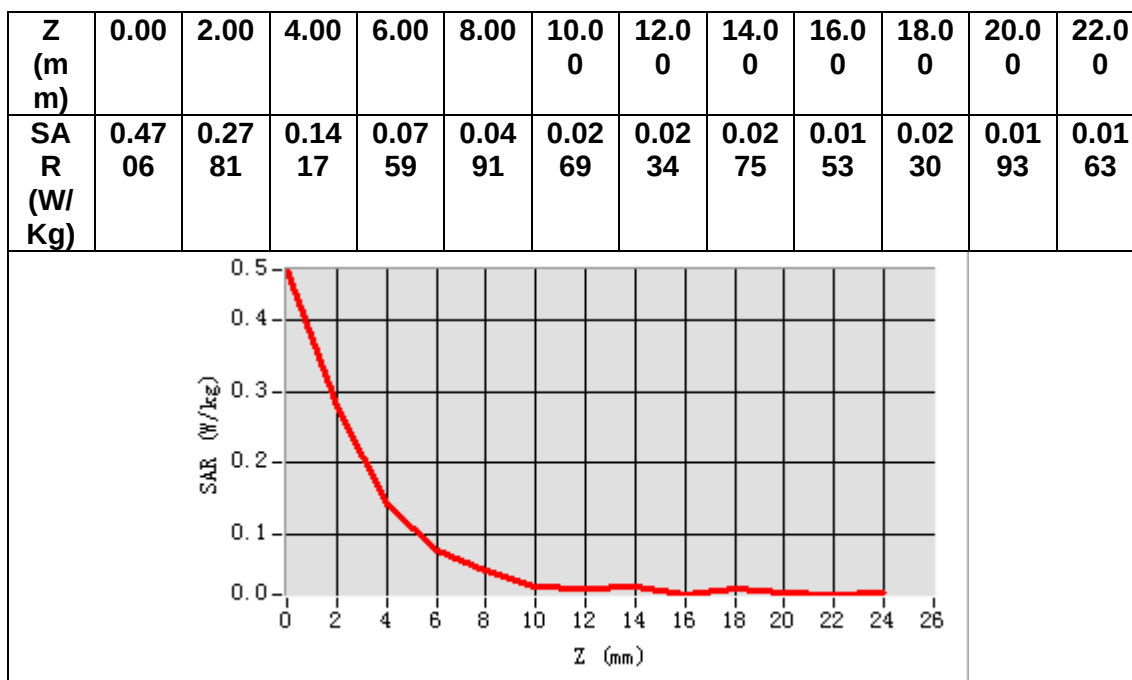

MEASUREMENT 10

Date of measurement: 11/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11n U-NII</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>IEEE802.11n (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.04</u>

B. SAR Measurement Results

Frequency (MHz)	5755.000000
Relative permittivity (real part)	34.186313
Relative permittivity (imaginary part)	16.047056
Conductivity (S/m)	5.130600
Variation (%)	2.930000



SURFACE SAR

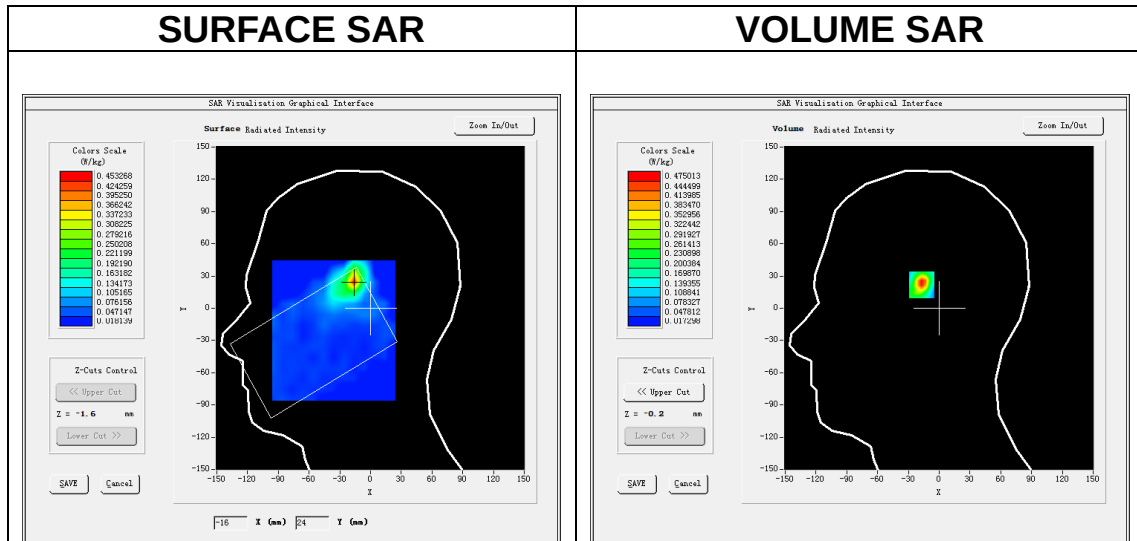

Maximum location: X=-16.00, Y=25.00

SAR Peak: 1.38 W/kg

SAR 10g (W/Kg)	0.155713
SAR 1g (W/Kg)	0.463685

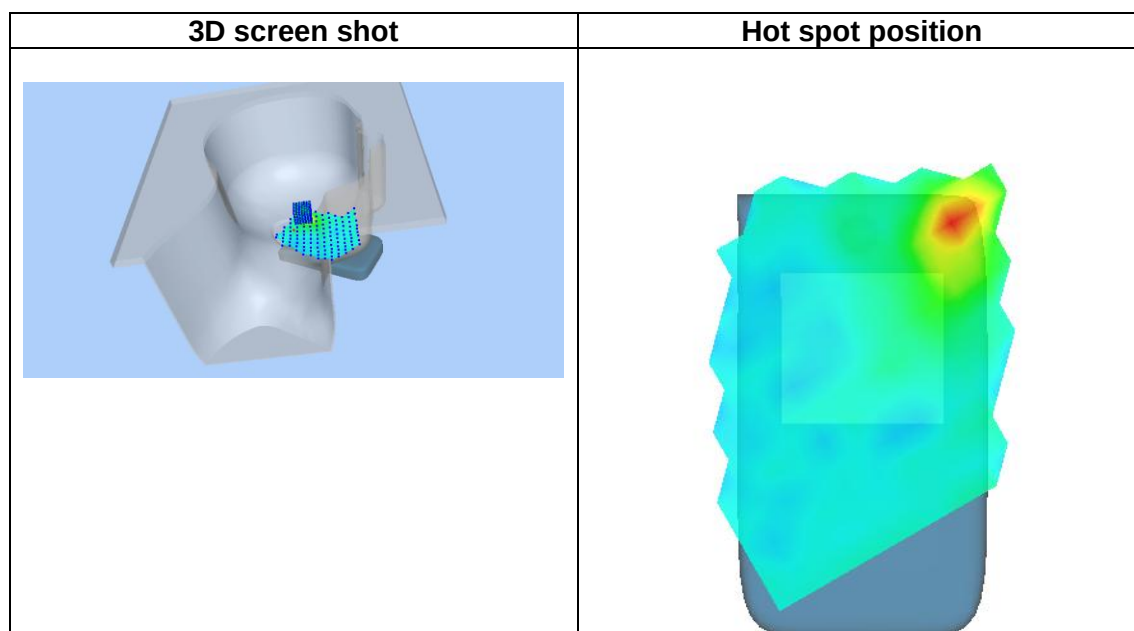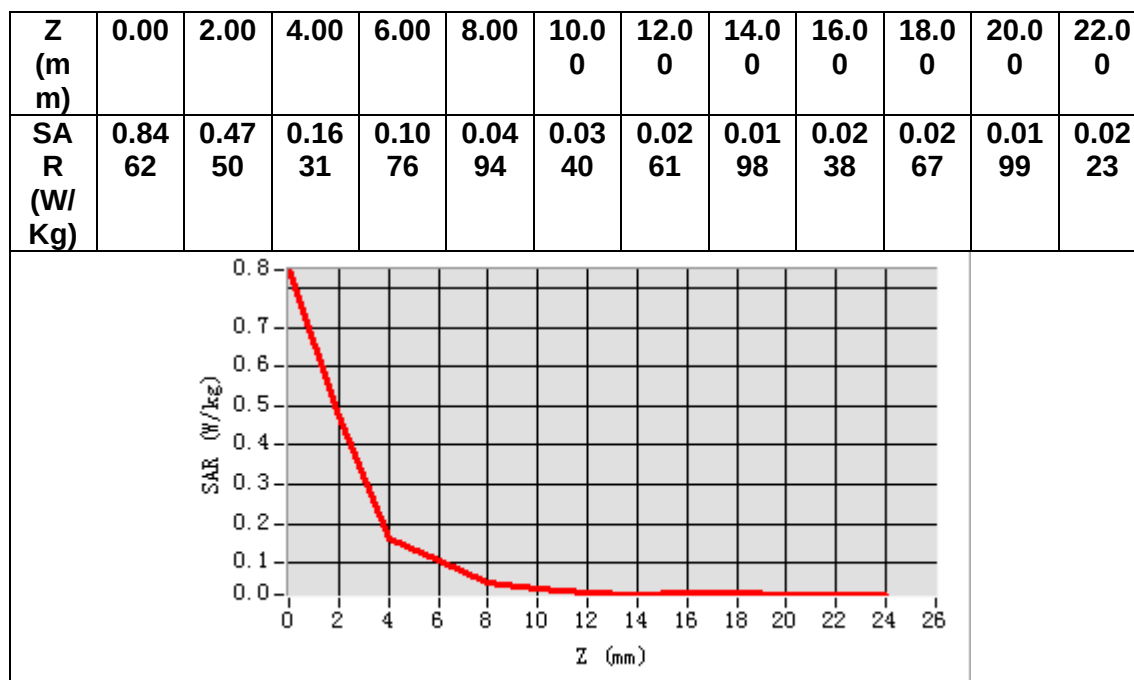

MEASUREMENT 11

Date of measurement: 10/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11n U-NII</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>IEEE802.11n (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.07</u>


B. SAR Measurement Results

Frequency (MHz)	5190.000000
Relative permittivity (real part)	34.492683
Relative permittivity (imaginary part)	15.484935
Conductivity (S/m)	4.464822
Variation (%)	-2.459999

SURFACE SAR

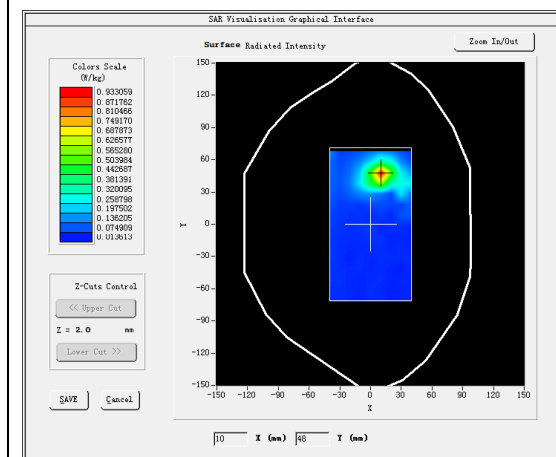



VOLUME SAR

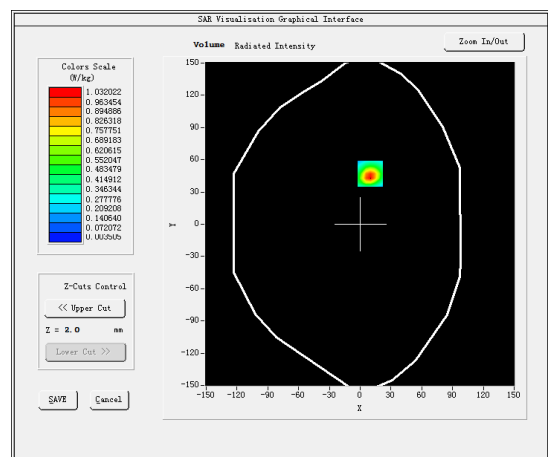

Maximum location: X=10.00, Y=47.00

SAR Peak: 1.92 W/kg

SAR 10g (W/Kg)	0.197334
SAR 1g (W/Kg)	0.569428

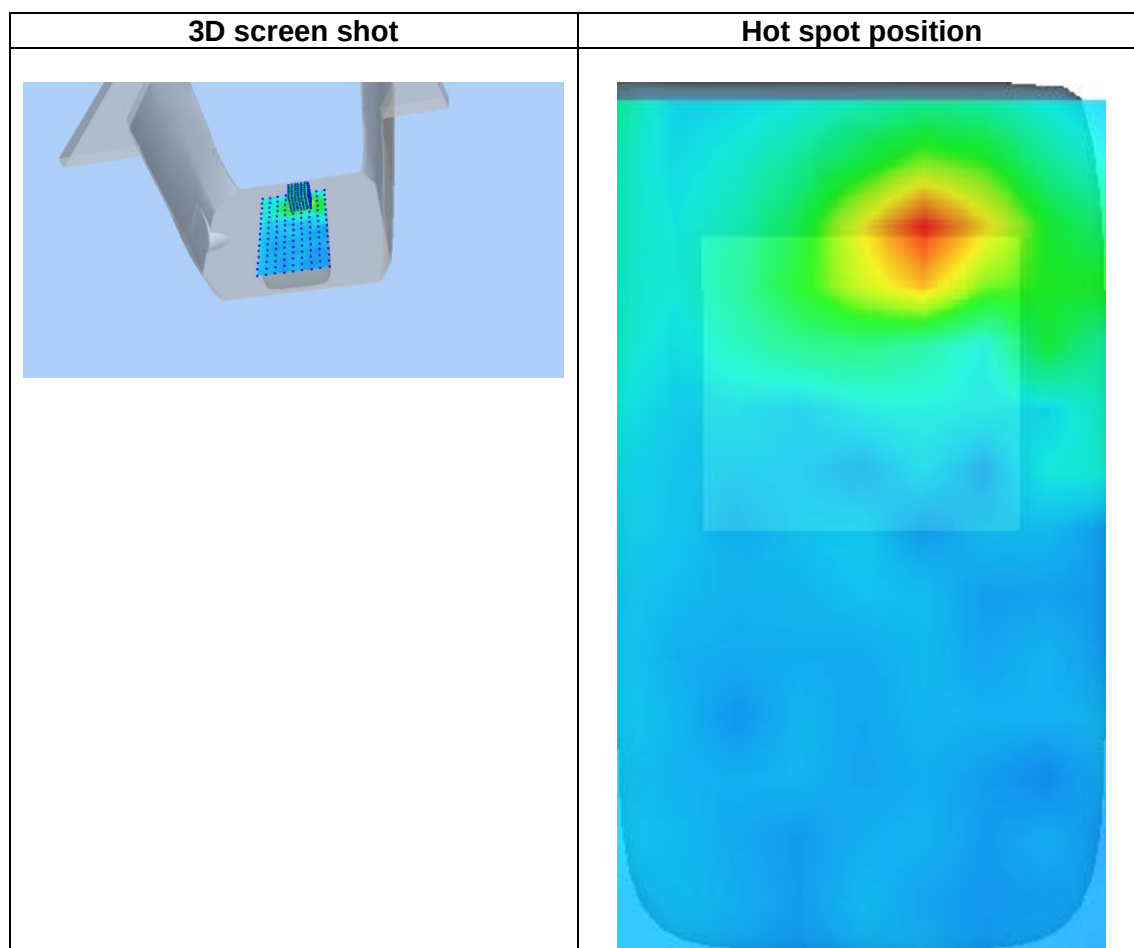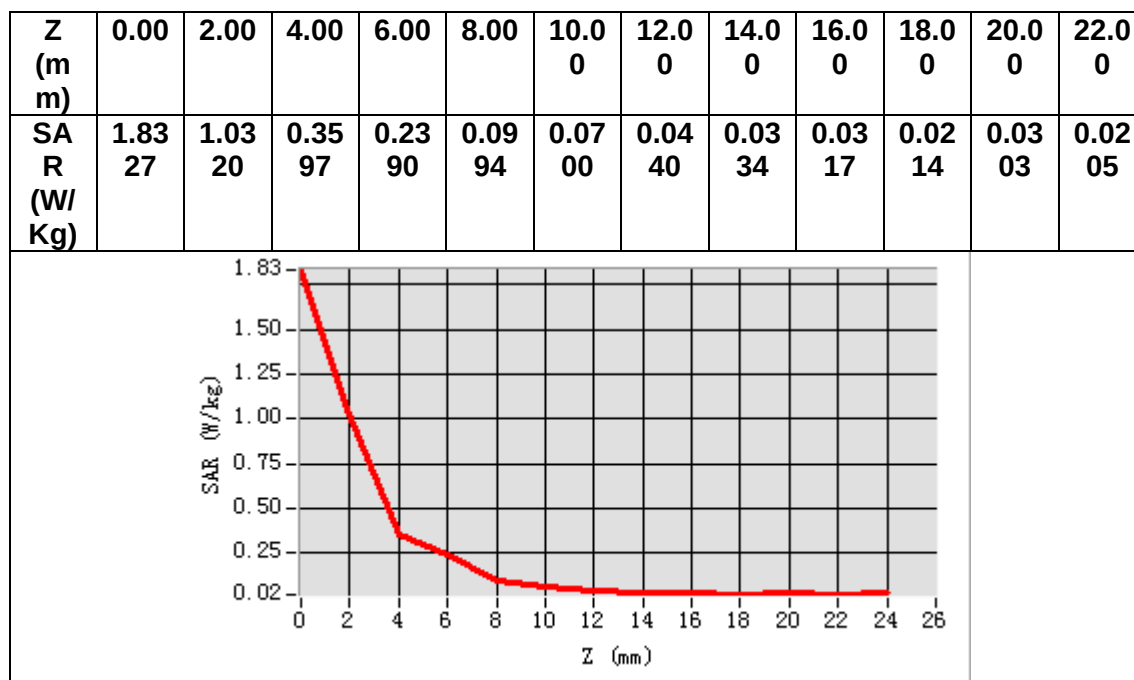

MEASUREMENT 12

Date of measurement: 11/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11n U-NII</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>IEEE802.11n (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.04</u>


B. SAR Measurement Results

Frequency (MHz)	5755.000000
Relative permittivity (real part)	34.186313
Relative permittivity (imaginary part)	16.047056
Conductivity (S/m)	5.130600
Variation (%)	-0.960000

SURFACE SAR

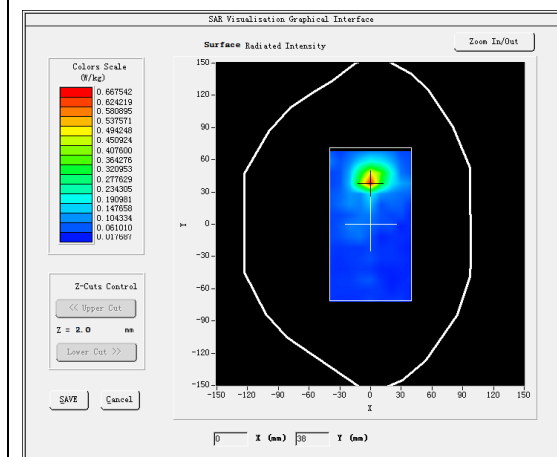



VOLUME SAR

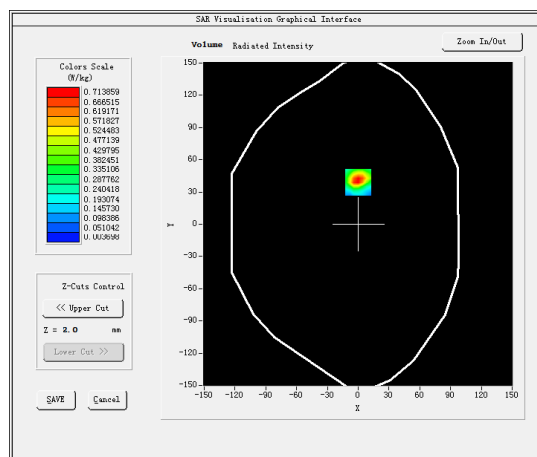

Maximum location: X=0.00, Y=39.00

SAR Peak: 1.41 W/kg

SAR 10g (W/Kg)	0.146162
SAR 1g (W/Kg)	0.404408

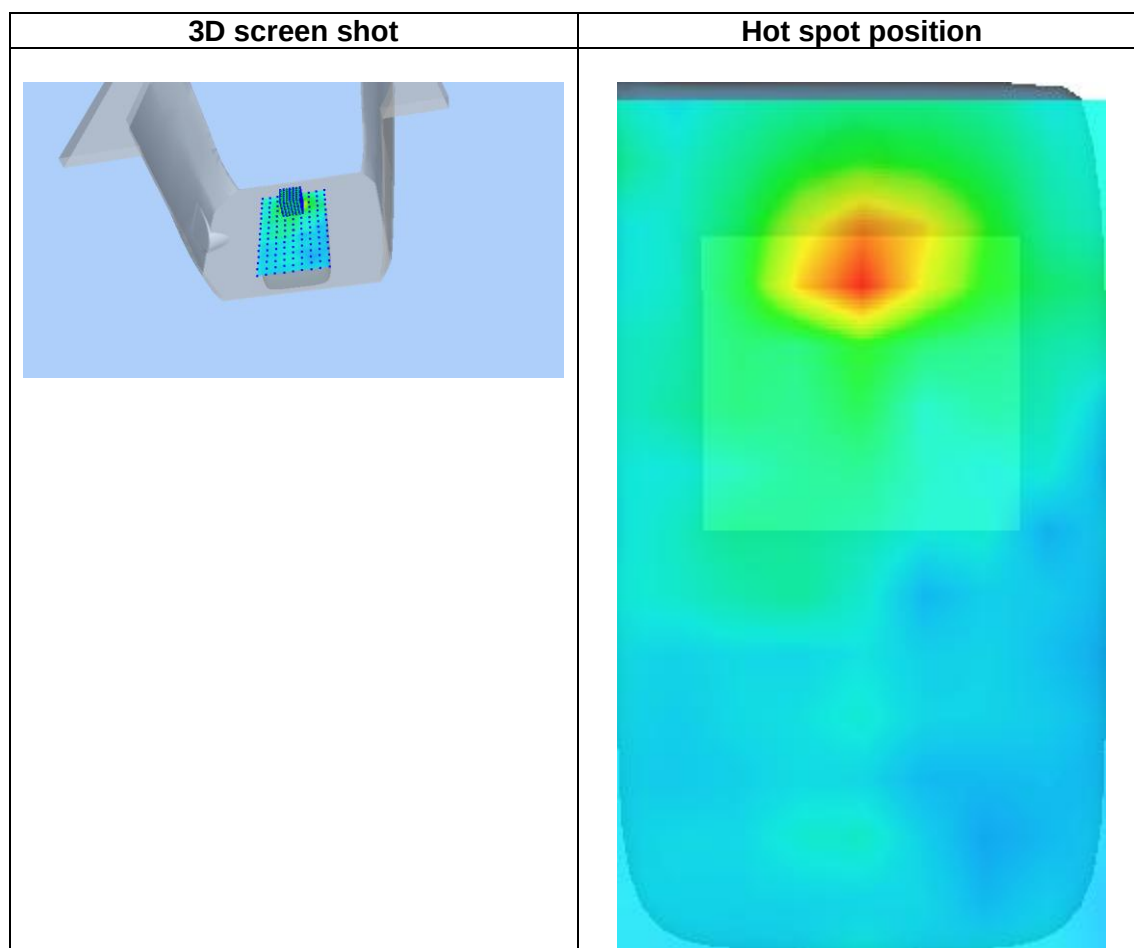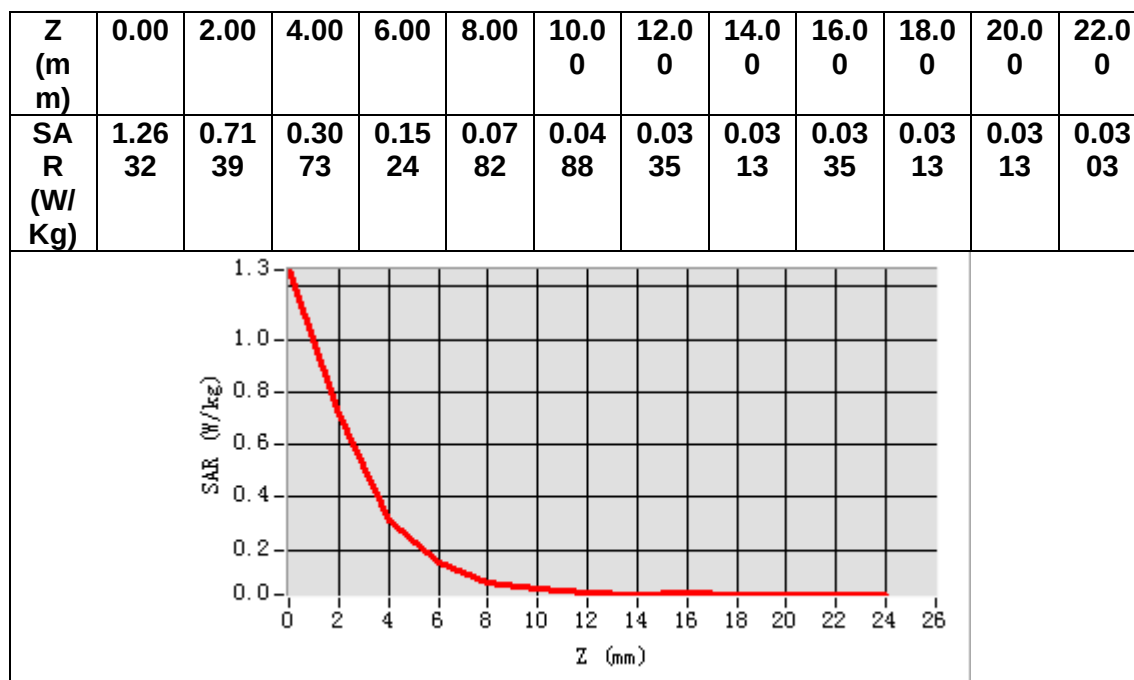

MEASUREMENT 13

Date of measurement: 5/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.85</u>


B. SAR Measurement Results

Frequency (MHz)	2442.000000
Relative permittivity (real part)	37.766766
Relative permittivity (imaginary part)	12.961621
Conductivity (S/m)	1.758460
Variation (%)	-3.480000

SURFACE SAR

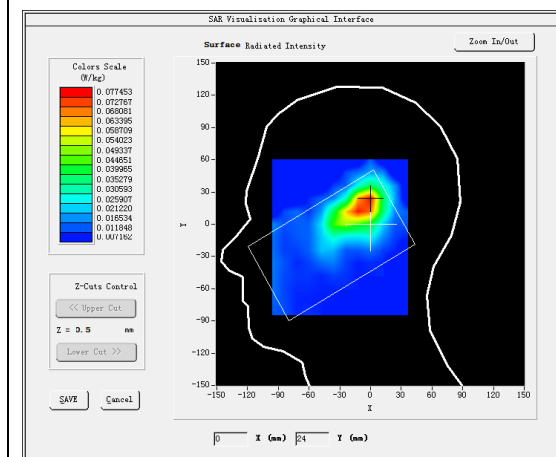



VOLUME SAR

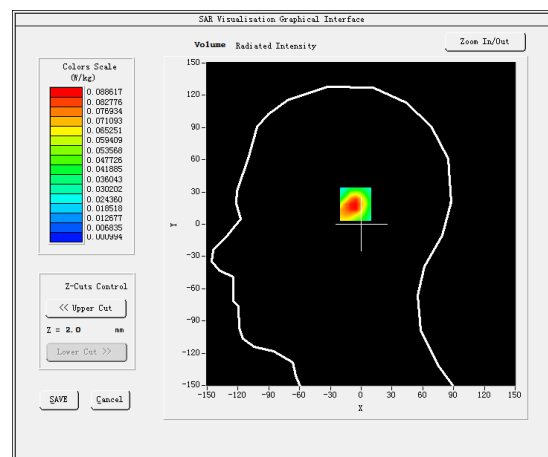

Maximum location: X=-3.00, Y=20.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.042775
SAR 1g (W/Kg)	0.084453

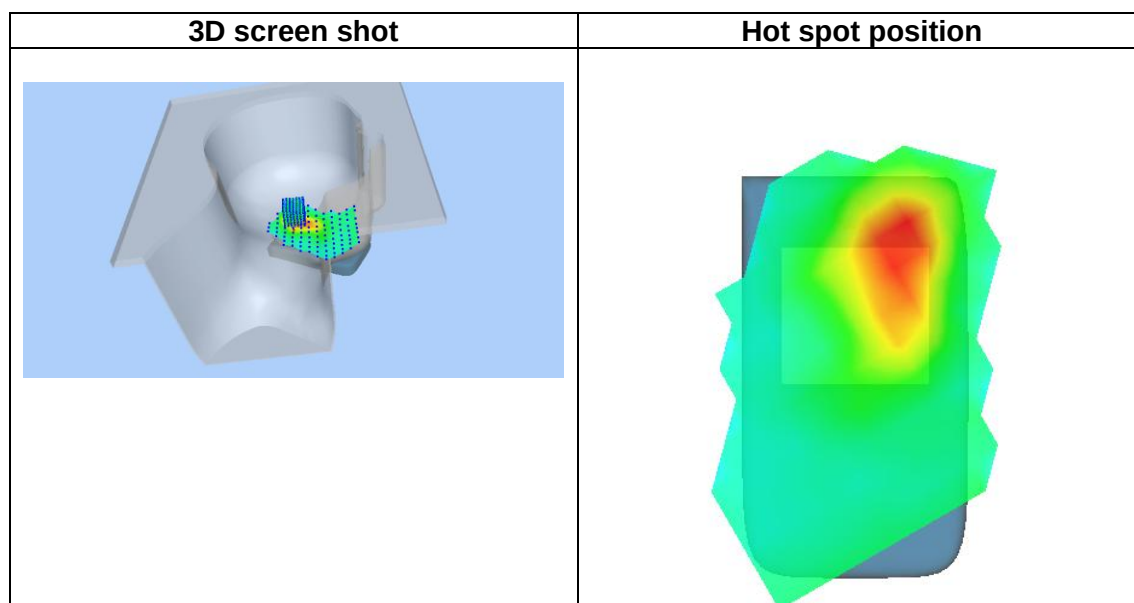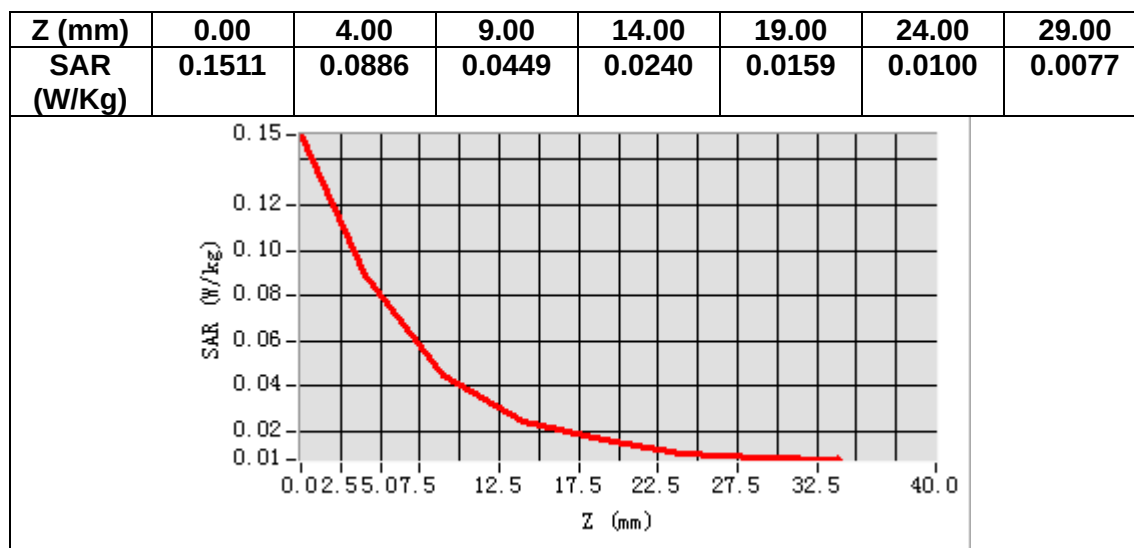

MEASUREMENT 14

Date of measurement: 5/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.85</u>


B. SAR Measurement Results

Frequency (MHz)	2442.000000
Relative permittivity (real part)	37.766766
Relative permittivity (imaginary part)	12.961621
Conductivity (S/m)	1.758460
Variation (%)	-0.960000

SURFACE SAR

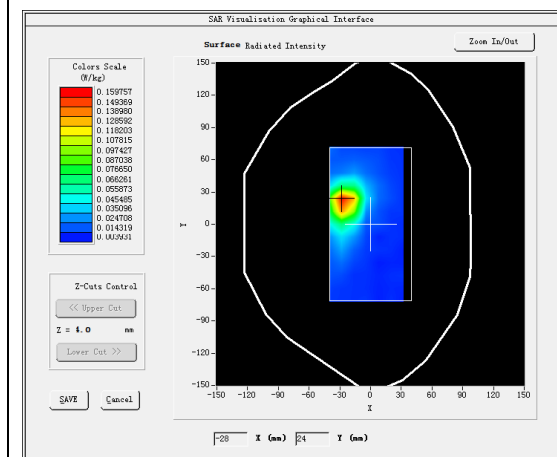


VOLUME SAR

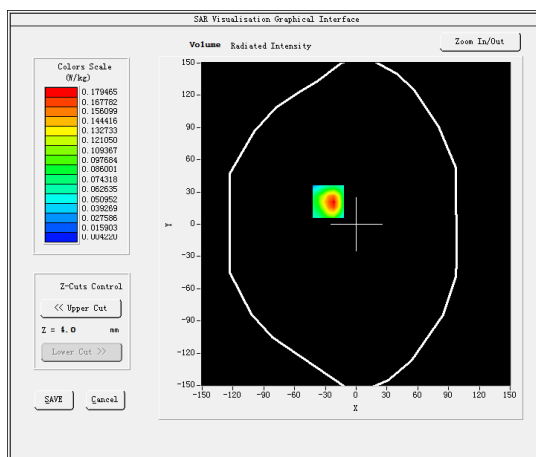


Maximum location: X=-27.00, Y=21.00

SAR Peak: 0.31 W/kg


SAR 10g (W/Kg)	0.073907
SAR 1g (W/Kg)	0.162236

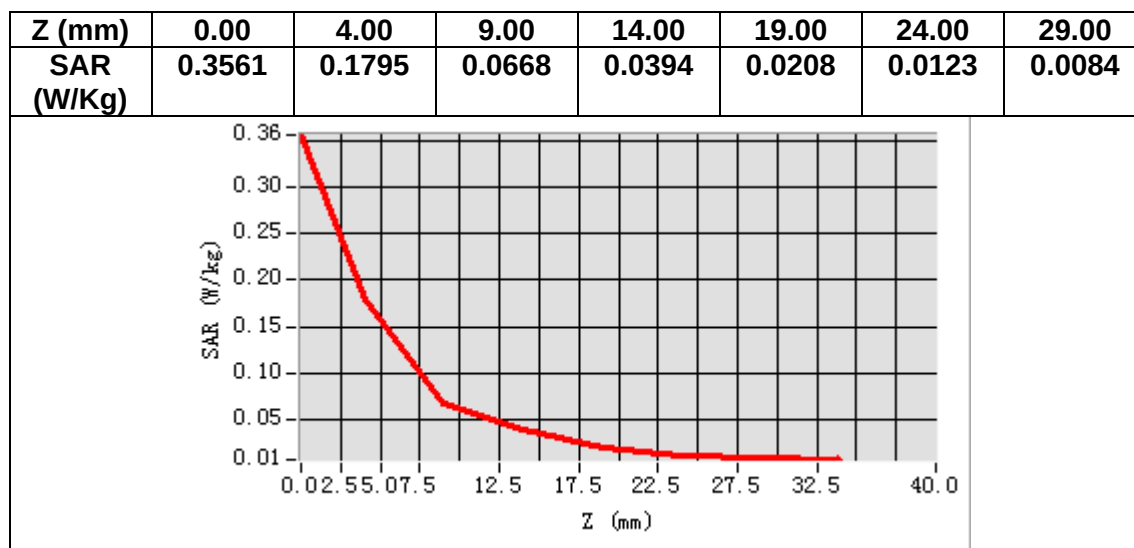

3D screen shot

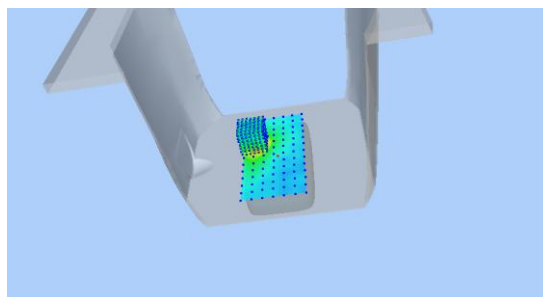

Hot spot position

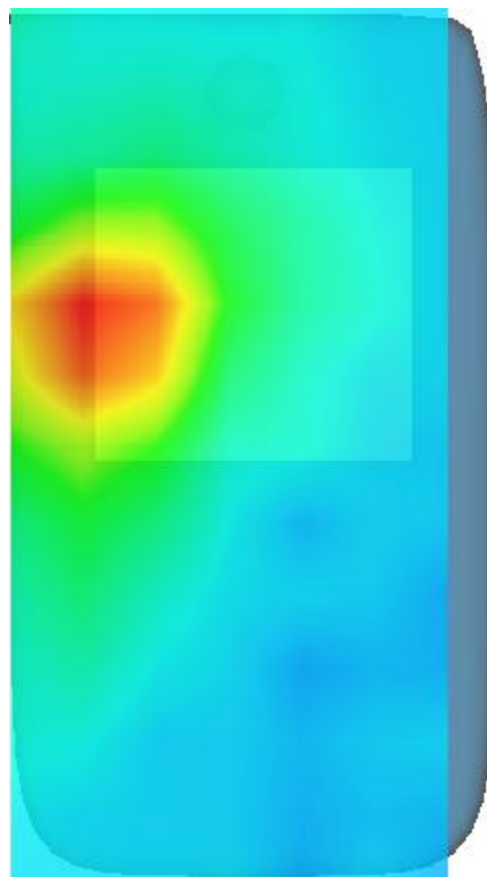

MEASUREMENT 15


Date of measurement: 12/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 1</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.83</u>

B. SAR Measurement Results


Frequency (MHz)	1950.000000
Relative permittivity (real part)	38.843918
Relative permittivity (imaginary part)	12.847650
Conductivity (S/m)	1.391829
Variation (%)	2.390000

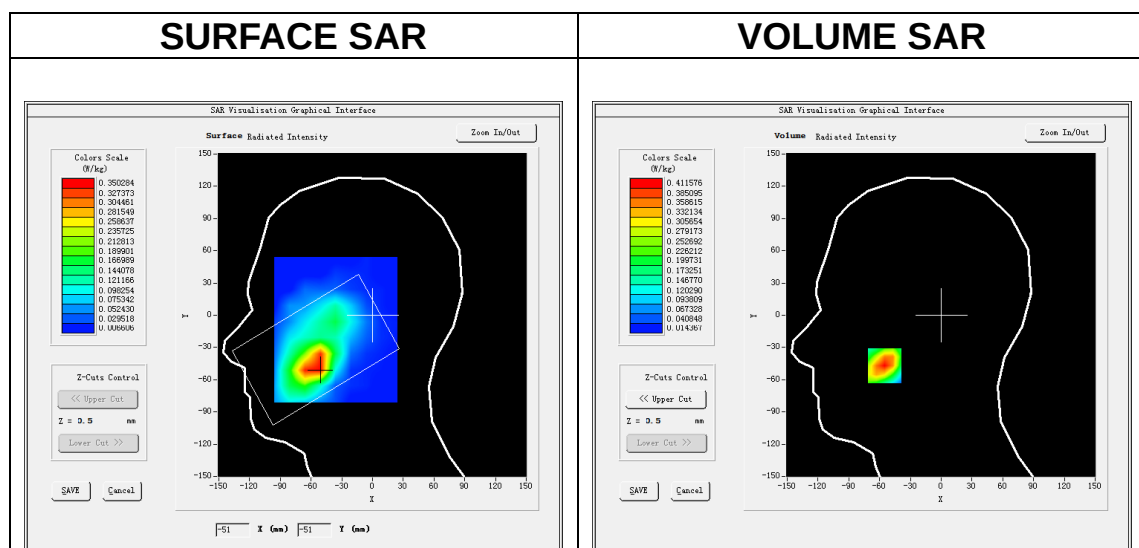


Maximum location: X=-55.00, Y=-47.00

SAR Peak: 0.55 W/kg


SAR 10g (W/Kg)	0.238171
SAR 1g (W/Kg)	0.387880

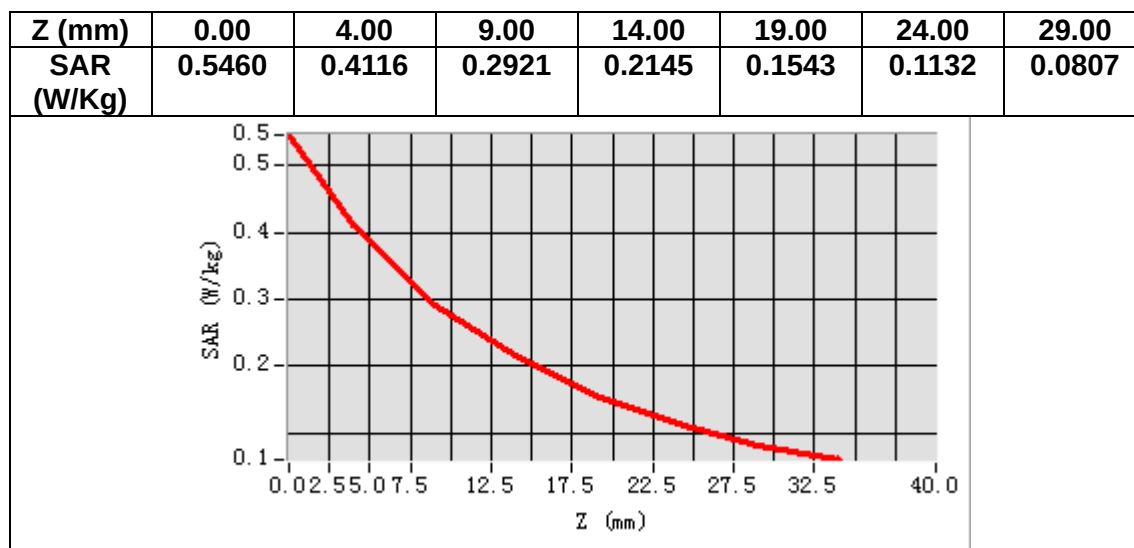

3D screen shot

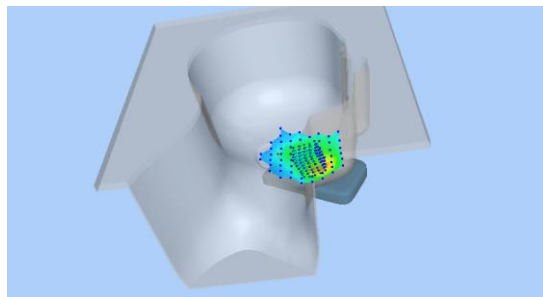

Hot spot position

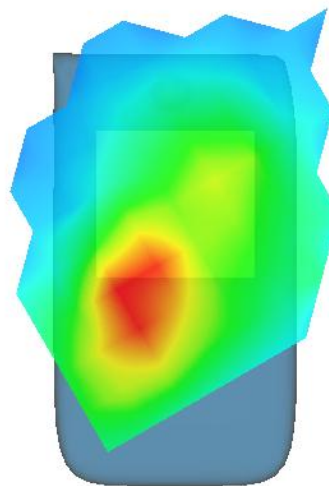

MEASUREMENT 16


Date of measurement: 12/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 1</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.83</u>

B. SAR Measurement Results



Frequency (MHz)	1950.000000
Relative permittivity (real part)	38.843918
Relative permittivity (imaginary part)	12.847650
Conductivity (S/m)	1.391829
Variation (%)	-0.520000

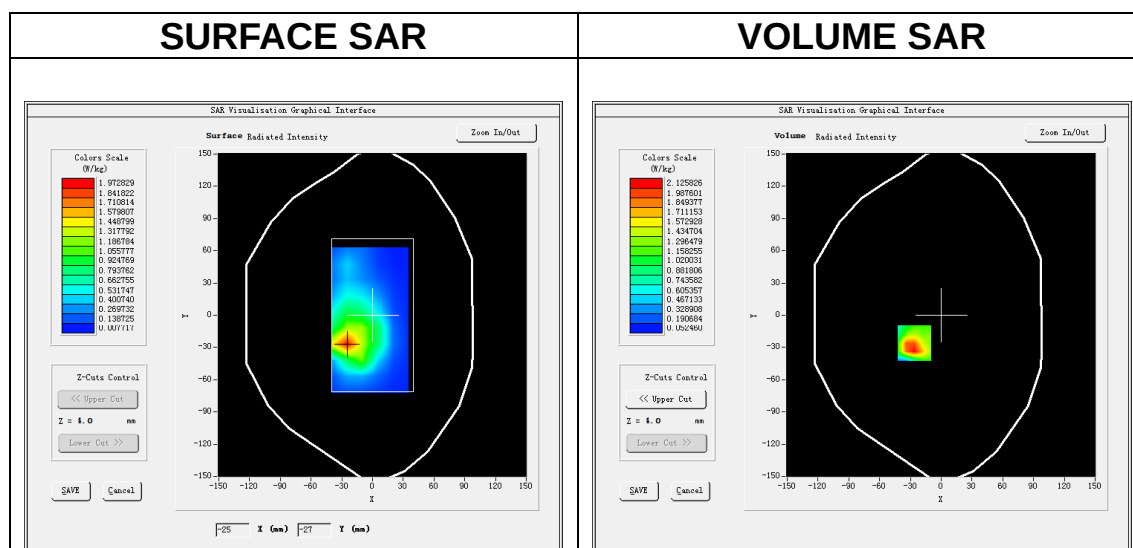

Maximum location: X=-26.00, Y=-26.00

SAR Peak: 3.53 W/kg

SAR 10g (W/Kg)	1.106260
SAR 1g (W/Kg)	2.116633

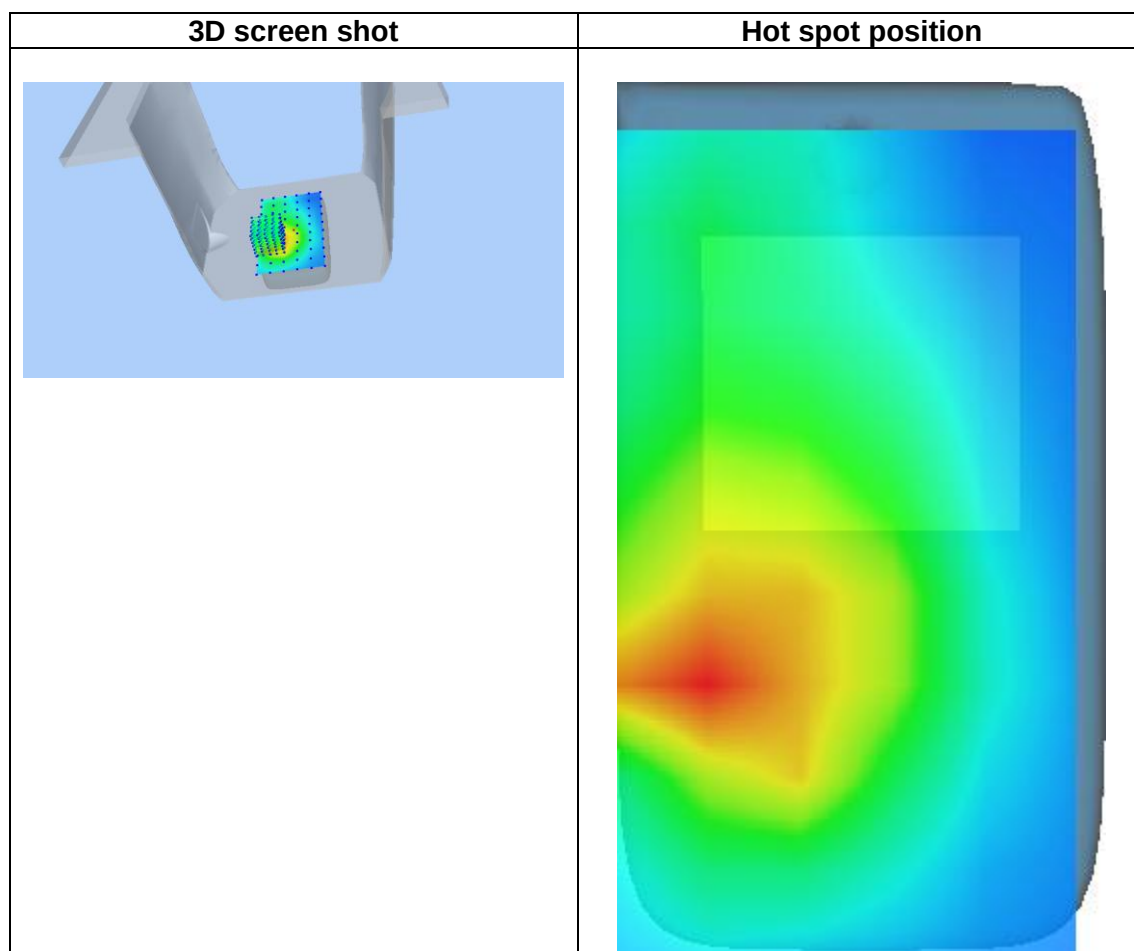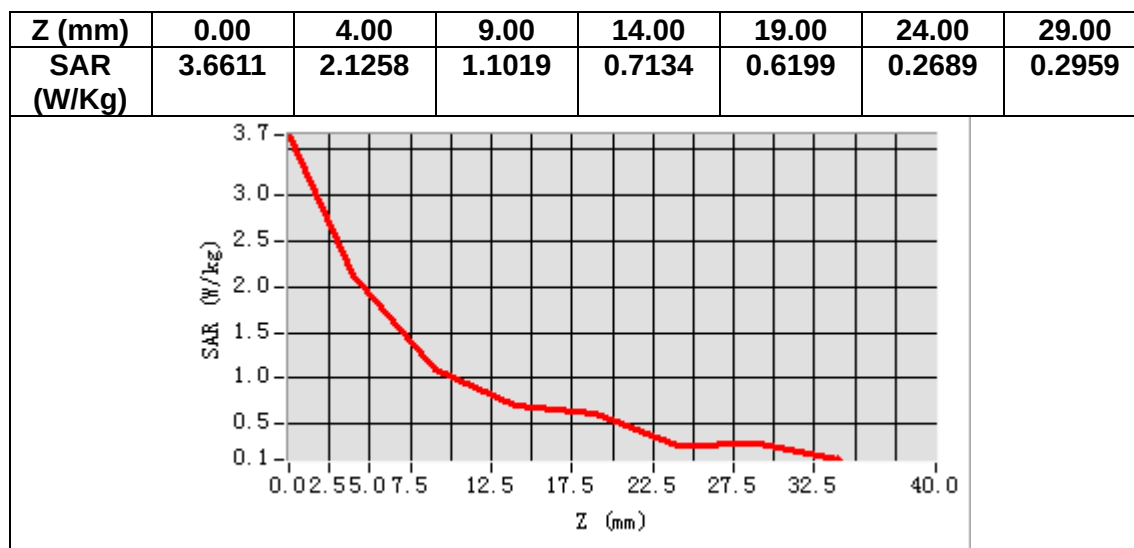

MEASUREMENT 17


Date of measurement: 9/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 3</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>

B. SAR Measurement Results



Frequency (MHz)	1747.500000
Relative permittivity (real part)	39.284084
Relative permittivity (imaginary part)	13.713947
Conductivity (S/m)	1.331015
Variation (%)	-0.080000

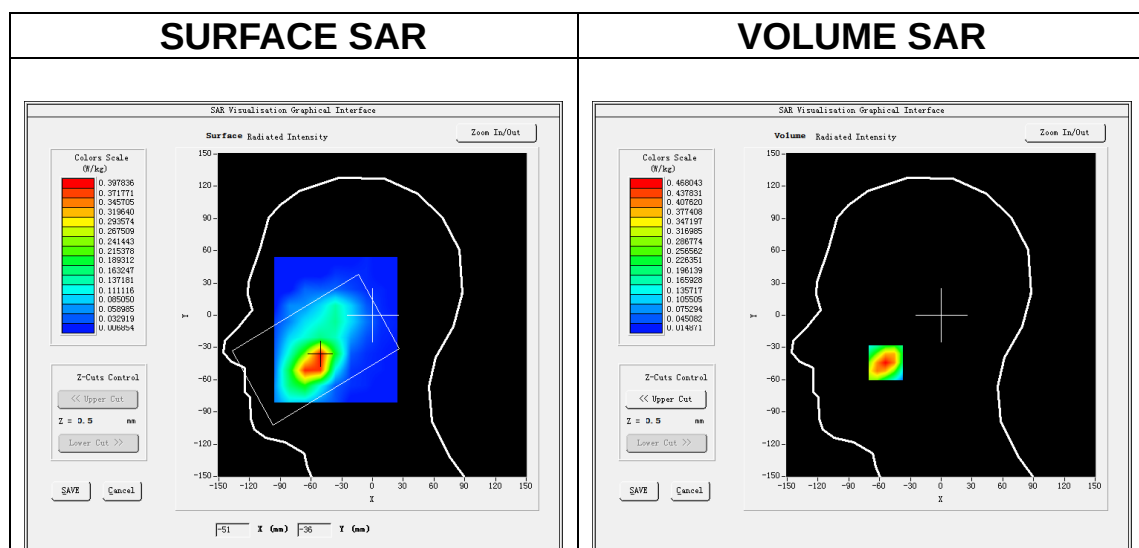

Maximum location: X=-54.00, Y=-44.00

SAR Peak: 0.63 W/kg

SAR 10g (W/Kg)	0.269015
SAR 1g (W/Kg)	0.437373

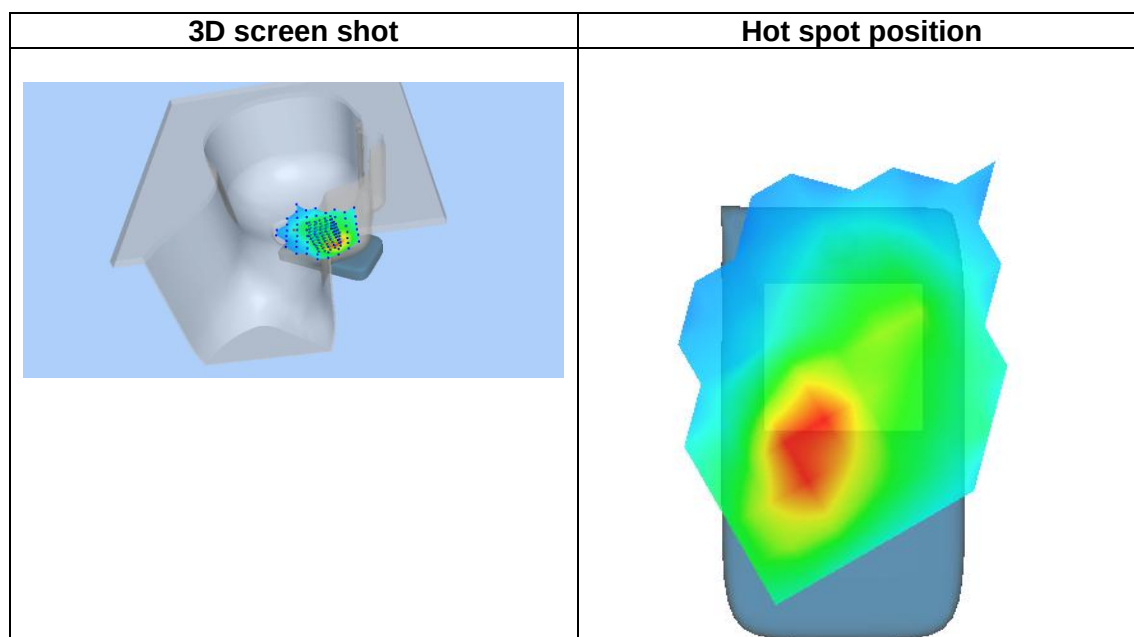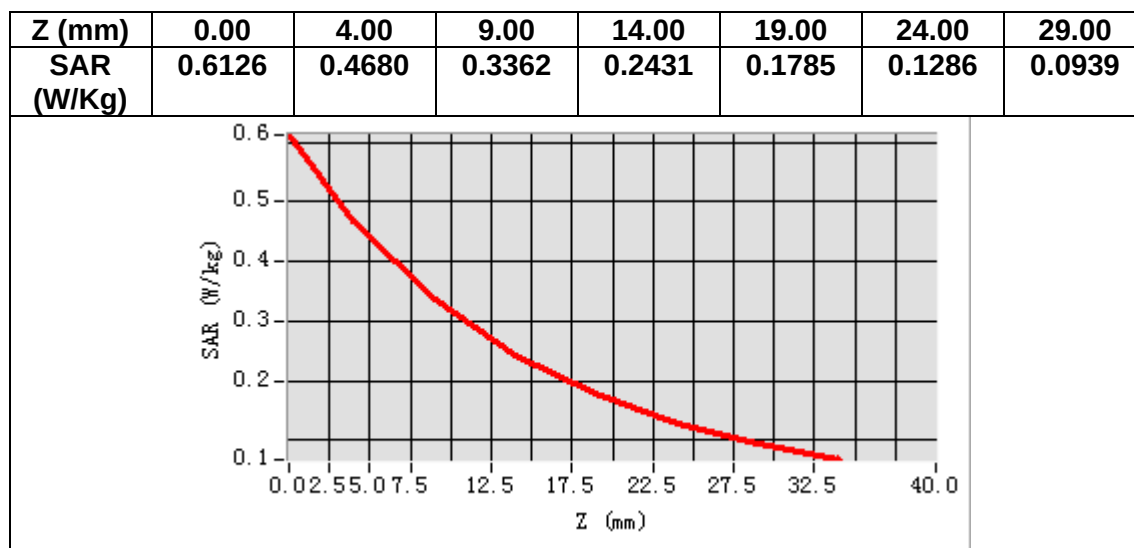

MEASUREMENT 18

Date of measurement: 9/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 3</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>


B. SAR Measurement Results

Frequency (MHz)	1747.500000
Relative permittivity (real part)	39.284084
Relative permittivity (imaginary part)	13.713947
Conductivity (S/m)	1.331015
Variation (%)	-1.940000

SURFACE SAR

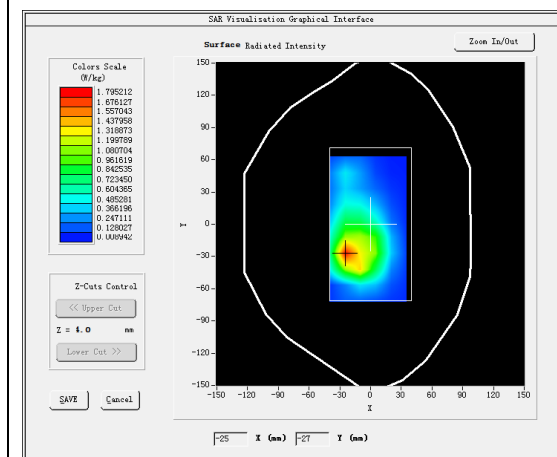


VOLUME SAR

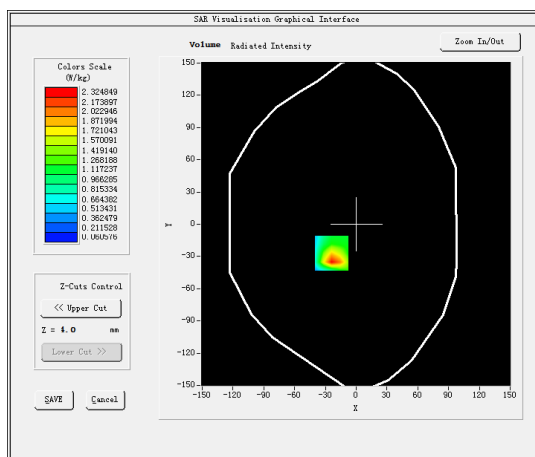


Maximum location: X=-24.00, Y=-27.00

SAR Peak: 3.54 W/kg


SAR 10g (W/Kg)	1.115165
SAR 1g (W/Kg)	2.104096

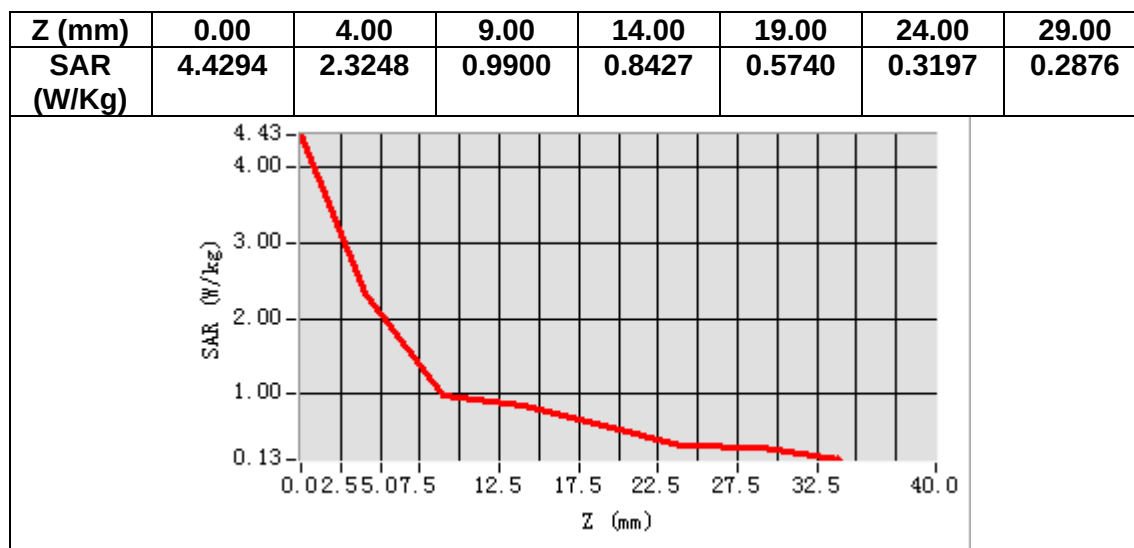

3D screen shot

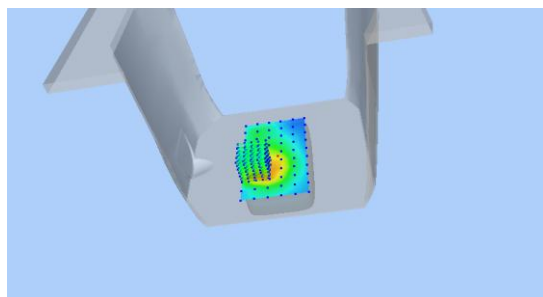

Hot spot position

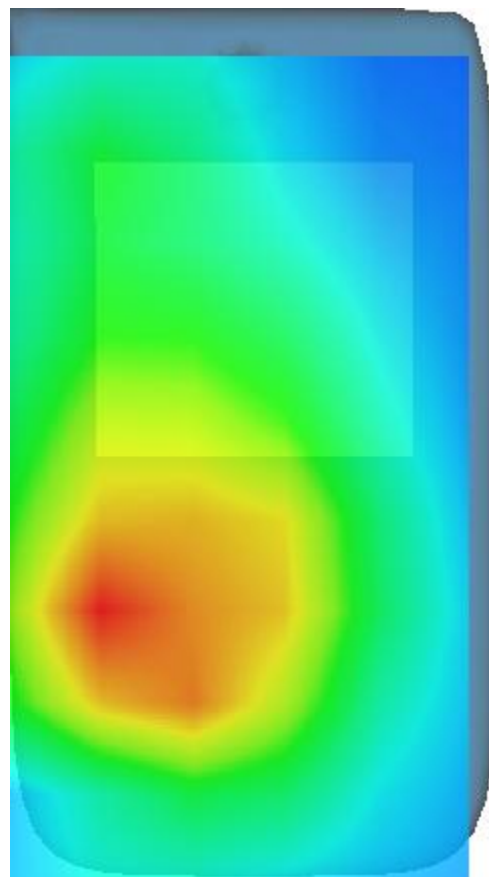

MEASUREMENT 19

Date of measurement: 6/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.65</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	39.213741
Relative permittivity (imaginary part)	13.599372
Conductivity (S/m)	1.915245
Variation (%)	-0.180000

SURFACE SAR

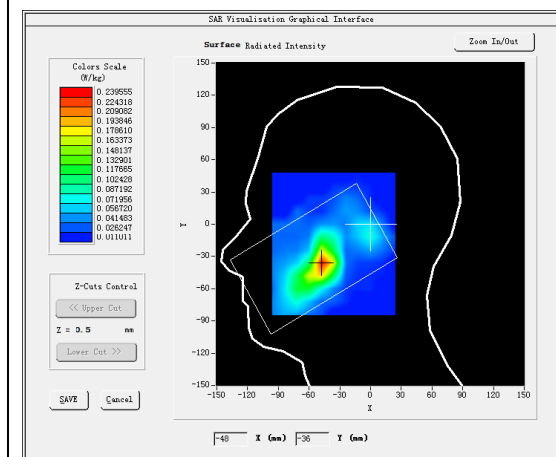



VOLUME SAR

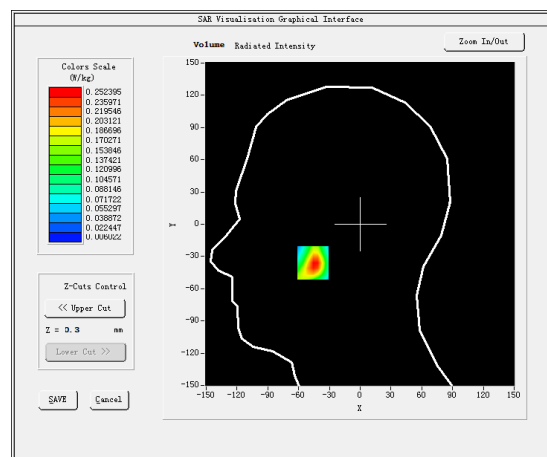

Maximum location: X=-46.00, Y=-36.00

SAR Peak: 0.40 W/kg

SAR 10g (W/Kg)	0.118669
SAR 1g (W/Kg)	0.236840

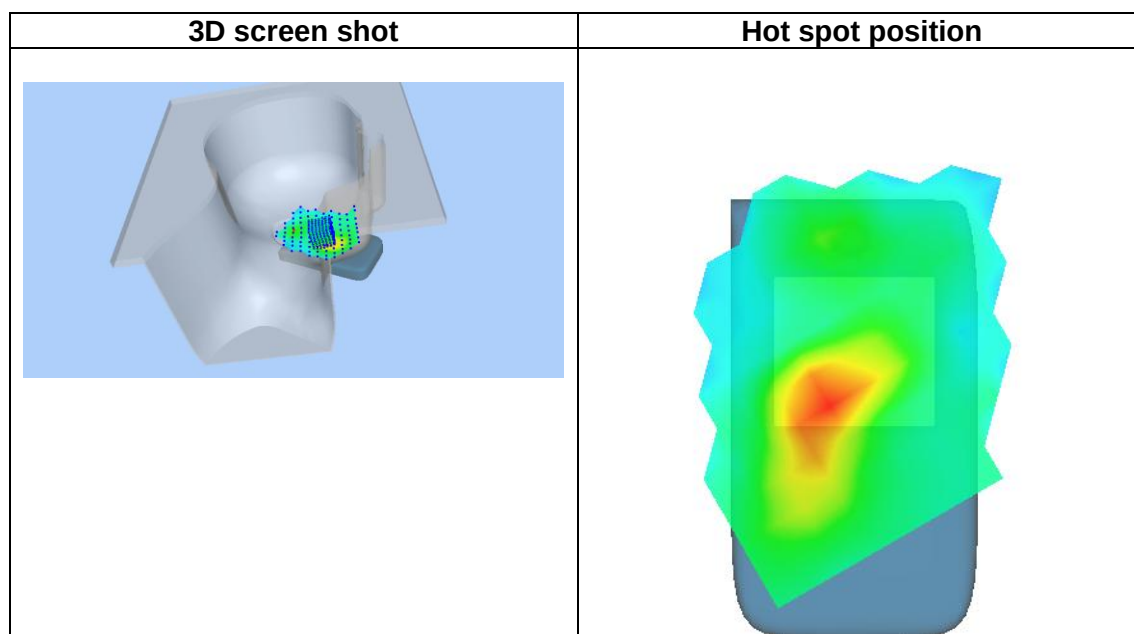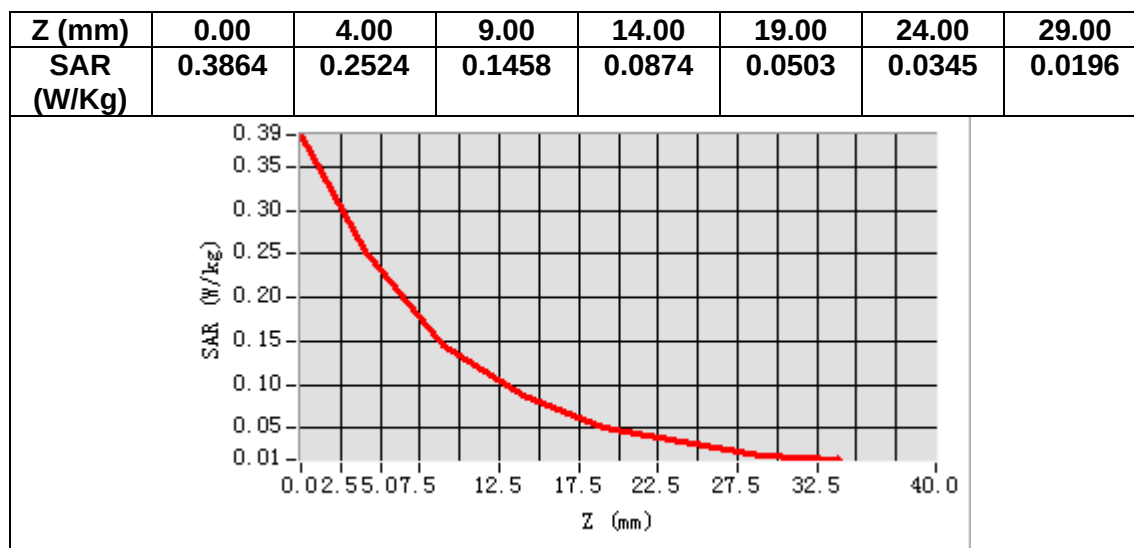

MEASUREMENT 20

Date of measurement: 6/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.65</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	39.213741
Relative permittivity (imaginary part)	13.599372
Conductivity (S/m)	1.915245
Variation (%)	-0.620000

SURFACE SAR

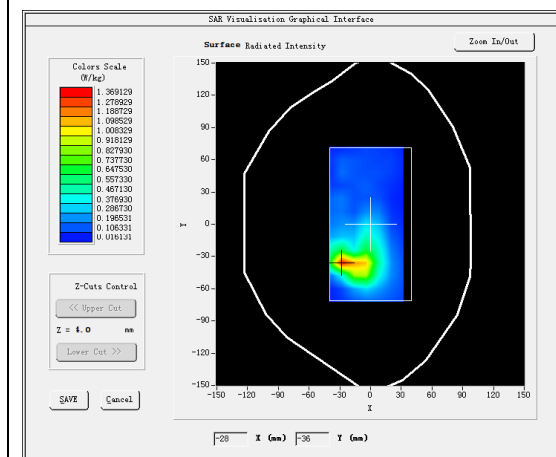



VOLUME SAR

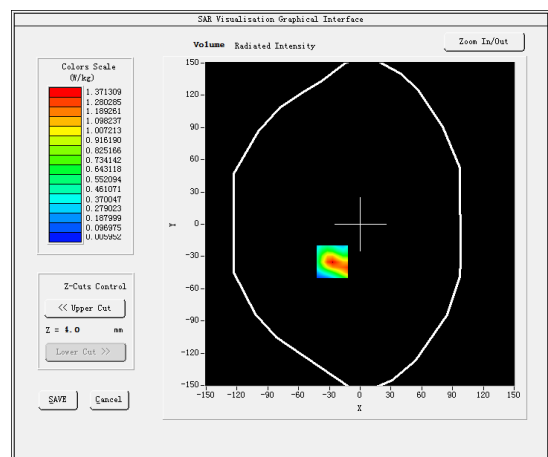

Maximum location: X=-27.00, Y=-35.00

SAR Peak: 2.35 W/kg

SAR 10g (W/Kg)	0.552890
SAR 1g (W/Kg)	1.231783

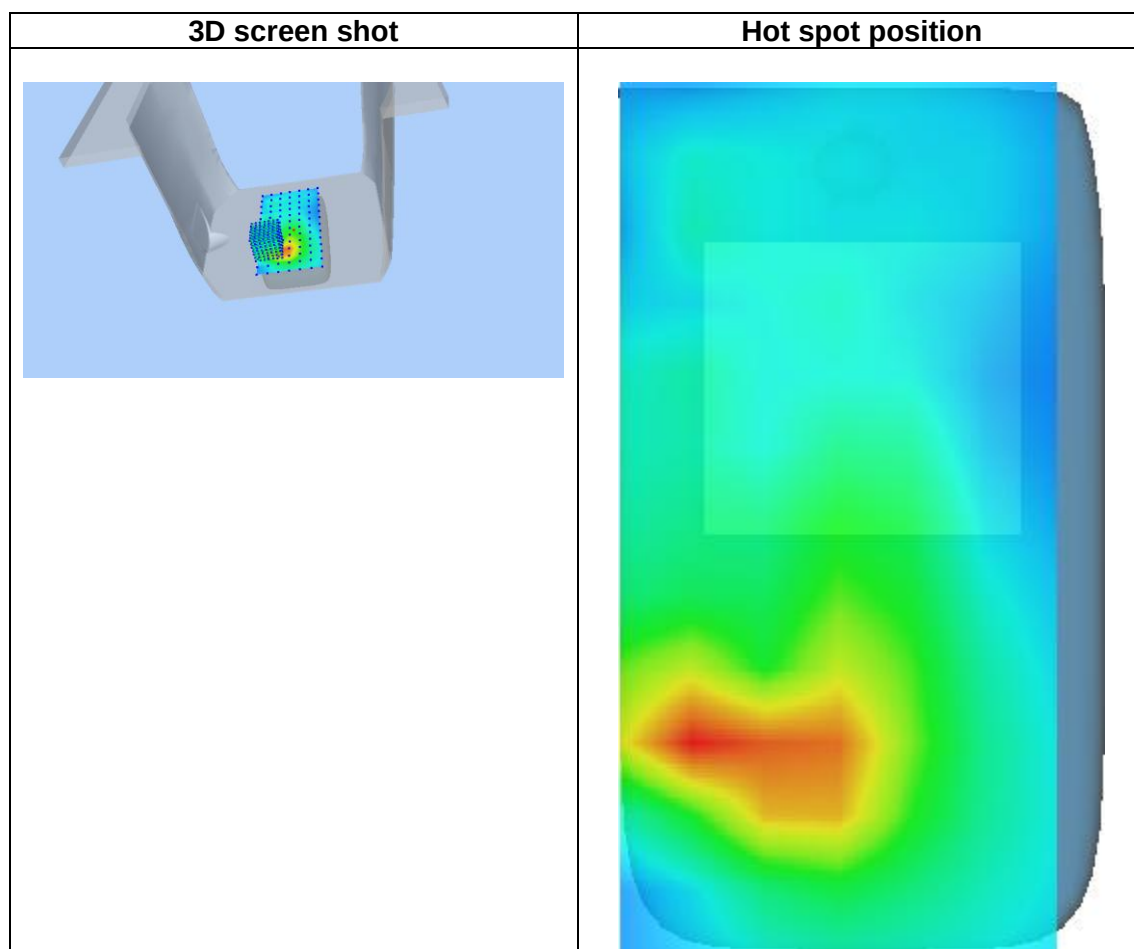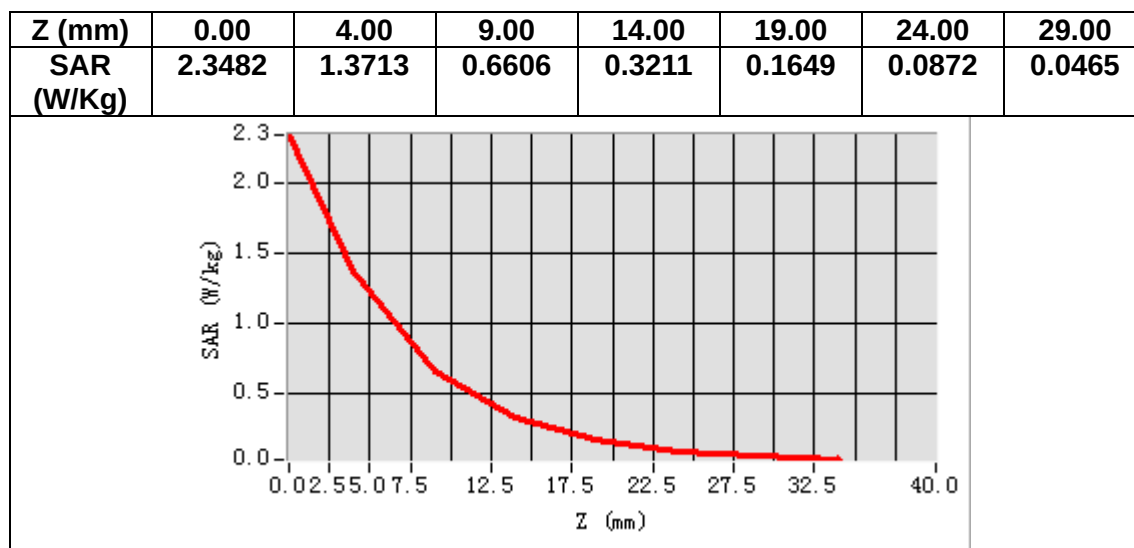

MEASUREMENT 21

Date of measurement: 15/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 8</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.23</u>


B. SAR Measurement Results

Frequency (MHz)	897.500000
Relative permittivity (real part)	41.362583
Relative permittivity (imaginary part)	19.811823
Conductivity (S/m)	0.987289
Variation (%)	1.690000

SURFACE SAR

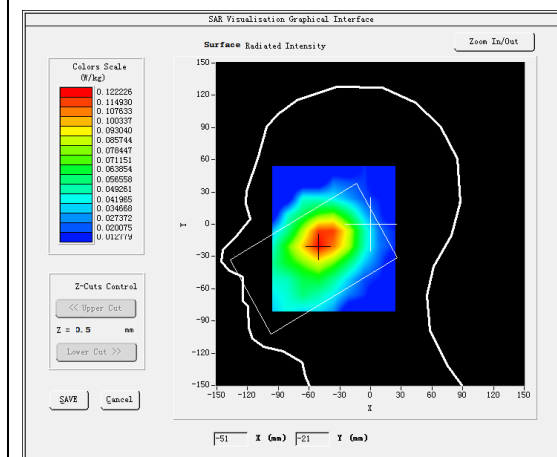



VOLUME SAR

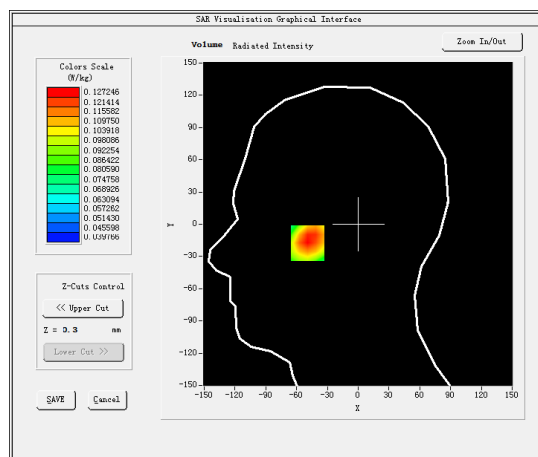

Maximum location: X=-49.00, Y=-17.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.109502
SAR 1g (W/Kg)	0.124164

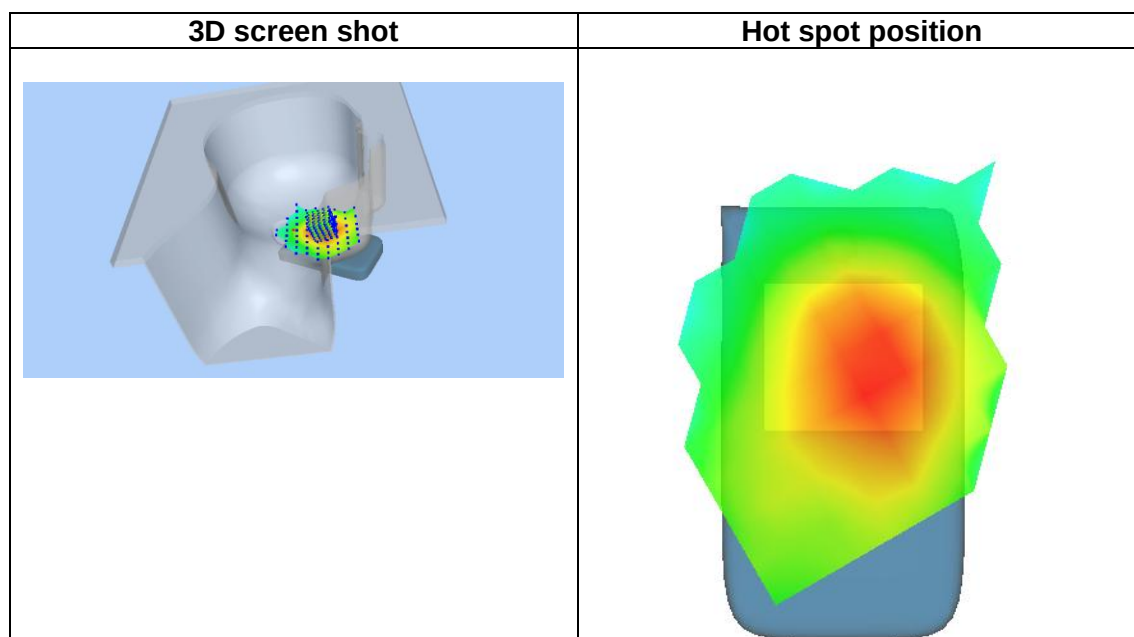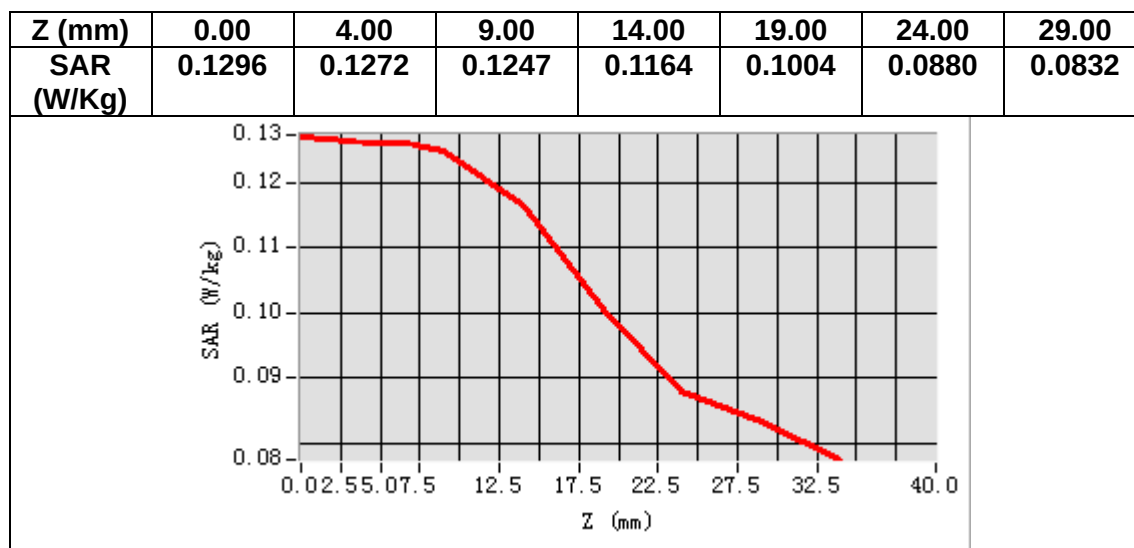

MEASUREMENT 22

Date of measurement: 15/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 8</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.23</u>


B. SAR Measurement Results

Frequency (MHz)	897.500000
Relative permittivity (real part)	41.362583
Relative permittivity (imaginary part)	19.811823
Conductivity (S/m)	0.987289
Variation (%)	-0.100000

SURFACE SAR

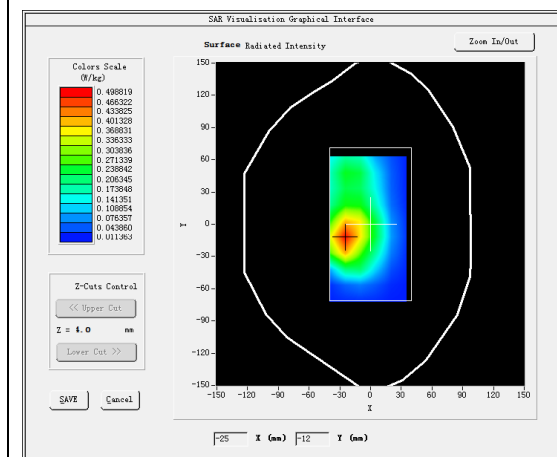



VOLUME SAR

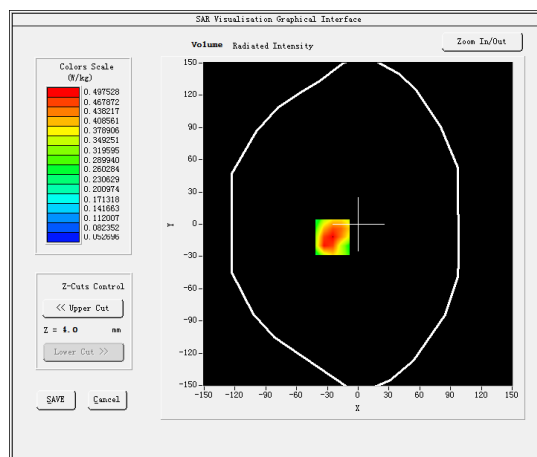

Maximum location: X=-25.00, Y=-12.00

SAR Peak: 0.78 W/kg

SAR 10g (W/Kg)	0.339681
SAR 1g (W/Kg)	0.509729

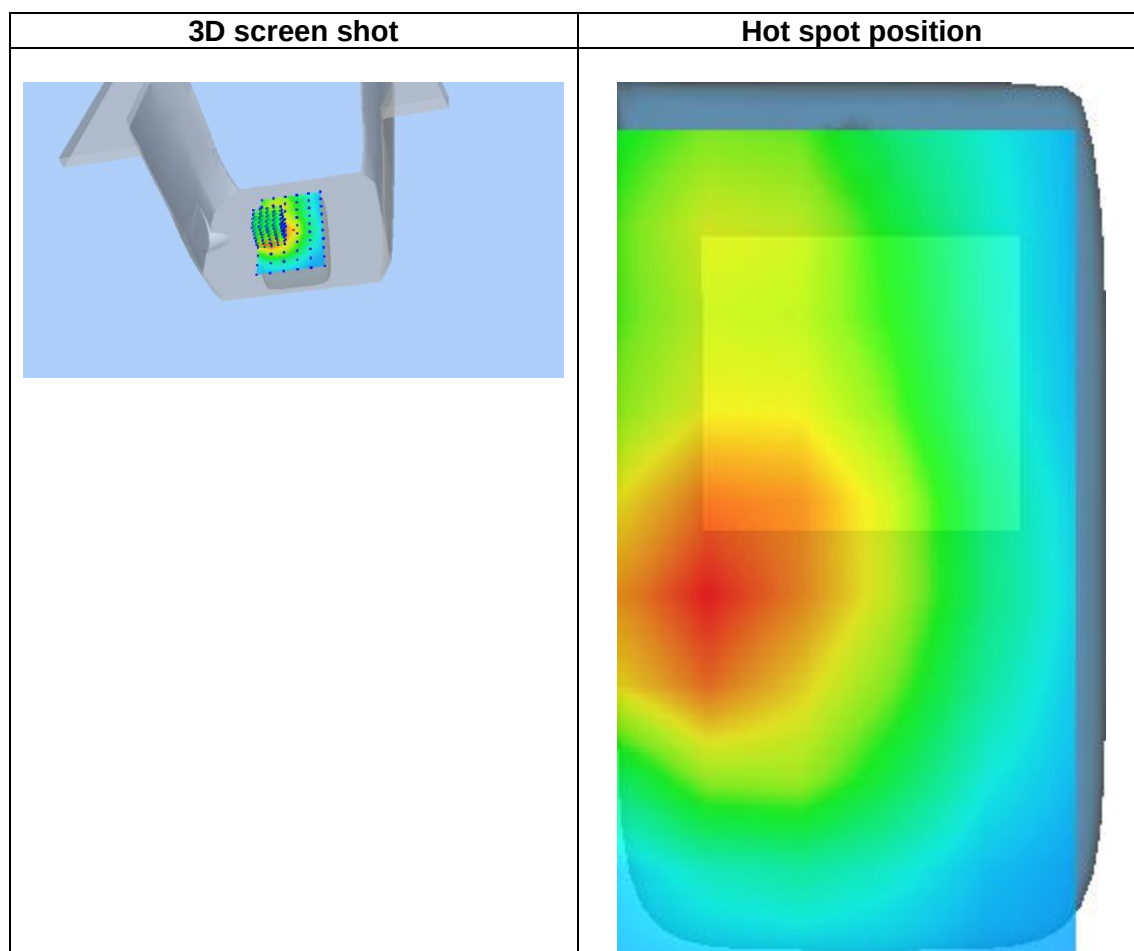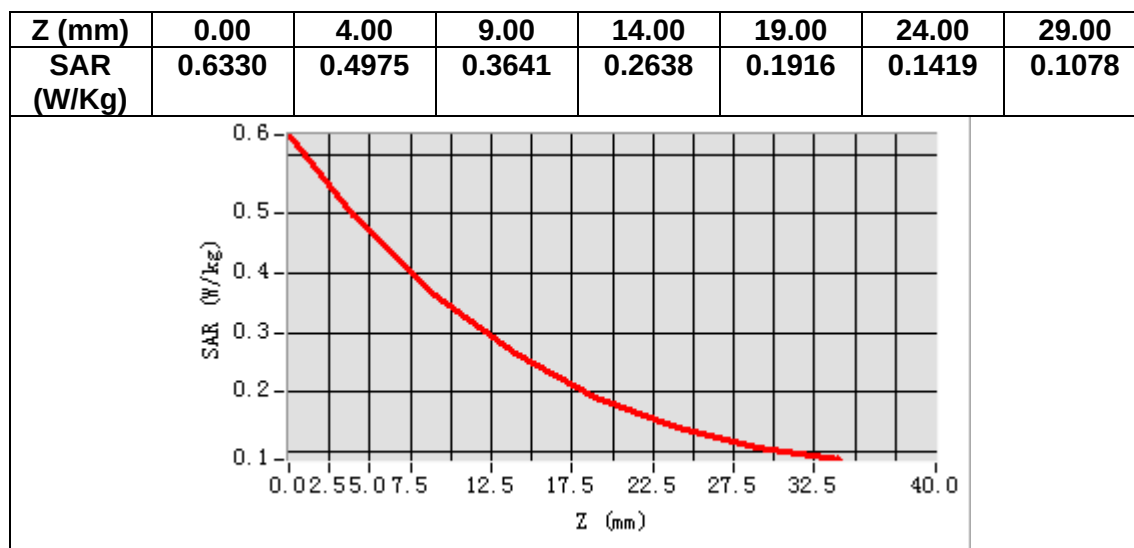

MEASUREMENT 23

Date of measurement: 15/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 20</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.23</u>


B. SAR Measurement Results

Frequency (MHz)	847.000000
Relative permittivity (real part)	41.981384
Relative permittivity (imaginary part)	19.596924
Conductivity (S/m)	0.922144
Variation (%)	2.050000

SURFACE SAR

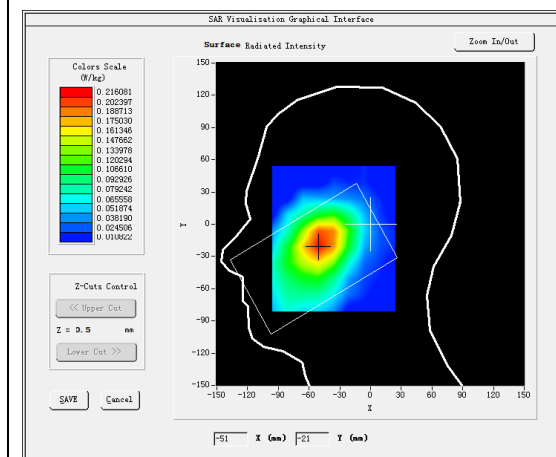



VOLUME SAR

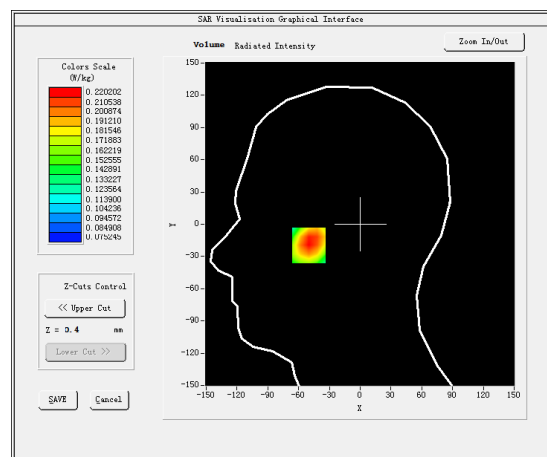

Maximum location: X=-50.00, Y=-19.00

SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.186484
SAR 1g (W/Kg)	0.213473

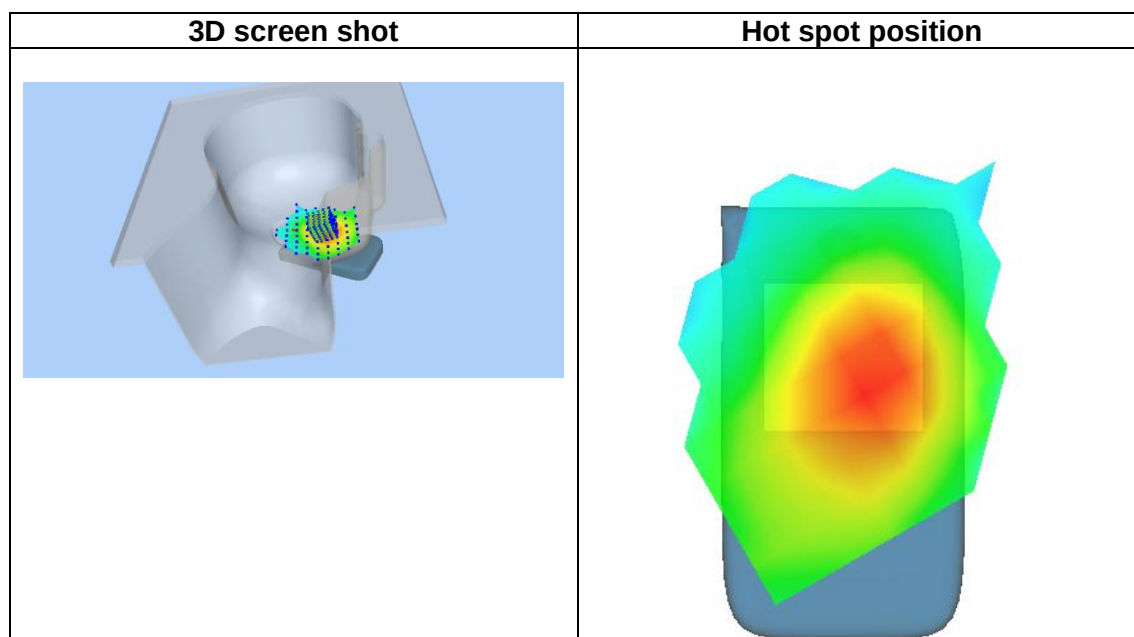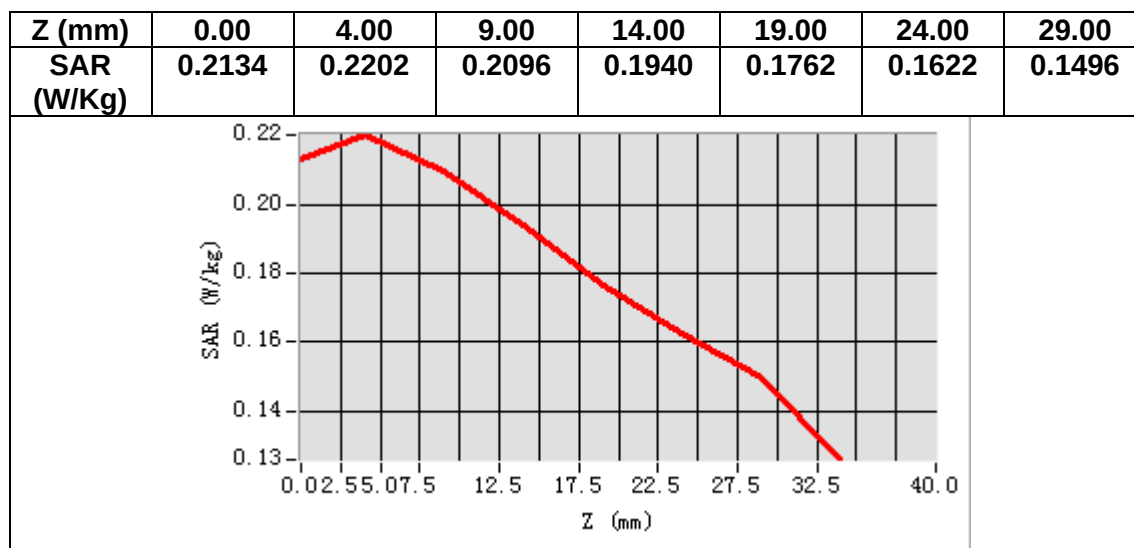

MEASUREMENT 24

Date of measurement: 15/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 20</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.23</u>


B. SAR Measurement Results

Frequency (MHz)	847.000000
Relative permittivity (real part)	41.981384
Relative permittivity (imaginary part)	19.596924
Conductivity (S/m)	0.922144
Variation (%)	-0.240000

SURFACE SAR

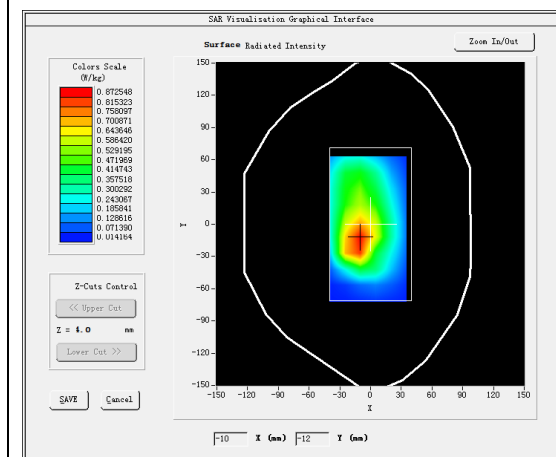



VOLUME SAR

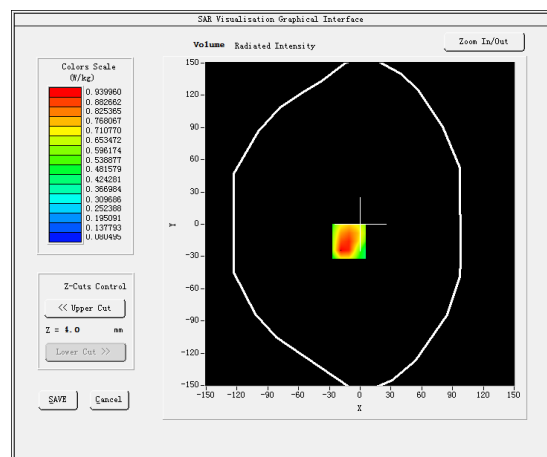

Maximum location: X=-11.00, Y=-16.00

SAR Peak: 1.48 W/kg

SAR 10g (W/Kg)	0.619512
SAR 1g (W/Kg)	0.944231

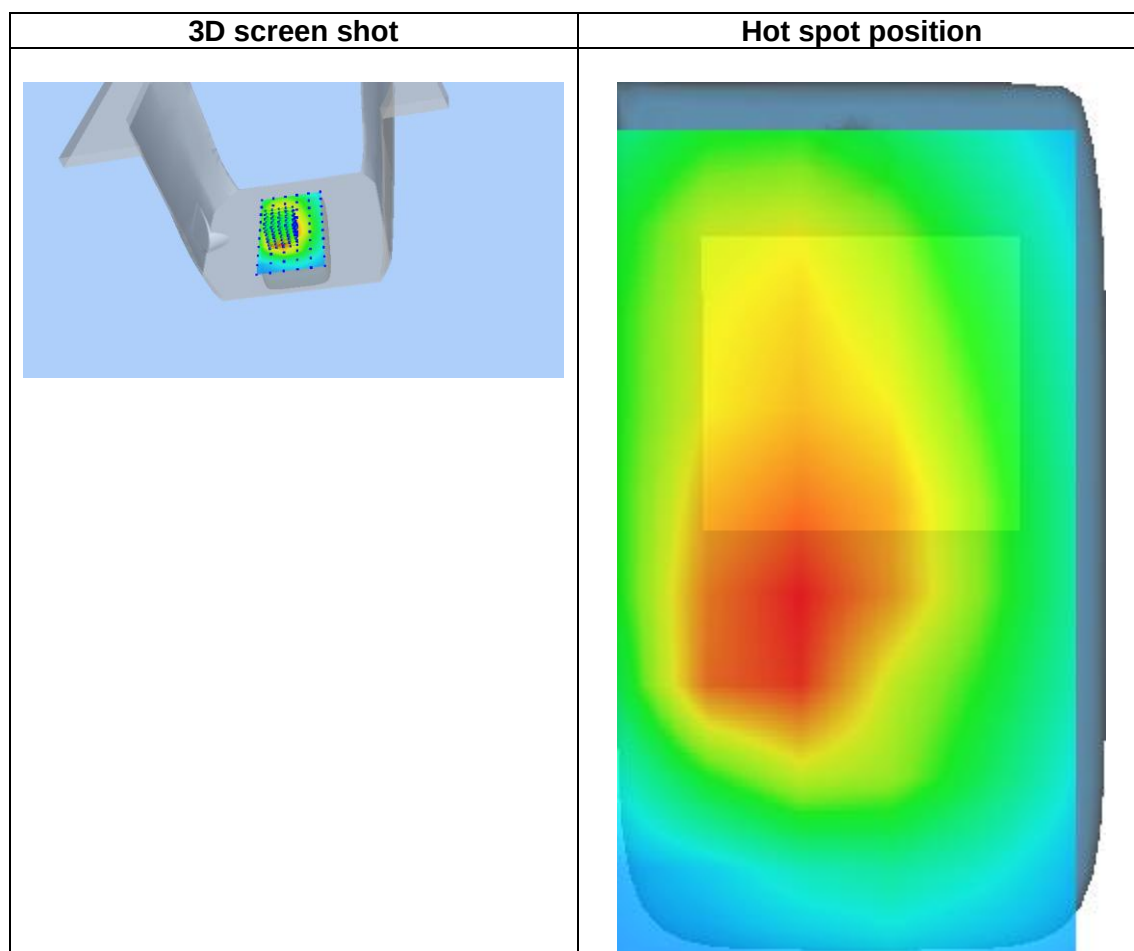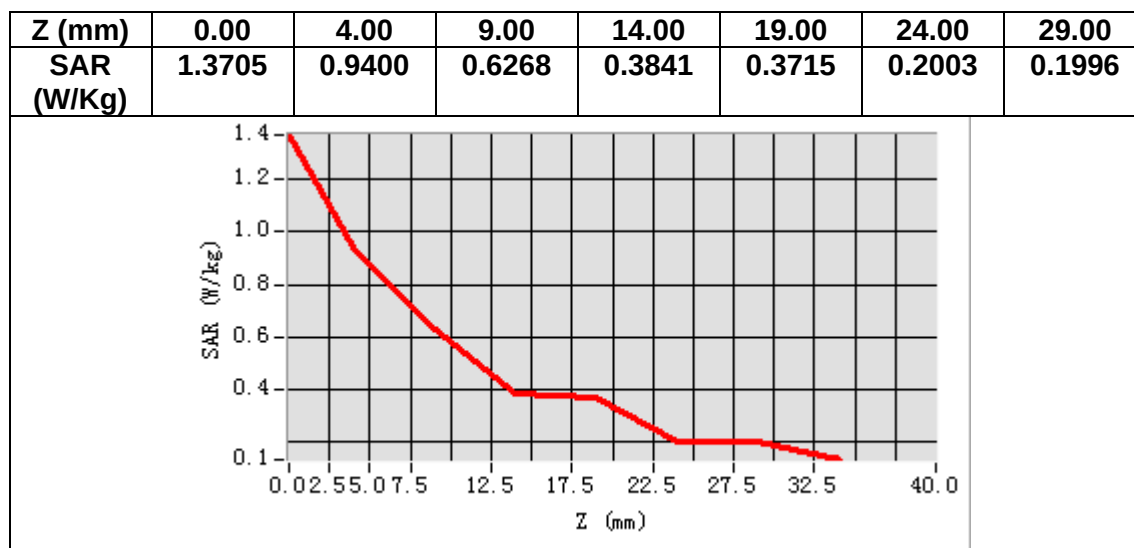

MEASUREMENT 25

Date of measurement: 13/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 40</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.6)</u>
<u>ConvF</u>	<u>2.81</u>


B. SAR Measurement Results

Frequency (MHz)	2350.000000
Relative permittivity (real part)	39.236031
Relative permittivity (imaginary part)	13.081219
Conductivity (S/m)	1.707826
Variation (%)	2.820000

SURFACE SAR

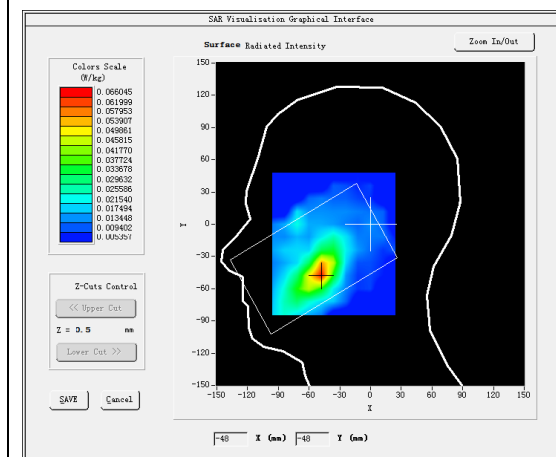



VOLUME SAR

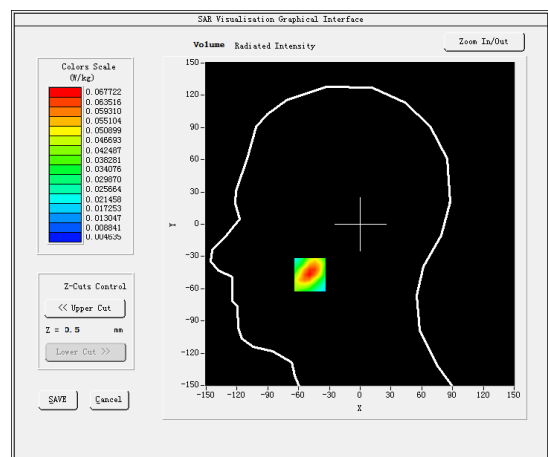

Maximum location: X=-49.00, Y=-47.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.036379
SAR 1g (W/Kg)	0.062070

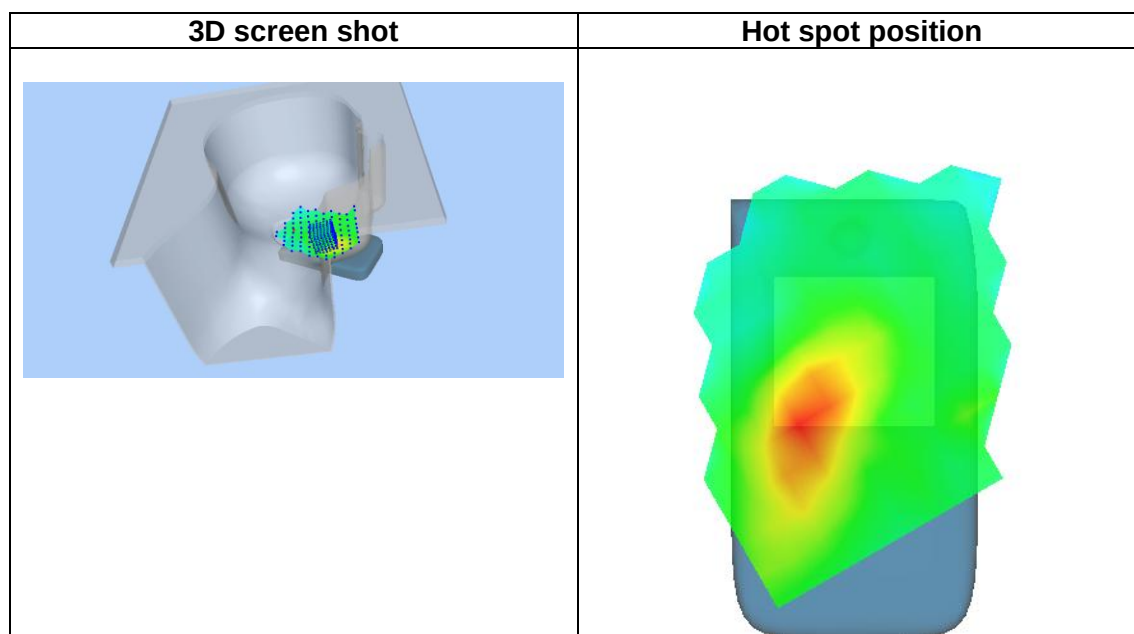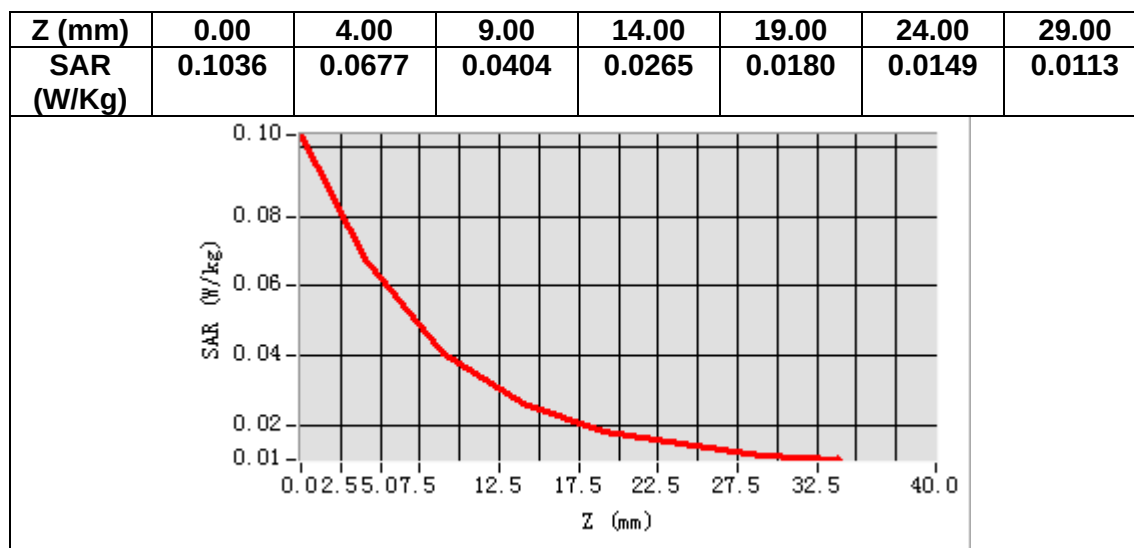

MEASUREMENT 26

Date of measurement: 13/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 40</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.6)</u>
<u>ConvF</u>	<u>2.81</u>


B. SAR Measurement Results

Frequency (MHz)	2350.000000
Relative permittivity (real part)	39.236031
Relative permittivity (imaginary part)	13.081219
Conductivity (S/m)	1.707826
Variation (%)	-2.370000

SURFACE SAR

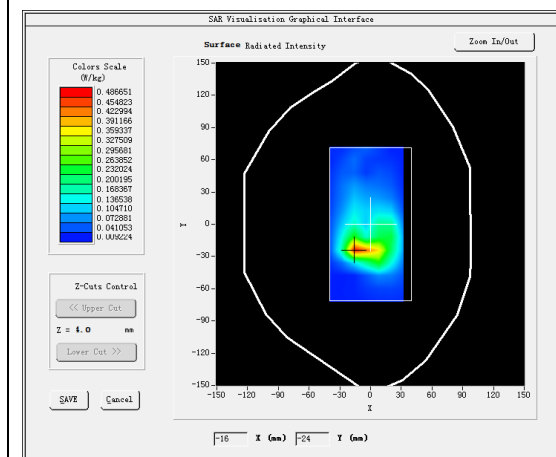



VOLUME SAR

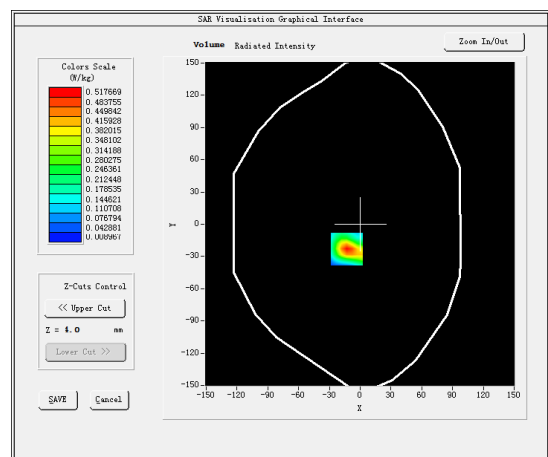

Maximum location: X=-13.00, Y=-23.00

SAR Peak: 0.85 W/kg

SAR 10g (W/Kg)	0.212836
SAR 1g (W/Kg)	0.459343

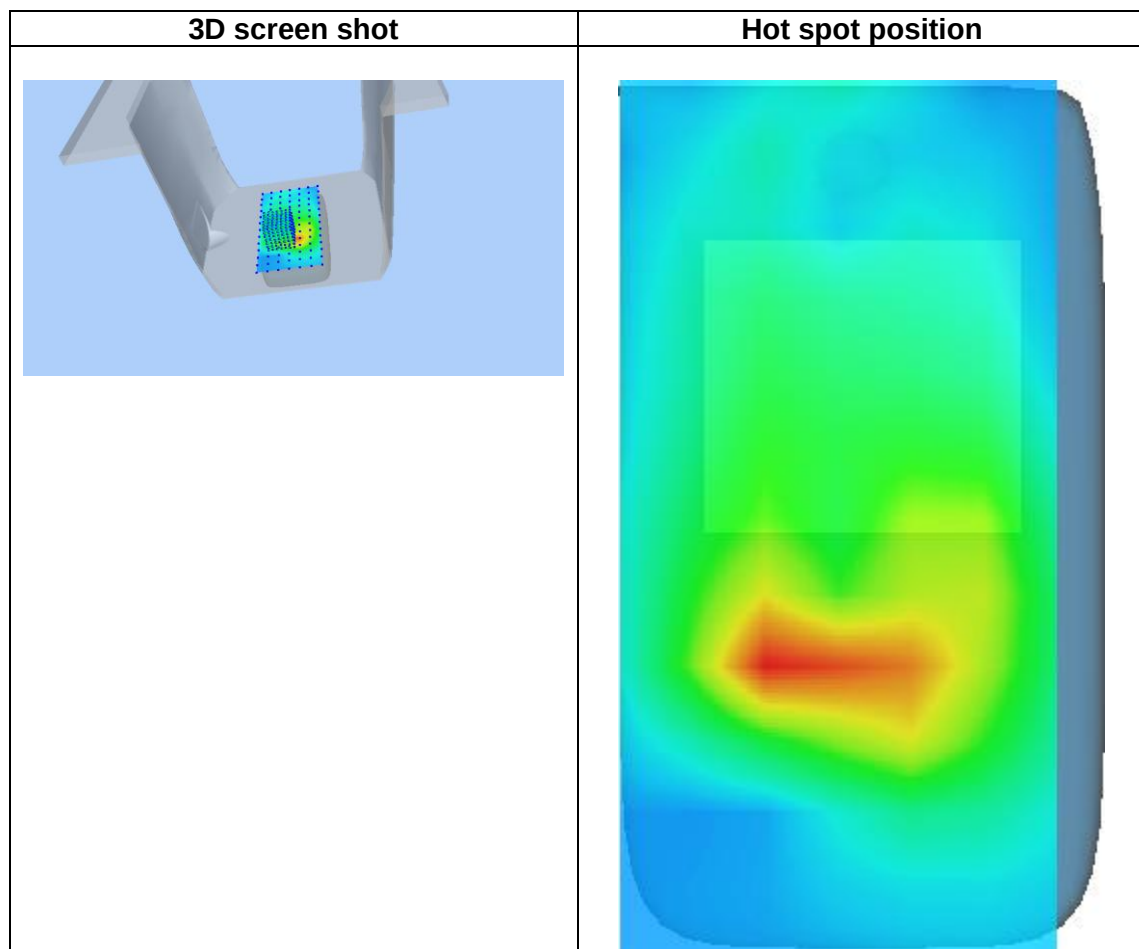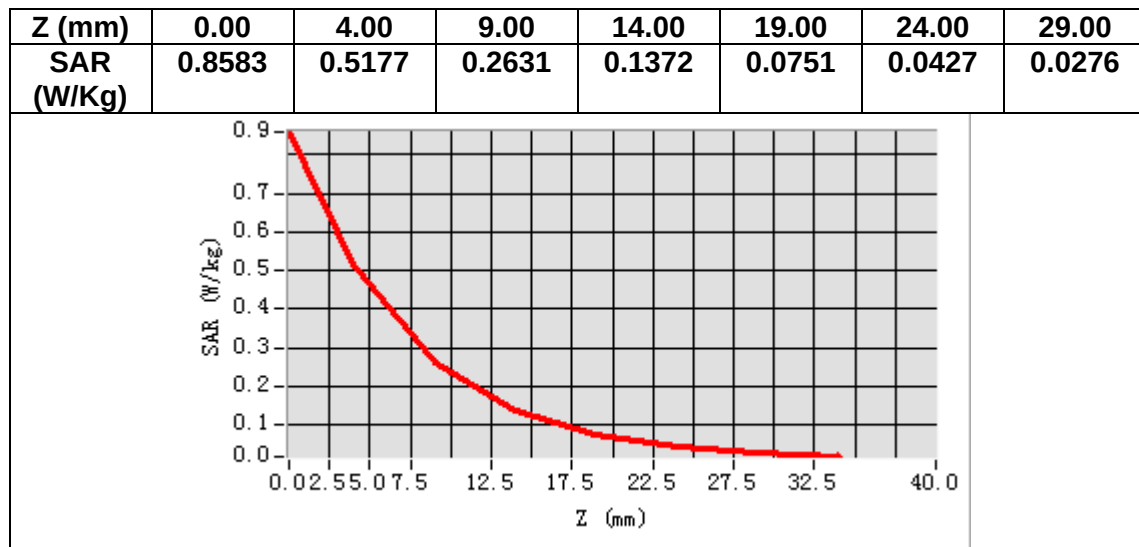

MEASUREMENT 27


Date of measurement: 14/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>FDDBand28</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.37</u>

B. SAR Measurement Results


Frequency (MHz)	728.000000
Relative permittivity (real part)	41.023602
Relative permittivity (imaginary part)	21.754904
Conductivity (S/m)	0.879865
Variation (%)	1.350000

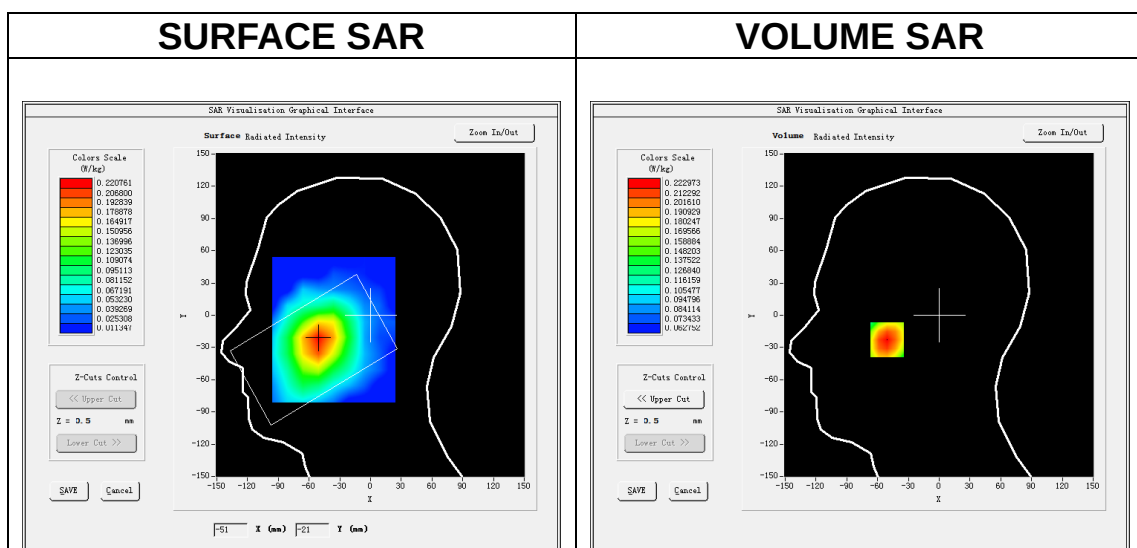


Maximum location: X=-51.00, Y=-23.00

SAR Peak: 0.23 W/kg


SAR 10g (W/Kg)	0.206936
SAR 1g (W/Kg)	0.226054

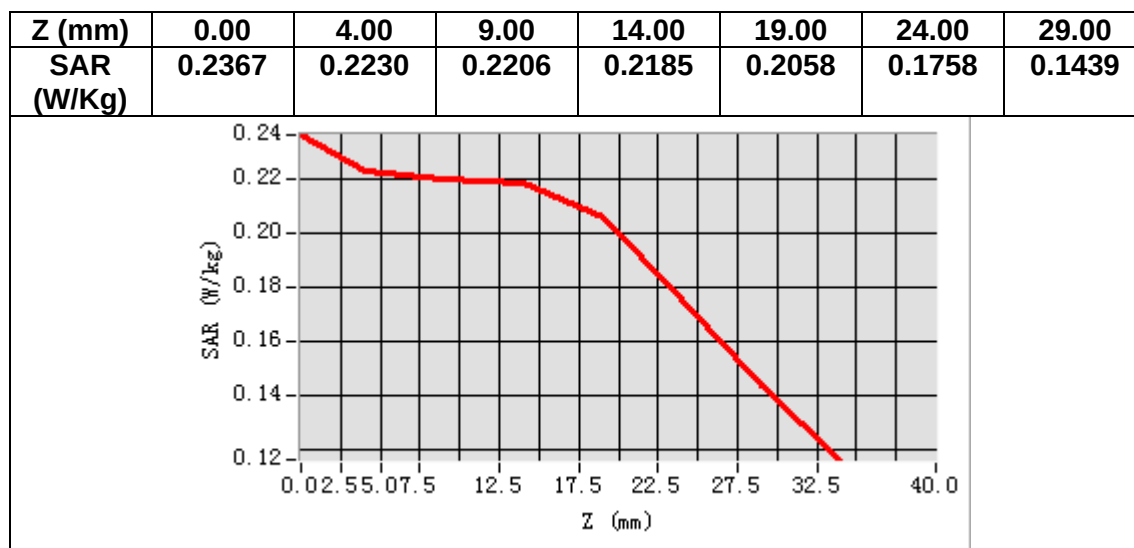

3D screen shot

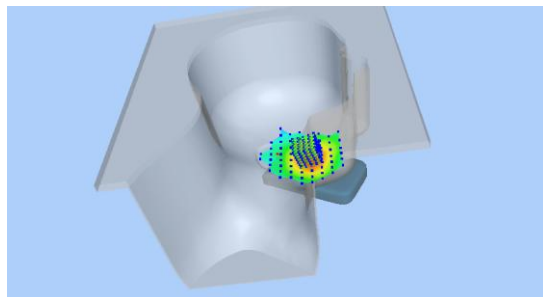

Hot spot position

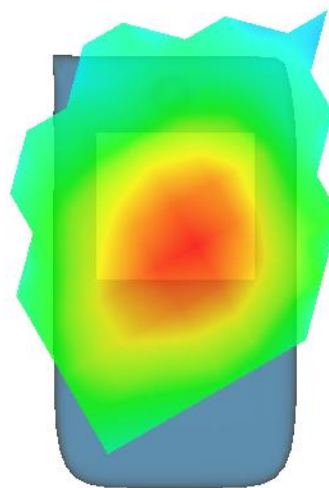

MEASUREMENT 28

Date of measurement: 14/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>FDDBand28</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.37</u>


B. SAR Measurement Results

Frequency (MHz)	728.000000
Relative permittivity (real part)	41.023602
Relative permittivity (imaginary part)	21.754904
Conductivity (S/m)	0.879865
Variation (%)	-0.530000

SURFACE SAR

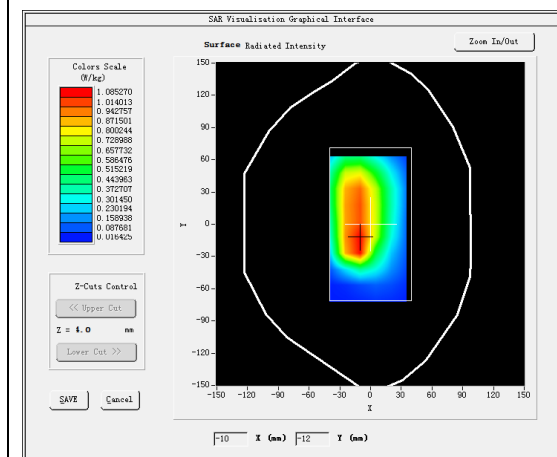



VOLUME SAR

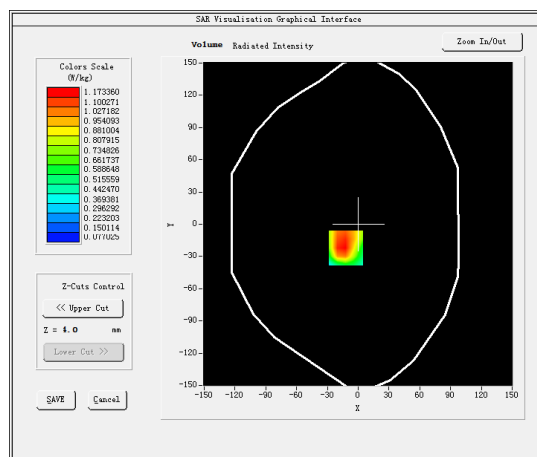

Maximum location: X=-12.00, Y=-22.00

SAR Peak: 1.93 W/kg

SAR 10g (W/Kg)	0.748325
SAR 1g (W/Kg)	1.202806

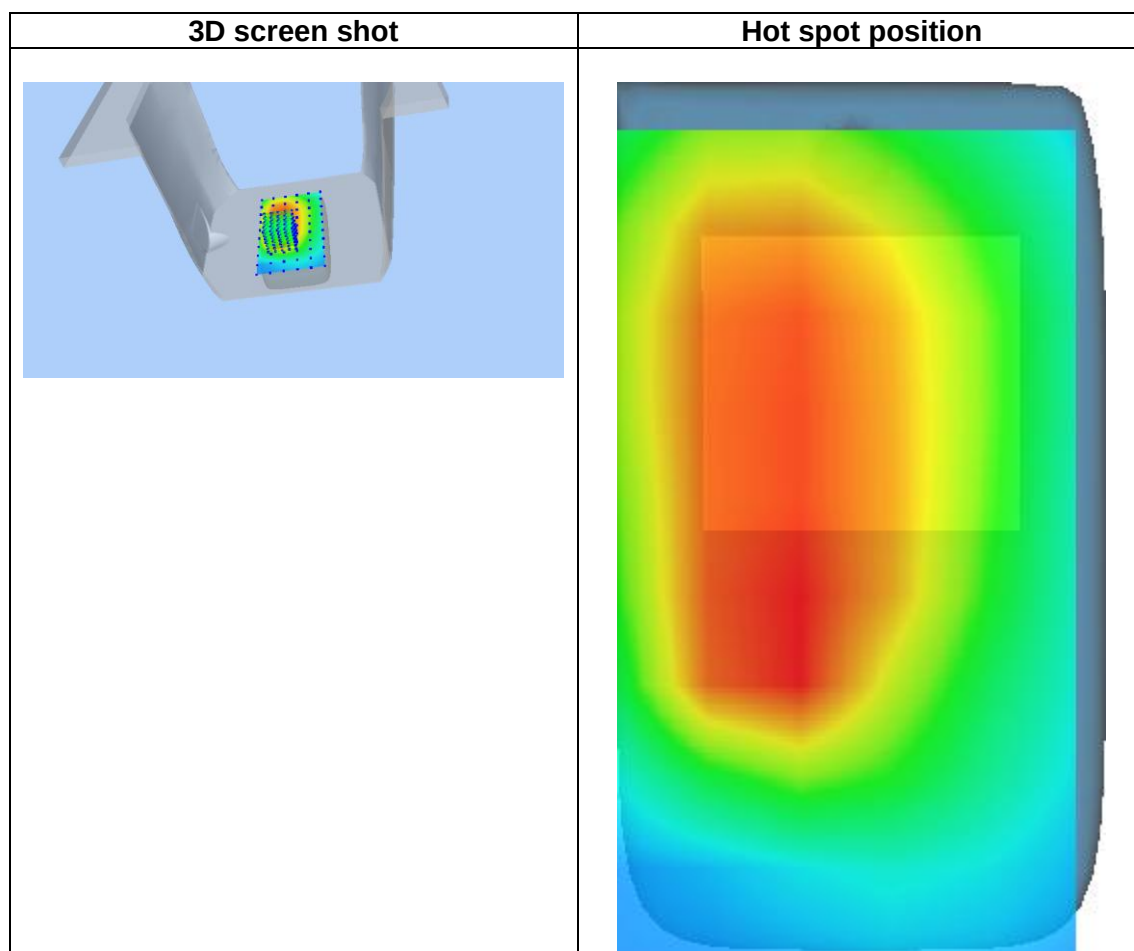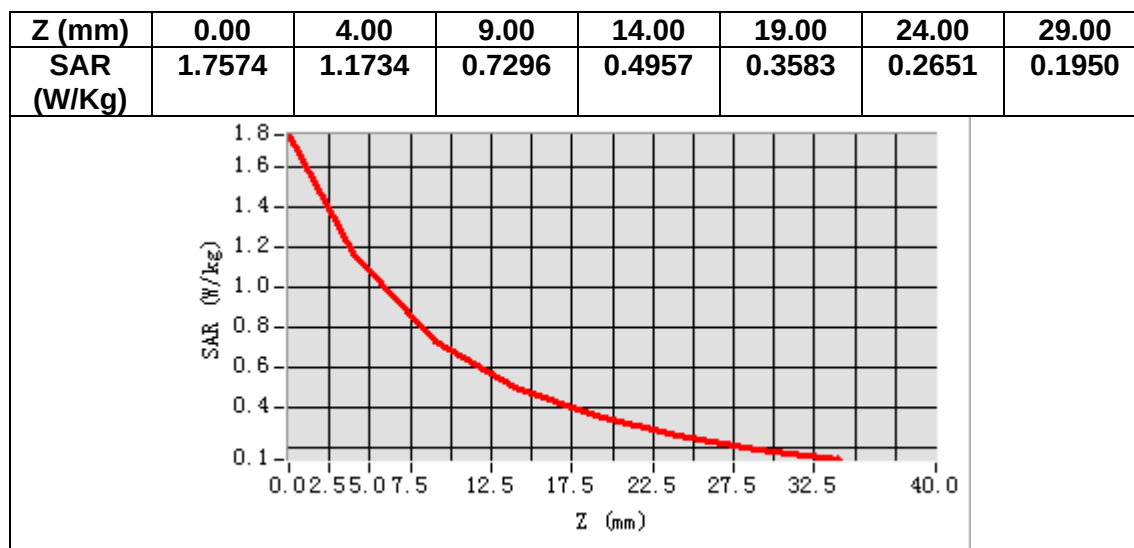

MEASUREMENT 29


Date of measurement: 12/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>SA_n1</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.83</u>

B. SAR Measurement Results



Frequency (MHz)	1950.000000
Relative permittivity (real part)	38.843918
Relative permittivity (imaginary part)	12.847650
Conductivity (S/m)	1.391829
Variation (%)	-0.570000

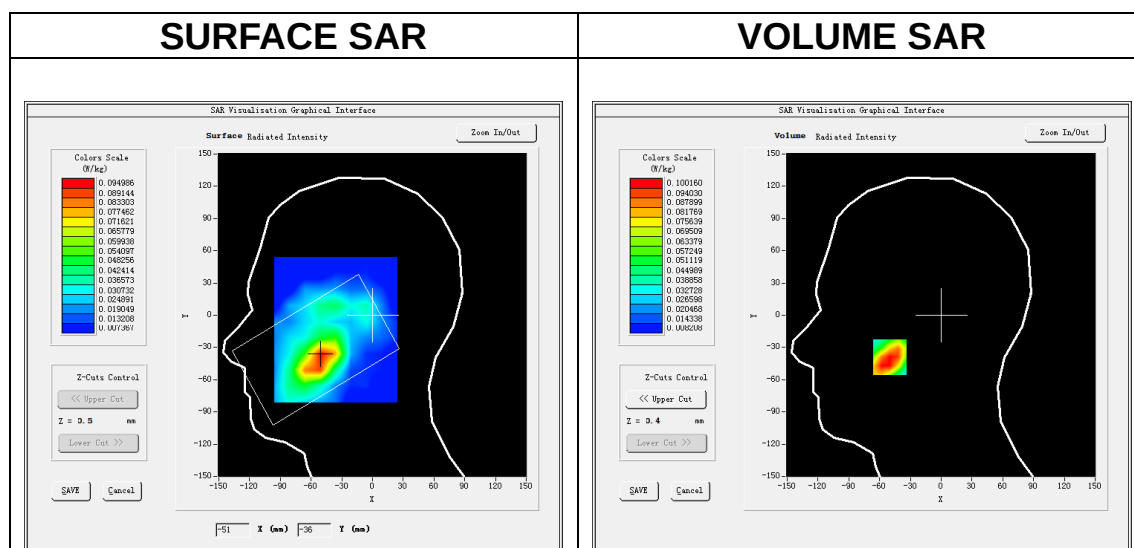

Maximum location: X=-50.00, Y=-39.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.060957
SAR 1g (W/Kg)	0.100279

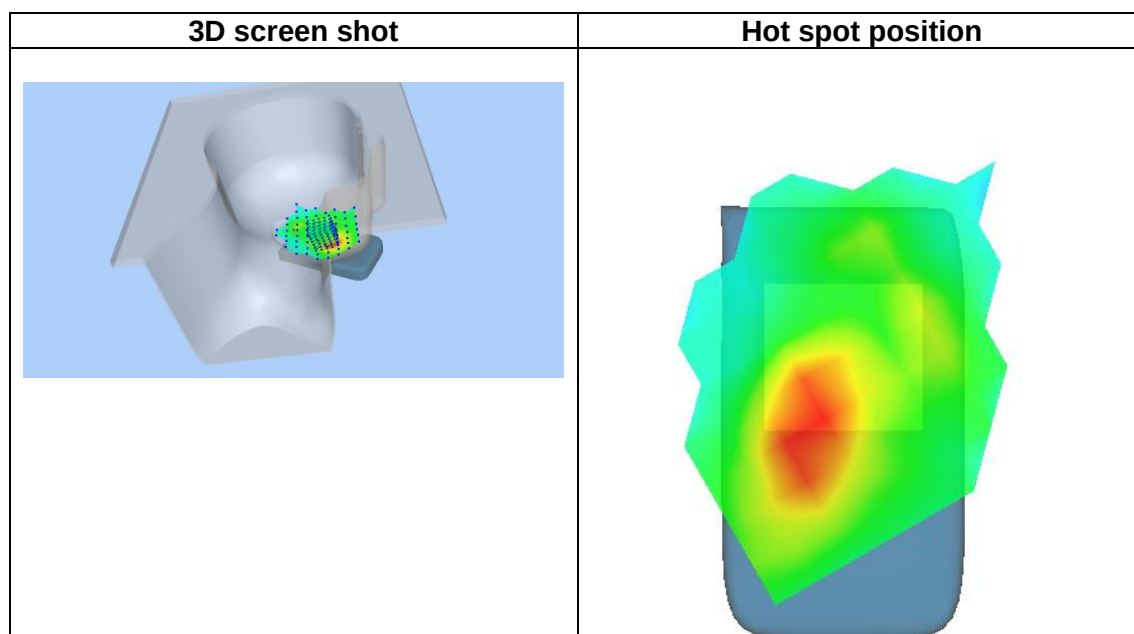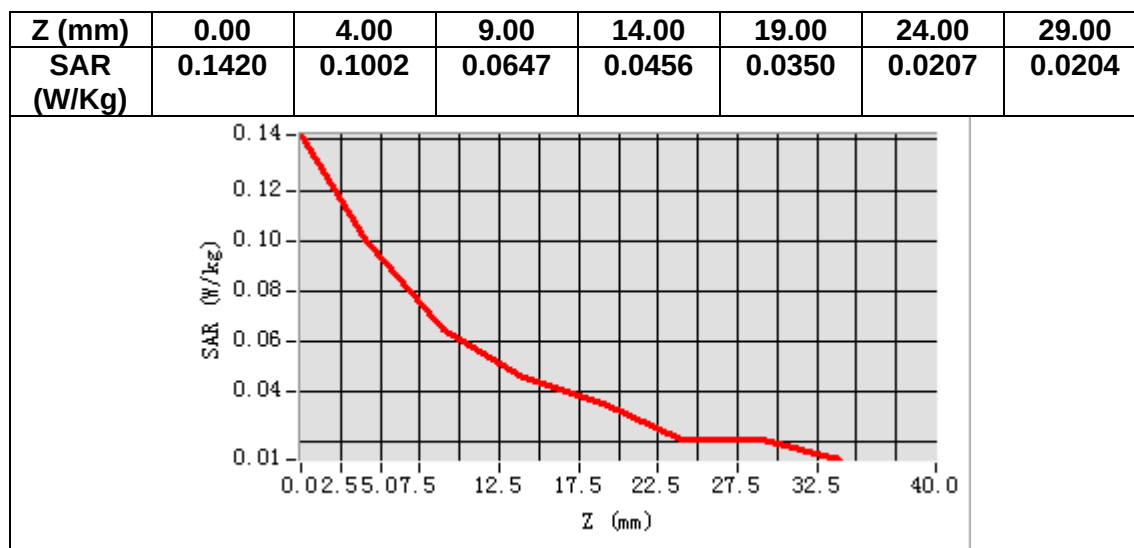

MEASUREMENT 30

Date of measurement: 12/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>SA_n1</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.83</u>


B. SAR Measurement Results

Frequency (MHz)	1950.000000
Relative permittivity (real part)	38.843918
Relative permittivity (imaginary part)	12.847650
Conductivity (S/m)	1.391829
Variation (%)	-0.450000

SURFACE SAR

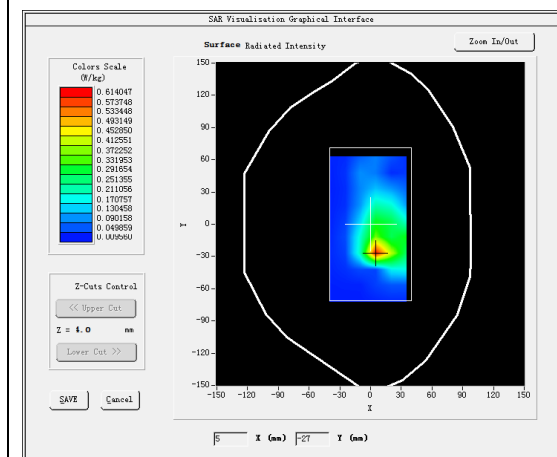


VOLUME SAR

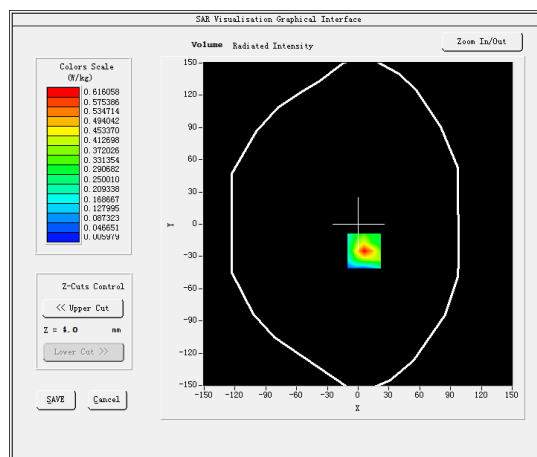


Maximum location: X=6.00, Y=-25.00

SAR Peak: 0.93 W/kg


SAR 10g (W/Kg)	0.282279
SAR 1g (W/Kg)	0.556293

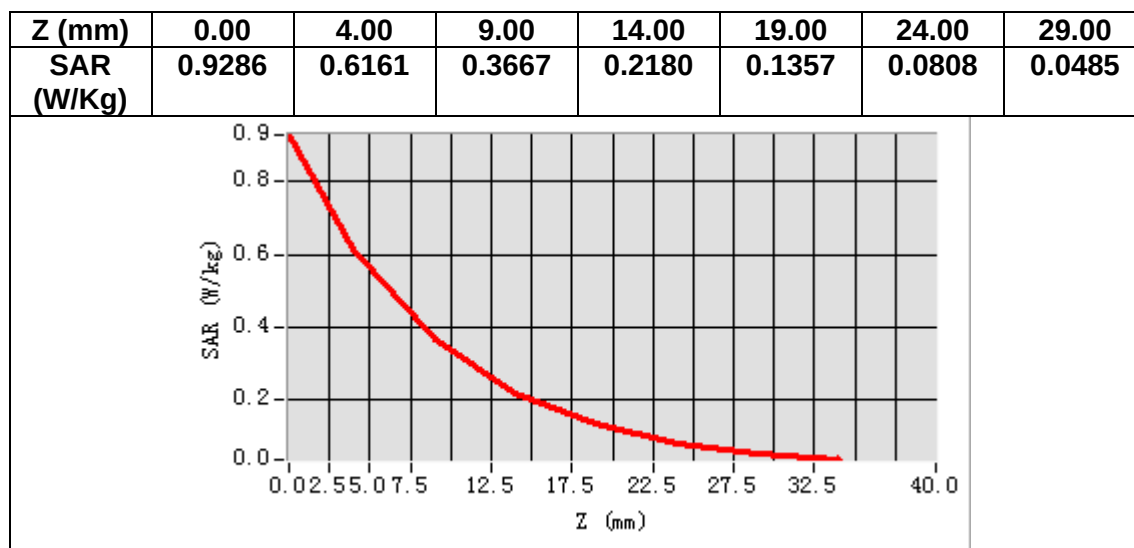

3D screen shot

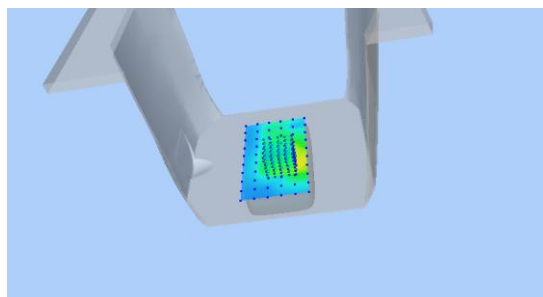

Hot spot position

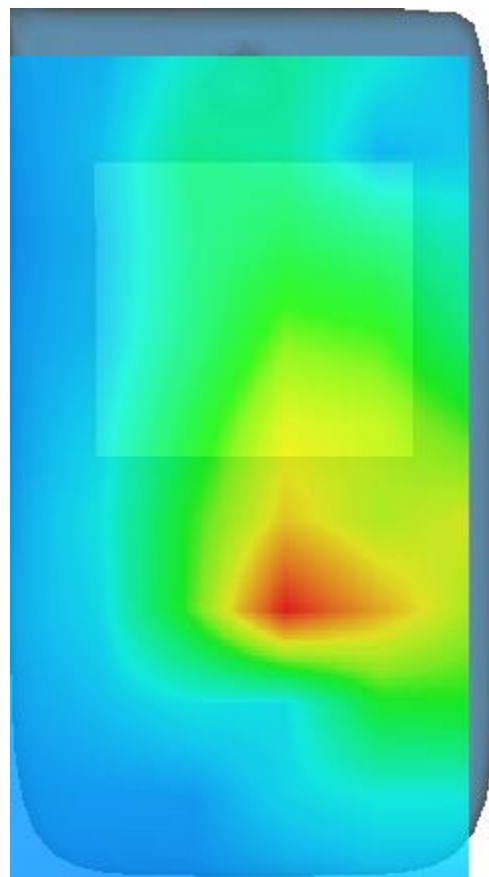

MEASUREMENT 31

Date of measurement: 14/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>SA_n28</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.37</u>


B. SAR Measurement Results

Frequency (MHz)	725.500000
Relative permittivity (real part)	41.043602
Relative permittivity (imaginary part)	21.936304
Conductivity (S/m)	0.884155
Variation (%)	1.410000

SURFACE SAR

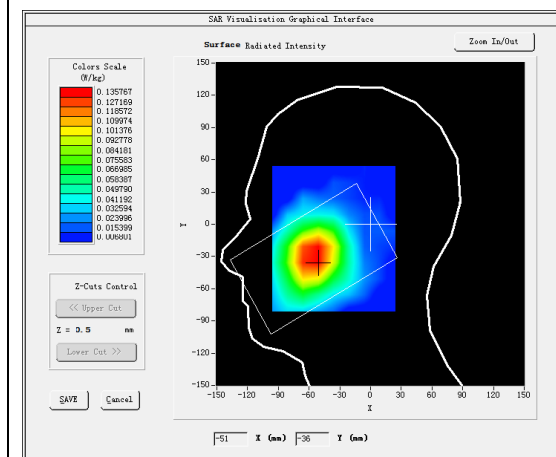



VOLUME SAR

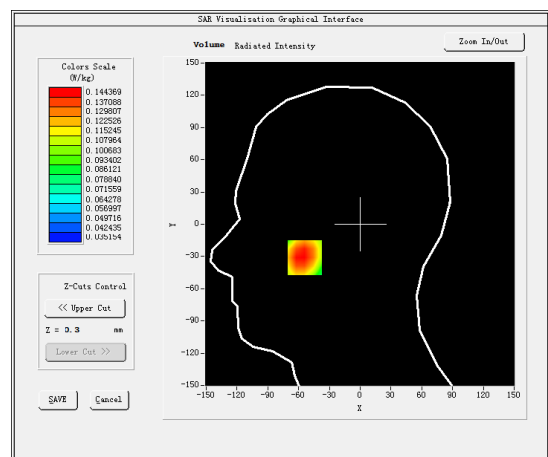

Maximum location: X=-54.00, Y=-31.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.129751
SAR 1g (W/Kg)	0.147214

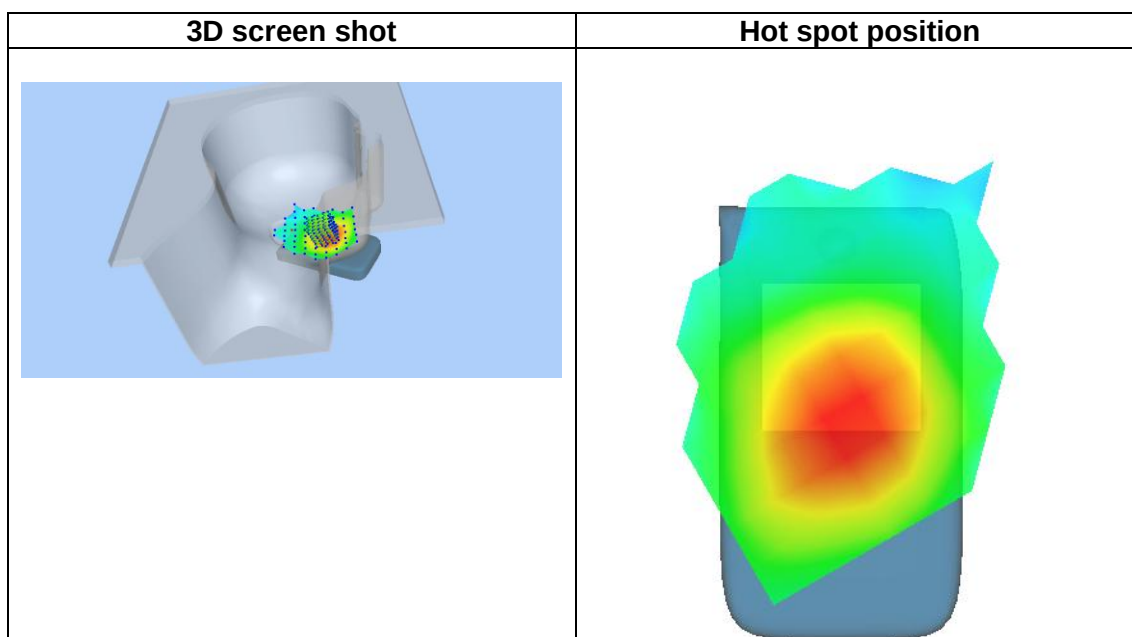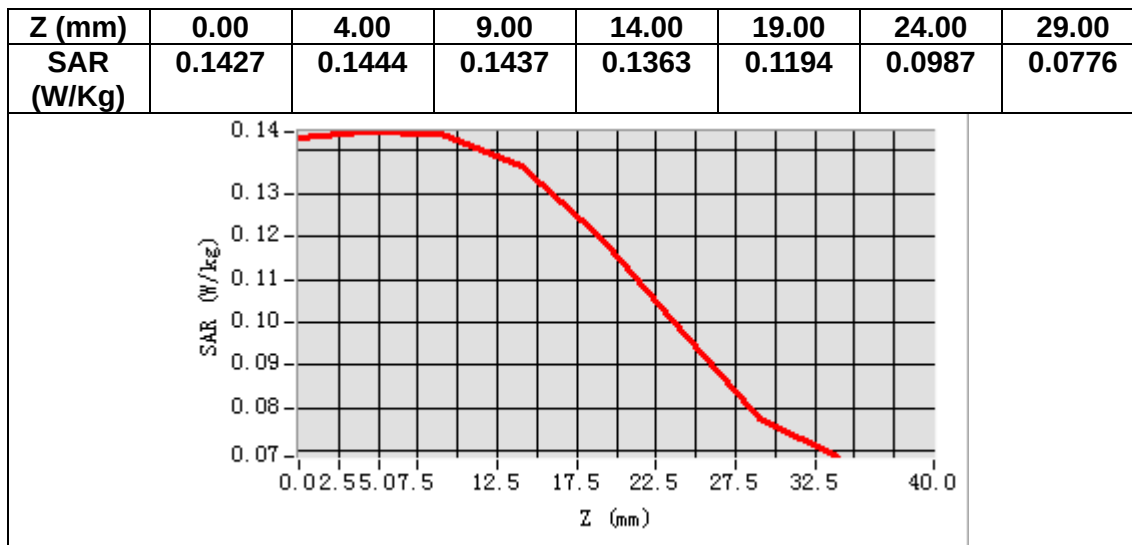

MEASUREMENT 32

Date of measurement: 14/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>SA_n28</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.37</u>


B. SAR Measurement Results

Frequency (MHz)	725.500000
Relative permittivity (real part)	41.043602
Relative permittivity (imaginary part)	21.936304
Conductivity (S/m)	0.884155
Variation (%)	-2.770000

SURFACE SAR

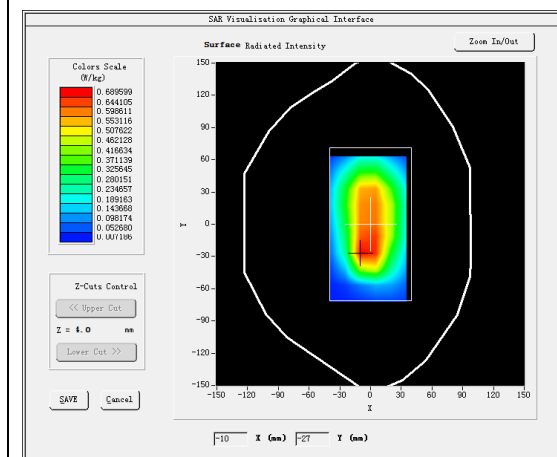



VOLUME SAR

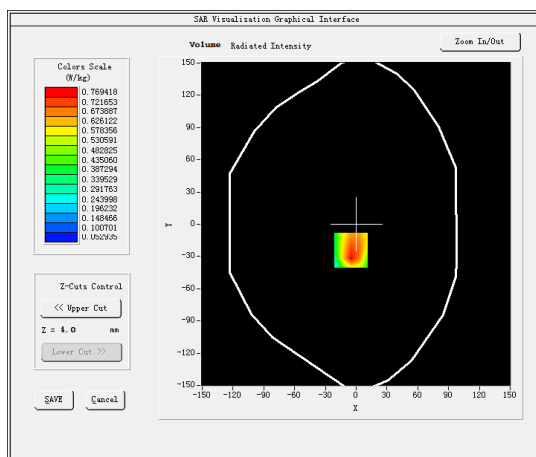

Maximum location: X=-5.00, Y=-24.00

SAR Peak: 1.21 W/kg

SAR 10g (W/Kg)	0.514317
SAR 1g (W/Kg)	0.765469

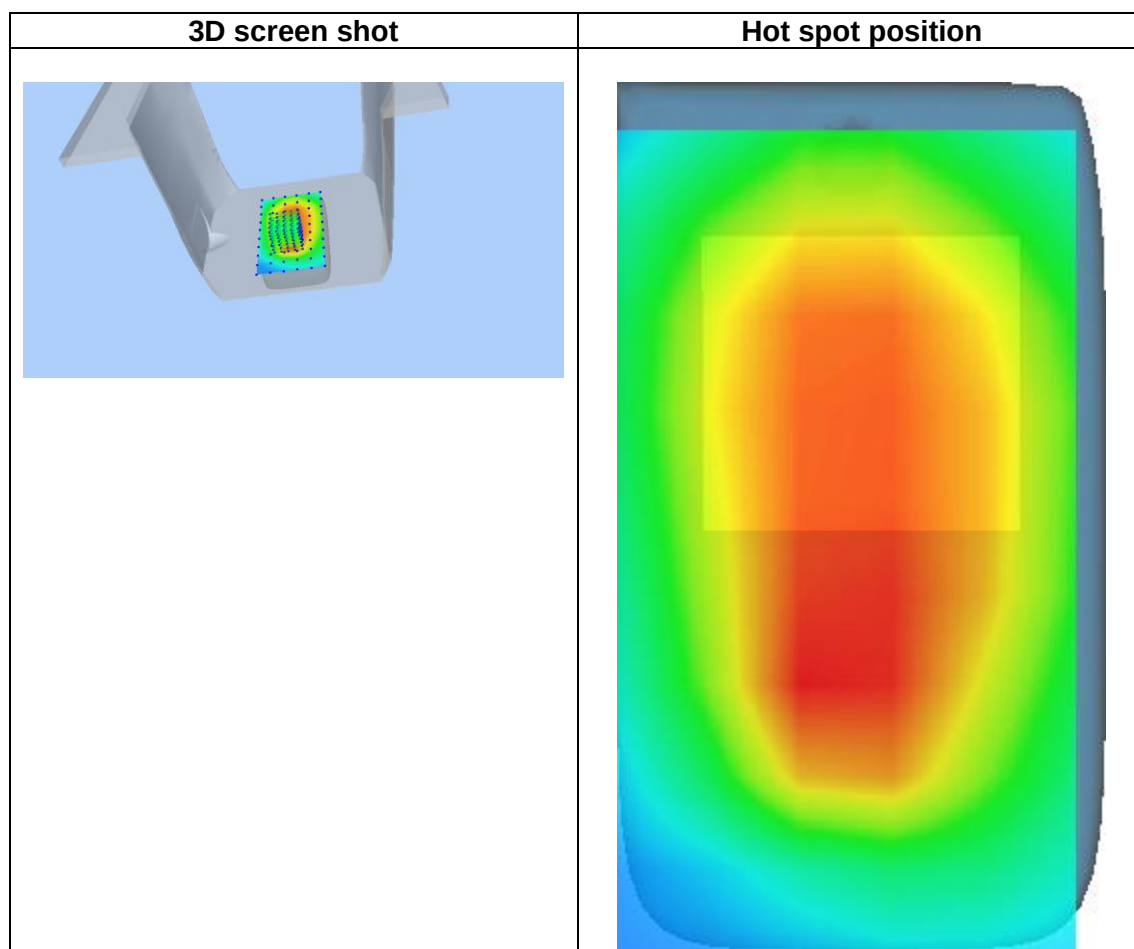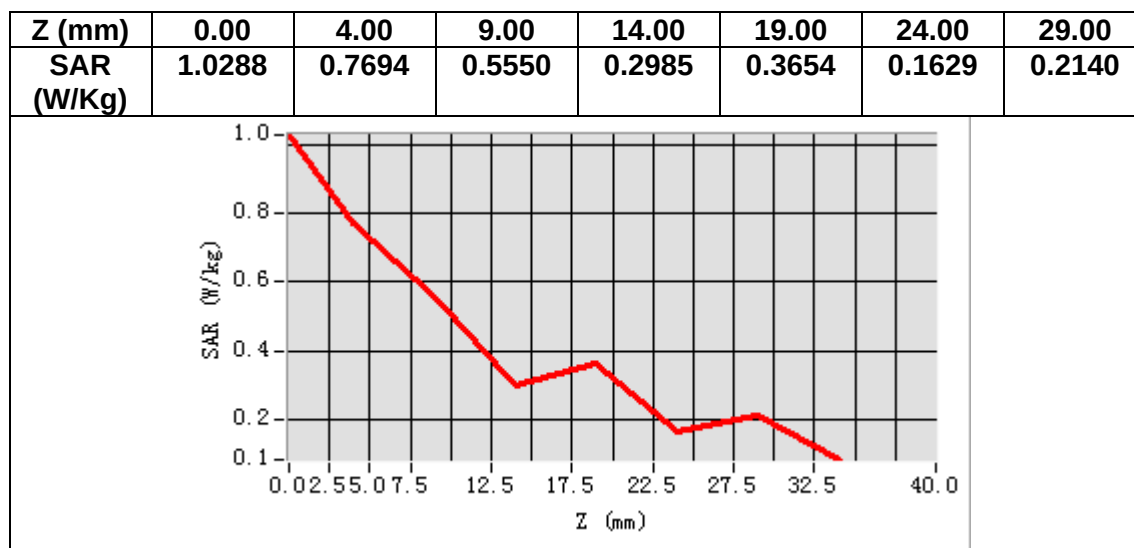

MEASUREMENT 33

Date of measurement: 17/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>SA_n77</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.6)</u>
<u>ConvF</u>	<u>2.11</u>


B. SAR Measurement Results

Frequency (MHz)	3750.000000
Relative permittivity (real part)	37.000565
Relative permittivity (imaginary part)	15.116482
Conductivity (S/m)	3.149267
Variation (%)	-4.940000

SURFACE SAR

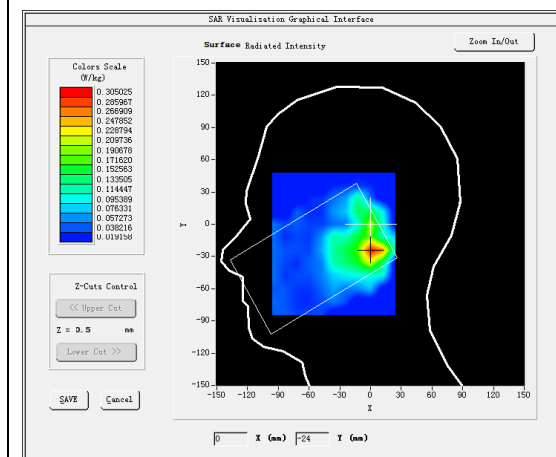



VOLUME SAR

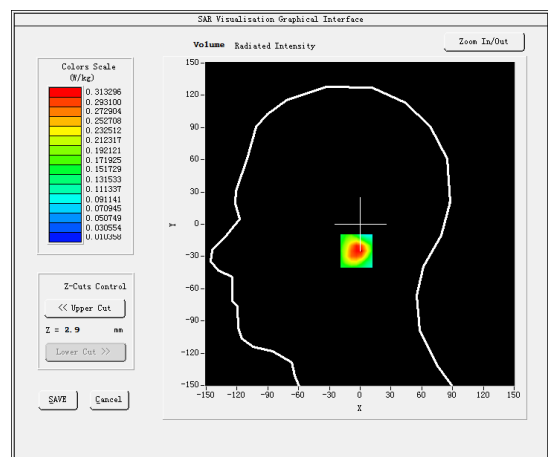

Maximum location: X=3.00, Y=-25.00

SAR Peak: 0.66 W/kg

SAR 10g (W/Kg)	0.129428
SAR 1g (W/Kg)	0.308961

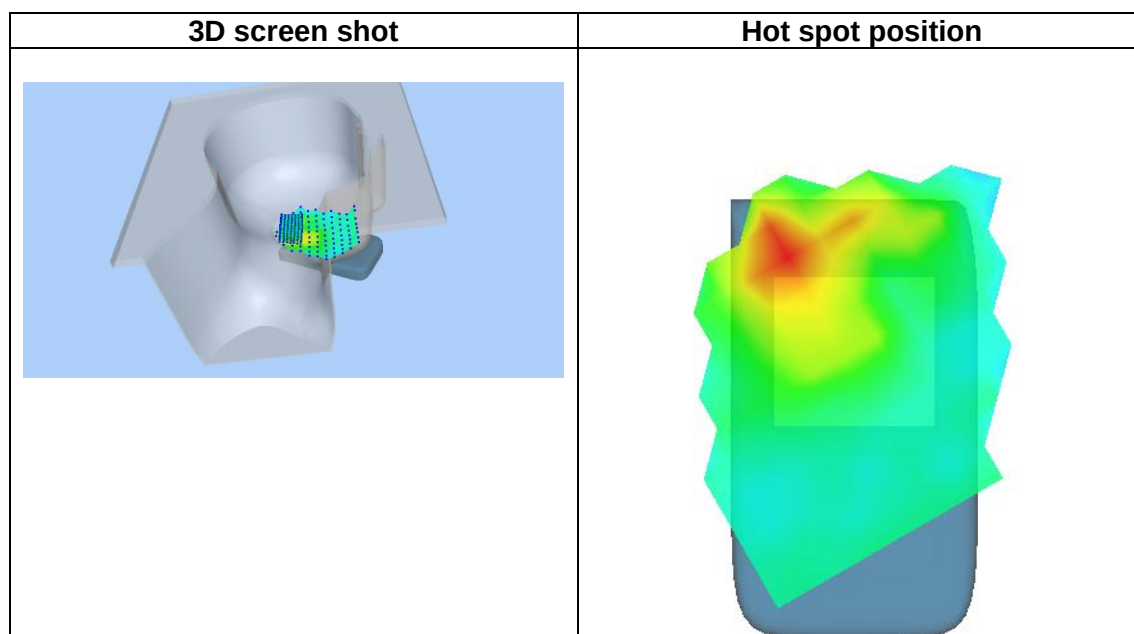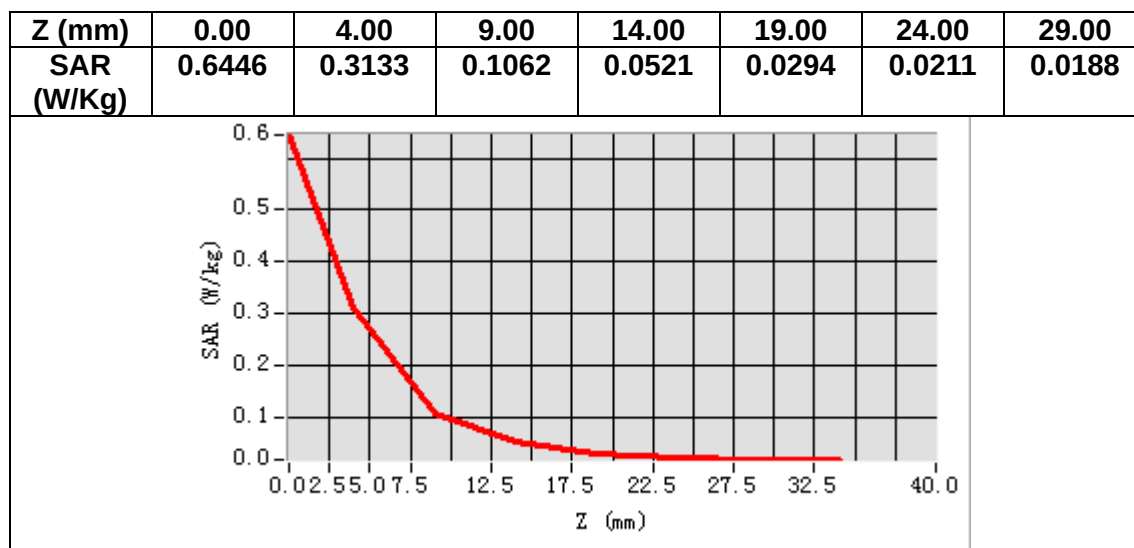

MEASUREMENT 34

Date of measurement: 17/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>SA_n77</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.6)</u>
<u>ConvF</u>	<u>2.11</u>


B. SAR Measurement Results

Frequency (MHz)	3750.000000
Relative permittivity (real part)	37.000565
Relative permittivity (imaginary part)	15.116482
Conductivity (S/m)	3.149267
Variation (%)	3.280000

SURFACE SAR

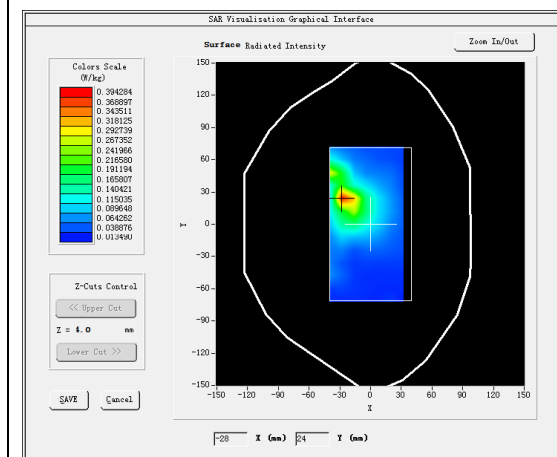



VOLUME SAR

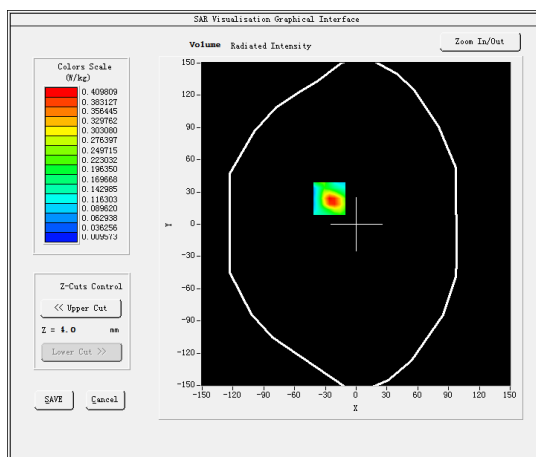

Maximum location: X=-26.00, Y=24.00

SAR Peak: 0.87 W/kg

SAR 10g (W/Kg)	0.150231
SAR 1g (W/Kg)	0.395227

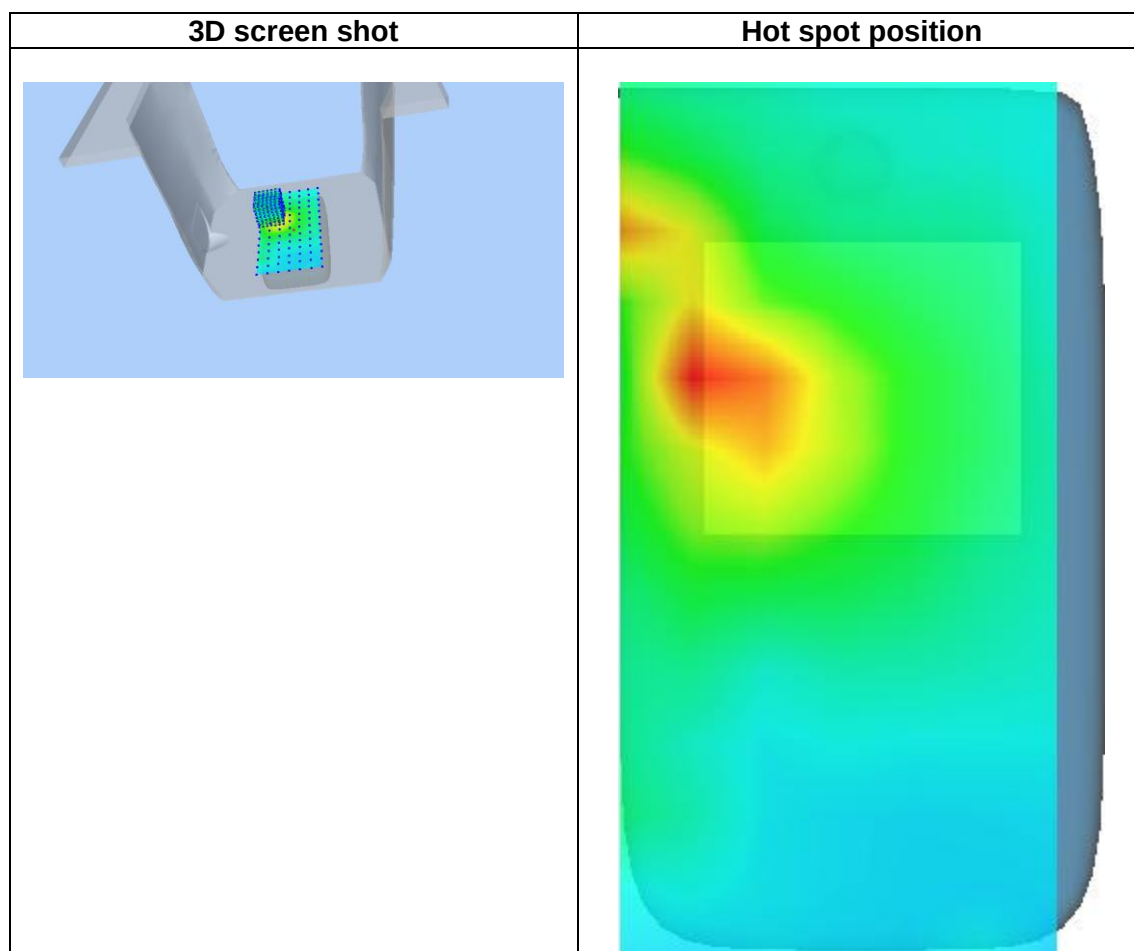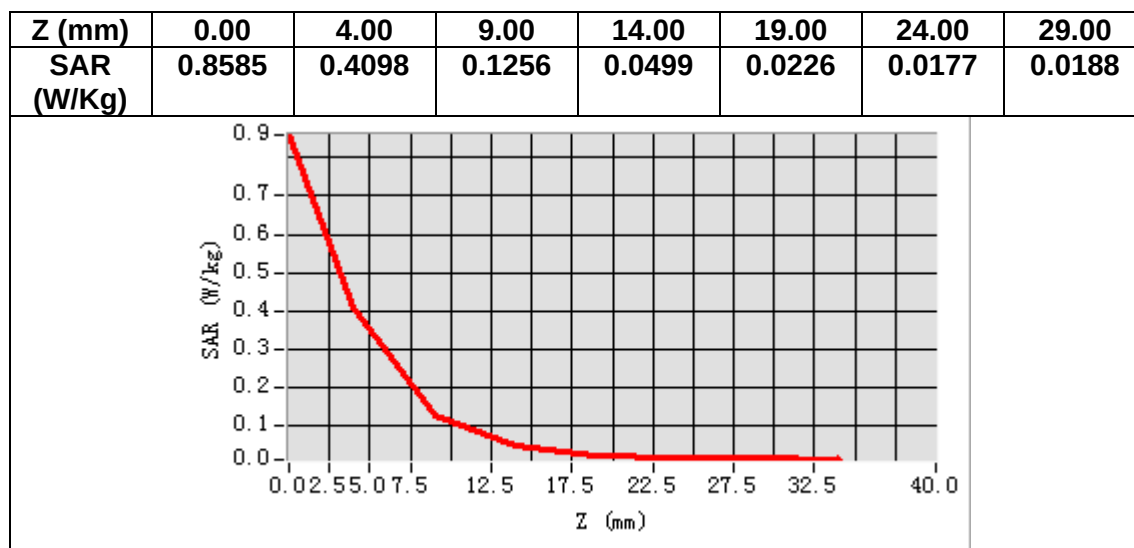

MEASUREMENT 35


Date of measurement: 16/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>SA_n78</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.6)</u>
<u>ConvF</u>	<u>2.20</u>

B. SAR Measurement Results



Frequency (MHz)	3549.990000
Relative permittivity (real part)	37.540264
Relative permittivity (imaginary part)	14.806692
Conductivity (S/m)	2.920200
Variation (%)	-1.220000

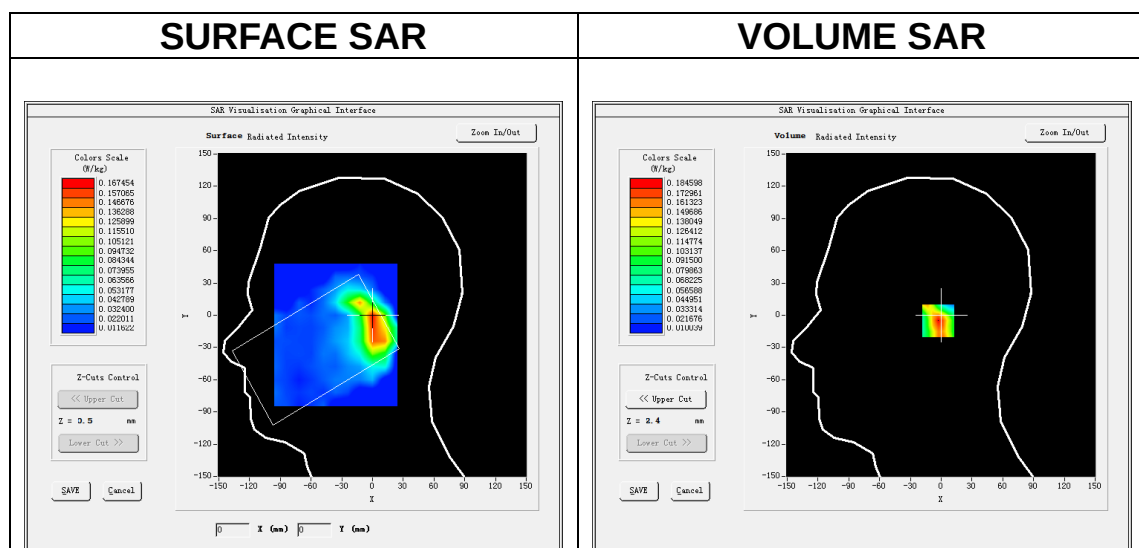

Maximum location: X=2.00, Y=-5.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.078192
SAR 1g (W/Kg)	0.174128

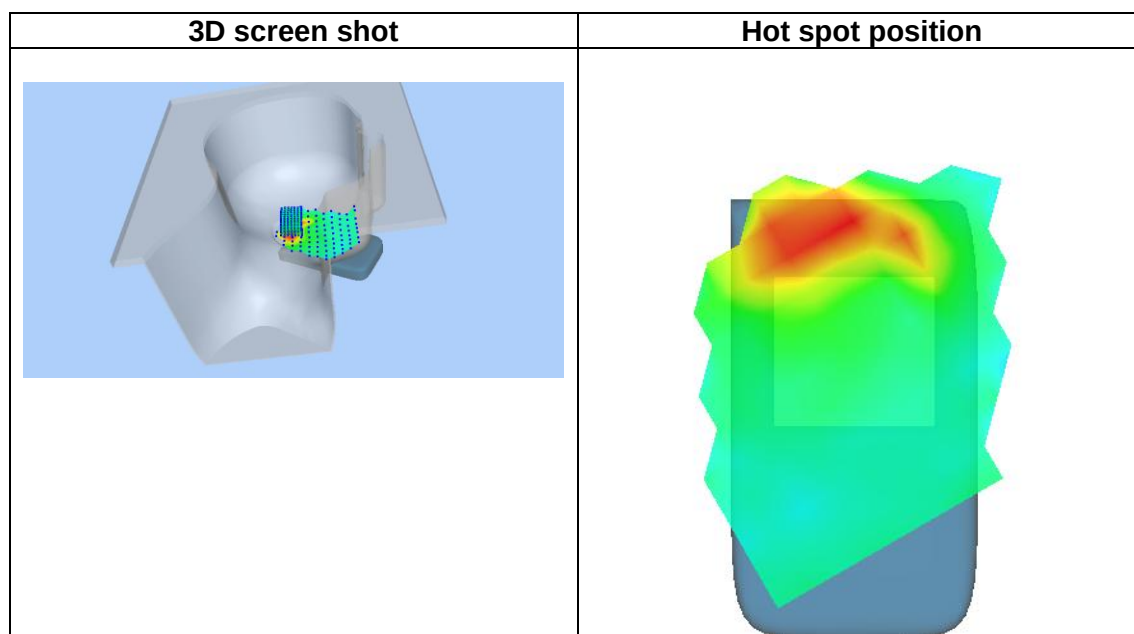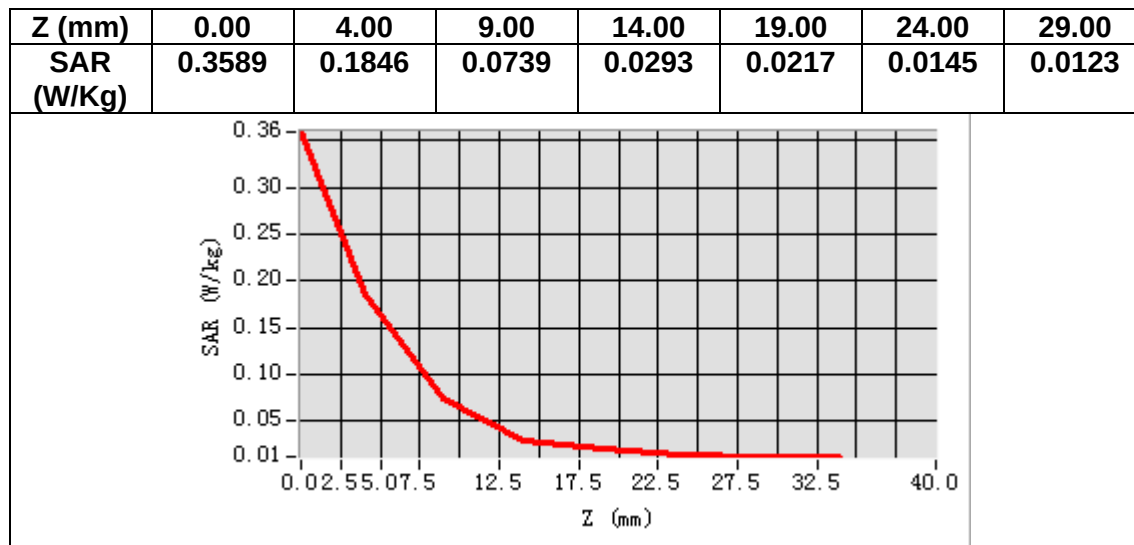

MEASUREMENT 36

Date of measurement: 16/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>SA_n78</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.6)</u>
<u>ConvF</u>	<u>2.20</u>


B. SAR Measurement Results

Frequency (MHz)	3549.990000
Relative permittivity (real part)	37.540264
Relative permittivity (imaginary part)	14.806692
Conductivity (S/m)	2.920200
Variation (%)	-1.320000

SURFACE SAR

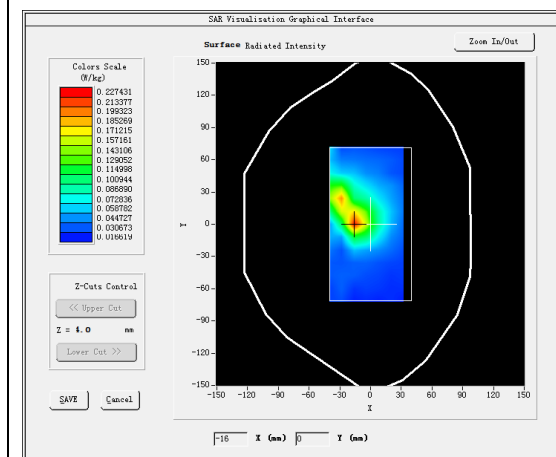



VOLUME SAR

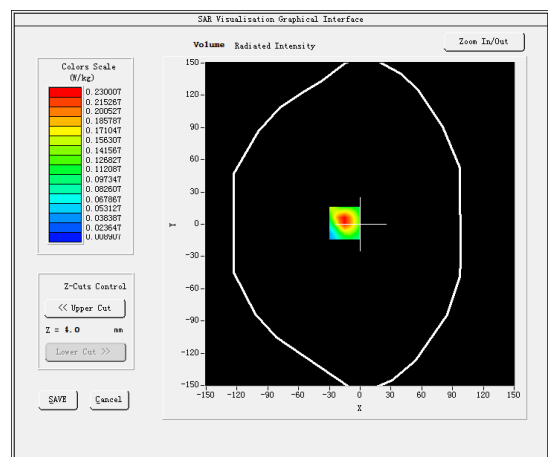

Maximum location: X=-15.00, Y=1.00

SAR Peak: 0.47 W/kg

SAR 10g (W/Kg)	0.095559
SAR 1g (W/Kg)	0.220545

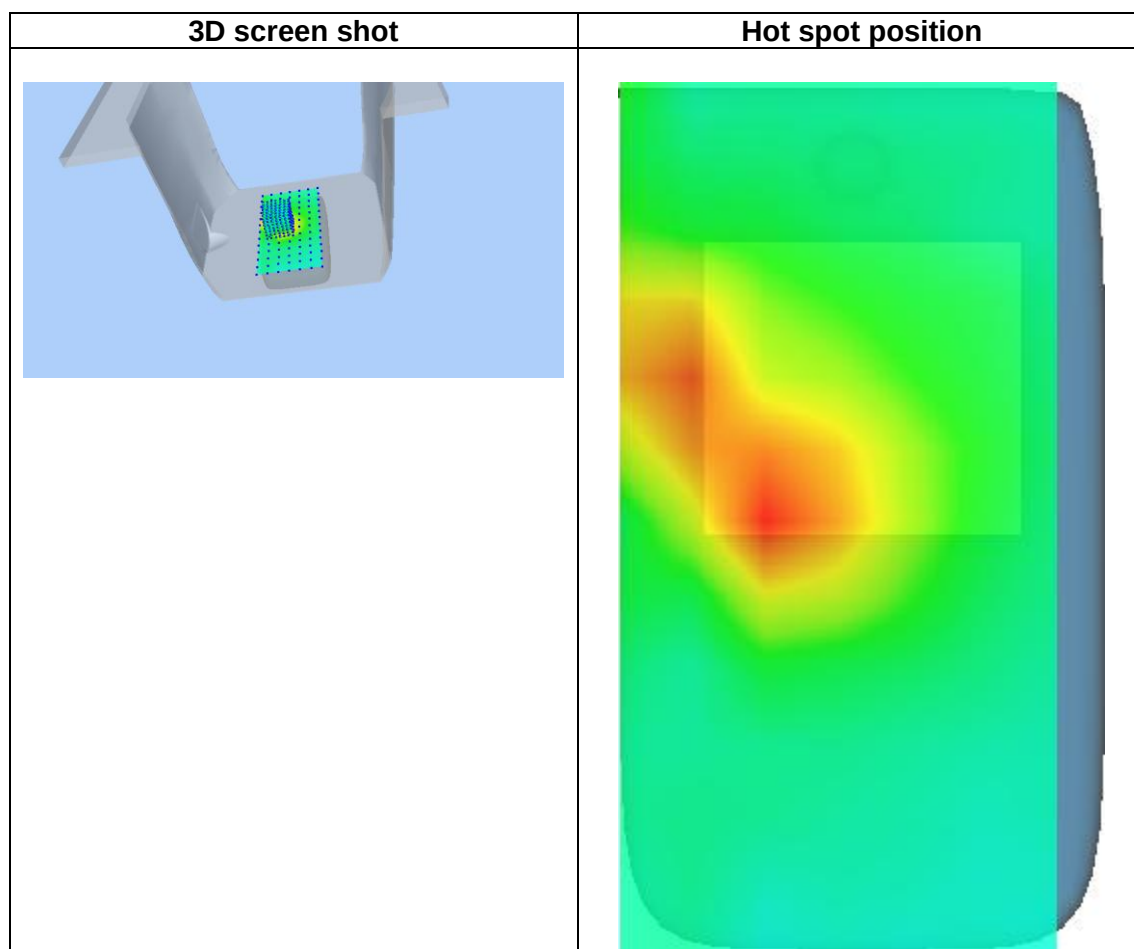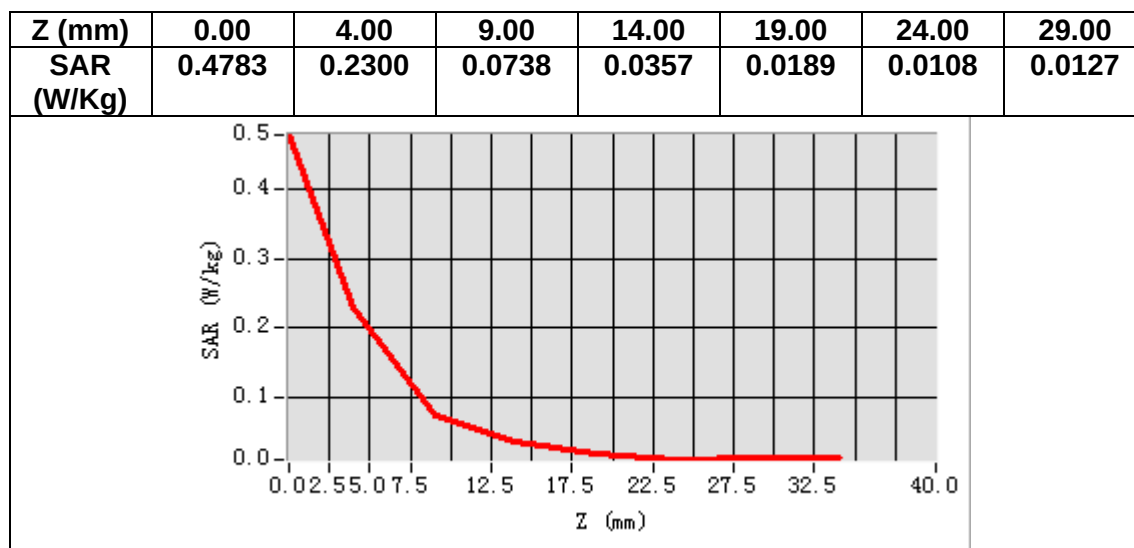

MEASUREMENT 37


Date of measurement: 9/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>SA_n3</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>

B. SAR Measurement Results



Frequency (MHz)	1747.500000
Relative permittivity (real part)	39.284782
Relative permittivity (imaginary part)	13.715797
Conductivity (S/m)	1.331575
Variation (%)	1.830000

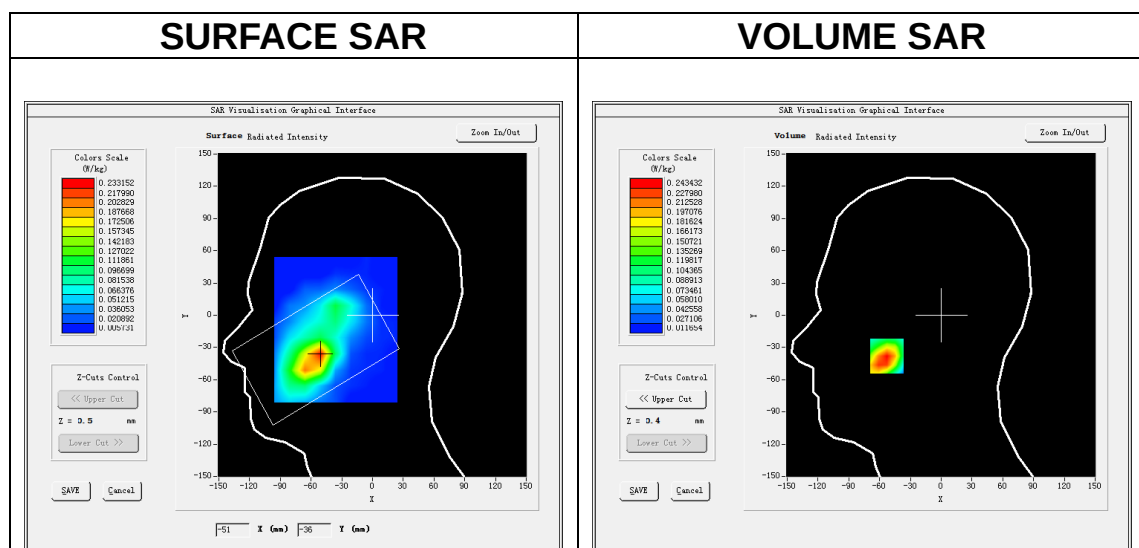

Maximum location: X=-53.00, Y=-38.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.141772
SAR 1g (W/Kg)	0.234306

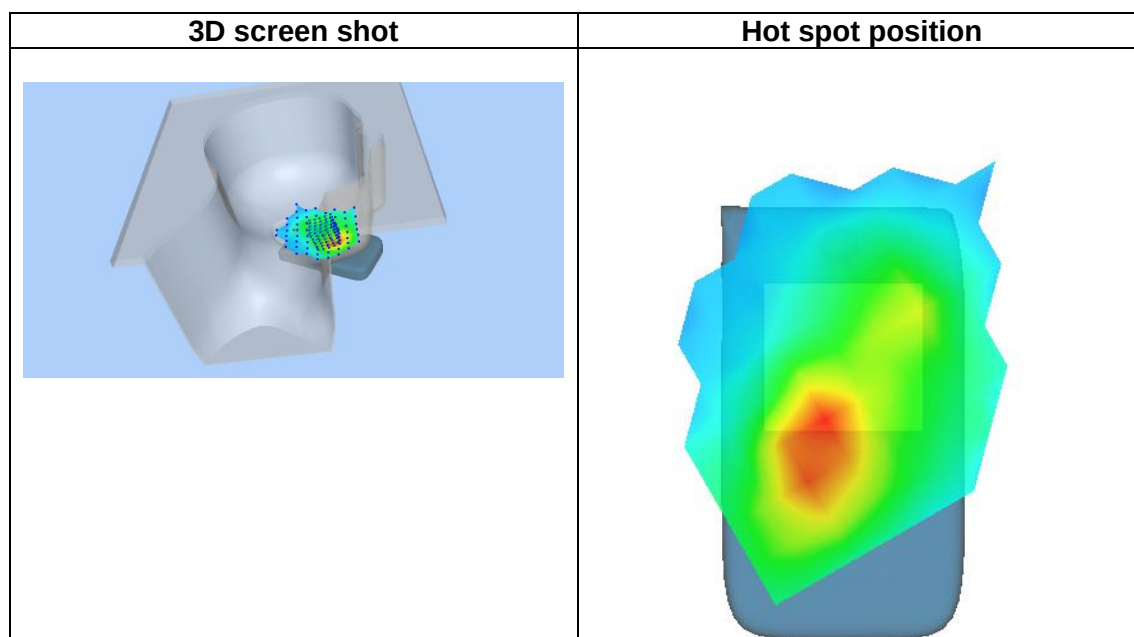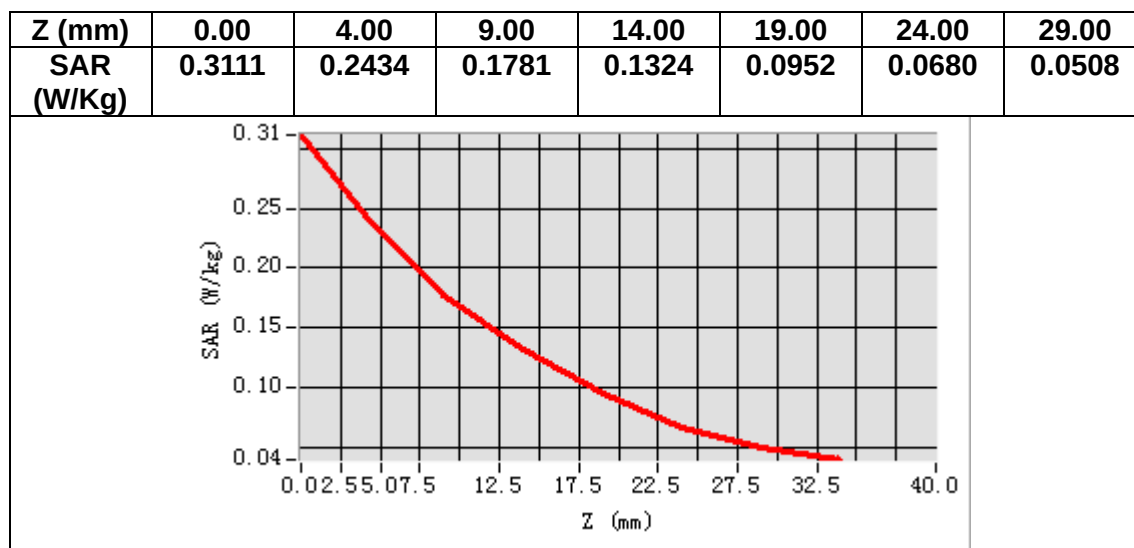

MEASUREMENT 38


Date of measurement: 9/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>SA_n3</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.45</u>

B. SAR Measurement Results



Frequency (MHz)	1747.500000
Relative permittivity (real part)	39.284782
Relative permittivity (imaginary part)	13.715797
Conductivity (S/m)	1.331575
Variation (%)	2.060000

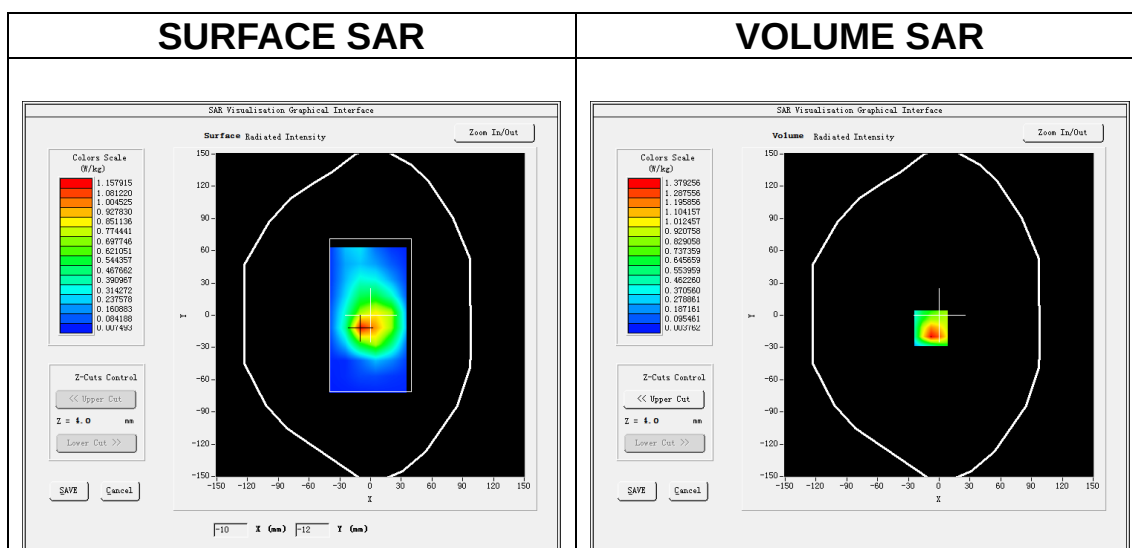

Maximum location: X=-8.00, Y=-12.00

SAR Peak: 3.41 W/kg

SAR 10g (W/Kg)	0.707426
SAR 1g (W/Kg)	1.573245

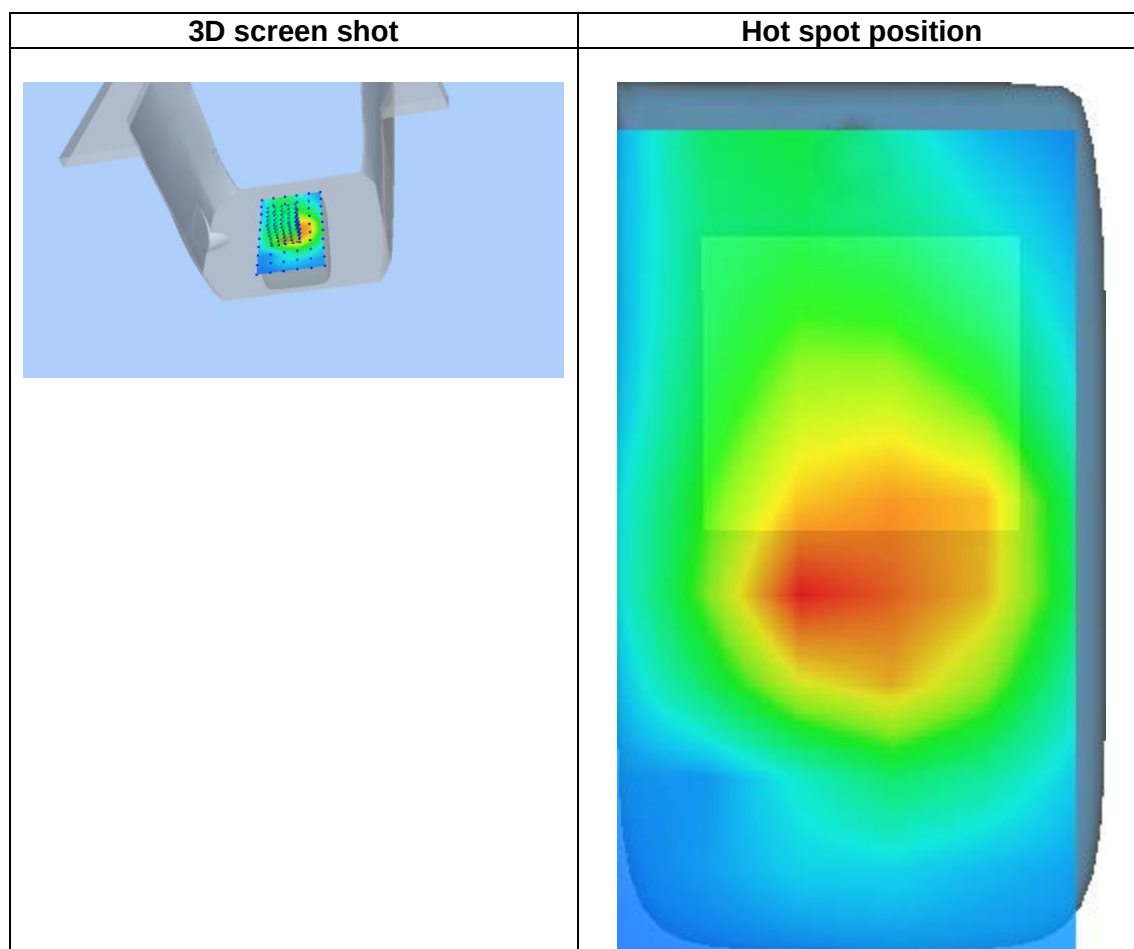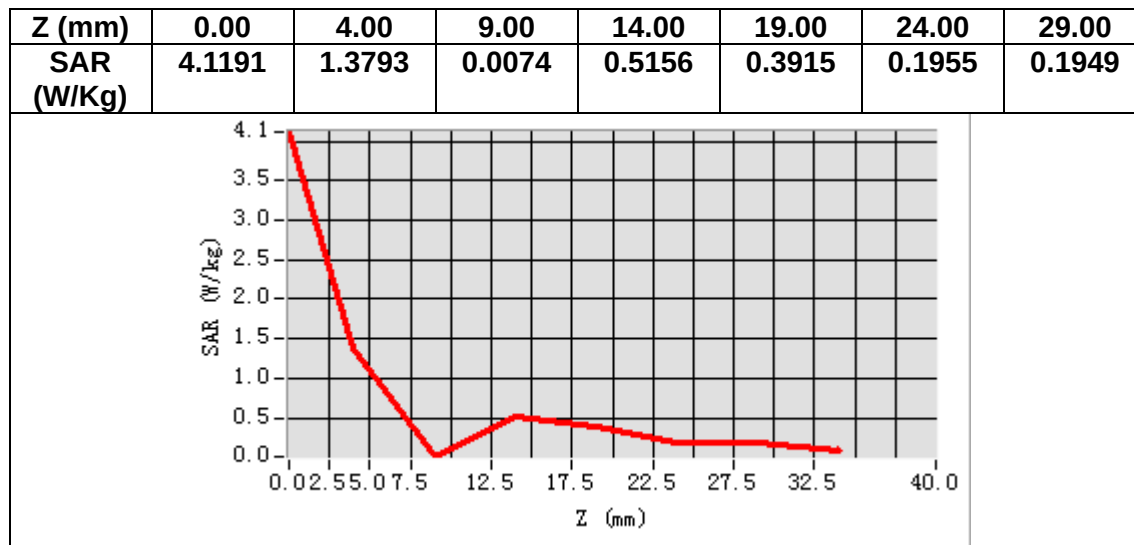

MEASUREMENT 39


Date of measurement: 6/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>SA_n38</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.6)</u>
<u>ConvF</u>	<u>2.65</u>

B. SAR Measurement Results


Frequency (MHz)	2595.000000
Relative permittivity (real part)	38.845840
Relative permittivity (imaginary part)	13.813172
Conductivity (S/m)	1.991399
Variation (%)	1.349998

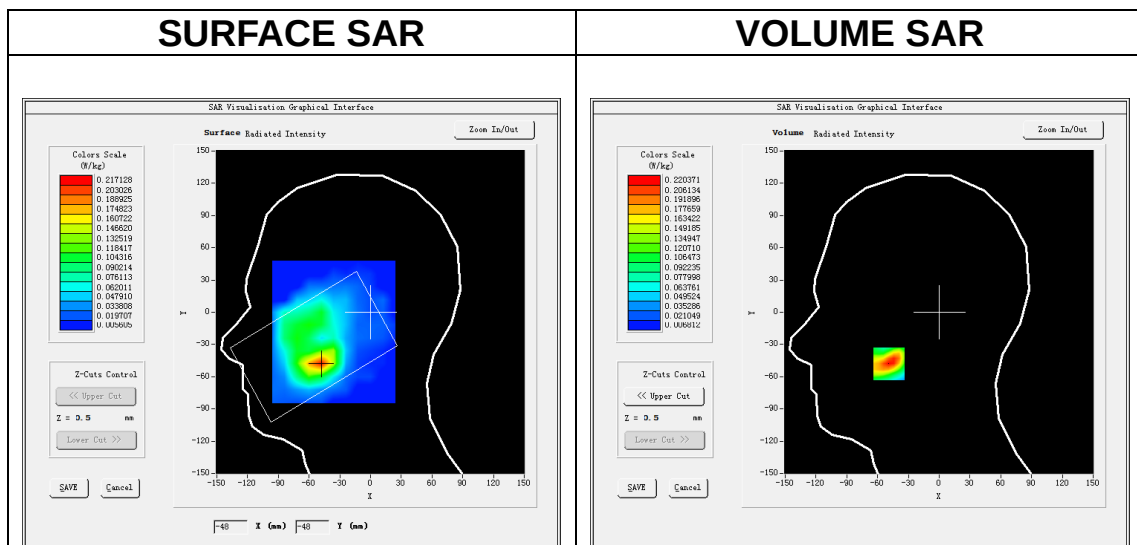


Maximum location: X=-49.00, Y=-48.00

SAR Peak: 0.34 W/kg


SAR 10g (W/Kg)	0.106588
SAR 1g (W/Kg)	0.205801

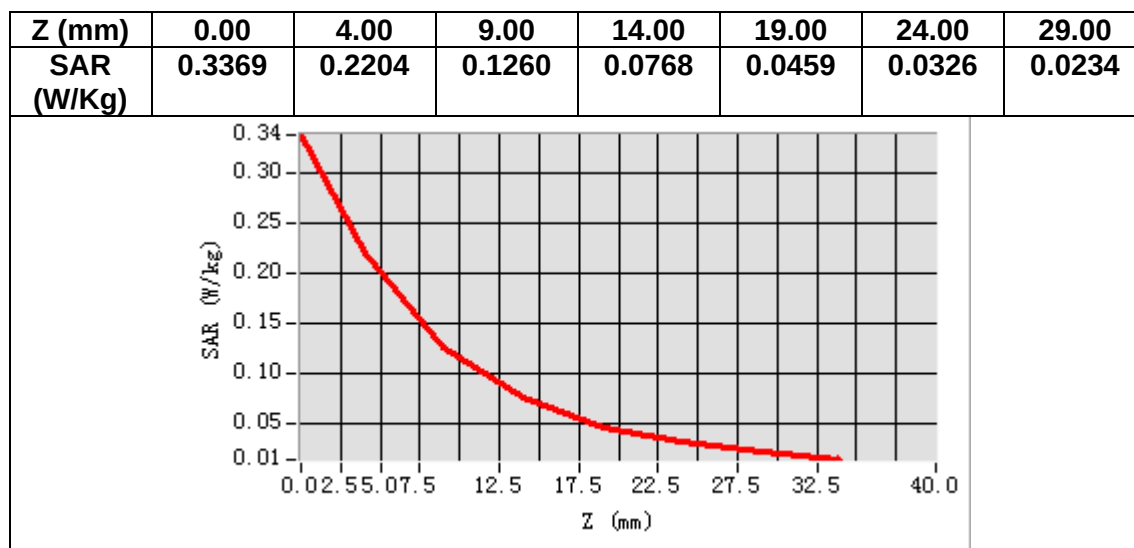

3D screen shot

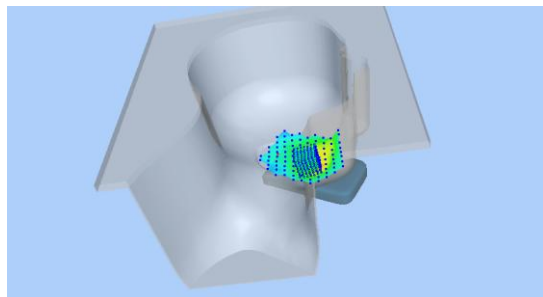

Hot spot position

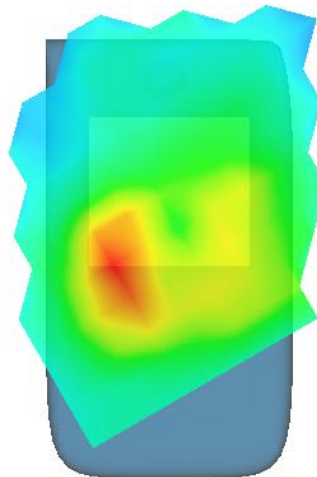

MEASUREMENT 40


Date of measurement: 6/7/2024

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>SA_n38</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.6)</u>
<u>ConvF</u>	<u>2.65</u>

B. SAR Measurement Results


Frequency (MHz)	2595.000000
Relative permittivity (real part)	38.845840
Relative permittivity (imaginary part)	13.813172
Conductivity (S/m)	1.991399
Variation (%)	3.300000

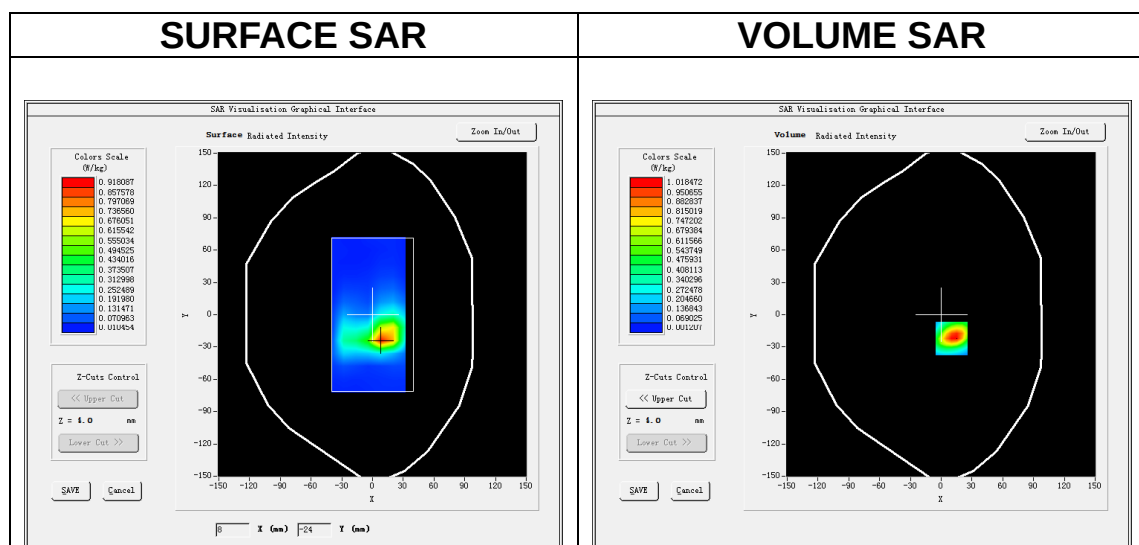


Maximum location: X=10.00, Y=-22.00

SAR Peak: 1.86 W/kg


SAR 10g (W/Kg)	0.415111
SAR 1g (W/Kg)	0.966200

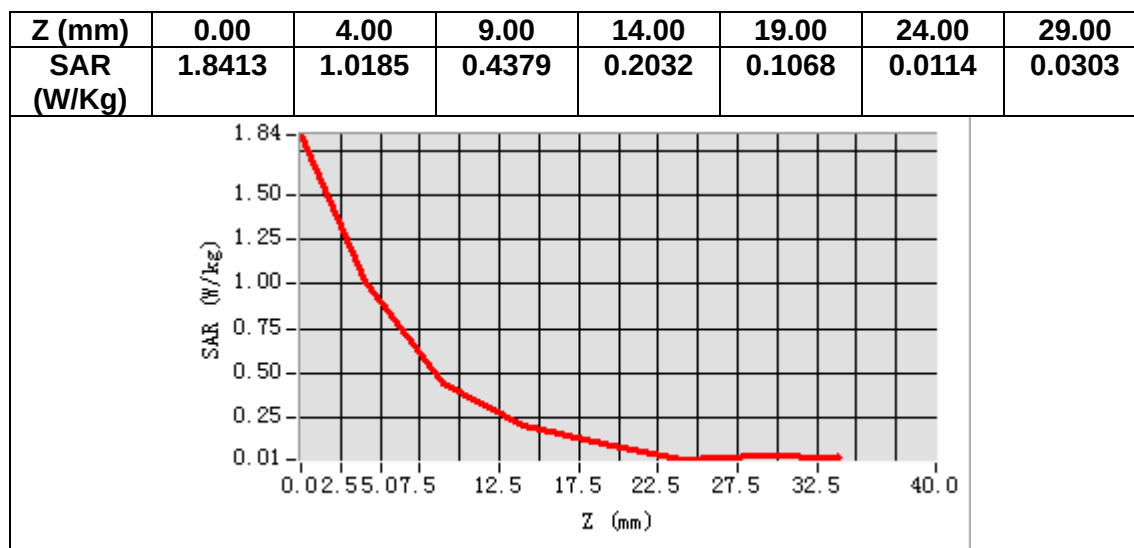

3D screen shot

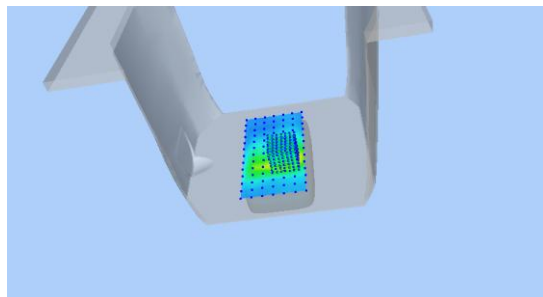

Hot spot position

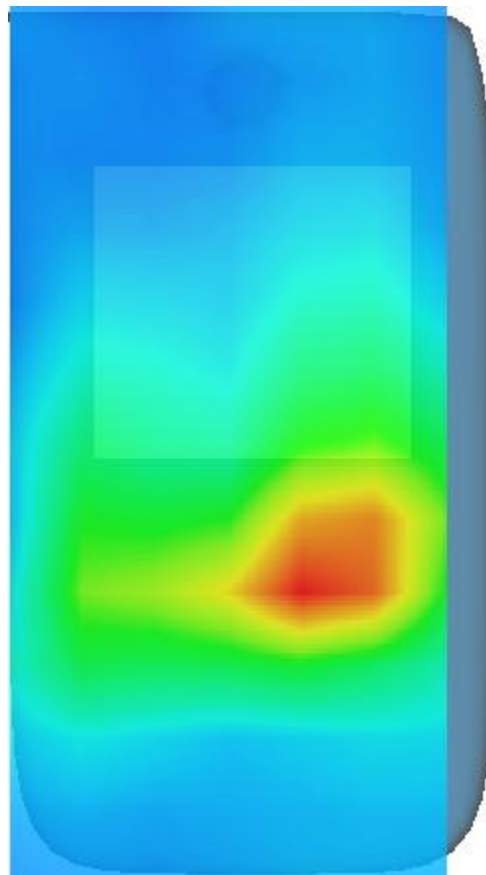

MEASUREMENT 41

Date of measurement: 15/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>SA n8</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.23</u>


B. SAR Measurement Results

Frequency (MHz)	897.500000
Relative permittivity (real part)	41.350384
Relative permittivity (imaginary part)	19.844673
Conductivity (S/m)	0.989477
Variation (%)	1.830000

SURFACE SAR

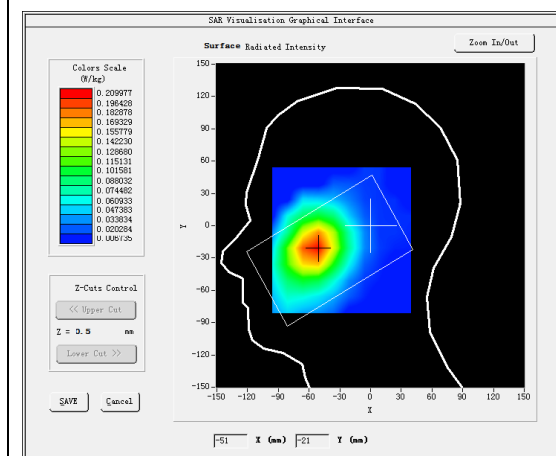


VOLUME SAR

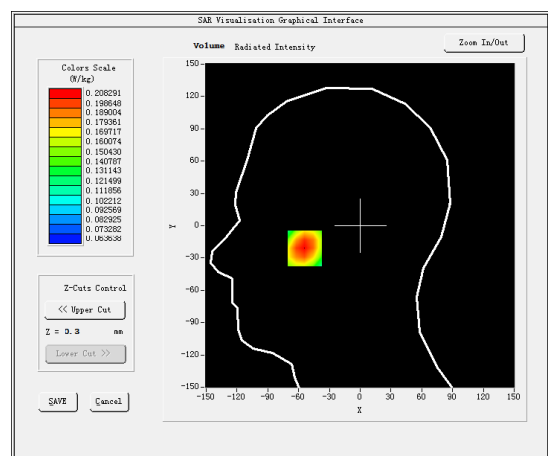


Maximum location: X=-54.00, Y=-21.00

SAR Peak: 0.20 W/kg


SAR 10g (W/Kg)	0.174883
SAR 1g (W/Kg)	0.201424

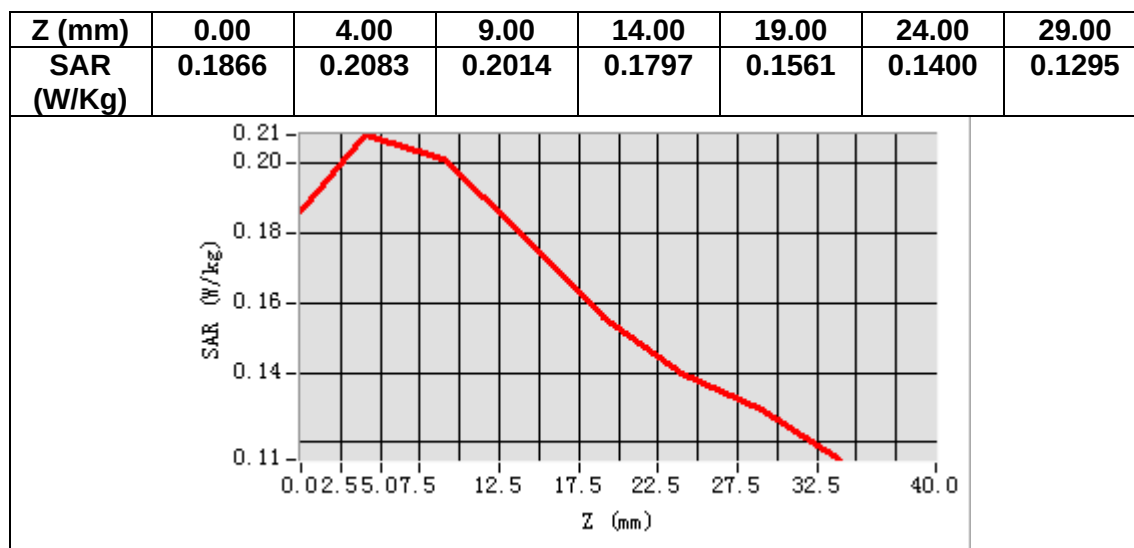

3D screen shot

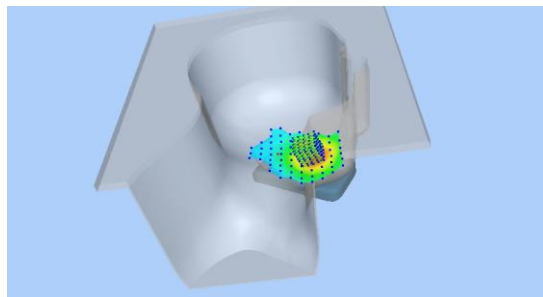

Hot spot position

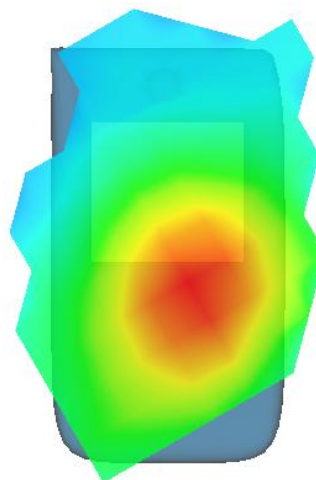

MEASUREMENT 42

Date of measurement: 15/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>SA_n8</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.23</u>


B. SAR Measurement Results

Frequency (MHz)	897.500000
Relative permittivity (real part)	41.350384
Relative permittivity (imaginary part)	19.844673
Conductivity (S/m)	0.989477
Variation (%)	-1.310000

SURFACE SAR

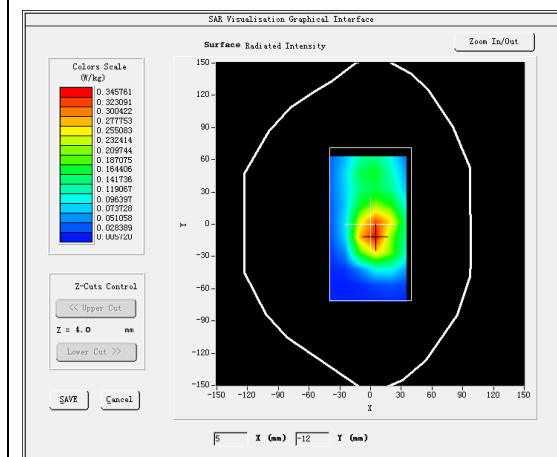



VOLUME SAR

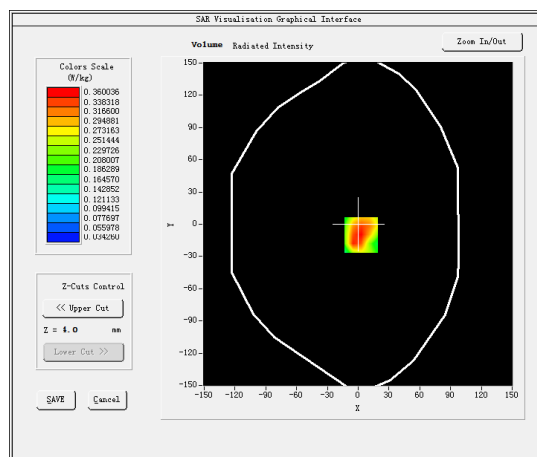

Maximum location: X=3.00, Y=-10.00

SAR Peak: 0.57 W/kg

SAR 10g (W/Kg)	0.238740
SAR 1g (W/Kg)	0.365983

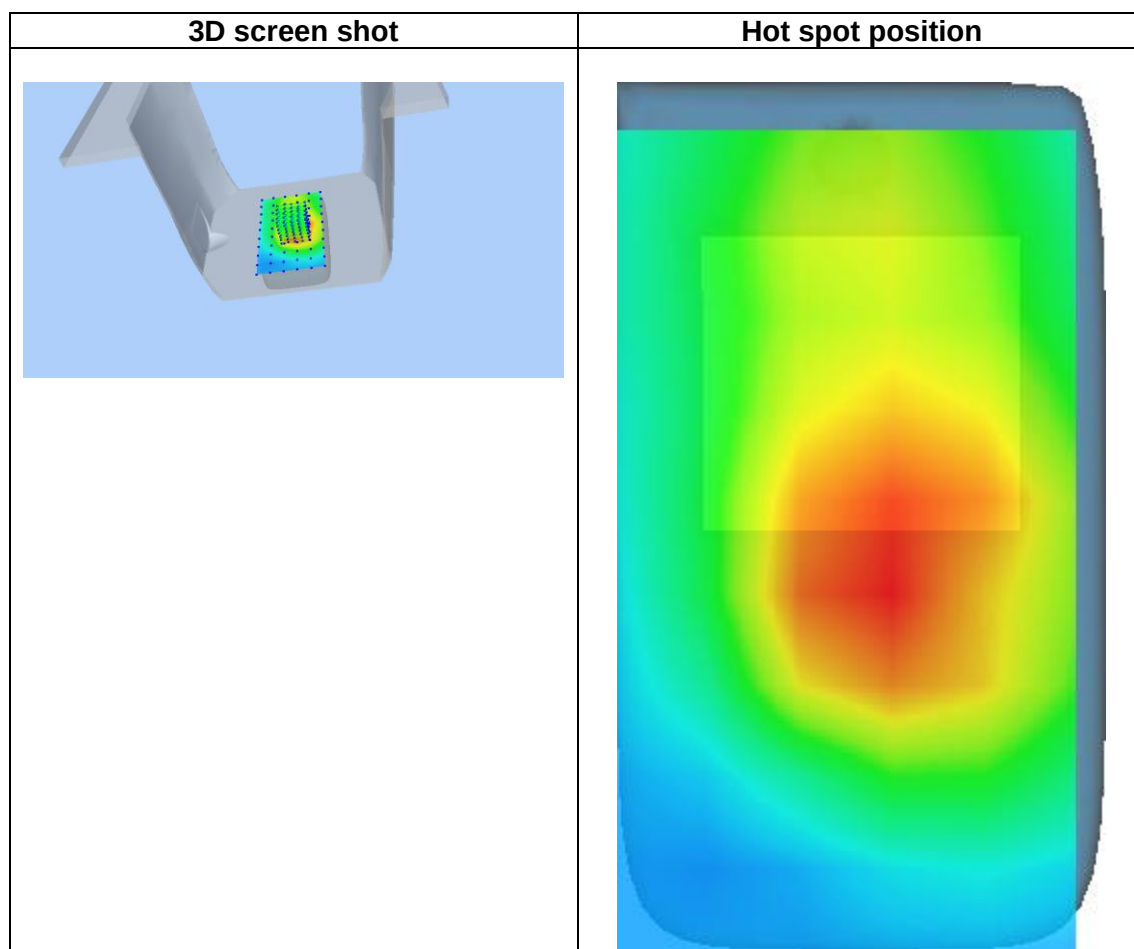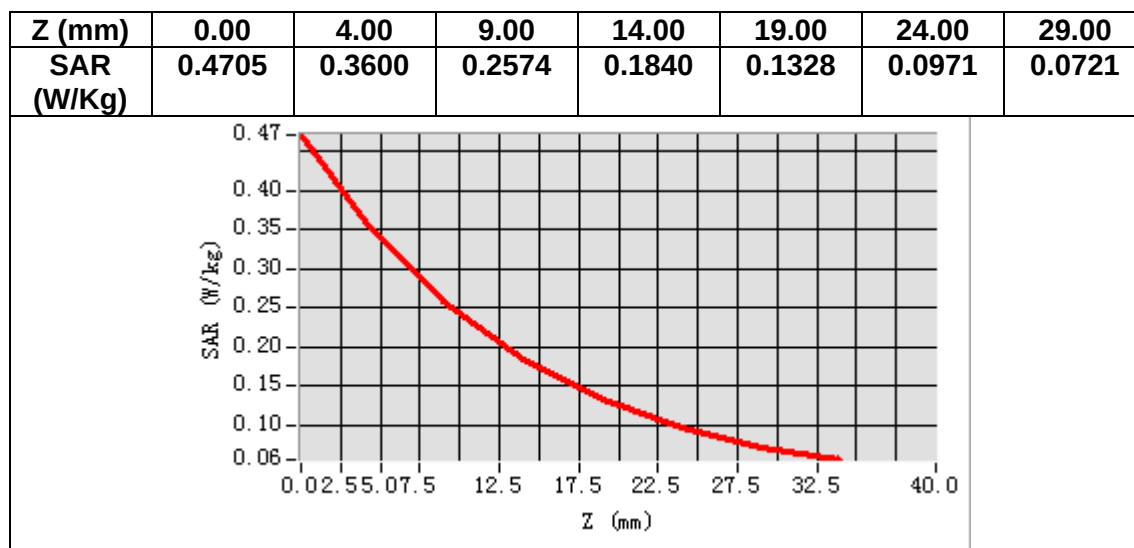

MEASUREMENT 43

Date of measurement: 15/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>SA_n20</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.23</u>


B. SAR Measurement Results

Frequency (MHz)	847.000000
Relative permittivity (real part)	41.981384
Relative permittivity (imaginary part)	19.596924
Conductivity (S/m)	0.922144
Variation (%)	0.040000

SURFACE SAR

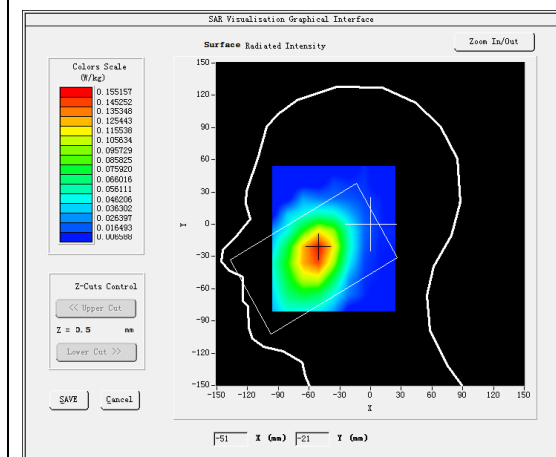



VOLUME SAR

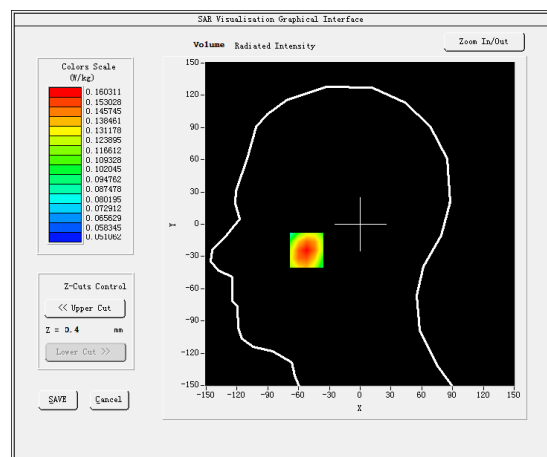

Maximum location: X=-52.00, Y=-24.00

SAR Peak: 0.17 W/kg

SAR 10g (W/Kg)	0.133358
SAR 1g (W/Kg)	0.156200

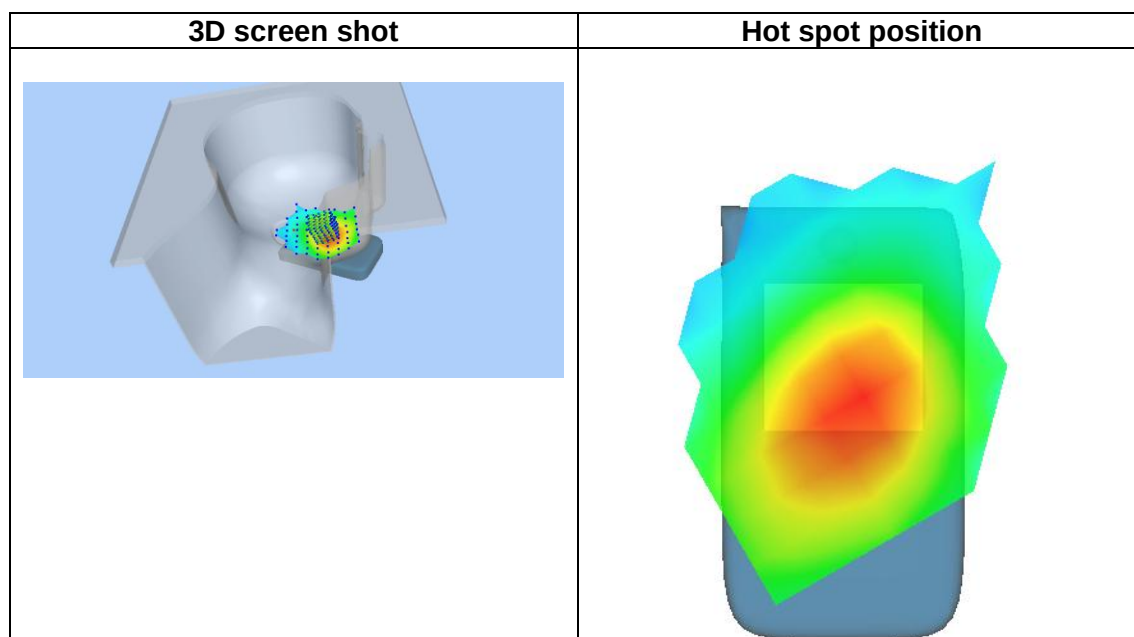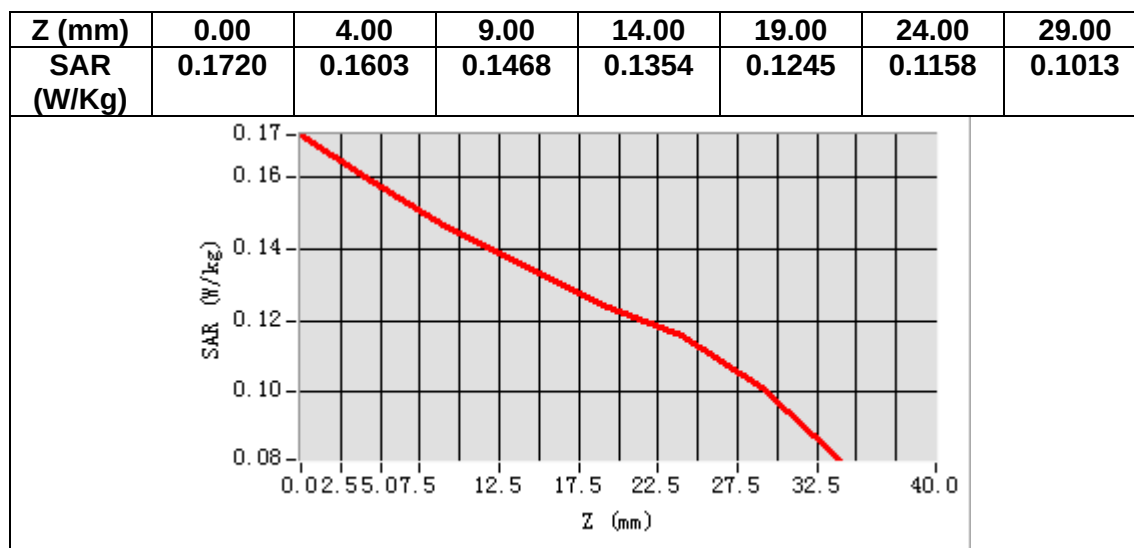

MEASUREMENT 44

Date of measurement: 15/7/2024


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>SA_n20</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>(Crest factor: 1.0)</u>
<u>ConvF</u>	<u>2.23</u>


B. SAR Measurement Results

Frequency (MHz)	847.000000
Relative permittivity (real part)	41.981384
Relative permittivity (imaginary part)	19.596924
Conductivity (S/m)	0.922144
Variation (%)	-1.100000

SURFACE SAR

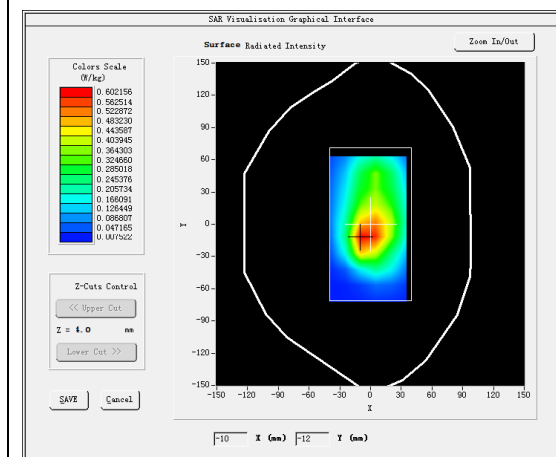


VOLUME SAR

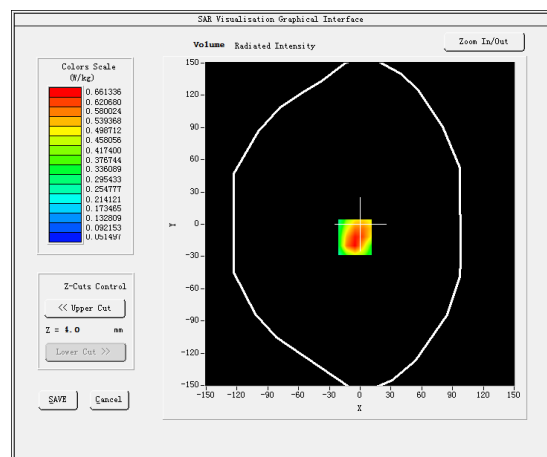


Maximum location: X=-5.00, Y=-12.00

SAR Peak: 1.06 W/kg


SAR 10g (W/Kg)	0.435496
SAR 1g (W/Kg)	0.664772

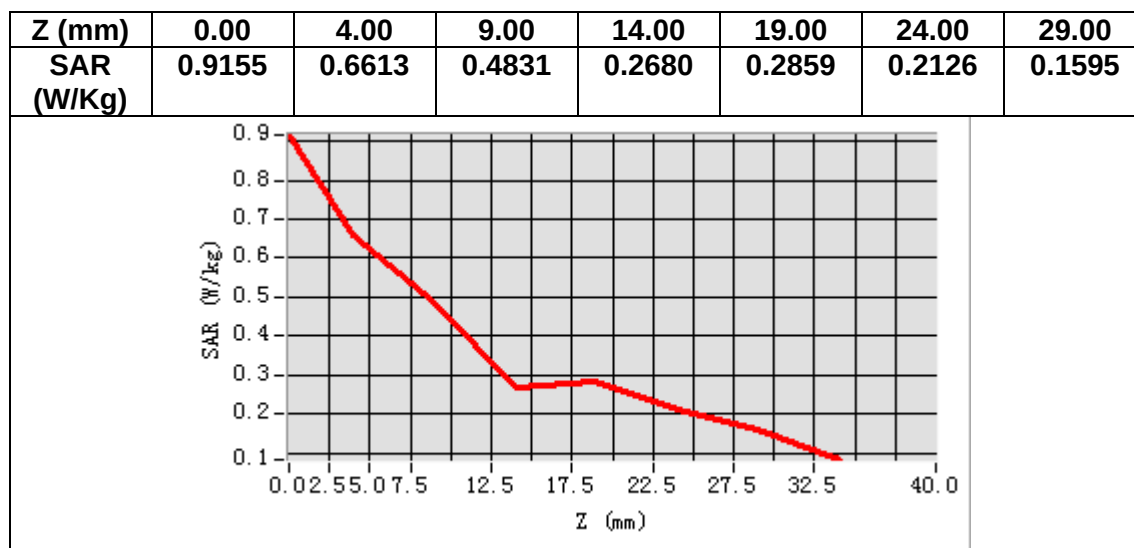

3D screen shot

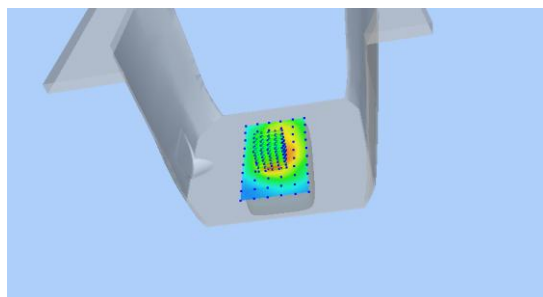

Hot spot position

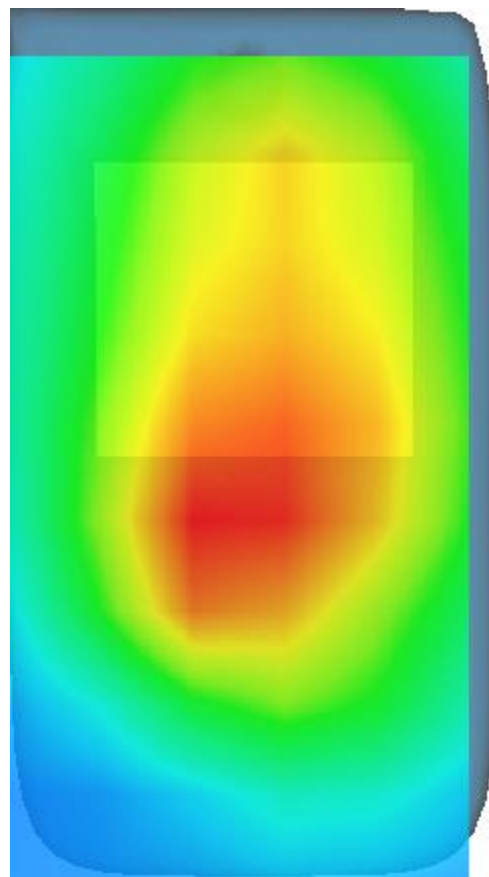

13. Appendix D. Calibration Certificate

Table of contents
E Field Probe - 3423-EPGO-426
750 MHz Dipole - SN 03/15 DIP 0G750-355
900 MHz Dipole - SN 03/15 DIP 0G900-348
1800 MHz Dipole - SN 03/15 DIP 1G800-349
2000 MHz Dipole - SN 03/15 DIP 2G000-351
2300 MHz Dipole - SN 03/16 DIP 2G300-358
2450 MHz Dipole - SN 03/15 DIP 2G450-352
2600 MHz Dipole - SN 03/15 DIP 2G600-356
3500 MHz Dipole - SN 09/12 DIP 3G500-360
3700 MHz Dipole - SN 09/12 DIP 3G700-361
5000-6000 MHz Dipole - SN 13/14 WGA 33



COMOSAR E-Field Probe Calibration Report

Ref : ACR.261.11.23.BES.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: 3423-EPGO-426

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 09/18/2023



Accreditations #2-6789
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Cyrille ONNEE	Measurement Responsible	9/18/2023	
<i>Checked & approved by:</i>	Jérôme Luc	Technical Manager	9/18/2023	
<i>Authorized by:</i>	Yann Toutain	Laboratory Director	9/19/2023	

Yann
Toutain ID

Signature
numérique de
Yann Toutain ID
Date : 2023.09.19
09:08:14 +02'00'

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

<i>Issue</i>	<i>Name</i>	<i>Date</i>	<i>Modifications</i>
A	Cyrille ONNEE	9/18/2023	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Sensitivity	4
3.2	Linearity	5
3.3	Isotropy	5
3.4	Boundary Effect	5
4	Measurement Uncertainty	6
5	Calibration Results	6
5.1	Calibration in air	6
5.2	Calibration in liquid	7
6	Verification Results	8
7	List of Equipment	9



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	3423-EPGO-426
Product Condition (new / used)	New
Frequency Range of Probe	0.15 GHz-7.5GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.261 MΩ Dipole 2: R2=0.213 MΩ Dipole 3: R3=0.233 MΩ

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Probe

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their effect. All calibrations / measurements performed meet the fore-mentioned standards.

3.1 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards for frequency range 600-7500MHz and using the calorimeter cell method (transfer method) as outlined in the standards for frequency 150-450 MHz.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

3.2 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01 W/kg to 100 W/kg.

3.3 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.4 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and $d_{be} + d_{step}$ along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \Delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/\delta})^2}{\delta/2} \quad \text{for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

$SAR_{uncertainty}$	is the uncertainty in percent of the probe boundary effect
d_{be}	is the distance between the surface and the closest <i>zoom-scan</i> measurement point, in millimetre
Δ_{step}	is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
δ	is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14$ mm at 3 GHz;
ΔSAR_{be}	in percent of SAR is the deviation between the measured SAR value, at the distance d_{be} from the boundary, and the analytical SAR value.

The measured worst case boundary effect SARuncertainty[%] for scanning distances larger than 4mm is 1.0% Limit ,2%).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty associated with a SAR probe calibration using the waveguide or calorimetric cell technique depending on the frequency.

The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-11% for the frequency range 150-450MHz.


The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-14% for the frequency range 600-7500MHz.

5 CALIBRATION RESULTS

Ambient condition	
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

5.1 CALIBRATION IN AIR

The following curve represents the measurement in waveguide of the voltage picked up by the probe toward the E-field generated inside the waveguide.

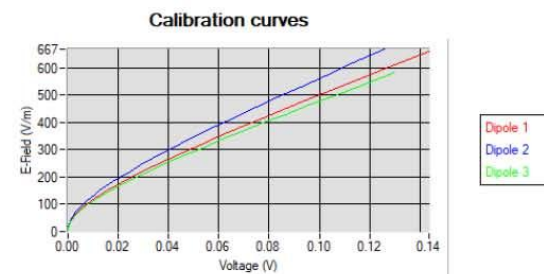

From this curve, the sensitivity in air is calculated using the below formula.

$$E^2 = \sum_{i=1}^3 \frac{V_i (1 + V_i / DCP_i)}{Norm_i}$$

where

Vi=voltage readings on the 3 channels of the probe

DCPi=diode compression point given below for the 3 channels of the probe

Normi=dipole sensitivity given below for the 3 channels of the probe



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

Normx dipole 1 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normy dipole 2 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normz dipole 3 ($\mu\text{V}/(\text{V}/\text{m})^2$)
0.78	0.62	0.85

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
105	108	107

5.2 CALIBRATION IN LIQUID

The calorimeter cell or the waveguide is used to determine the calibration in liquid using the formula below.

$$\text{ConvF} = \frac{E_{\text{liquid}}^2}{E_{\text{air}}^2}$$

The E-field in the liquid is determined from the SAR measurement according to the below formula.

$$E_{\text{liquid}}^2 = \frac{\rho \text{ SAR}}{\sigma}$$

where

σ =the conductivity of the liquid

ρ =the volumetric density of the liquid

SAR=the SAR measured from the formula that depends on the setup used. The SAR formulas are given below

For the calorimeter cell (150-450 MHz), the formula is:

$$\text{SAR} = c \frac{dT}{dt}$$

where

c =the specific heat for the liquid

dT/dt =the temperature rises over the time

For the waveguide setup (600-75000 MHz), the formula is:

$$\text{SAR} = \frac{4P_W}{ab\delta} e^{-\frac{2z}{\delta}}$$

where

a =the larger cross-sectional of the waveguide

b =the smaller cross-sectional of the waveguide

δ =the skin depth for the liquid in the waveguide

P_W =the power delivered to the liquid





COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

The below table summarize the ConvF for the calibrated liquid. The curves give examples for the measured SAR depending on the voltage in some liquid.


Liquid	Frequency (MHz*)	ConvF
HL750	750	2.37
HL850	835	2.32
HL900	900	2.23
HL1800	1800	2.45
HL1900	1900	2.63
HL2000	2000	2.83
HL2300	2300	2.81
HL2450	2450	2.85
HL2600	2600	2.65
HL3300	3300	2.21
HL3500	3500	2.20
HL3700	3700	2.11
HL3900	3900	2.40
HL4200	4200	2.40
HL4600	4600	2.33
HL4900	4900	2.37
HL5200	5200	2.07
HL5400	5400	2.11
HL5600	5600	2.20
HL5800	5800	2.04

(*) Frequency validity is +/-50MHz below 600MHz, +/-100MHz from 600MHz to 6GHz and +/-700MHz above 6GHz

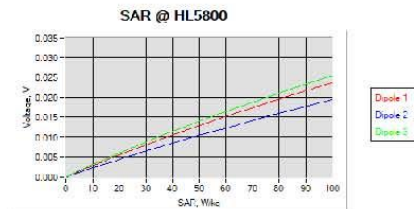


6 VERIFICATION RESULTS

The figures below represent the measured linearity and axial isotropy for this probe. The probe specification is +/-0.2 dB for linearity and +/-0.15 dB for axial isotropy.

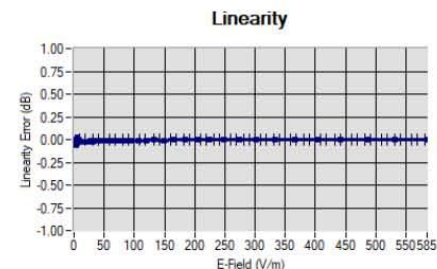

Linearity: +/-1.42% (+/-0.06dB)



Isotropy: +/-0.21% (+/-0.01dB)



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

7 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
CALIPROBE Test Bench	Version 2	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	08/2021	08/2024
Network Analyzer	Agilent 8753ES	MY40003210	10/2019	10/2023
Network Analyzer – Calibration kit	HP 85033D	3423A08186	06/2021	06/2027
Network Analyzer – Calibration kit	Rohde & Schwarz ZV-Z235	101223	07/2022	07/2025
Multimeter	Keithley 2000	4013982	02/2023	02/2026
Signal Generator	Rohde & Schwarz SMB	106589	03/2022	03/2025
Amplifier	MVG	MODU-023-C-0002	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	06/2021	06/2024
Power Meter	Keysight U2000A	SN: MY62340002	10/2022	10/2025
Directional Coupler	Krytar 158020	131467	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Fluoroptic Thermometer	LumaSense Luxtron 812	94264	09/2022	09/2025
Coaxial cell	MVG	SN 32/16 COAXCELL_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG2_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_0G600_1	Validated. No cal required.	Validated. No cal required.

Page: 9/10

Template_ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR Probe vL

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

Waveguide	MVG	SN 32/16 WG4_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_0G900_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG6_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_1G500_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG8_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_1G800B_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_1G800H_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG10_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_3G500_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG12_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_5G000_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG14_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_7G000_1	Validated. No cal required.	Validated. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44225320	06/2021	06/2024



SAR Reference Dipole Calibration Report

Ref : ACR.53.23.24.BES.A

**SHENZHEN NTEK TESTING TECHNOLOGY
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR REFERENCE DIPOLE**

FREQUENCY: 750 MHZ

SERIAL NO.: SN 03/15DIP0G750-355

Calibrated at MVG

Z.I. de la pointe du diable

**Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE**

Calibration date: 02/21/2024



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

REF : ACR.53.23.24.BES.A

	Name	Function	Date	Signature
Prepared by :	Pedro Ruiz	Measurement Responsible	2/22/2024	
Checked & approved by:	Jérôme Luc	Technical Manager	2/22/2024	
Authorized by:	Yann Toutain	Laboratory Director	2/27/2024	

Yann
Toutain ID

Signature
numérique de
Yann Toutain ID
Date : 2024.02.27
08:54:37 +01'00'

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Pedro Ruiz	2/22/2024	Initial release



SAR REFERENCE DIPOLE CALIBRATION REPORT

REF : ACR.53.23.24.BES.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Mechanical Requirements	5
4.2	S11 parameter Requirements	5
4.3	SAR Requirements	5
5	Measurement Uncertainty	5
5.1	Mechanical dimensions	5
5.2	S11 Parameter	5
5.3	SAR	5
6	Calibration Results.....	6
6.1	Mechanical Dimensions	6
6.2	S11 parameter	6
6.3	SAR	6
7	List of Equipment	8



SAR REFERENCE DIPOLE CALIBRATION REPORT

REF : ACR.53.23.24.BES.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 750 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID750
Serial Number	SN 03/15DIP0G 750-355
Product Condition (new / used)	Used

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



4 MEASUREMENT METHOD

4.1 MECHANICAL REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards specify the mechanical components and dimensions of the validation dipoles, with the dimension's frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness. A direct method is used with a ISO17025 calibrated caliper.

4.2 S11 PARAMETER REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a S11 of -20 dB or better. The S11 measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. A direct method is used with a network analyser and its calibration kit, both with a valid ISO17025 calibration.

4.3 SAR REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore-mentioned standards.

5 MEASUREMENT UNCERTAINTY

5.1 MECHANICAL DIMENSIONS

For the measurement in the range 0-300mm, the estimated expanded uncertainty ($k=2$) in calibration for the dimension measurement in mm is ± 0.20 mm with respect to measurement conditions.

For the measurement in the range 300-450mm, the estimated expanded uncertainty ($k=2$) in calibration for the dimension measurement in mm is ± 0.44 mm with respect to measurement conditions.

5.2 S11 PARAMETER

The estimated expanded uncertainty ($k=2$) in calibration for the S11 parameter in linear is ± 0.08 with respect to measurement conditions.

5.3 SAR

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty for validation measurements.

The estimated expanded uncertainty ($k=2$) in calibration for the 1g and 10g SAR measurement in W/kg is $\pm 19\%$ with respect to measurement conditions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

REF : ACR.53.23.24.BES.A


6 CALIBRATION RESULTS

6.1 MECHANICAL DIMENSIONS

L mm		h mm		d mm	
Measured	Required	Measured	Required	Measured	Required
-	176.00 +/- 2%	-	100.00 +/- 2%	-	6.35 +/- 2%

6.2 S11 PARAMETER

6.2.1 S11 parameter in Head Liquid

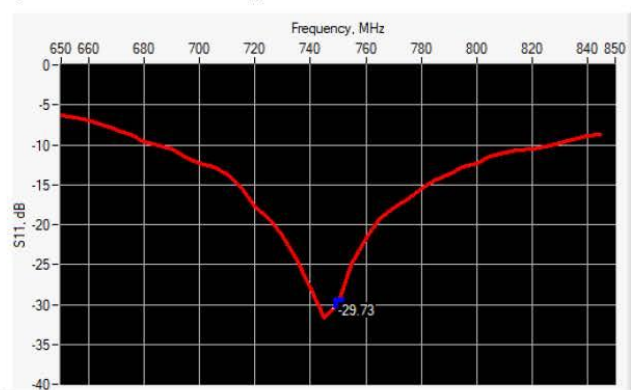

Frequency (MHz)	S11 parameter (dB)	Requirement (dB)	Impedance
750	-29.73	-20	$52.5\Omega + 2.2j\Omega$

6.3 SAR

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

6.3.1 SAR with Head Liquid

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.




SAR REFERENCE DIPOLE CALIBRATION REPORT

REF : ACR.53.23.24.BES.A

Software	OPENSAR V5
Phantom	SN 13/09 SAM68
Probe	3523-EPGO-429
Liquid	Head Liquid Values: $\epsilon_{ps}' : 45.0$ $\sigma : 0.87$
Distance between dipole center and liquid	15.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=8mm/dy=8mm/dz=5mm$
Frequency	750 MHz
Input power	20 dBm
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

Frequency	1g SAR (W/kg)			10g SAR (W/kg)		
	Measured	Measured normalized to 1W	Target normalized to 1W	Measured	Measured normalized to 1W	Target normalized to 1W
750 MHz	0.86	8.60	8.49	0.58	5.78	5.55

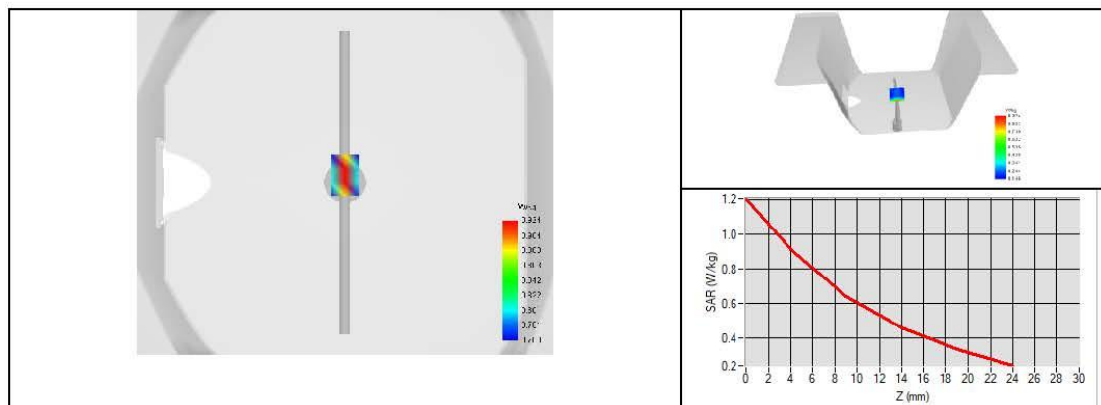



SAR REFERENCE DIPOLE CALIBRATION REPORT

REF : ACR.53.23.24.BES.A

7 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN 13/09 SAM68	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	08/2021	08/2024
Network Analyzer – Calibration kit	Rohde & Schwarz ZV-Z235	101223	07/2022	07/2025
Calipers	Mitutoyo	SN 0009732	11/2022	11/2025
Reference Probe	MVG	3523-EPGO-429	11/2023	11/2024
Multimeter	Keithley 2000	4013982	02/2023	02/2026
Signal Generator	Rohde & Schwarz SMB	106589	03/2022	03/2025
Amplifier	MVG	MODU-023-C-0002	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	06/2021	06/2024
Power Meter	Keysight U2000A	SN: MY62340002	10/2022	10/2025
Directional Coupler	Krytar 158020	131467	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44225320	06/2021	06/2024



SAR Reference Dipole Calibration Report

Ref : ACR.53.25.24.BES.A

**SHENZHEN NTEK TESTING TECHNOLOGY
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR REFERENCE DIPOLE**

FREQUENCY: 900 MHZ

SERIAL NO.: SN 03/15DIP0G900-348

Calibrated at MVG

Z.I. de la pointe du diable

**Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE**

Calibration date: 21/02/2024



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref : ACR.53.25.24.BES.A

	Name	Function	Date	Signature
Prepared by :	Pedro Ruiz	Measurement Responsible	2/22/2024	
Checked & approved by:	Jérôme Luc	Technical Manager	2/22/2024	
Authorized by:	Yann Toutain	Laboratory Director	2/27/2024	

Yann
Toutain ID

Signature
numérique de
Yann Toutain ID
Date : 2024.02.27
08:55:46 +01'00'

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Pedro Ruiz	2/22/2024	Initial release



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.25.24.BES.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Mechanical Requirements	5
4.2	S11 parameter Requirements	5
4.3	SAR Requirements	5
5	Measurement Uncertainty	5
5.1	Mechanical dimensions	5
5.2	S11 Parameter	5
5.3	SAR	5
6	Calibration Results.....	6
6.1	Mechanical Dimensions	6
6.2	S11 parameter	6
6.3	SAR	6
7	List of Equipment	8



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.25.24.BES.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 900 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID900
Serial Number	SN 03/15DIP0G900-348
Product Condition (new / used)	Used

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



4 MEASUREMENT METHOD

4.1 MECHANICAL REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards specify the mechanical components and dimensions of the validation dipoles, with the dimension's frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness. A direct method is used with a ISO17025 calibrated caliper.

4.2 S11 PARAMETER REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a S11 of -20 dB or better. The S11 measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. A direct method is used with a network analyser and its calibration kit, both with a valid ISO17025 calibration.

4.3 SAR REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore-mentioned standards.

5 MEASUREMENT UNCERTAINTY

5.1 MECHANICAL DIMENSIONS

For the measurement in the range 0-300mm, the estimated expanded uncertainty ($k=2$) in calibration for the dimension measurement in mm is ± 0.20 mm with respect to measurement conditions.

For the measurement in the range 300-450mm, the estimated expanded uncertainty ($k=2$) in calibration for the dimension measurement in mm is ± 0.44 mm with respect to measurement conditions.

5.2 S11 PARAMETER

The estimated expanded uncertainty ($k=2$) in calibration for the S11 parameter in linear is ± 0.08 with respect to measurement conditions.

5.3 SAR

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty for validation measurements.

The estimated expanded uncertainty ($k=2$) in calibration for the 1g and 10g SAR measurement in W/kg is $\pm 19\%$ with respect to measurement conditions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.25.24.BES.A


6 CALIBRATION RESULTS

6.1 MECHANICAL DIMENSIONS

L mm		h mm		d mm	
Measured	Required	Measured	Required	Measured	Required
-	149.00 +/- 2%	-	83.30 +/- 2%	-	3.60 +/- 2%

6.2 S11 PARAMETER

6.2.1 S11 parameter in Head Liquid

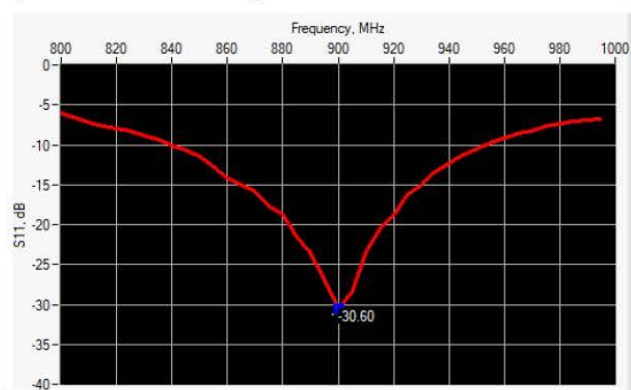

Frequency (MHz)	S11 parameter (dB)	Requirement (dB)	Impedance
900	-30.60	-20	$51.5\Omega + 2.6j\Omega$

6.3 SAR

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

6.3.1 SAR with Head Liquid

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.




SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref : ACR.53.25.24.BES.A

Software	OPENSAR V5
Phantom	SN 13/09 SAM68
Probe	3523-EPGO-429
Liquid	Head Liquid Values: $\epsilon_{ps}' : 44.6$ $\sigma : 0.92$
Distance between dipole center and liquid	15.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=8mm/dy=8mm/dz=5mm$
Frequency	900 MHz
Input power	20 dBm
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

Frequency	1g SAR (W/kg)			10g SAR (W/kg)		
	Measured	Measured normalized to 1W	Target normalized to 1W	Measured	Measured normalized to 1W	Target normalized to 1W
900 MHz	1.06	10.63	10.90	0.70	7.01	6.99

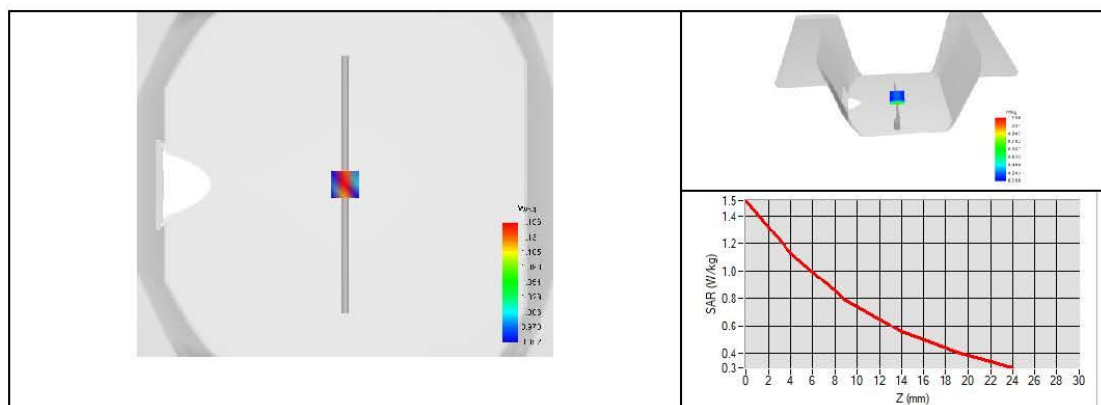



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.25.24.BES.A

7 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN 13/09 SAM68	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	08/2021	08/2024
Network Analyzer – Calibration kit	Rohde & Schwarz ZV-Z235	101223	07/2022	07/2025
Calipers	Mitutoyo	SN 0009732	11/2022	11/2025
Reference Probe	MVG	3523-EPGO-429	11/2023	11/2024
Multimeter	Keithley 2000	4013982	02/2023	02/2026
Signal Generator	Rohde & Schwarz SMB	106589	03/2022	03/2025
Amplifier	MVG	MODU-023-C-0002	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	06/2021	06/2024
Power Meter	Keysight U2000A	SN: MY62340002	10/2022	10/2025
Directional Coupler	Krytar 158020	131467	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44225320	06/2021	06/2024



SAR Reference Dipole Calibration Report

Ref : ACR.53.26.24.BES.A

**SHENZHEN NTEK TESTING TECHNOLOGY
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR REFERENCE DIPOLE**

FREQUENCY: 1800 MHZ

SERIAL NO.: SN 03/15DIP1G800-349

Calibrated at MVG

Z.I. de la pointe du diable

**Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE**

Calibration date: 02/21/2024



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref : ACR.53.26.24.BES.A

	Name	Function	Date	Signature
Prepared by :	Pedro Ruiz	Measurement Responsible	2/22/2024	
Checked & approved by:	Jérôme Luc	Technical Manager	2/22/2024	
Authorized by:	Yann Toutain	Laboratory Director	2/27/2024	

Yann
Toutain IDSignature
numérique de
Yann Toutain ID
Date : 2024.02.27
08:56:12 +01'00'

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Pedro Ruiz	2/22/2024	Initial release



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.26.24.BES.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Mechanical Requirements	5
4.2	S11 parameter Requirements	5
4.3	SAR Requirements	5
5	Measurement Uncertainty.....	5
5.1	Mechanical dimensions	5
5.2	S11 Parameter	5
5.3	SAR	5
6	Calibration Results.....	6
6.1	Mechanical Dimensions	6
6.2	S11 parameter	6
6.3	SAR	6
7	List of Equipment	8



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.26.24.BES.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 1800 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID1800
Serial Number	SN 03/15DIP1G800-349
Product Condition (new / used)	Used

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



4 MEASUREMENT METHOD

4.1 MECHANICAL REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards specify the mechanical components and dimensions of the validation dipoles, with the dimension's frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness. A direct method is used with a ISO17025 calibrated caliper.

4.2 S11 PARAMETER REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a S11 of -20 dB or better. The S11 measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. A direct method is used with a network analyser and its calibration kit, both with a valid ISO17025 calibration.

4.3 SAR REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore-mentioned standards.

5 MEASUREMENT UNCERTAINTY

5.1 MECHANICAL DIMENSIONS

For the measurement in the range 0-300mm, the estimated expanded uncertainty ($k=2$) in calibration for the dimension measurement in mm is ± 0.20 mm with respect to measurement conditions.

For the measurement in the range 300-450mm, the estimated expanded uncertainty ($k=2$) in calibration for the dimension measurement in mm is ± 0.44 mm with respect to measurement conditions.

5.2 S11 PARAMETER

The estimated expanded uncertainty ($k=2$) in calibration for the S11 parameter in linear is ± 0.08 with respect to measurement conditions.

5.3 SAR

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty for validation measurements.

The estimated expanded uncertainty ($k=2$) in calibration for the 1g and 10g SAR measurement in W/kg is $\pm 19\%$ with respect to measurement conditions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.26.24.BES.A


6 CALIBRATION RESULTS

6.1 MECHANICAL DIMENSIONS

L mm		h mm		d mm	
Measured	Required	Measured	Required	Measured	Required
-	72.00 +/- 2%	-	41.70 +/- 2%	-	3.60 +/- 2%

6.2 S11 PARAMETER

6.2.1 S11 parameter in Head Liquid

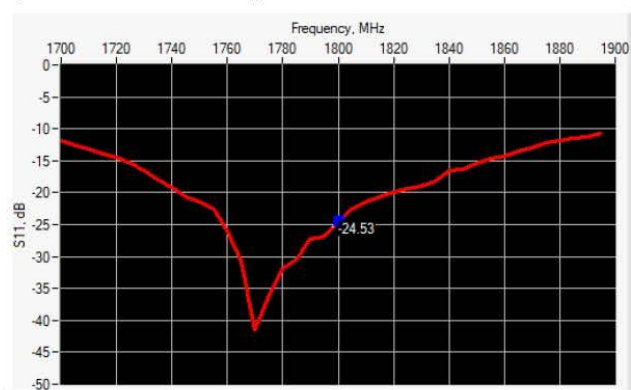

Frequency (MHz)	S11 parameter (dB)	Requirement (dB)	Impedance
1800	-24.53	-20	$44.8\Omega + 2.0j\Omega$

6.3 SAR

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

6.3.1 SAR with Head Liquid

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.




SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref : ACR.53.26.24.BES.A

Software	OPENSAR V5
Phantom	SN 13/09 SAM68
Probe	3523-EPGO-429
Liquid	Head Liquid Values: $\epsilon_p' : 42.7$ $\sigma : 1.36$
Distance between dipole center and liquid	10.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=8mm/dy=8mm/dz=5mm$
Frequency	1800 MHz
Input power	20 dBm
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

Frequency	1g SAR (W/kg)			10g SAR (W/kg)		
	Measured	Measured normalized to 1W	Target normalized to 1W	Measured	Measured normalized to 1W	Target normalized to 1W
1800 MHz	3.71	37.06	38.40	2.00	20.01	20.10

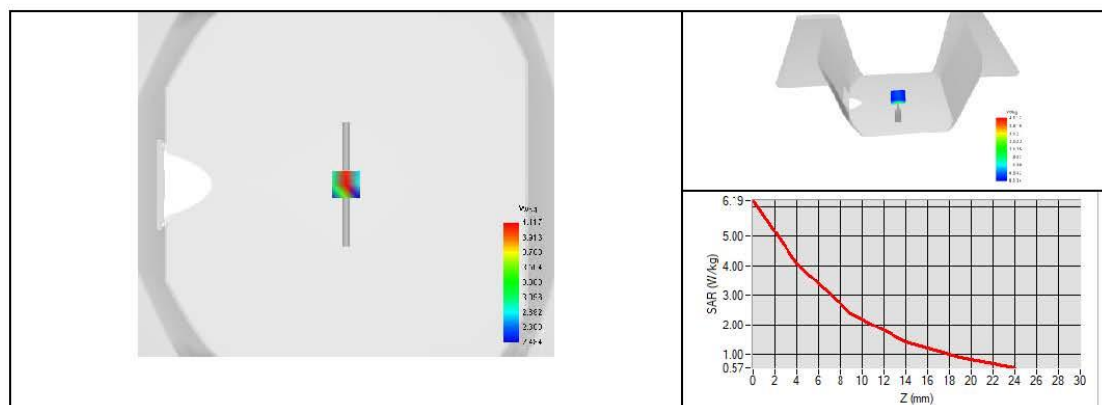



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.26.24.BES.A

7 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN 13/09 SAM68	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	08/2021	08/2024
Network Analyzer – Calibration kit	Rohde & Schwarz ZV-Z235	101223	07/2022	07/2025
Calipers	Mitutoyo	SN 0009732	11/2022	11/2025
Reference Probe	MVG	3523-EPGO-429	11/2023	11/2024
Multimeter	Keithley 2000	4013982	02/2023	02/2026
Signal Generator	Rohde & Schwarz SMB	106589	03/2022	03/2025
Amplifier	MVG	MODU-023-C-0002	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	06/2021	06/2024
Power Meter	Keysight U2000A	SN: MY62340002	10/2022	10/2025
Directional Coupler	Krytar 158020	131467	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44225320	06/2021	06/2024



SAR Reference Dipole Calibration Report

Ref : ACR.53.28.24.BES.A

**SHENZHEN NTEK TESTING TECHNOLOGY
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR REFERENCE DIPOLE**

FREQUENCY: 2000 MHZ

SERIAL NO.: SN 03/15DIP2G000-351

Calibrated at MVG

Z.I. de la pointe du diable

**Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE**

Calibration date: 02/21/2024



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref : ACR.53.28.24.BES.A

	Name	Function	Date	Signature
Prepared by :	Pedro Ruiz	Measurement Responsible	2/22/2024	
Checked & approved by:	Jérôme Luc	Technical Manager	2/22/2024	
Authorized by:	Yann Toutain	Laboratory Director	2/27/2024	

Yann
Toutain IDSignature numérique
de Yann Toutain ID
Date : 2024.02.27
08:57:13 +01'00'

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Pedro Ruiz	2/22/2024	Initial release



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.28.24.BES.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Mechanical Requirements	5
4.2	S11 parameter Requirements	5
4.3	SAR Requirements	5
5	Measurement Uncertainty.....	5
5.1	Mechanical dimensions	5
5.2	S11 Parameter	5
5.3	SAR	5
6	Calibration Results.....	6
6.1	Mechanical Dimensions	6
6.2	S11 parameter	6
6.3	SAR	6
7	List of Equipment	8



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.28.24.BES.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 2000 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID2000
Serial Number	SN 03/15DIP2G000-351
Product Condition (new / used)	Used

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



4 MEASUREMENT METHOD

4.1 MECHANICAL REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards specify the mechanical components and dimensions of the validation dipoles, with the dimension's frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness. A direct method is used with a ISO17025 calibrated caliper.

4.2 S11 PARAMETER REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a S11 of -20 dB or better. The S11 measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. A direct method is used with a network analyser and its calibration kit, both with a valid ISO17025 calibration.

4.3 SAR REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore-mentioned standards.

5 MEASUREMENT UNCERTAINTY

5.1 MECHANICAL DIMENSIONS

For the measurement in the range 0-300mm, the estimated expanded uncertainty ($k=2$) in calibration for the dimension measurement in mm is ± 0.20 mm with respect to measurement conditions.

For the measurement in the range 300-450mm, the estimated expanded uncertainty ($k=2$) in calibration for the dimension measurement in mm is ± 0.44 mm with respect to measurement conditions.

5.2 S11 PARAMETER

The estimated expanded uncertainty ($k=2$) in calibration for the S11 parameter in linear is ± 0.08 with respect to measurement conditions.

5.3 SAR

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty for validation measurements.

The estimated expanded uncertainty ($k=2$) in calibration for the 1g and 10g SAR measurement in W/kg is $\pm 19\%$ with respect to measurement conditions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.28.24.BES.A


6 CALIBRATION RESULTS

6.1 MECHANICAL DIMENSIONS

L mm		h mm		d mm	
Measured	Required	Measured	Required	Measured	Required
-	64.50 +/- 2%	-	37.50 +/- 2%	-	3.60 +/- 2%

6.2 S11 PARAMETER

6.2.1 S11 parameter in Head Liquid

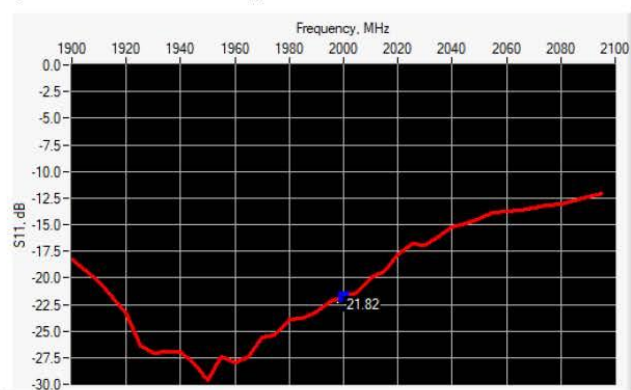

Frequency (MHz)	S11 parameter (dB)	Requirement (dB)	Impedance
2000	-21.82	-20	$58.3\Omega + 2.9j\Omega$

6.3 SAR

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

6.3.1 SAR with Head Liquid

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.




SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref : ACR.53.28.24.BES.A

Software	OPENSAR V5
Phantom	SN 13/09 SAM68
Probe	3523-EPGO-429
Liquid	Head Liquid Values: ϵ_{ps}' : 42.6 σ : 1.46
Distance between dipole center and liquid	10.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=5mm/dy=5mm/dz=5mm$
Frequency	2000 MHz
Input power	20 dBm
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

Frequency	1g SAR (W/kg)			10g SAR (W/kg)		
	Measured	Measured normalized to 1W	Target normalized to 1W	Measured	Measured normalized to 1W	Target normalized to 1W
2000 MHz	3.83	38.27	41.10	1.98	19.79	21.10

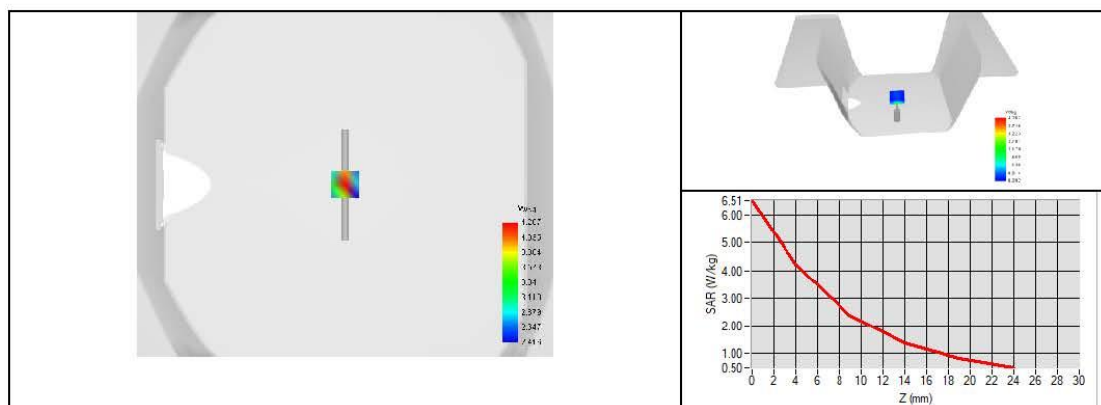



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.28.24.BES.A

7 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN 13/09 SAM68	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	08/2021	08/2024
Network Analyzer – Calibration kit	Rohde & Schwarz ZV-Z235	101223	07/2022	07/2025
Calipers	Mitutoyo	SN 0009732	11/2022	11/2025
Reference Probe	MVG	3523-EPGO-429	11/2023	11/2024
Multimeter	Keithley 2000	4013982	02/2023	02/2026
Signal Generator	Rohde & Schwarz SMB	106589	03/2022	03/2025
Amplifier	MVG	MODU-023-C-0002	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	06/2021	06/2024
Power Meter	Keysight U2000A	SN: MY62340002	10/2022	10/2025
Directional Coupler	Krytar 158020	131467	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44225320	06/2021	06/2024



SAR Reference Dipole Calibration Report

Ref : ACR.53.32.24.BES.A

**SHENZHEN NTEK TESTING TECHNOLOGY
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR REFERENCE DIPOLE**

FREQUENCY: 2300 MHZ

SERIAL NO.: SN 03/16DIP2G300-358

Calibrated at MVG

Z.I. de la pointe du diable

**Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE**

Calibration date: 02/21/2024



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref : ACR.53.32.24.BES.A

	Name	Function	Date	Signature
Prepared by :	Pedro Ruiz	Measurement Responsible	2/22/2024	
Checked & approved by:	Jérôme Luc	Technical Manager	2/22/2024	
Authorized by:	Yann Toutain	Laboratory Director	2/27/2024	

Yann
Toutain ID

Signature
numérique de
Yann Toutain ID
Date : 2024.02.27
08:57:39 +01'00'

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Pedro Ruiz	2/22/2024	Initial release



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.32.24.BES.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Mechanical Requirements	5
4.2	S11 parameter Requirements	5
4.3	SAR Requirements	5
5	Measurement Uncertainty.....	5
5.1	Mechanical dimensions	5
5.2	S11 Parameter	5
5.3	SAR	5
6	Calibration Results	6
6.1	Mechanical Dimensions	6
6.2	S11 parameter	6
6.3	SAR	6
7	List of Equipment	8



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.32.24.BES.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 2300 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID2300
Serial Number	SN 03/16DIP2G300-358
Product Condition (new / used)	Used

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



4 MEASUREMENT METHOD

4.1 MECHANICAL REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards specify the mechanical components and dimensions of the validation dipoles, with the dimension's frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness. A direct method is used with a ISO17025 calibrated caliper.

4.2 S11 PARAMETER REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a S11 of -20 dB or better. The S11 measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. A direct method is used with a network analyser and its calibration kit, both with a valid ISO17025 calibration.

4.3 SAR REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore-mentioned standards.

5 MEASUREMENT UNCERTAINTY

5.1 MECHANICAL DIMENSIONS

For the measurement in the range 0-300mm, the estimated expanded uncertainty ($k=2$) in calibration for the dimension measurement in mm is ± 0.20 mm with respect to measurement conditions.

For the measurement in the range 300-450mm, the estimated expanded uncertainty ($k=2$) in calibration for the dimension measurement in mm is ± 0.44 mm with respect to measurement conditions.

5.2 S11 PARAMETER

The estimated expanded uncertainty ($k=2$) in calibration for the S11 parameter in linear is ± 0.08 with respect to measurement conditions.

5.3 SAR

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty for validation measurements.

The estimated expanded uncertainty ($k=2$) in calibration for the 1g and 10g SAR measurement in W/kg is $\pm 19\%$ with respect to measurement conditions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.32.24.BES.A


6 CALIBRATION RESULTS

6.1 MECHANICAL DIMENSIONS

L mm		h mm		d mm	
Measured	Required	Measured	Required	Measured	Required
-	55.50 +/- 2%	-	32.60 +/- 2%	-	3.60 +/- 2%

6.2 S11 PARAMETER

6.2.1 S11 parameter in Head Liquid

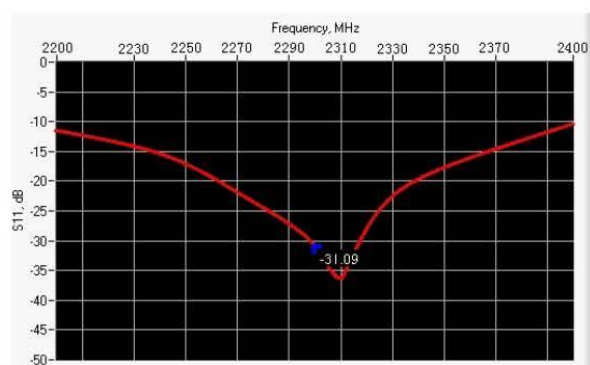

Frequency (MHz)	S11 parameter (dB)	Requirement (dB)	Impedance
2300	-31.09	-20	56.3Ω - 2.9jΩ

6.3 SAR

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

6.3.1 SAR with Head Liquid

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.




SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref : ACR.53.32.24.BES.A

Software	OPENSAR V5
Phantom	SN 13/09 SAM68
Probe	3523-EPGO-429
Liquid	Head Liquid Values: eps' : 42.0 sigma : 1.80
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=5mm/dy=5mm/dz=5mm
Frequency	2300 MHz
Input power	20 dBm
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

Frequency	1g SAR (W/kg)			10g SAR (W/kg)		
	Measured	Measured normalized to 1W	Target normalized to 1W	Measured	Measured normalized to 1W	Target normalized to 1W
2300 MHz	5.06	50.63	48.70	2.35	23.51	23.30

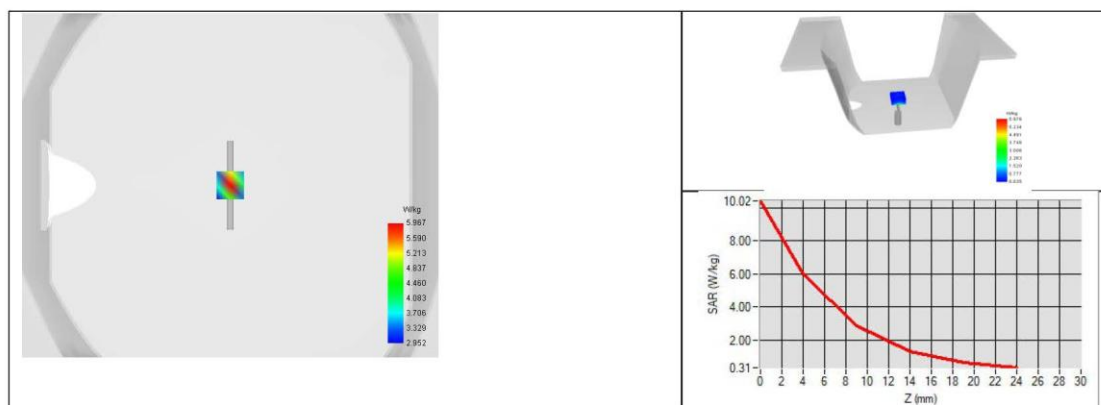



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.32.24.BES.A

7 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN 13/09 SAM68	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	08/2021	08/2024
Network Analyzer – Calibration kit	Rohde & Schwarz ZV-Z235	101223	07/2022	07/2025
Calipers	Mitutoyo	SN 0009732	11/2022	11/2025
Reference Probe	MVG	3523-EPGO-429	11/2023	11/2024
Multimeter	Keithley 2000	4013982	02/2023	02/2026
Signal Generator	Rohde & Schwarz SMB	106589	03/2022	03/2025
Amplifier	MVG	MODU-023-C-0002	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	06/2021	06/2024
Power Meter	Keysight U2000A	SN: MY62340002	10/2022	10/2025
Directional Coupler	Krytar 158020	131467	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44225320	06/2021	06/2024

Page: 8/8

Template: ACR.DDD.N.YY.MVGB.ISSUE_SAR Reference Dipole v1

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR Reference Dipole Calibration Report

Ref : ACR.53.29.24.BES.A

**SHENZHEN NTEK TESTING TECHNOLOGY
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR REFERENCE DIPOLE**

FREQUENCY: 2450 MHZ

SERIAL NO.: SN 03/15DIP2G450-352

Calibrated at MVG

Z.I. de la pointe du diable

**Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE**

Calibration date: 02/21/2024



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref : ACR.53.29.24.BES.A

	Name	Function	Date	Signature
Prepared by :	Pedro Ruiz	Measurement Responsible	2/22/2024	
Checked & approved by:	Jérôme Luc	Technical Manager	2/22/2024	
Authorized by:	Yann Toutain	Laboratory Director	2/27/2024	

Yann
Toutain ID

Signature
numérique de
Yann Toutain ID
Date : 2024.02.27
08:57:39 +01'00'

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Pedro Ruiz	2/22/2024	Initial release



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.29.24.BES.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Mechanical Requirements	5
4.2	S11 parameter Requirements	5
4.3	SAR Requirements	5
5	Measurement Uncertainty.....	5
5.1	Mechanical dimensions	5
5.2	S11 Parameter	5
5.3	SAR	5
6	Calibration Results.....	6
6.1	Mechanical Dimensions	6
6.2	S11 parameter	6
6.3	SAR	6
7	List of Equipment	8



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.29.24.BES.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 2450 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID2450
Serial Number	SN 03/15DIP2G450-352
Product Condition (new / used)	Used

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



4 MEASUREMENT METHOD

4.1 MECHANICAL REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards specify the mechanical components and dimensions of the validation dipoles, with the dimension's frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness. A direct method is used with a ISO17025 calibrated caliper.

4.2 S11 PARAMETER REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a S11 of -20 dB or better. The S11 measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. A direct method is used with a network analyser and its calibration kit, both with a valid ISO17025 calibration.

4.3 SAR REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore-mentioned standards.

5 MEASUREMENT UNCERTAINTY

5.1 MECHANICAL DIMENSIONS

For the measurement in the range 0-300mm, the estimated expanded uncertainty ($k=2$) in calibration for the dimension measurement in mm is ± 0.20 mm with respect to measurement conditions.

For the measurement in the range 300-450mm, the estimated expanded uncertainty ($k=2$) in calibration for the dimension measurement in mm is ± 0.44 mm with respect to measurement conditions.

5.2 S11 PARAMETER

The estimated expanded uncertainty ($k=2$) in calibration for the S11 parameter in linear is ± 0.08 with respect to measurement conditions.

5.3 SAR

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty for validation measurements.

The estimated expanded uncertainty ($k=2$) in calibration for the 1g and 10g SAR measurement in W/kg is $\pm 19\%$ with respect to measurement conditions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.29.24.BES.A


6 CALIBRATION RESULTS

6.1 MECHANICAL DIMENSIONS

L mm		h mm		d mm	
Measured	Required	Measured	Required	Measured	Required
-	51.50 +/- 2%	-	30.40 +/- 2%	-	3.60 +/- 2%

6.2 S11 PARAMETER

6.2.1 S11 parameter in Head Liquid

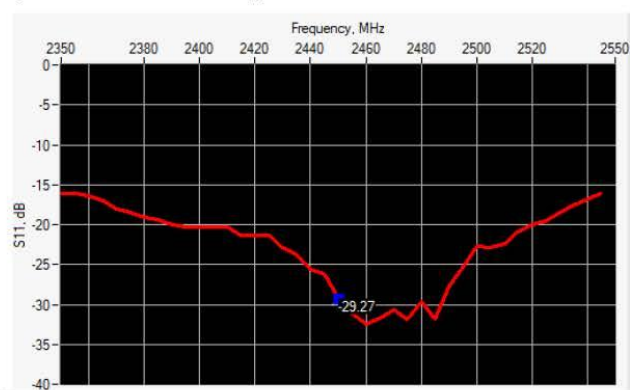

Frequency (MHz)	S11 parameter (dB)	Requirement (dB)	Impedance
2450	-29.27	-20	$53.6\Omega + 0.1j\Omega$

6.3 SAR

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

6.3.1 SAR with Head Liquid

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.




SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref : ACR.53.29.24.BES.A

Software	OPENSAR V5
Phantom	SN 13/09 SAM68
Probe	3523-EPGO-429
Liquid	Head Liquid Values: $\epsilon_{ps}' : 42.1$ $\sigma : 1.83$
Distance between dipole center and liquid	10.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=5mm/dy=5mm/dz=5mm$
Frequency	2450 MHz
Input power	20 dBm
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

Frequency	1g SAR (W/kg)			10g SAR (W/kg)		
	Measured	Measured normalized to 1W	Target normalized to 1W	Measured	Measured normalized to 1W	Target normalized to 1W
2450 MHz	5.00	50.05	52.40	2.38	23.80	24.00

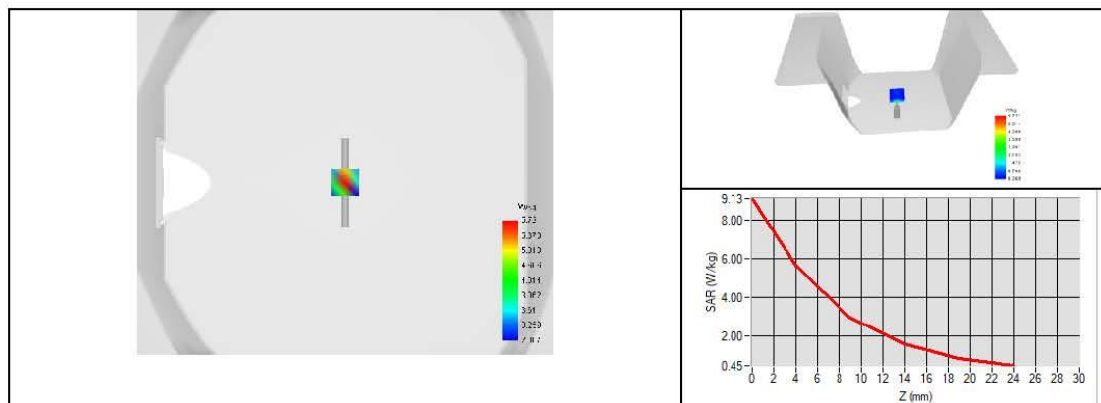



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.29.24.BES.A

7 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN 13/09 SAM68	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	08/2021	08/2024
Network Analyzer – Calibration kit	Rohde & Schwarz ZV-Z235	101223	07/2022	07/2025
Calipers	Mitutoyo	SN 0009732	11/2022	11/2025
Reference Probe	MVG	3523-EPGO-429	11/2023	11/2024
Multimeter	Keithley 2000	4013982	02/2023	02/2026
Signal Generator	Rohde & Schwarz SMB	106589	03/2022	03/2025
Amplifier	MVG	MODU-023-C-0002	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	06/2021	06/2024
Power Meter	Keysight U2000A	SN: MY62340002	10/2022	10/2025
Directional Coupler	Krytar 158020	131467	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44225320	06/2021	06/2024



SAR Reference Dipole Calibration Report

Ref : ACR.53.30.24.BES.A

**SHENZHEN NTEK TESTING TECHNOLOGY
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR REFERENCE DIPOLE**

FREQUENCY: 2600 MHZ

SERIAL NO.: SN 03/15DIP2G600-356

Calibrated at MVG

Z.I. de la pointe du diable

**Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE**

Calibration date: 02/21/2024



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref : ACR.53.30.24.BES.A

	Name	Function	Date	Signature
Prepared by :	Pedro Ruiz	Measurement Responsible	2/22/2024	
Checked & approved by:	Jérôme Luc	Technical Manager	2/22/2024	
Authorized by:	Yann Toutain	Laboratory Director	2/27/2024	

Yann
Toutain
IDSignature
numérique de
Yann Toutain ID
Date : 2024.02.27
08:58:12 +01'00'

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Pedro Ruiz	2/22/2024	Initial release



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.30.24.BES.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Mechanical Requirements	5
4.2	S11 parameter Requirements	5
4.3	SAR Requirements	5
5	Measurement Uncertainty.....	5
5.1	Mechanical dimensions	5
5.2	S11 Parameter	5
5.3	SAR	5
6	Calibration Results.....	6
6.1	Mechanical Dimensions	6
6.2	S11 parameter	6
6.3	SAR	6
7	List of Equipment	8



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.30.24.BES.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 2600 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID2600
Serial Number	SN 03/15DIP2G600-356
Product Condition (new / used)	Used

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.30.24.BES.A

4 MEASUREMENT METHOD

4.1 MECHANICAL REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards specify the mechanical components and dimensions of the validation dipoles, with the dimension's frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness. A direct method is used with a ISO17025 calibrated caliper.

4.2 S11 PARAMETER REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a S11 of -20 dB or better. The S11 measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. A direct method is used with a network analyser and its calibration kit, both with a valid ISO17025 calibration.

4.3 SAR REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore-mentioned standards.

5 MEASUREMENT UNCERTAINTY

5.1 MECHANICAL DIMENSIONS

For the measurement in the range 0-300mm, the estimated expanded uncertainty ($k=2$) in calibration for the dimension measurement in mm is ± 0.20 mm with respect to measurement conditions.

For the measurement in the range 300-450mm, the estimated expanded uncertainty ($k=2$) in calibration for the dimension measurement in mm is ± 0.44 mm with respect to measurement conditions.

5.2 S11 PARAMETER

The estimated expanded uncertainty ($k=2$) in calibration for the S11 parameter in linear is ± 0.08 with respect to measurement conditions.

5.3 SAR

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty for validation measurements.

The estimated expanded uncertainty ($k=2$) in calibration for the 1g and 10g SAR measurement in W/kg is $\pm 19\%$ with respect to measurement conditions.

Page: 5/8

Template_ACR.DDD.N.YY.MVGB.ISSUE_SAR Reference Dipole vL

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.30.24.BES.A


6 CALIBRATION RESULTS

6.1 MECHANICAL DIMENSIONS

L mm		h mm		d mm	
Measured	Required	Measured	Required	Measured	Required
-	48.50 +/- 2%	-	28.80 +/- 2%	-	3.60 +/- 2%

6.2 S11 PARAMETER

6.2.1 S11 parameter in Head Liquid

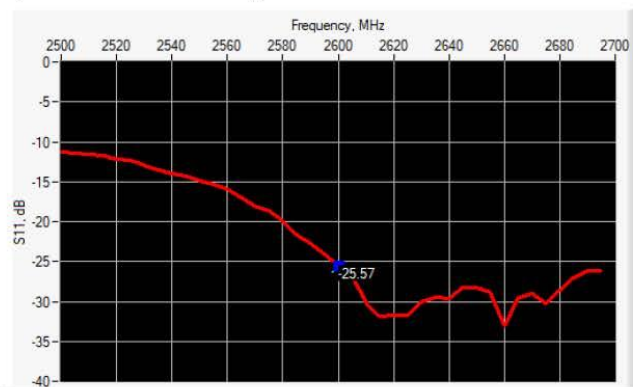

Frequency (MHz)	S11 parameter (dB)	Requirement (dB)	Impedance
2600	-25.57	-20	$54.5\Omega - 3.2j\Omega$

6.3 SAR

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

6.3.1 SAR with Head Liquid

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.




SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref : ACR.53.30.24.BES.A

Software	OPENSAR V5
Phantom	SN 13/09 SAM68
Probe	3523-EPGO-429
Liquid	Head Liquid Values: ϵ_p' : 41.3 σ : 1.95
Distance between dipole center and liquid	10.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=5mm/dy=5mm/dz=5mm$
Frequency	2600 MHz
Input power	20 dBm
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

Frequency	1g SAR (W/kg)			10g SAR (W/kg)		
	Measured	Measured normalized to 1W	Target normalized to 1W	Measured	Measured normalized to 1W	Target normalized to 1W
2600 MHz	5.42	54.16	55.30	2.49	24.85	24.60

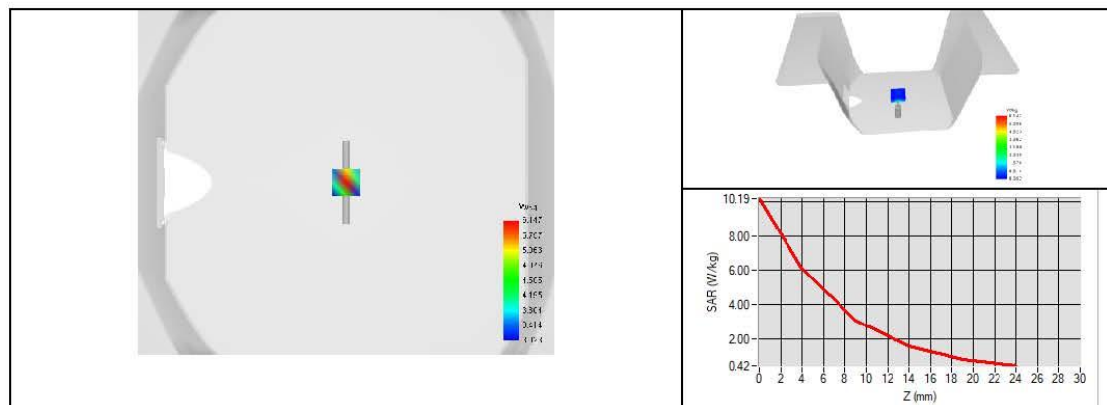



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref.: ACR.53.30.24.BES.A

7 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN 13/09 SAM68	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	08/2021	08/2024
Network Analyzer – Calibration kit	Rohde & Schwarz ZV-Z235	101223	07/2022	07/2025
Calipers	Mitutoyo	SN 0009732	11/2022	11/2025
Reference Probe	MVG	3523-EPGO-429	11/2023	11/2024
Multimeter	Keithley 2000	4013982	02/2023	02/2026
Signal Generator	Rohde & Schwarz SMB	106589	03/2022	03/2025
Amplifier	MVG	MODU-023-C-0002	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	06/2021	06/2024
Power Meter	Keysight U2000A	SN: MY62340002	10/2022	10/2025
Directional Coupler	Krytar 158020	131467	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44225320	06/2021	06/2024



SAR Reference Dipole Calibration Report

Ref : ACR.139.15.20.SATU.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.
BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR REFERENCE DIPOLE
FREQUENCY: 3500 MHZ
SERIAL NO.: SN 09/12 DIP 3G500-360

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



10/15/2022

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.15.20.SATU.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	10/15/2022	<i>JS</i>
<i>Checked by :</i>	Jérôme LUC	Product Manager	10/15/2022	<i>JS</i>
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	10/15/2022	<i>Kim Rutkowski</i>

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	10/15/2022	Initial release



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.15.20.SATU.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.15.20.SATU.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 3500 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID3500
Serial Number	SN 09/12 DIP 3G500-360
Product Condition (new / used)	New

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.15.20.SATU.A

4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.139.15.20.SATU.A

10 g

20.1 %


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

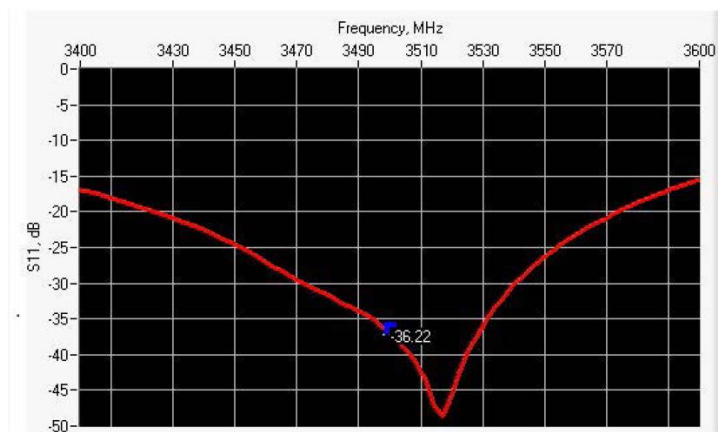

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
3500	-36.22	-20	$48.9 \Omega + 1.1 j\Omega$

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

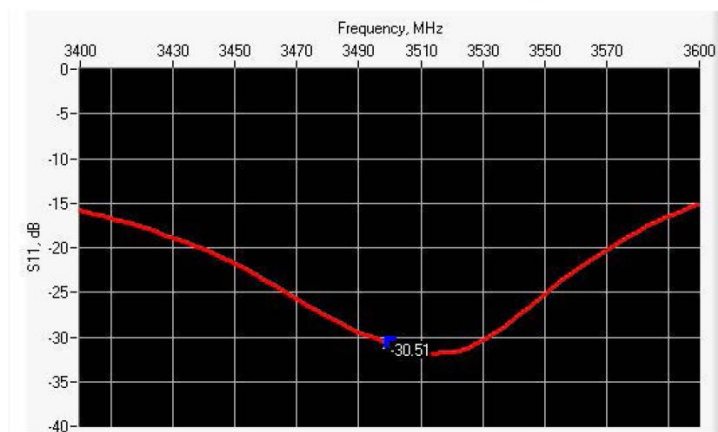

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
3500	-30.51	-20	$52.2 \Omega + 2.0 j\Omega$

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	$420.0 \pm 1 \%$		$250.0 \pm 1 \%$		$6.35 \pm 1 \%$	

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.15.20.SATU.A

450	290.0 ±1 %.		166.7 ±1 %.		6.35 ±1 %.	
750	176.0 ±1 %.		100.0 ±1 %.		6.35 ±1 %.	
835	161.0 ±1 %.		89.8 ±1 %.		3.6 ±1 %.	
900	149.0 ±1 %.		83.3 ±1 %.		3.6 ±1 %.	
1450	89.1 ±1 %.		51.7 ±1 %.		3.6 ±1 %.	
1500	80.5 ±1 %.		50.0 ±1 %.		3.6 ±1 %.	
1640	79.0 ±1 %.		45.7 ±1 %.		3.6 ±1 %.	
1750	75.2 ±1 %.		42.9 ±1 %.		3.6 ±1 %.	
1800	72.0 ±1 %.		41.7 ±1 %.		3.6 ±1 %.	
1900	68.0 ±1 %.		39.5 ±1 %.		3.6 ±1 %.	
1950	66.3 ±1 %.		38.5 ±1 %.		3.6 ±1 %.	
2000	64.5 ±1 %.		37.5 ±1 %.		3.6 ±1 %.	
2100	61.0 ±1 %.		35.7 ±1 %.		3.6 ±1 %.	
2300	55.5 ±1 %.		32.6 ±1 %.		3.6 ±1 %.	
2450	51.5 ±1 %.		30.4 ±1 %.		3.6 ±1 %.	
2600	48.5 ±1 %.		28.8 ±1 %.		3.6 ±1 %.	
3400	41.5 ±1 %.		25.0 ±1 %.		3.6 ±1 %.	
3500	37.0 ±1 %.	PASS	26.4 ±1 %.	PASS	3.6 ±1 %.	PASS
3800	34.7 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.15.20.SATU.A

1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3400	38.0 ±5 %		2.81 ±5 %	
3500	37.9 ±5 %	PASS	2.91 ±5 %	PASS

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: ϵ_p : 37.9 sigma : 2.95
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=5mm/dy=5mm/dz=5mm
Frequency	3500 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	

Page: 8/11


This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.15.20.SATU.A

1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3400	66.4		25.1	
3500	67.1	67.18 (6.72)	25	24.50 (2.45)

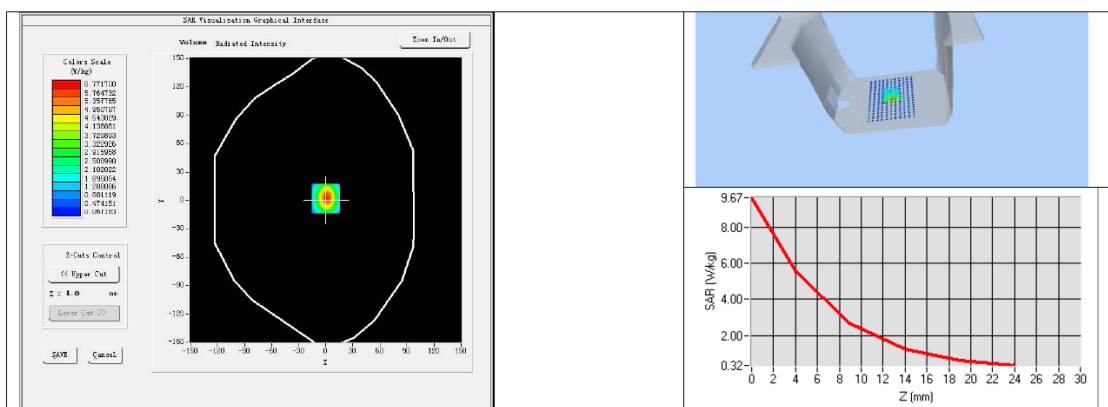

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 ±5 %		0.80 ±5 %	
300	58.2 ±5 %		0.92 ±5 %	
450	56.7 ±5 %		0.94 ±5 %	
750	55.5 ±5 %		0.96 ±5 %	
835	55.2 ±5 %		0.97 ±5 %	
900	55.0 ±5 %		1.05 ±5 %	
915	55.0 ±5 %		1.06 ±5 %	
1450	54.0 ±5 %		1.30 ±5 %	
1610	53.8 ±5 %		1.40 ±5 %	
1800	53.3 ±5 %		1.52 ±5 %	
1900	53.3 ±5 %		1.52 ±5 %	
2000	53.3 ±5 %		1.52 ±5 %	
2100	53.2 ±5 %		1.62 ±5 %	
2450	52.7 ±5 %		1.95 ±5 %	

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.139.15.20.SATU.A

3400	51.5 ±5 %		3.20 ±5 %	
3500	51.3 ±5 %	PASS	3.31 ±5 %	PASS
3800	50.9 ±5 %		3.66 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: eps' : 51.4 sigma : 3.40
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=5mm/dy=5mm/dz=5mm
Frequency	3500 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
3500	59.22(5.92)	23.80 (2.38)

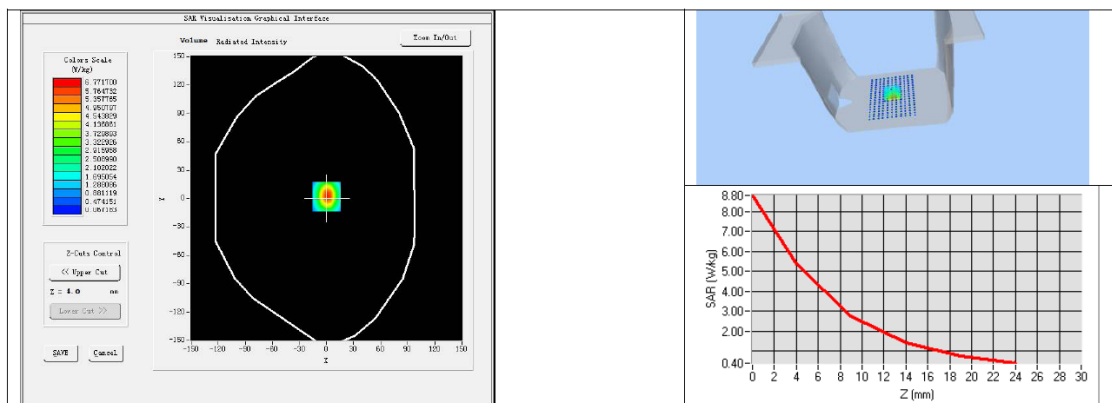



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.15.20.SATU.A

8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2020	02/2023
Calipers	Carrera	CALIPER-01	01/2020	01/2023
Reference Probe	MVG	EPG122 SN 18/11	06/2022	06/2023
Multimeter	Keithley 2000	1188656	01/2020	01/2023
Signal Generator	Agilent E4438C	MY49070581	01/2020	01/2023
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	01/2020	01/2023
Power Sensor	HP ECP-E26A	US37181460	01/2020	01/2023
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	11/2019	11/2022



SAR Reference Dipole Calibration Report

Ref : ACR.139.16.20.SATU.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.
BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR REFERENCE DIPOLE
FREQUENCY: 3700 MHZ
SERIAL NO.: SN 09/12 DIP 3G700-361

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



10/15/2022

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.16.20.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	10/15/2022	<i>JS</i>
Checked by :	Jérôme LUC	Product Manager	10/15/2022	<i>JS</i>
Approved by :	Kim RUTKOWSKI	Quality Manager	10/15/2022	<i>Kim Rutkowski</i>

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Date	Modifications
A	10/15/2022	Initial release



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.16.20.SATU.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.16.20.SATU.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 3700 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID3700
Serial Number	SN 09/12 DIP 3G700-361
Product Condition (new / used)	New

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.16.20.SATU.A

4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.139.16.20.SATU.A

10 g

20.1 %


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

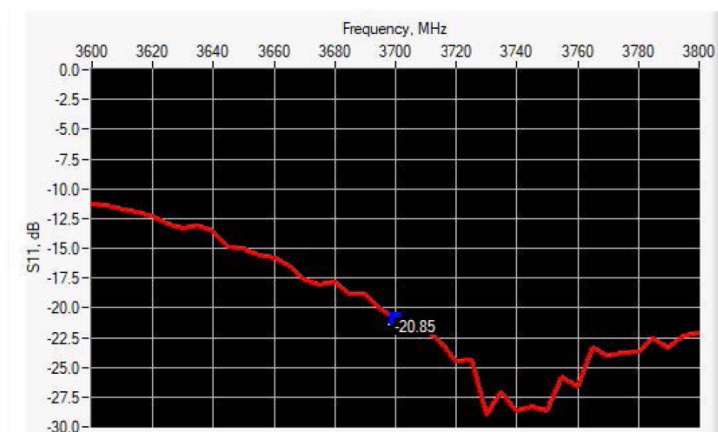

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
3700	-20.85	-20	54.9 Ω - 8.3 j Ω

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

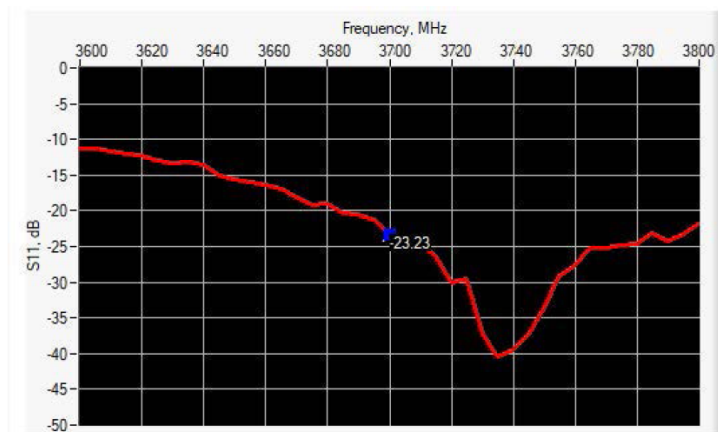

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
3700	-23.23	-20	50.6 Ω - 7.0 j Ω

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 $\pm$ 1 %.		250.0 $\pm$ 1 %.		6.35 $\pm$ 1 %.	

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.16.20.SATU.A

450	290.0 ±1 %.		166.7 ±1 %.		6.35 ±1 %.	
750	176.0 ±1 %.		100.0 ±1 %.		6.35 ±1 %.	
835	161.0 ±1 %.		89.8 ±1 %.		3.6 ±1 %.	
900	149.0 ±1 %.		83.3 ±1 %.		3.6 ±1 %.	
1450	89.1 ±1 %.		51.7 ±1 %.		3.6 ±1 %.	
1500	80.5 ±1 %.		50.0 ±1 %.		3.6 ±1 %.	
1640	79.0 ±1 %.		45.7 ±1 %.		3.6 ±1 %.	
1750	75.2 ±1 %.		42.9 ±1 %.		3.6 ±1 %.	
1800	72.0 ±1 %.		41.7 ±1 %.		3.6 ±1 %.	
1900	68.0 ±1 %.		39.5 ±1 %.		3.6 ±1 %.	
1950	66.3 ±1 %.		38.5 ±1 %.		3.6 ±1 %.	
2000	64.5 ±1 %.		37.5 ±1 %.		3.6 ±1 %.	
2100	61.0 ±1 %.		35.7 ±1 %.		3.6 ±1 %.	
2300	55.5 ±1 %.		32.6 ±1 %.		3.6 ±1 %.	
2450	51.5 ±1 %.		30.4 ±1 %.		3.6 ±1 %.	
2600	48.5 ±1 %.		28.8 ±1 %.		3.6 ±1 %.	
3400	41.5 ±1 %.		25.0 ±1 %.		3.6 ±1 %.	
3600	37.0 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	
3700	34.7 ±1 %.	PASS	26.4 ±1 %.	PASS	3.6 ±1 %.	PASS

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.16.20.SATU.A

1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
3400	38.0 ±5 %		2.81 ±5 %	
3600	37.8 ±5 %		3.02 ±5 %	
3700	37.7 ±5 %	PASS	3.12 ±5 %	PASS

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: ϵ_p : 37.8 σ : 3.25
Distance between dipole center and liquid	10.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=5mm/dy=5mm/dz=5mm$
Frequency	3700 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	

Page: 8/11


This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.16.20.SATU.A

1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3400	66.4		25.1	
3600	67.3		24.6	
3700	67.4	66.30 (6.63)	24.2	24.16 (2.42)

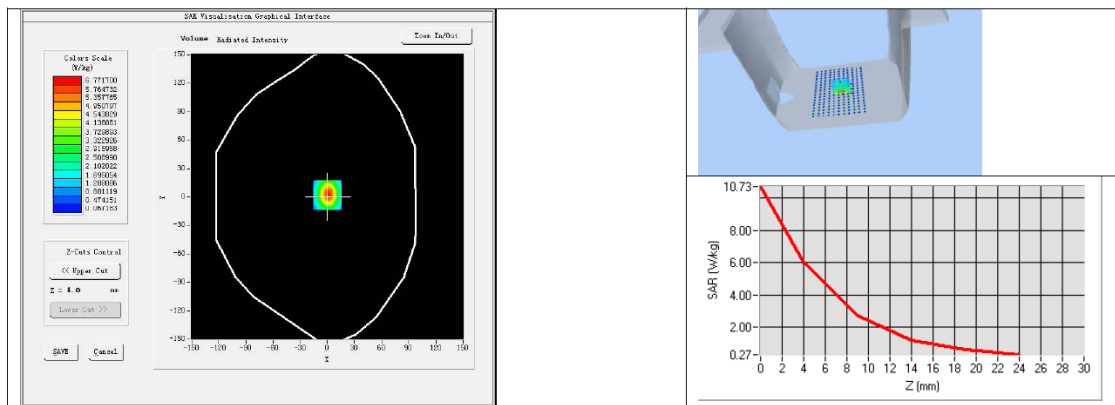

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 ± 5 %		0.80 ± 5 %	
300	58.2 ± 5 %		0.92 ± 5 %	
450	56.7 ± 5 %		0.94 ± 5 %	
750	55.5 ± 5 %		0.96 ± 5 %	
835	55.2 ± 5 %		0.97 ± 5 %	
900	55.0 ± 5 %		1.05 ± 5 %	
915	55.0 ± 5 %		1.06 ± 5 %	
1450	54.0 ± 5 %		1.30 ± 5 %	
1610	53.8 ± 5 %		1.40 ± 5 %	
1800	53.3 ± 5 %		1.52 ± 5 %	
1900	53.3 ± 5 %		1.52 ± 5 %	
2000	53.3 ± 5 %		1.52 ± 5 %	
2100	53.2 ± 5 %		1.62 ± 5 %	

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.139.16.20.SATU.A

2300	52.9 ±5 %		1.81 ±5 %	
2450	52.7 ±5 %		1.95 ±5 %	
2600	52.5 ±5 %		2.16 ±5 %	
3400	51.5 ±5 %		3.20 ±5 %	
3600	51.2 ±5 %		3.43 ±5 %	
3700	51.1 ±5 %	PASS	3.55 ±5 %	PASS
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: eps' : 51.3 sigma : 3.56
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=5mm/dy=5mm/dz=5mm
Frequency	3700 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
3700	62.36 (6.24)	23.56 (2.35)

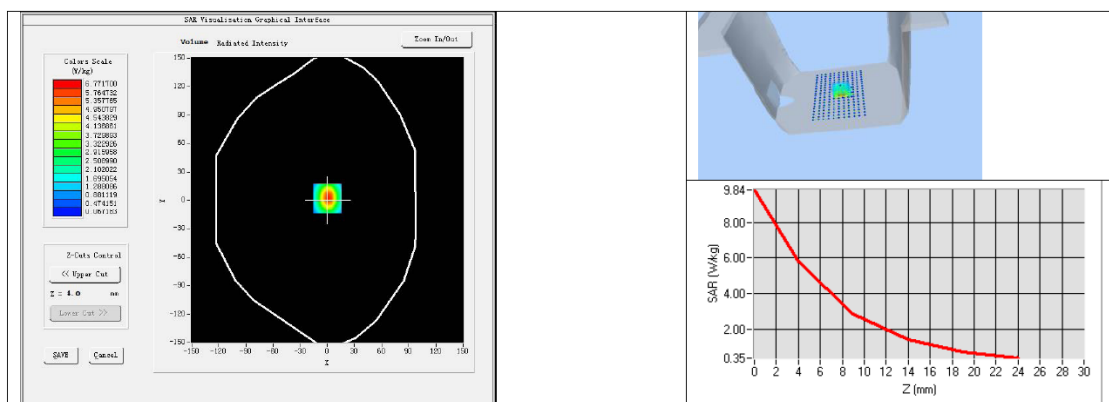

Page: 10/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.139.16.20.SATU.A

8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2020	02/2023
Calipers	Carrera	CALIPER-01	01/2020	01/2023
Reference Probe	MVG	EPG122 SN 18/11	06/2022	06/2023
Multimeter	Keithley 2000	1188656	01/2020	01/2023
Signal Generator	Agilent E4438C	MY49070581	01/2020	01/2023
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	01/2020	01/2023
Power Sensor	HP ECP-E26A	US37181460	01/2020	01/2023
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	11/2019	11/2022



SAR Reference Waveguide Calibration Report

Ref : ACR.53.31.24.BES.A

**SHENZHEN NTEK TESTING TECHNOLOGY
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET, BAO'AN
DISTRICT, SHENZHEN GUANGDONG, CHINA MVG
COMOSAR REFERENCE WAVEGUIDE**

**FREQUENCY: 5000-6000 MHZ
SERIAL NO.: SN 13/14 WGA 33**

Calibrated at MVG

Z.I. de la pointe du diable

**Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE**

Calibration date: 02/21/2024



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited SAR reference waveguide calibration performed at MVG, using the COMOSAR test bench. The test results covered by accreditation are traceable to the International System of Units (SI).



SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref.: ACR.53.31.24.BES.A

	Name	Function	Date	Signature
Prepared by :	Pedro Ruiz	Measurement Responsible	2/22/2024	
Checked & approved by:	Jérôme Luc	Technical Manager	2/22/2024	
Authorized by:	Yann Toutain	Laboratory Director	2/27/2024	

Yann
Toutain ID

Signature
numérique de Yann
Toutain ID
Date : 2024.02.27
08:58:45 +01'00'

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Pedro Ruiz	2/22/2024	Initial release



SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref.: ACR.53.31.24.BES.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	4
4.1	Mechanical Requirements	4
4.2	S11 parameter Requirements	4
4.3	SAR Requirements	5
5	Measurement Uncertainty.....	5
5.1	Mechanical dimensions	5
5.2	S11 Parameter	5
5.3	SAR	5
6	Calibration Results.....	5
6.1	Mechanical Dimensions	5
6.2	S11 parameter	6
6.3	SAR	6
7	List of Equipment	9



SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref.: ACR.53.31.24.BES.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards for reference waveguides used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 5000-6000 MHz REFERENCE WAVEGUIDE
Manufacturer	MVG
Model	SWG5500
Serial Number	SN 13/14 WGA 33
Product Condition (new / used)	Used

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Waveguides are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards.

4 MEASUREMENT METHOD

4.1 MECHANICAL REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards specify the mechanical components and dimensions of the validation dipoles, with the dimension's frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness. A direct method is used with a ISO17025 calibrated caliper.

4.2 S11 PARAMETER REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a S11 of -8 dB or better. The S11 measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. A direct method is used with a network analyser and its calibration kit, both with a valid ISO17025 calibration.



SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref.: ACR.53.31.24.BES.A

4.3 SAR REQUIREMENTS

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore-mentioned standards.

5 MEASUREMENT UNCERTAINTY

5.1 MECHANICAL DIMENSIONS

The estimated expanded uncertainty ($k=2$) in calibration for the dimension measurement in mm is ± 0.20 mm with respect to measurement conditions.

5.2 S11 PARAMETER

The estimated expanded uncertainty ($k=2$) in calibration for the S11 parameter in linear is ± 0.08 with respect to measurement conditions.

5.3 SAR

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty for validation measurements.

The estimated expanded uncertainty ($k=2$) in calibration for the 1g and 10g SAR measurement in W/kg is $\pm 19\%$ with respect to measurement conditions.

6 CALIBRATION RESULTS

6.1 MECHANICAL DIMENSIONS

Frequency (MHz)	L (mm)		W (mm)		L _r (mm)		W _r (mm)	
	Required	Measured	Required	Measured	Required	Measured	Required	Measured
5800	40.39 $\pm$ 0.13	-	20.19 $\pm$ 0.13	-	81.03 $\pm$ 0.13	-	61.98 $\pm$ 0.13	-

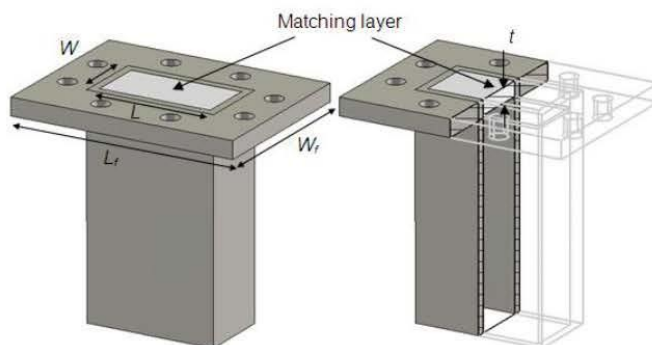


Figure 1: Validation Waveguide Dimensions




SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref.: ACR.53.31.24.BES.A

6.2 S11 PARAMETER

6.2.1 S11 parameter In Head Liquid

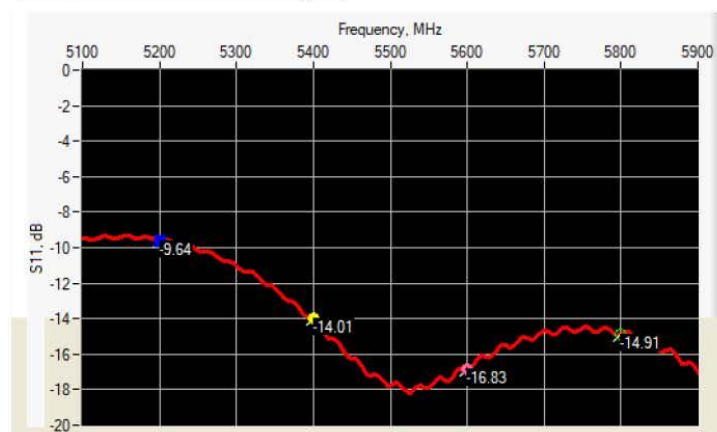

Frequency (MHz)	S11 parameter (dB)	Requirement (dB)	Impedance
5200	-9.64	-8	$25.80 \Omega - 6.58 j\Omega$
5400	-14.01	-8	$51.53 \Omega + 20.60 j\Omega$
5600	-16.83	-8	$44.12 \Omega - 12.35 j\Omega$
5800	-14.91	-8	$38.53 \Omega + 11.21 j\Omega$

6.3 SAR

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards state that the system validation measurements must be performed using a reference waveguide meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed with the matching layer placed in the open end of the waveguide, with the waveguide and matching layer in direct contact with the phantom shell.

6.3.1 SAR With Head Liquid

At those frequencies, the target SAR value can not be generic. Hereunder is the target SAR value defined by MVG, within the uncertainty for the system validation. All SAR values are normalized to 1 W net power. In bracket, the measured SAR is given with the used input power.




SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref : ACR.53.31.24.BES.A

Software	OPENSAR V5
Phantom	SN 13/09 SAM68
Probe	3523-EPGO-429
Liquid	Head Liquid Values 5200 MHz: eps' :34.16 sigma : 4.42 Head Liquid Values 5400 MHz: eps' :33.63 sigma : 4.64 Head Liquid Values 5600 MHz: eps' :33.12 sigma : 4.87 Head Liquid Values 5800 MHz: eps' :32.57 sigma : 5.12
Distance between dipole waveguide and liquid	0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=4mm/dy=4m/dz=2mm
Frequency	5200 MHz 5400 MHz 5600 MHz 5800 MHz
Input power	20 dBm
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

Frequency (MHz)	1 g SAR (W/kg)			10 g SAR (W/kg)		
	Measured	Measured normalized to 1W	Target normalized to 1W	Measured	Measured normalized to 1W	Target normalized to 1W
5200	16.26	162.59	159.00	5.62	56.21	56.90
5400	15.98	159.81	166.40	5.50	55.00	58.43
5600	17.91	179.15	173.80	6.10	61.01	59.97
5800	18.22	182.20	181.20	6.13	61.32	61.50

SAR MEASUREMENT PLOTS @ 5200 MHz

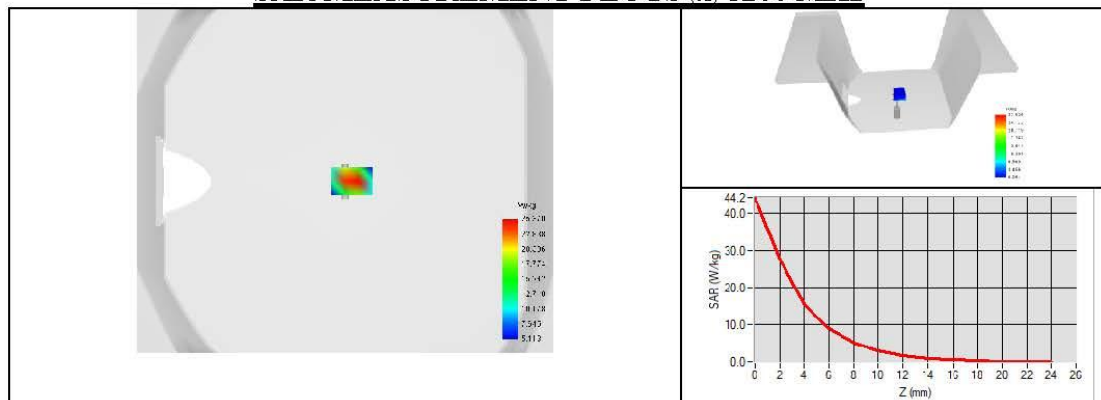





SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref.: ACR.53.31.24.BES.A


SAR MEASUREMENT PLOTS @ 5400 MHz

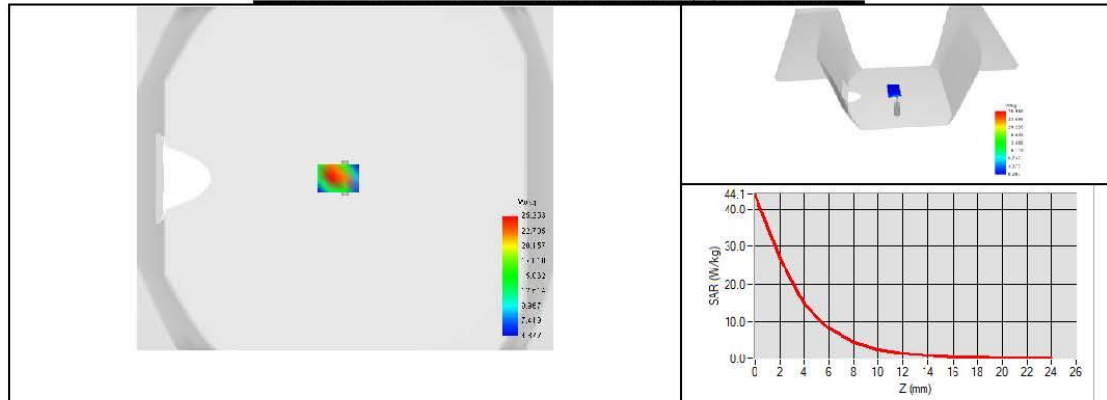

SAR MEASUREMENT PLOTS @ 5600 MHz

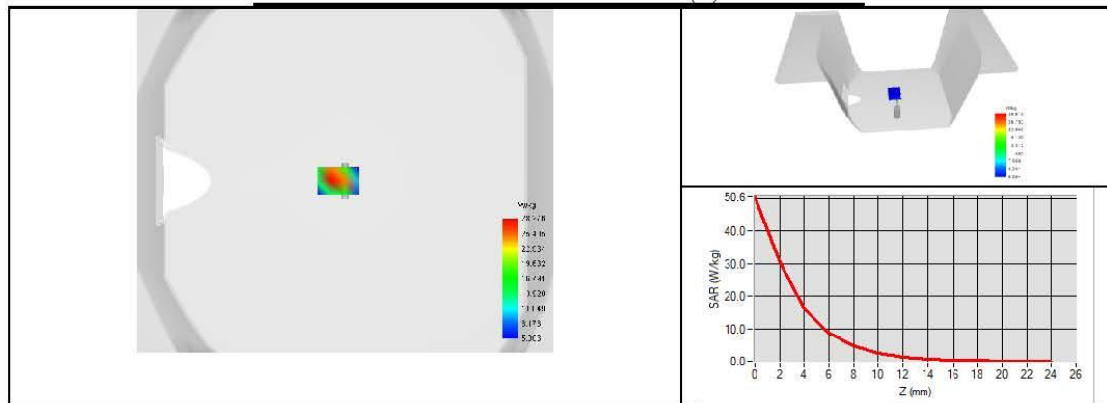

SAR MEASUREMENT PLOTS @ 5800 MHz

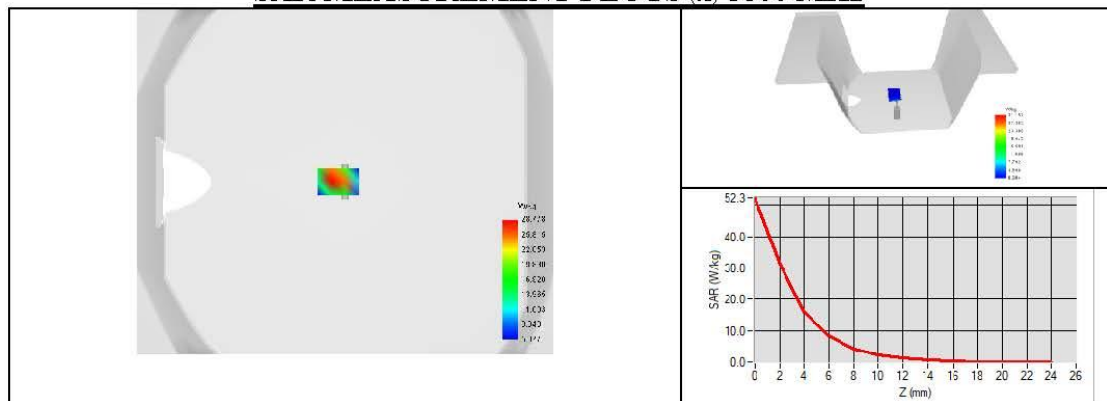



SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref.: ACR.53.31.24.BES.A

7 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN 13/09 SAM68	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	08/2021	08/2024
Network Analyzer – Calibration kit	Rohde & Schwarz ZV-Z235	101223	07/2022	07/2025
Calipers	Mitutoyo	SN 0009732	11/2022	11/2025
Reference Probe	MVG	3623-EPGO-431	11/2023	11/2024
Multimeter	Keithley 2000	4013982	02/2023	02/2026
Signal Generator	Rohde & Schwarz SMB	106589	03/2022	03/2025
Amplifier	MVG	MODU-023-C-0002	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	06/2021	06/2024
Power Meter	Keysight U2000A	SN: MY62340002	10/2022	10/2025
Directional Coupler	Krytar 158020	131467	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44225320	06/2021	06/2024

Page: 9/9

Template_ACR.DDD.N.YY.MVGB.ISSUE_SAR Reference Waveguide vL

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.

END