

Declaration of Conformity (DoC)

We, Shenzhen Doke Electronic Co., LTD

801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road, Guangming District, Shenzhen, China

Declare that the DoC is issued under our sole responsibility and belongs to the following product(s):

Product Type: 4G Smart phone

Trademark: Blackview

Model Number(s): WAVE 10

Operating system:

Hardware Version:J567F_9230SMB_D4UFU_V1.0

Software Version :WAVE10_EEA_J567F_V1.0_A16

(Name of product, type or model, batch or serial number)

System components:.

PIFA Antenna:

Bluetooth: 1.9dBi

2.4G WLAN: 1.9dBi

5G WLAN: 2.1dBi

GSM 900: -3.0 dBi; GSM 1800: 1.7 dBi

WCDMA B1: 2.1 dBi; WCDMA B8: -2.9 dBi

LTE B1: 2.0 dBi; LTE B3: 1.5 dBi; LTE B7: 1.9 dBi; LTE B8: -2.8 dBi; LTE B20: -3.6 dBi

GPS: 0dBi;

Adapter:

Model: QZ-01004EA00

Input: 100-240V~50/60Hz 0.3A

Output: 5.0V 2.0A(10.0W)


Manufacturer: Guangdong Quanzhi Technology Co.,Ltd.

Rechargeable Li-ion Battery:

Model: FHPV466495PNJ; Specification: DC 3.85V, 5000mAh

Manufacturer: Shenzhen Nuoja Technology Industrial Co.,LTD

USB Cable: 100cm;

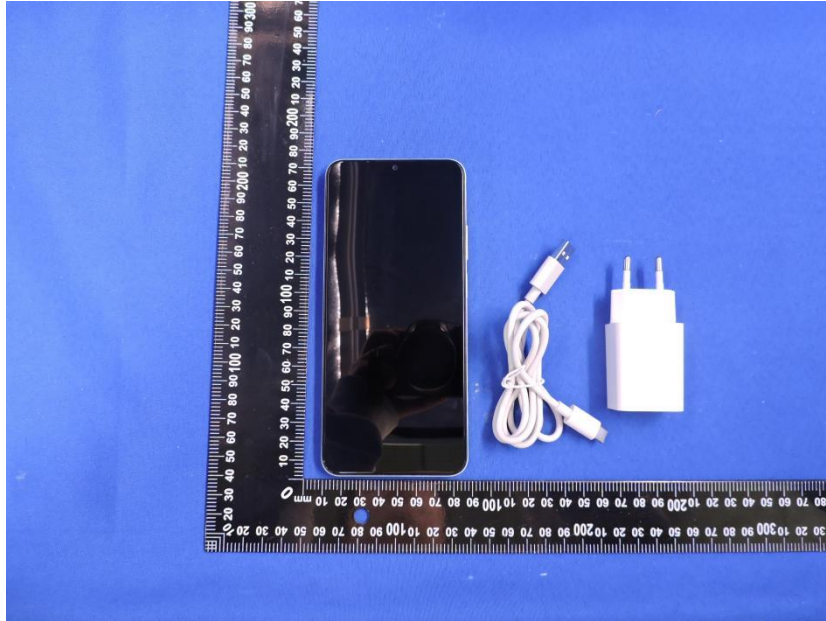

The object of the declaration described above is in conformity with the essential requirements of the relevant Union harmonization legislation: Radio Equipment Directive *RED (2014/53/EU)*.

The following *harmonized* standards and technical specifications have been applied:

HEALTH & SAFETY (Art. 3(1)(a)):

EN 50360:2017+A1:2023 EN 50566:2017+A1:2023 EN IEC/IEEE 62209-1528:2021 EN 50663:2017 EN 62479:2010
EN IEC 62368-1:2020+A11:2020

EMC (Art. 3(1)(b)):

ETSI EN 301 489-1 V2.2.3 (2019-11)
ETSI EN 301 489-3 V2.3.2 (2023-01)
ETSI EN 301 489-17 V3.3.1 (2024-09)
ETSI EN 301 489-19 V2.2.1 (2022-09)
ETSI EN 301 489-52 V1.3.1 (2024-11)
EN 55032:2015+A11:2020; EN 55035:2017+A11:2020
EN IEC 61000-3-2:2019+A2:2024; EN 61000-3-3:2013+A2:2021+AC:2022

Radio Spectrum (Article 3.2):

ETSI EN 301 511 V12.5.1 (2017-03);
TS 151 010-1 V13.14.0 (2024-06)
ETSI EN 301 908-1 V15.2.1 (2023-01)
ETSI EN 301 908-2 V13.1.1 (2020-06)
ETSI EN 301 908-13 V13.3.1 (2024-10)
EN 300 328 V2.2.2 (2019-07);
EN 303 345-1 V1.1.1 (2019-06)
EN 303 345-3 V1.1.1 (2021-06)
EN 301 893 V2.1.1 (2017-05);
EN 300 440 V2.2.1 (2018-07);
EN 303 413 V1.2.1 (2021-04);

The submitted samples of the above equipment has been tested and found to comply with the following European Directives:

RoHS Directive 2011/65/EU & (EU) 2015/863

Notified Body Involved:

Notified Body Name: DERYCOM CERTIFICATION SERVICES, INC.

Notified Body Number: 3052

Notified Body Assessment Performed: Module B/C on Article 3.1a, 3.1b, 3.2 EU-type examination certificate number: JEC-62

RF Specification:

Function	Operation Frequency	Max RF output power:
BLE	2402MHz–2480MHz	3.72dBm
BT(BR+EDR)	2402MHz–2480MHz	4.32 dBm
WIFI 2.4G 802.11b/n(20MHz): 802.11n(40MHz):	802.11b/n(20MHz):2412-2472MHz 802.11n(40MHz):2422~2462MHz	14.10dBm
Wi-Fi 5.2G 802.11a/n/ac (20MHz): 802.11n/ac(40MHz): 802.11ac(80MHz):	802.11a/n/ac (20MHz):5180~5240MHZ 802.11n/ac(40MHz):5190~5230MHZ 802.11ac(80MHz):5210MHz	13.69dBm
Wi-Fi 5.8G 802.11a/n/ac (20MHz): 802.11n/ac(40MHz): 802.11ac (80MHz):	802.11a/n/ac(20MHz):5745~5825MHz 802.11n /ac(40MHz):5755~5795MHz 802.11ac (80MHz):5775MHz	13.49 dBm
GSM/GPRS/EGPRS 900	TX(Uplink):880M-915MHZ; RX(Downlink):925M-960MHZ	31.59dBm
GSM/GPRS/EGPRS 1800	TX(Uplink):1710M-1785MHZ; RX(Downlink):1805M-1880MHZ	29.35dBm
WCDMA B1	TX(Uplink):1920-1980MHZ; RX(Downlink):2110-2170MHz	21.67 dBm
WCDMA B8	TX(Uplink): 880-915MHz; RX(Downlink):925-960MHz	21.91dBm
LTE FDD B1	TX(Uplink):1920-1980MHZ; RX(Downlink):2110-2170MHz	22.75 dBm
LTE FDD B3	TX(Uplink) :1710-1785MHz; RX(Downlink):1805-1880MHz	22.63 dBm
LTE FDD B7	TX(Uplink) :2500-2570MHz; RX(Downlink):2620-2690MHz	23.93 dBm
LTE FDD B8	TX(Uplink): 880MHz to 915 MHz RX(Downlink): 925 MHz to 960 MHz	22.64dBm
LTE FDD B20	TX(Uplink): 832MHz~862MHz; RX(Downlink):791MHz~821MHz	23.40 dBm
GPS	Rx(Downlink): 1.57542GHz	--
FM	Rx(Downlink): 87.5-108MHZ	--

Tests for SAR are conducted using standard operating positions with the device transmitting at its highest certified power level in all tested frequency bands. The maximum SAR values tested on this device when used in its normal position at the ear and when used closet othe body(at a minimum distance of 5mm/0mm) are:

Max SAR Value(W/kg) Limitis 2.0(W/kg) for10-g	10g-Head	0.838W/kg
Limitis 4.0(W/kg) for10-g	10g-Body/MemberDAS	1.152W/kg

Technical file held by: **Shenzhen Doke Electronic Co., LTD**

801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road, Guangming District, Shenzhen, China

Signed for and on behalf of:

Shenzhen Doke Electronic Co., LTD

Name and Title:

Duan chunlin/Manager

Address:

801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road, Guangming District, Shenzhen, China

Duan chunlin

Signature of Authorized Person

2026-01-06