


TEST REPORT

Reference No. : XK2503007040E
Applicant : Shenzhen KuKirin Technology Co., Ltd.
Address : Room 4F4913, Shenzhou Computer Building, Marie Curie Avenue, Vanke City Community, Bantian Street, Longgang District, Shenzhen City
Manufacturer : Shenzhen KuKirin Technology Co., Ltd.
Address : Room 4F4913, Shenzhou Computer Building, Marie Curie Avenue, Vanke City Community, Bantian Street, Longgang District, Shenzhen City
Product Name : Electric Scooter
Model No. : M4 Max
Test specification : EN IEC 61000-6-3:2021, EN IEC 61000-6-1:2019
EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A2:2021
Date of Receipt sample : 2025-03-03
Date of Test : 2025-03-03 to 2025-03-07
Date of Issue : 2025-03-07
Test Report Form No. ... : TRF EN IEC 61000-6-3:2021-EMC-001-V01
Test Result : **Pass**

Remarks:


The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Compiled by:



Smile Xu

Reviewed by:



Snow Wu



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen SiCT Technology Co., Ltd.

TABLE OF CONTENTS

1 - GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST SUMMARY	5
2 - SYSTEM TEST CONFIGURATION	6
2.1 JUSTIFICATION	6
2.2 EUT EXERCISE SOFTWARE	6
2.3 SPECIAL ACCESSORIES	6
2.4 EQUIPMENT MODIFICATIONS	6
2.5 TEST SETUP DIAGRAM	6
3 - DISTURBANCE VOLTAGE AT THE MAINS TERMINALS	7
3.1 MEASUREMENT UNCERTAINTY	7
3.2 LIMIT OF DISTURBANCE VOLTAGE AT THE MAINS TERMINALS (CLASS B)	7
3.3 EUT SETUP	7
3.4 INSTRUMENT SETUP	7
3.5 TEST PROCEDURE	8
3.6 SUMMARY OF TEST RESULTS	8
3.7 DISTURBANCE VOLTAGE TEST DATA	8
3.8 TEST EQUIPMENT LIST AND DETAILS	8
3.9 TEST RESULT	8
4 - RADIATED DISTURBANCES	11
4.1 MEASUREMENT UNCERTAINTY	11
4.2 LIMIT OF RADIATED DISTURBANCES (CLASS B)	11
4.3 EUT SETUP	11
4.4 TEST RECEIVER SETUP	12
4.5 TEST PROCEDURE	12
4.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	12
4.7 RADIATED EMISSIONS TEST RESULT	12
4.8 TEST EQUIPMENT LIST AND DETAILS	13
4.9 TEST RESULT	13
6- HARMONIC CURRENT TEST	16
6.1 APPLICATION OF HARMONIC CURRENT EMISSION	16
6.2 BLOCK DIAGRAM OF TEST SETUP:	16
6.3 TEST PROCEDURE:	16
6.4 TEST EQUIPMENT LIST AND DETAILS	17
6.5 TEST RESULT	17
7 – VOLTAGE FLUCTUATIONS AND FLICKER TEST	18
7.1 APPLICATION AND LIMIT OF VOLTAGE FLUCTUATIONS AND FLICKER TEST	18
7.2 BLOCK DIAGRAM OF TEST SETUP:	18
7.3 TEST PROCEDURE:	18
7.4 TEST EQUIPMENT LIST AND DETAILS	19
7.5 TEST RESULT	19
8- IMMUNITY TEST DESCRIPTION	20
8.1 GENERAL DESCRIPTION	20
8.2 THE PHENOMENA ALLOWED DURING AND AFTER TEST IN EACH CRITERION ARE CLEARLY STATED IN THE FOLLOWING TABLE ...	21
8.3 DEVIATIONS FROM THE STANDARD	21
9- IMMUNITY TEST RESULTS	22
9.1 ELECTROSTATIC DISCHARGE IMMUNITY TEST	22
9.1.1 TEST SPECIFICATION	22
9.1.2 TEST SETUP	22
9.1.3 TEST PROCEDURE	23
9.1.4 TEST EQUIPMENT LIST AND DETAILS	23
9.1.5 PERFORMANCE CRITERION REQUIRED & TEST RESULT	24

9.2 RADIATED SUSCEPTIBILITY TEST	25
9.2.1 TEST SPECIFICATION	25
9.2.2 TEST SETUP	25
9.2.3 TEST PROCEDURE	25
9.2.4 TEST EQUIPMENT LIST AND DETAILS	26
9.2.5 PERFORMANCE CRITERION REQUIRED & TEST RESULT	26
9.3 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST	27
9.3.1 TEST SPECIFICATION	27
9.3.2 TEST SETUP	27
9.3.3 TEST PROCEDURE	28
9.3.4 TEST EQUIPMENT LIST AND DETAILS	28
9.3.5 PERFORMANCE CRITERION REQUIRED & TEST RESULT	28
9.4 SURGE IMMUNITY TEST	29
9.4.1 TEST SPECIFICATION	29
9.4.2 TEST SETUP	29
9.4.3 TEST PROCEDURE	30
9.4.4 TEST EQUIPMENT LIST AND DETAILS	30
9.4.5 PERFORMANCE CRITERION REQUIRED & TEST RESULT	30
9.5 CONDUCTED SUSCEPTIBILITY TEST	31
9.5.1 TEST SPECIFICATION	31
9.5.2 TEST SETUP	31
9.5.3 TEST PROCEDURE	31
9.5.4 TEST EQUIPMENT LIST AND DETAILS	32
9.5.5 PERFORMANCE CRITERION REQUIRED & TEST RESULT	32
9.6 VOLTAGE DIPS, SHORT INTERRUPTIONS IMMUNITY TESTS	33
9.6.1 TEST SPECIFICATION	33
9.6.2 TEST SETUP	33
9.6.3 TEST PROCEDURE	33
9.6.4 TEST EQUIPMENT LIST AND DETAILS	34
9.6.5 PERFORMANCE CRITERION REQUIRED & TEST RESULT	34
APPENDIX A - EUT PHOTOGRAPHS	35

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant:	Shenzhen KuKirin Technology Co., Ltd.
Address of applicant:	Room 4F4913, Shenzhou Computer Building, Marie Curie Avenue, Vanke City Community, Bantian Street, Longgang District, Shenzhen City
Manufacturer:	Shenzhen KuKirin Technology Co., Ltd.
Address of manufacturer:	Room 4F4913, Shenzhou Computer Building, Marie Curie Avenue, Vanke City Community, Bantian Street, Longgang District, Shenzhen City

General Description of E.U.T

EUT Name:	Electric Scooter
Trademark:	KuKirin
Model No.:	M4 Max
Test Model No.:	M4 Max
Operating Mode.:	Mode1:Power on
Power Rating:	For adapter: Input:100-240VAC,50/60Hz,2.5Amax Output: 54.6V===2.0A,Class II Scooter Input: 54.6V ===2.0A,IPX4

Remark: * *The test data gathered are from the production sample provided by the manufacturer.*
* *Supplementary models have the same circuit, but with different appearance.*

1.2 Test Standards

The following Declaration of Conformity report of EUT is prepared in accordance with

EN IEC 61000-6-3:2021

EN IEC 61000-6-1:2019

EN IEC 61000-3-2:2019+A1:2021

EN 61000-3-3:2013+A2:2021

The objective of the manufacturer is to demonstrate compliance with the described standards above.

1.3 Test Summary

For the EUT described above. The standards used were EN 61000-6-3 Class B for Emissions & EN 61000-6-1 for Immunity.

Table 1 : Tests Carried Out Under EN IEC 61000-6-3:2021

Standard	Test Items	Status
EN IEC 61000-6-3:2021	Disturbance Voltage at The Mains Terminals (150KHz To 30MHz)	✓
	Radiated Disturbances (30MHz To 1000MHz)	✓

✓ Indicates that the test is applicable

× Indicates that the test is not applicable

Table 2 : Tests Carried Out Under EN IEC 61000-3-2:2019+A1:2021/ EN 61000-3-3:2013+A2:2021

Standard	Test Items	Status
EN IEC 61000-3-2:2019+A1:2021	Harmonic Current Test	✓
EN 61000-3-3:2013+A2:2021	Voltage Fluctuations and Flicker Test	✓

✓ Indicates that the test is applicable

× Indicates that the test is not applicable

Table 3 : Tests Carried Out Under EN IEC 61000-6-1:2019

Standard	Test Items	Status
EN 61000-4-2:2009	Electrostatic discharge Immunity	✓
EN 61000-4-3:2006+A2:2010*	Radiated Susceptibility (80MHz to 1GHz)	✓
EN 61000-4-4:2012	Electrical Fast Transient/Burst Immunity	✓
EN 61000-4-5:2014+A1:2017	Surge Immunity	✓
EN 61000-4-6:2014+AC:2015	Conducted Susceptibility (150kHz to 80MHz)	✓
EN 61000-4-8: 2010	Power Frequency Magnetic Field Immunity (50/60Hz)	×
EN 61000-4-11: 2004	Voltage Dips, Short Interruptions Immunity	✓

✓ Indicates that the test is applicable

× Indicates that the test is not applicable

1.4 Test Facility

The measurement Radiated Susceptibility (80~1000MHz,) was performed at Shenzhen SiCT Technology Co., Ltd.

2 - SYSTEM TEST CONFIGURATION

2.1 Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

2.2 EUT Exercise Software


The EUT exercising program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software offered by manufacture, can let the EUT being normal operation.

2.3 Special Accessories

As shown in section 2.5, interface cable used for compliance testing is shielded as normally supplied by **Shenzhen KuKirin Technology Co., Ltd.** and its respective support equipment manufacturers.


2.4 Equipment Modifications

The EUT tested was not modified by XK.



EUT

2.5 Test Setup Diagram

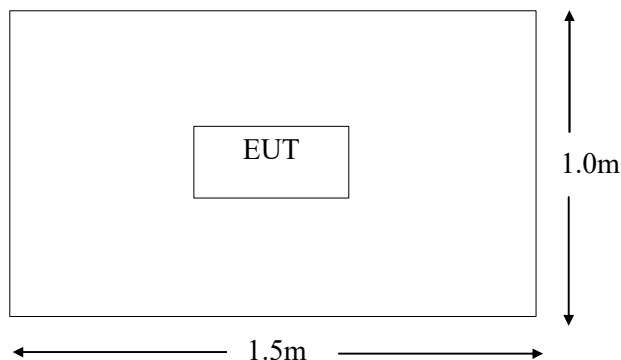

3 - DISTURBANCE VOLTAGE AT THE MAINS TERMINALS

3.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.


The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is 2.7 dB.

3.2 Limit of Disturbance Voltage At The Mains Terminals (Class B)

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

3.3 EUT Setup

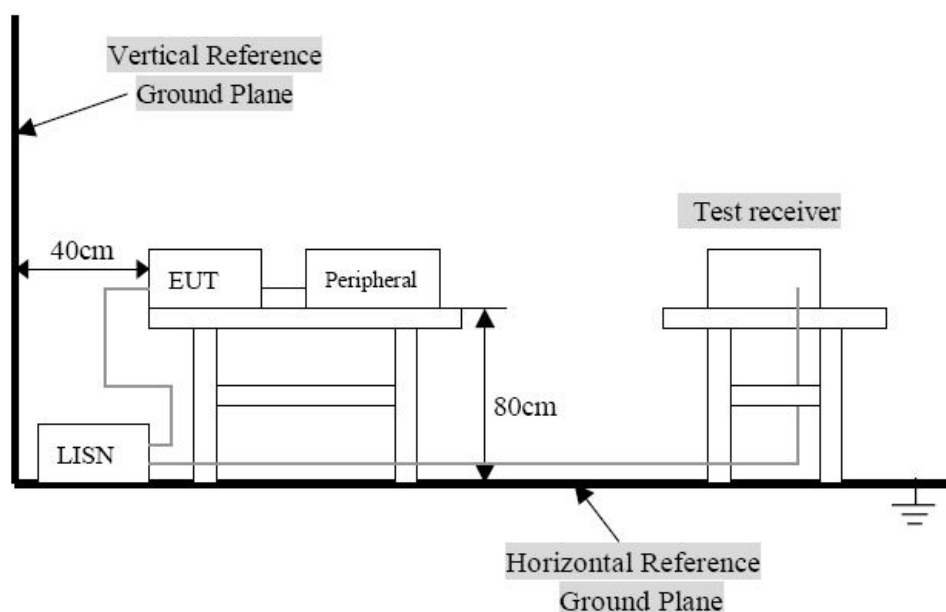

3.4 Instrument Setup

The test receiver was set with the following configurations:

Test Receiver Setting:

Frequency Range.....150 KHz to 30 MHz
Detector.....Peak & Quasi-Peak & Average
Sweep Speed.....Auto
IF Band Width.....9 KHz

3.5 Test Procedure

During the conducted emission test, the EUT power cord was connected to the auxiliary outlet of the first Artificial Mains.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance using all installation combination.

All data was recorded in the peak detection mode. Quasi-peak and Average readings were only performed when an emission was found to be marginal (within -10 dB μ V of specification limits). Quasi-peak readings are distinguished with a "QP". Average readings are distinguished with a "AV".

3.6 Summary of Test Results

According to the data in section 3.6, the EUT complied with the BS BS EN 61000-6-3 Conducted margin, with the *worst* margin reading of:

3.7 Disturbance Voltage Test Data

Temperature (°C)	24
Humidity (%RH)	55
Atmospheric pressure: (kPa)	101
EUT	Electric Scooter
M/N	M4 Max
Operating Mode	Mode1

Test data see following pages

3.8 Test Equipment List and Details


No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	WTHE1004A1-003	EMI Test Receiver	R&S	ESCI 3	100687	2025-02-24	2026-02-23
2	WTHE1011A1-001	Teo Line Single Phase Module	SCHWARZBECK	NSLK8128	8128249	2025-02-24	2026-02-23
3	WTHE1010A1-002	10dB attenuator	SCHWARZBECK	9561-F061	8360009	2025-02-24	2026-02-23
Software List							
Description		Manufacturer		Model		Version	
Test Software		Farad		EZ-EMC		EMEC-3A1	
*Remark: indicates software version used in the compliance certification testing							

3.9 Test Result

Pass

Conducted Emission Test


EUT:	Electric Scooter
M/N:	M4 Max
Operating Mode:	Mode1
Test Site:	Shielded Room
Test Voltage:	AC230V/50Hz
Comment:	Live Line

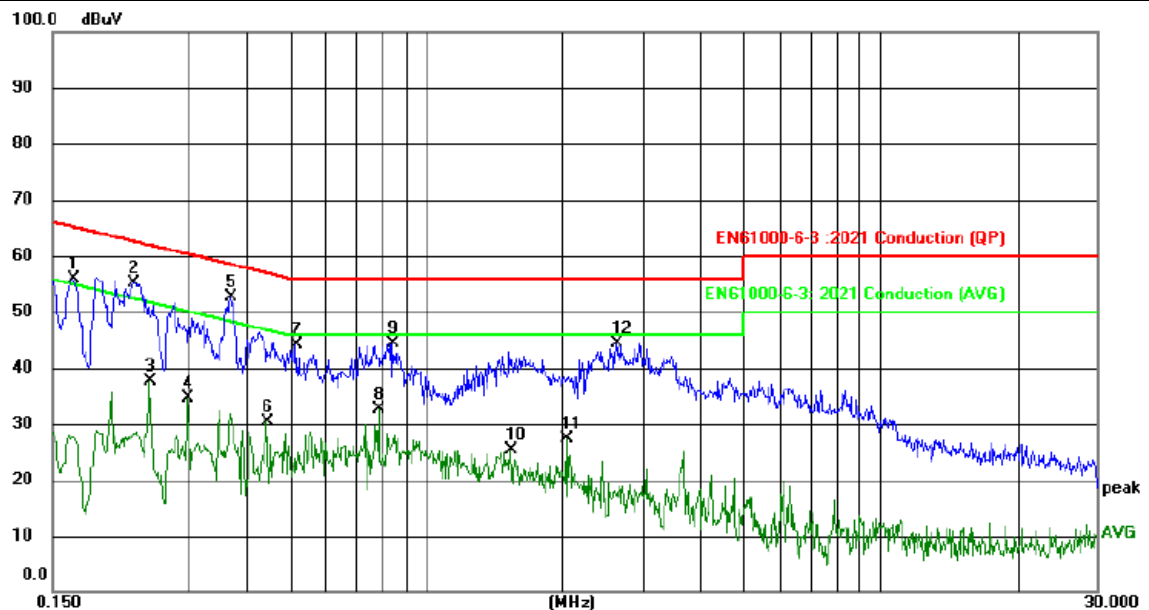

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1660	46.37	9.55	55.92	65.16	-9.24	QP	
2		0.2267	45.22	9.97	55.19	62.57	-7.38	QP	
3		0.2459	27.56	9.97	37.53	51.89	-14.36	AVG	
4		0.2978	24.56	9.95	34.51	50.30	-15.79	AVG	
5	*	0.3700	42.73	9.87	52.60	58.50	-5.90	QP	
6		0.4460	20.43	9.86	30.29	46.95	-16.66	AVG	
7		0.5180	34.28	9.89	44.17	56.00	-11.83	QP	
8		0.7860	22.57	10.02	32.59	46.00	-13.41	AVG	
9		0.8417	34.30	10.03	44.33	56.00	-11.67	QP	
10		1.5300	15.12	10.36	25.48	46.00	-20.52	AVG	
11		2.0379	17.44	10.01	27.45	46.00	-18.55	AVG	
12		2.6139	34.15	10.20	44.35	56.00	-11.65	QP	

Conducted Emission Test

EUT:	Electric Scooter
M/N:	M4 Max
Operating Mode:	Mode1
Test Site:	Shielded Room
Test Voltage:	AC230V/50Hz
Comment:	Neutral Line

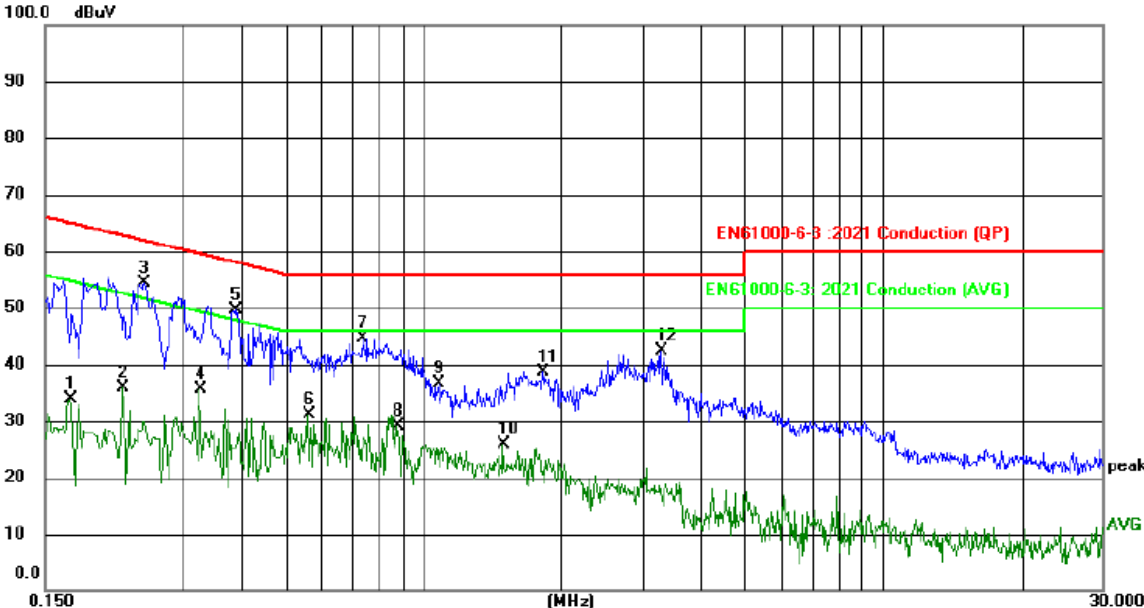

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1700	24.10	9.71	33.81	54.96	-21.15	AVG	
2		0.2220	25.82	9.99	35.81	52.74	-16.93	AVG	
3	*	0.2467	44.15	10.11	54.26	61.87	-7.61	QP	
4		0.3260	25.57	10.13	35.70	49.55	-13.85	AVG	
5		0.3900	39.53	10.06	49.59	58.06	-8.47	QP	
6		0.5620	21.13	10.11	31.24	46.00	-14.76	AVG	
7		0.7379	34.51	10.20	44.71	56.00	-11.29	QP	
8		0.8780	18.96	10.25	29.21	46.00	-16.79	AVG	
9		1.0820	26.41	10.25	36.66	56.00	-19.34	QP	
10		1.4900	15.54	10.44	25.98	46.00	-20.02	AVG	
11		1.8140	28.27	10.42	38.69	56.00	-17.31	QP	
12		3.2860	31.83	10.55	42.38	56.00	-13.62	QP	

4 - RADIATED DISTURBANCES

4.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is 4.5 dB.

4.2 Limit of Radiated Disturbances (Class B)

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note: (1) The tighter limit shall apply at the edge between two frequency bands.
(2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.


4.3 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup accordance with the CISPR 16-1-1:2019, CISPR16-2-3:2016+A1:2019. The specification used was EN 61000-6-3 Class B limits.

The EUT was placed on the center of the test table.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

Block diagram of test setup (In chamber)

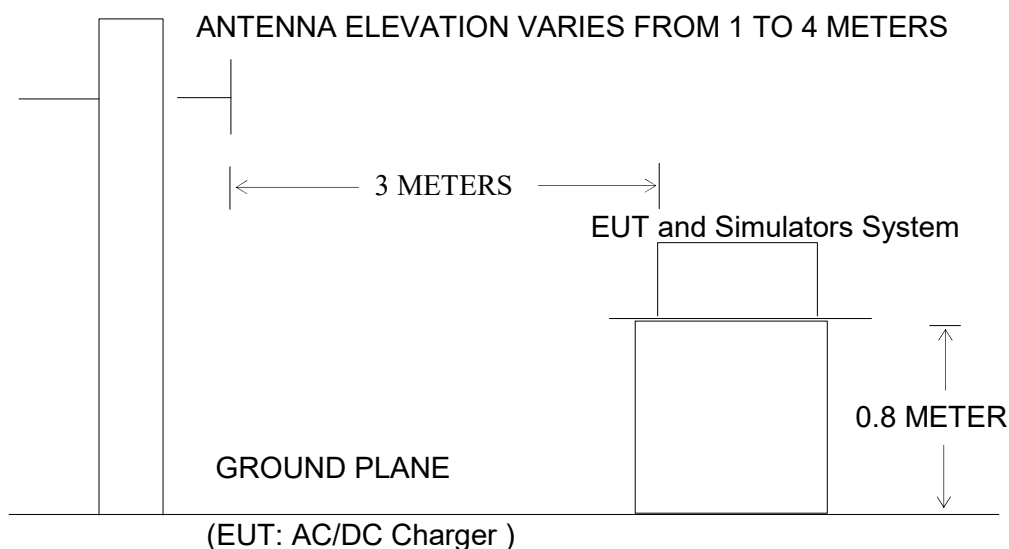

4.4 Test Receiver Setup

According to BS EN 61000-6-3 rules, the frequency was investigated from 30 to 1000 MHz. During the radiated emission test, the test receiver was set with the following configurations:

Test Receiver Setting:

Detector.....Peak & Quasi-Peak
IF Band Width.....120KHz
Frequency Range.....30MHz to 1000MHz
Turntable Rotated.....0 to 360 degrees

Antenna Position:

Height.....1m to 4m
Polarity.....Horizontal and Vertical

4.5 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (within -10 dB μ V of specification limits), and are distinguished with a "QP" in the data table.

4.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Ampl.}$$

4.7 Radiated Emissions Test Result

Temperature (°C)	24
Humidity (%RH)	55
Atmospheric pressure: (kPa)	101
EUT	Electric Scooter
M/N	M4 Max
Operating Mode	Mode1

4.8 Test Equipment List and Details


No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	WTHE1004A1-001	EMI Test Receiver	R&S	ESPI7	100097	2025-02-24	2026-02-23
2	WTHE1005A2-004	Broadband Logarithmic Period Antenna	SCHWARZBECK	VULB 9162	/	2025-02-24	2026-02-23
3	WTHE1006A1-001	Broadband preamplifier	SCHWARZBECK	9718-182	9718-182	2025-02-24	2026-02-23
4	WTHE1006A1-002	Preamplifier	Agilent	8447D	1937A02492	2025-02-24	2026-02-23
Software List							
Description		Manufacturer		Model		Version	
Test Software		Farad		EZ-EMC		EMEC-3A1	
*Remark: indicates software version used in the compliance certification testing							

4.9 Test Result

PASS

Radiated Emission Test Data of Below 1GHz


EUT:	Electric Scooter
M/N:	M4 Max
Operating Mode:	Mode1
Test Site:	3m CHAMBER
Test Voltage:	AC230V/50Hz
Comment:	Polarization: Horizontal

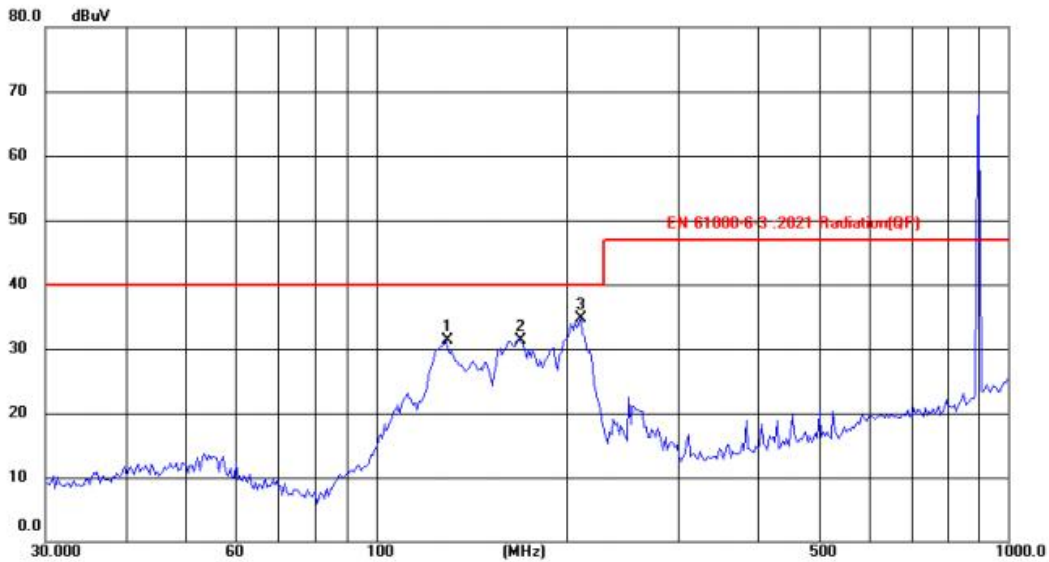

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree	Comment
1		129.0146	49.78	-18.51	31.27	40.00	-8.73	peak		
2		168.4138	48.61	-17.34	31.27	40.00	-8.73	peak		
3	*	210.7860	49.50	-14.81	34.69	40.00	-5.31	peak		

Radiated Emission Test Data of Below 1GHz

EUT:	Electric Scooter
M/N:	M4 Max
Operating Mode:	Mode1
Test Site:	3m CHAMBER
Test Voltage:	AC230V/50Hz
Comment:	Polarization: Vertical

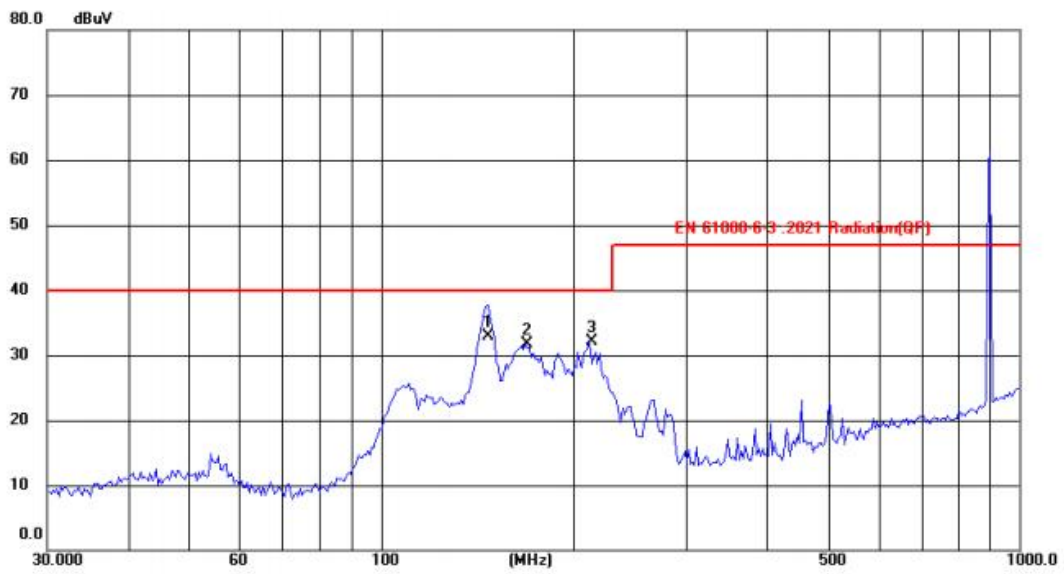


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	146.3735	50.80	-17.80	33.00	40.00	-7.00	QP		
2		168.4138	49.05	-17.34	31.71	40.00	-8.29	peak		
3		212.2695	46.86	-14.79	32.07	40.00	-7.93	peak		

6– HARMONIC CURRENT TEST

6.1 Application of Harmonic Current Emission

Compliance to these standards ensures that tested equipment will not generate harmonic currents at levels that cause unacceptable degradation of the main environment. This directly contributes to meeting compatibility levels established in other EMC standards, which defines compatibility levels for low-frequency conducted disturbances in low-voltage supply systems.

6.2 Block Diagram of Test Setup:

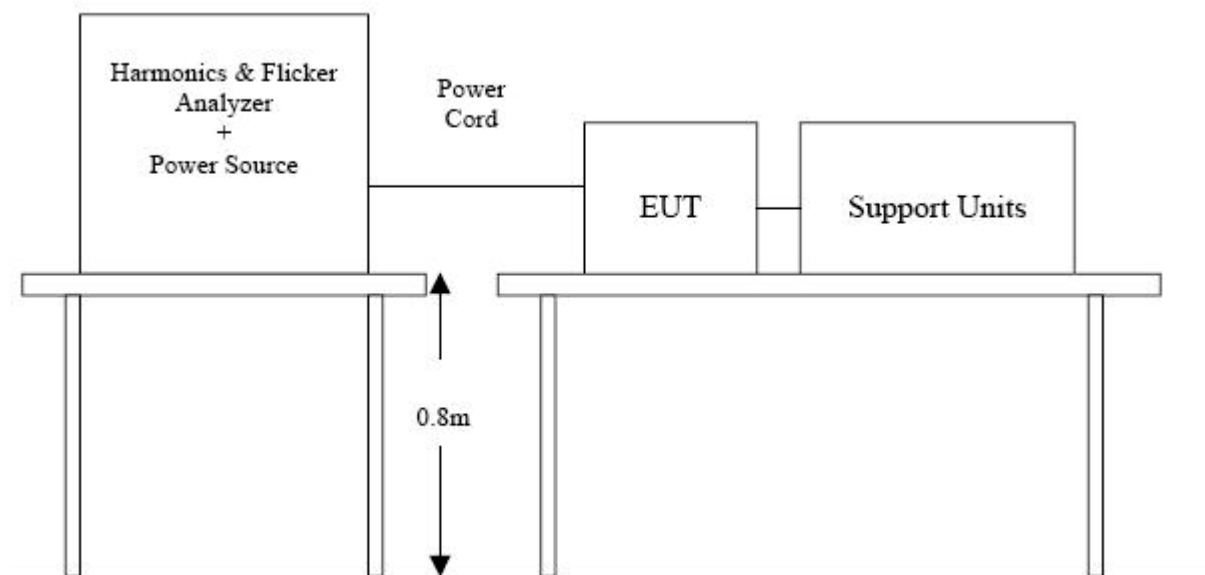

6.3 Test Procedure:

1. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
2. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

6.4 Test Equipment List and Details

No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	WTHE1026A1-002	HARMONICS&FLICKER ANALYSER	VOLTECH	PM6000	200006700433	2024-07-06	2025-07-05

6.5 Test Result

Basic Standard:	EN IEC 61000-3-2:2019+A1:2021
Observation time	150s
Windows width:	10 periods - (EN 61000-4-7 Edition 2000)
Temperature:	24 (°C)
Humidity:	55 (%RH)
Atmospheric pressure:	101.1 (kPa)
Operating Mode:	Mode1
Test Result:	Pass
Note:	The input power of the EUT is less than 75W, then this EUT could be deemed to comply with the requirements of EN IEC 61000-3-2:2019+A1:2021 without test.


7 – VOLTAGE FLUCTUATIONS AND FLICKER TEST

7.1 Application and Limit of Voltage Fluctuations and Flicker Test

Compliance to these standards ensures that tested equipment will not generate flickers and voltage change at levels that cause unacceptable degradation of the main environment. This directly contributes to meeting compatibility levels established in other EMC standards, which defines compatibility levels for low-frequency conducted disturbances in low-voltage supply systems.

Test Item	Limit	Remark
Pst	1.0	Pst means short-term flicker indicator.
Plt	0.65	Plt means long-term flicker indicator.
Tdt (ms)	500	Tdt means maximum time that dt exceeds 3 %.
dmax (%)	4%	dmax means maximum relative voltage change.
dc (%)	3.3%	dc means relative steady-state voltage change

7.2 Block Diagram of Test Setup:

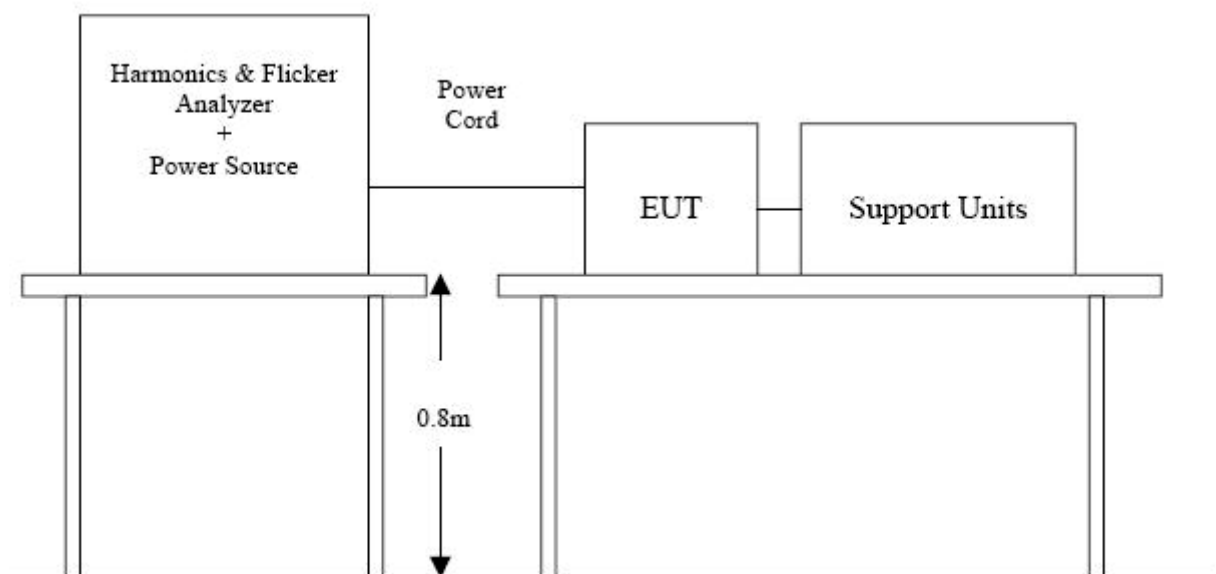

7.3 Test Procedure:

1. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
2. During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

7.4 Test Equipment List and Details

No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	WTHE1026A1-002	HARMONICS&FLICKER ANALYSER	VOLTECH	PM6000	200006700433	2024-07-06	2025-07-05

7.5 Test Result

Basic Standard:	EN 61000-3-3:2013+A2:2021
Short time (Pst)	10 min
Observation time	10 min (1 Flicker measurement)
Temperature:	24 (°C)
Humidity:	55 (%RH)
Atmospheric pressure:	101.1 (kPa)
Operating Mode:	Mode1
Test Result:	Pass

Maximum Flicker results			
Test Item	EUT values	Limit	Result
Pst	0.071	1.000	Pass
dc [%]	0.006	3.300	Pass
dmax [%]	0.125	4.000	Pass
dt [ms]	/	500	Pass

8- IMMUNITY TEST DESCRIPTION

8.1 General Description

Product Standard	EN 61000-6-1	
Basic Standard, Specification, and Performance Criterion required	EN 61000-4-2	Electrostatic Discharge – ESD: $\pm 8\text{kV}$ air discharge, $\pm 4\text{kV}$ Contact discharge, Performance Criterion B
	EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test – RS: 80 ~ 1000 MHz, 3V/m, 80% AM (1kHz), Performance Criterion A
	EN 61000-4-4	Electrical Fast Transient/Burst - EFT, Power line: $\pm 1\text{kV}$, Signal line: $\pm 0.5\text{kV}$, Performance Criterion B
	EN 61000-4-5	Surge Immunity Test: 1.2/50 μs Open Circuit Voltage, 8 /20 μs Short Circuit Current, Power Line: line to line 1 kV, line to ground 2 kV Signal line: line to ground: outdoor: 1kV indoor: 0.5kV Performance Criterion B
	EN 61000-4-6	Conducted Radio Frequency Disturbances Test – CS: 0.15 ~ 80 MHz, 3Vrms, 80% AM, 1kHz, Performance Criterion A
	EN 61000-4-11	Voltage Dips: 1) 0% residual for 0.5 cycle, Performance Criterion B 2) 0% residual for 1 cycle, Performance Criterion B 3) 70% residual for 25/30 cycles for 50/60Hz, Performance Criterion C Voltage Interruptions: 0% residual for 250/300 cycles for 50/60Hz, Performance Criterion C is required for EUT with battery back-up Performance Criterion C is required for EUT without battery back-up

8.2 The phenomena allowed during and after test in each criterion are clearly stated in the following table

Performance criteria		
Criteria	During test	After test
A	Shall operate as intended. May show degradation of performance (see note1). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance (see note 2). Shall be no loss of function. Shall be no loss of stored data or user programmable functions.
B	May show loss of function (one or more). May show degradation of performance (see note 1). No unintentional transmissions.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no degradation of performance (see note 2). Shall be no loss of stored data or user programmable functions.
C	May be loss of function (one or more).	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no degradation of performance (see note 2).
NOTE 1: Degradation of performance during the test is understood as a degradation to a level not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended. NOTE 2: No degradation of performance after the test is understood as no degradation below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. After the test no change of actual operating data or user retrievable data is allowed. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.		

8.3 Deviations from the standard

No deviations from EN 61000-6-1 were made when performing the tests described in this report.


9- IMMUNITY TEST RESULTS

9.1 Electrostatic Discharge Immunity Test

9.1.1 Test Specification

Basic Standard:	EN 61000-4-2:2009
Test Level:	± 8 kV (Air Discharge) ± 4 kV (Contact Discharge) ± 4 kV (Indirect Contact HCP) ± 4 kV (Indirect Contact VCP)
Temperature:	23.6 (°C)
Humidity:	55 (%RH)
Atmospheric pressure:	101.1 (kPa)
Operating Mode:	Mode1

9.1.2 Test Setup

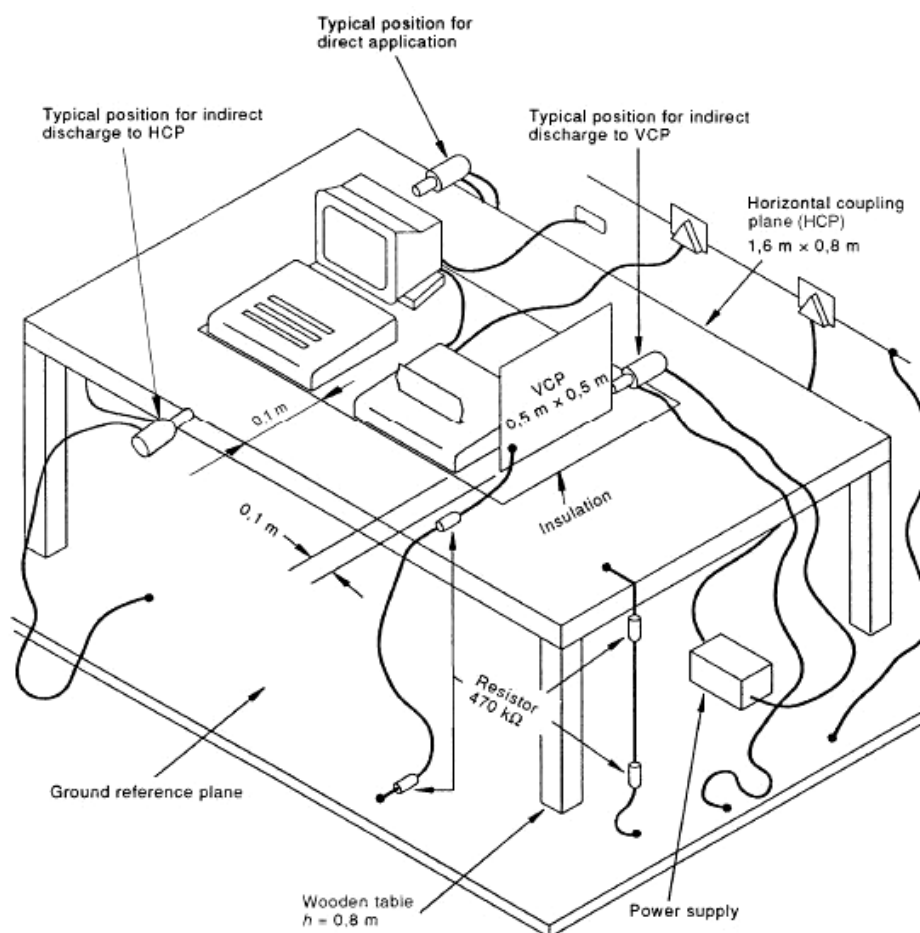

9.1.3 Test Procedure

1. Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
2. The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
3. The time interval between two successive single discharges was at least 1 second.
4. The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
5. Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
6. Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
7. At least ten single discharges (in the most sensitive polarity) were applied to the Horizontal Coupling Plane at points on each side of the EUT. The ESD generator was positioned horizontally at a distance of 0.1 meters from the EUT with the discharge electrode touching the HCP.
8. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane in sufficiently different positions that the four faces of the EUT were completely illuminated. The VCP (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

9.1.4 Test Equipment List and Details

No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	WTHE1016A1-002	Electrostatic Discharge Simulator	NoiseKen	ESS-B3011	/	2024-06-21	2025-06-20

9.1.5 Performance Criterion Required & Test Result

Table 1: Electrostatic Discharge Immunity (Air Discharge)

Test Level			Test Points	Observation Performance	Criterion Required
±2 kV	±4kV	±8kV			
☐	☐	☒	Gap	A	B
☐	☐	☒	Other Port	A	B

Table 2: Electrostatic Discharge Immunity (Direct Contact)

Test Level			Test Points	Observation Performance	Criterion Required
±2 kV	±4kV	±8kV			
☐	☒	☐	Shell	A	B
☐	☒	☐	Lan	A	B

Table 3: Electrostatic Discharge Immunity (Indirect Contact HCP)

Test Level			Test Points	Observation Performance	Criterion Required
±2 kV	±4kV	±8kV			
☐	☒	☐	Front Side	A	B
☐	☒	☐	Back Side	A	B
☐	☒	☐	Left Side	A	B
☐	☒	☐	Right Side	A	B

Table 4: Electrostatic Discharge Immunity (Indirect Contact VCP)

Test Level			Test Points	Observation Performance	Criterion Required
±2 kV	±4kV	±8kV			
☐	☒	☐	Front Side	A	B
☐	☒	☐	Back Side	A	B
☐	☒	☐	Left Side	A	B
☐	☒	☐	Right Side	A	B


Test Result: Pass

9.2 Radiated Susceptibility Test

9.2.1 Test Specification

Basic Standard:	EN 61000-4-3:2006+A2:2010
Frequency Range:	80~1000MHz
Modulation:	Amplitude 80%, 1kHz sinewave
Test Level:	3V/m
Temperature:	23.6 (°C)
Humidity:	55 (%RH)
Atmospheric pressure:	101.1 (kPa)
Operating Mode:	Mode1

9.2.2 Test Setup

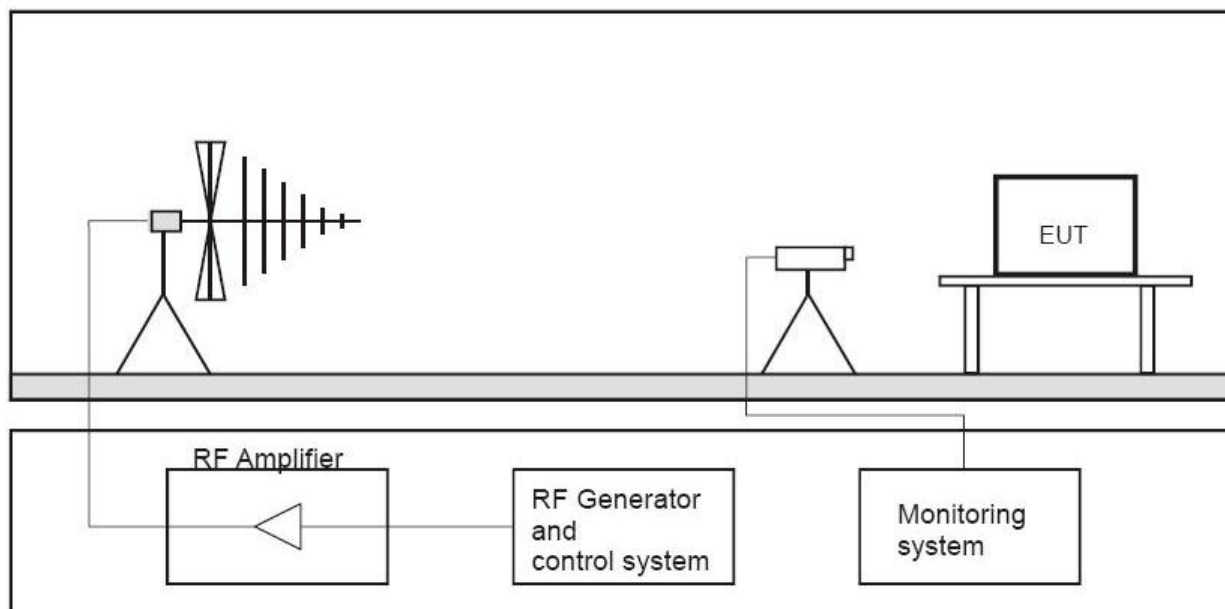

9.2.3 Test Procedure

1. The testing was performed in a fully-anechoic chamber.
2. The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80% amplitude modulated with a 1kHz sine wave.
3. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to respond, but shall in no case be less than 0,5s.
4. The field strength level was 3V/m.
5. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

9.2.4 Test Equipment List and Details

No.	Equipment	Manufacturer	Model No.	S/N	Calibration Date	Next Calibration Date
1	Signal Generator	HP	8688B	3438A00604	2025-02-24	2026-02-23
2	Power Sensor	Agilent	E9301A	MY52450001	2025-02-24	2026-02-23
3	Power Sensor	Agilent	E9304A	MY55081055	2025-02-24	2026-02-23
4	RF Power Amplifier	MicoTop	MPA-80-1000-250	MPA1906239	2025-02-24	2026-02-23
5	RF Power Amplifier	MicoTop	MPA-80-1000-100	MPA1906238	2025-02-24	2026-02-23
6	Antenna	SCHWARZBECK	STLP 9129	9129 114	N/A	N/A
7	Power Meter	Agilent	E4419B	GB42420578	2025-02-24	2026-02-23

9.2.5 Performance Criterion Required & Test Result

Frequency Band (MHz)	Test Level	Test Points	Observation Performance	Criterion Required
80-1000	3V/m	Front Side	A	A
80-1000	3V/m	Rear Side	A	A
80-1000	3V/m	Left Side	A	A
80-1000	3V/m	Right Side	A	A


Test Result: Pass

9.3 Electrical Fast Transient/Burst Immunity Test

9.3.1 Test Specification

Basic Standard :	EN 61000-4-4:2012
Test Level:	± 1 kV for AC Power Line ± 0.5 kV for Communication Line (If applicable)
Impulse Frequency:	5kHz
Impulse Wave-shape:	5/50ns
Burst Duration:	15ms
Burst Period:	300ms
Test Duration:	1 min.
Temperature:	24 (°C)
Humidity:	55 (%RH)
Atmospheric pressure:	101.1 (kPa)
Operating Mode:	Mode1

9.3.2 Test Setup

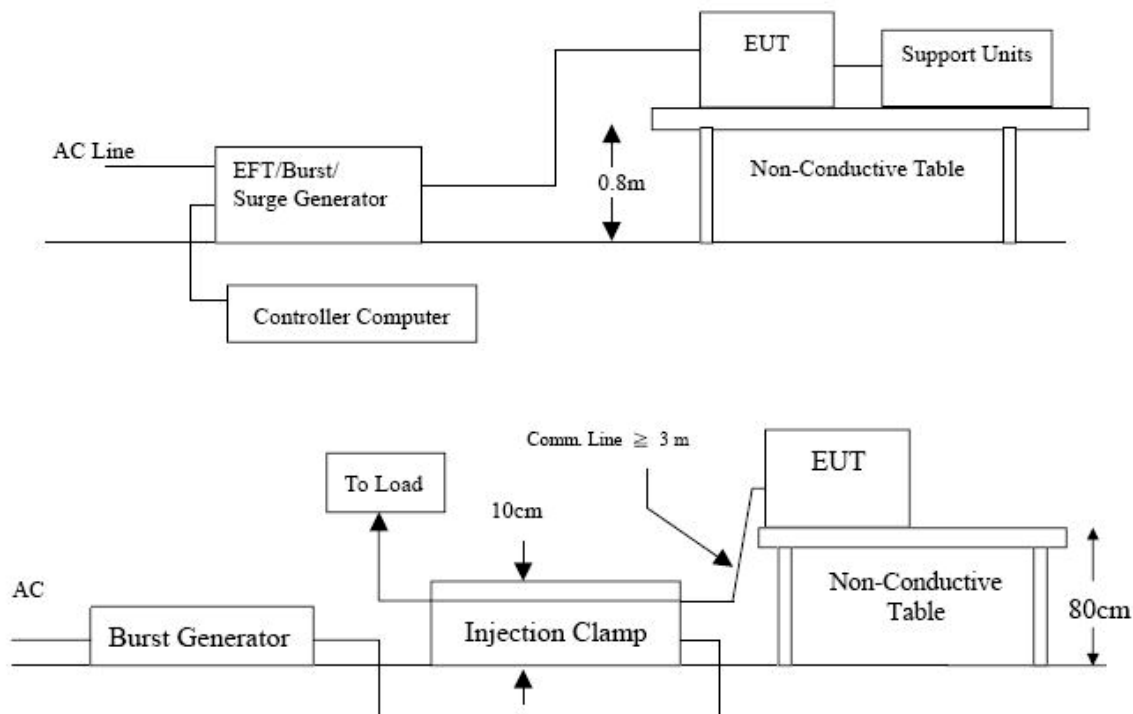

9.3.3 Test Procedure

1. Both positive and negative polarity discharges were applied.
2. The length of the “hot wire” from the coaxial output of the EFT generator to the terminals on the EUT should be 0.5m.
3. The duration time of each test sequential was 1 minute.
4. The transient/burst waveform was in accordance with EN 61000-4-4, 5/50ns.

9.3.4 Test Equipment List and Details

No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	WTHE1017A1-001	Fast Transient Burst Generator	SCHAFFNER	MODULA6150	34572	2025-02-24	2026-02-23

9.3.5 Performance Criterion Required & Test Result

Voltage	Test Points	Observation Performance	Criterion Required
±1kV	L	A	B
±1kV	N	A	B
±1kV	Earth	A	B
±1kV	L+N	/	/
±1kV	L + Earth	A	B
±1kV	N + Earth	A	B
±1kV	L+N+Earth	A	B
±0.5kV	Control Line	/	/
±0.5kV	DSL (RJ11)	/	/
±0.5kV	LAN (RJ45)	/	/


Test Result: Pass

9.4 Surge Immunity Test

9.4.1 Test Specification

Basic Standard :	EN 61000-4-5:2014+A1:2017
Test Level:	$\pm 0.5, 1$ kV (Line to Line) for AC Power Line $\pm 0.5, 1, 2$ kV (Line(s) to Ground) for AC Power Line ± 0.5 kV for unshielded unsymmetrically operated interconnection lines (If applicable)
Wave-Shape:	Combination Wave 1.2/50 μ s Open Circuit Voltage 8/20 μ s Short Circuit Current
Generator Impedance:	42 ohm between signal line and ground 2 ohm between networks
Phase Angle:	$0^\circ / 90^\circ / 180^\circ / 270^\circ$
Pulse Repetition Rate:	1 time / min
Number of Tests:	5 positive and 5 negative at selected points
Temperature:	24 ($^\circ\text{C}$)
Humidity:	55 (%RH)
Atmospheric pressure:	101.1 (kPa)
Operating Mode:	Mode1

9.4.2 Test Setup

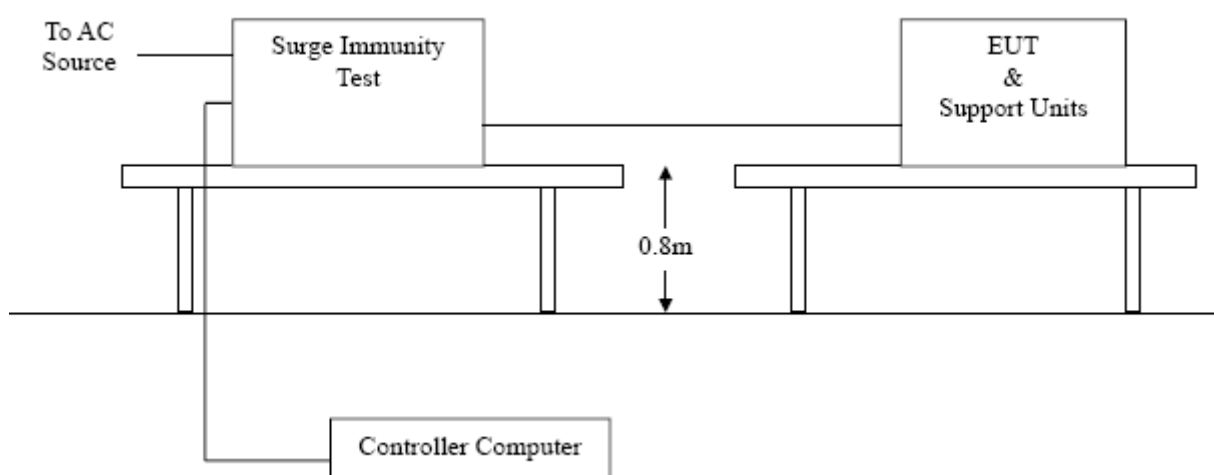

9.4.3 Test Procedure

1. For EUT power supply:

The surge is applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

2. For test applied to unshielded unsymmetrically operated interconnection lines of EUT: (If applicable)

The surge was applied to the lines via the capacitive coupling. The coupling / decoupling networks didn't influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

9.4.4 Test Equipment List and Details

No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	WTHE1025A1-001	10KV/Telecom Surge Generator	Lioncel	LSG-510CB	/	2025-02-24	2026-02-23
2	WTHE1025A1-002	10KV/Telecom Surge Generator	Lioncel	LSG-506CT	/	2025-02-24	2026-02-23
3	WTHE1025A1-003	Surge	Lioncel	FHR-T82	/	2025-02-24	2026-02-23
4	WTHE1025A1-004	Surge	Lioncel	CN533P	/	2025-02-24	2026-02-23

9.4.5 Performance Criterion Required & Test Result

Voltage	Test Points	Observation Performance	Criterion Required
±0.5kV	L-N	/	/
±1kV	L-N	A	B
±2kV	L-PE, N-PE	A	B
±4kV	L-N, L-PE, N-PE	A	B
±0.5kV	Control Line	/	/
±0.5kV	DSL (RJ11)	/	/
±0.5kV	LAN (RJ45)	/	/


Test Result: Pass

9.5 Conducted Susceptibility Test

9.5.1 Test Specification

Basic Standard:	EN 61000-4-6:2014+AC:2015
Test Level:	3Vr.m.s
Frequency Range:	0.15~80MHz
Modulation:	Amplitude 80%, 1kHz sinewave
Frequency Step:	1 % of preceding frequency value
Temperature:	24 (°C)
Humidity:	55 (%RH)
Atmospheric pressure:	101.1 (kPa)
Operating Mode:	Mode1

9.5.2 Test Setup

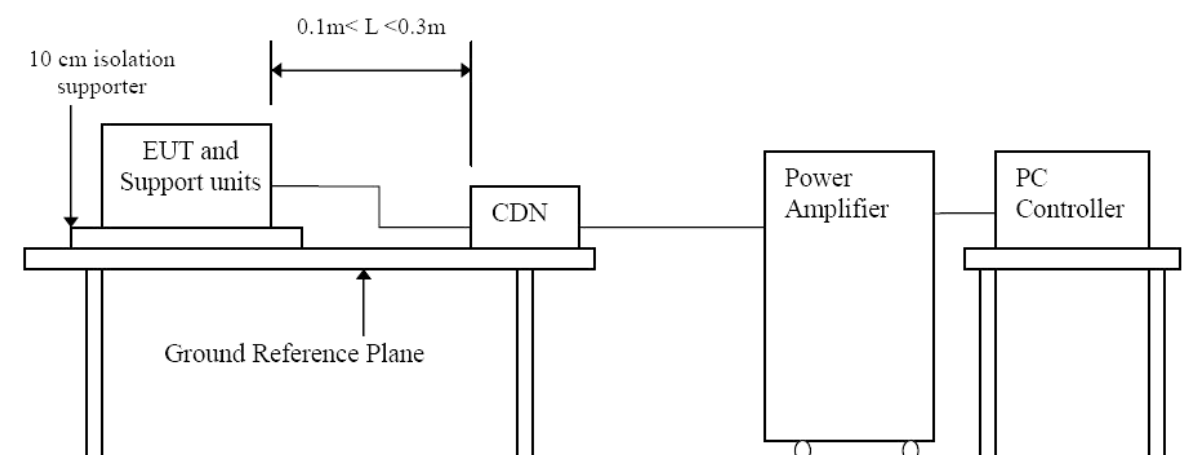

9.5.3 Test Procedure

1. The test was performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50-ohm load resistor.
2. The frequency range was swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal was modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. The sweep rate was 1.5×10^{-3} decades/s. Where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value from 150 kHz to 80 MHz.

3. The dwell time at each frequency was less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies such as clock frequency(ies) and harmonics or frequencies of dominant interest, was analyzed separately.
4. Attempts was made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.

9.5.4 Test Equipment List and Details

No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	WTHE1020A1-001	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2025-02-24	2026-02-23
2	WTHE1021A1-001	CDN	FRANKONIA	CDN M2+M3	A3027019	2025-02-24	2026-02-23
3	WTHE1014A1-002	6DB Attenuator	FRANKONIA	\	1001698	2025-02-24	2026-02-23
4	WTHE1015A1-002	EM Injection clamp	FCC	F-203I-23mm	091536	2025-02-24	2026-02-23

9.5.5 Performance Criterion Required & Test Result

Frequency Band (MHz)	Voltage (Vrms)	Test Points	Observation Performance	Criterion Required
0.15-80	3	L-N	A	A


Test Result: Pass

9.6 Voltage Dips, Short Interruptions Immunity Tests

9.6.1 Test Specification

Basic Standard:	EN 61000-4-11:2004+A1:2017
Test Level:	Voltage Dips: 1) 0% residual voltage for 0.5 cycle, 2) 0% residual voltage for 1 cycle, 3) 70% residual voltage for 25/30 cycles, Voltage Interruptions: 0% residual voltage for 250/300 cycles
Interval between event:	10 seconds
Phase Angle:	0°/180°
Test cycle:	3 times
Temperature:	24 (°C)
Humidity:	55 (%RH)
Atmospheric pressure:	101 (kPa)
Operating Mode:	Mode1

9.6.2 Test Setup

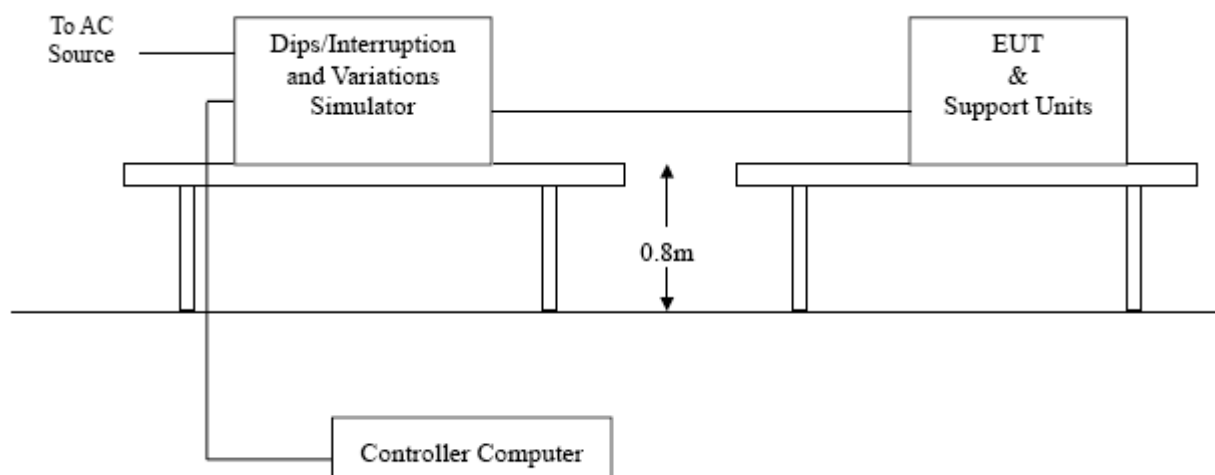

9.6.3 Test Procedure

The EUT was tested for each selected combination of test levels and duration with a sequence of 3 dips/interruptions with intervals of 10s (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

9.6.4 Test Equipment List and Details

No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	WTHE1027A1-00 1	Surge/Dips Generator	/	TRA2000	/	2025-02-24	2026-02-23

9.6.5 Performance Criterion Required & Test Result

Ut: 230V AC, 50Hz			
Voltage (% Residual)	Duration (Period)	Observation Performance	Criterion Required
0	0.5	A	B
0	1	A	B
70	25	A	C
0	250	C	C

Ut: 230V AC, 60Hz			
Voltage (% Residual)	Duration (Period)	Observation Performance	Criterion Required
0	0.5	A	B
0	1	A	B
70	30	A	C
0	300	C	C

Test Result: Pass

APPENDIX A - EUT PHOTOGRAPHS

Photo 1



Photo 2



Photo 3



Photo 4



Photo 5



Photo 6



Photo 7



Photo 8



***** END OF REPORT *****