



EMC TEST REPORT

For

SHENZHEN AIPEAN INDUSTRIAL COMPANY LIMITED

Product Name: Digital Photo Frame

Model No.: AD173

Prepared for : SHENZHEN AIPEAN INDUSTRIAL COMPANY LIMITED
Address : 5th Floor, Block No.2,B District, TianRui Industrial Park, Fuyuan
1st Road, Fuyong Town, Bao'an, Shenzhen

Prepared by : SHENZHEN POCE TECHNOLOGY CO., LTD.
Address : H Building, Hongfa Science and Technology Park,Tangtou,
Shiyan, Bao'an District, Shenzhen, China

Report No. : POCE19031911GRE
Date of Receiver : Mar. 19, 2019
Number of tested samples : 1
Serial number : Prototype
Date of Test : Mar. 19, 2019 to Mar. 23, 2019
Date of Report : Mar. 23, 2019

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior written consent of Shenzhen POCE Technology Co., Ltd

TABLE OF CONTENT

Description	Page
Test Report Description	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Test Standards	5
1.3. Test Methodology	5
1.4. Test Facility	5
2. MEASURING DEVICE AND TEST EQUIPMENT	6
2.1. For Power Line Conducted Emission	6
2.2. For Radiated Emission Measurement	6
2.3. For Harmonic Current / Flicker Measurement.....	6
2.4. For Electrostatic Discharge Immunity Test	6
2.5. For RF Strength Susceptibility Test	7
2.6. For Electrical Fast Transient /Burst Immunity Test.....	7
2.7. For Surge Immunity Test.....	7
2.8. For Injected Current Susceptibility Test.....	7
2.9. For Magnetic Field Immunity Test.....	7
2.10. For Voltage Dips and Interruptions Test.....	7
3. POWER LINE CONDUCTED EMISSION MEASUREMENT	8
3.1. Block Diagram of Test Setup	8
3.2. Measuring Standard	8
3.3. EUT Configuration on Measurement.....	8
3.4. Test Procedure	8
4. RADIATED EMISSION MEASUREMENT.....	11
4.1. Block Diagram of Test	11
4.2. Measuring Standard	11
4.3. EUT Configuration on Test.....	11
4.4. Test Procedure	12
5. HARMONIC CURRENT EMISSION MEASUREMENT	15
5.1 Block Diagram of Test Setup	15
5.2 Measuring Standard.....	15
5.3 Description of test Equipment.....	15
6. VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT.....	16
6.1 Block Diagram of Test Setup	16
6.2 Measuring Standard	16
7. ELECTROSTATIC DISCHARGE IMMUNITY TEST	18
7.1 Block Diagram of Test Setup	18
7.2 Test Standard	18
7.3 Severity Levels and Performance Criterion	18
7.4 Test Procedure	19
8. RF FIELD STRENGTH SUSCEPTIBILITY TEST	21
8.1 Block Diagram of Test	21
8.2 Test Standard.....	21
8.3 Severity Levels and Performance Criterion.....	22
8.4 Test Procedure	22
9. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST	24
9.1 Block Diagram of Test Setup	24
9.2 Test Standard	24
9.3 Severity Levels and Performance Criterion	24

9.4 Test Procedure	25
10. SURGE IMMUNITY TEST.....	27
10.1 Block Diagram of Test Setup	27
10.2 Test Standard	27
10.3 Severity Levels and Performance Criterion	27
10.4 Test Procedure	28
11. INJECTED CURRENTS SUSCEPTIBILITY TEST	30
11.1 Block Diagram of Test Setup.....	30
11.2 Test Standard	30
11.3 Severity Levels and Performance Criterion.....	30
11.4 Test Procedure	31
12. MAGNETIC FIELD SUSCEPTIBILITY TEST	33
12.1 Block Diagram of Test	33
12.2 Test Standard	33
12.3 Severity Levels and Performance Criterion	33
12.4 Test Procedure	33
13. VOLTAGE DIPS AND INTERRUPTIONS TEST	35
13.1 Block Diagram of Test Setup	35
13.2 Test Standard	35
13.3 Severity Levels and Performance Criterion	36
13.4 Test Procedure	36
14. PHOTOGRAPH	38
14.1 Photo of Conducted Emission	38
14.2 Photo of Radiated Emission	38
15. PHOTOGRAPHS OF EUT.....	39
16. MANUFACTURER/ APPROVAL HOLDER DECLARATION.....	43

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Digital Photo Frame

Trade Name : N/A

Model : AD173

Supplementary Model : AD701, AD702, AD703, AD704, AD706, AD718, AD719, AD801, AD802, AD803, AD806, AD101, AD102, AD103, AD104, AD105, AD106, AD107, AD116, AD121, AD122, AD123, AD124, AD125, AD126, AD127, AD131, AD132, AD133, AD134, AD135, AD141, AD142, AD143, AD145, AD151, AD152, AD153, AD154, AD155, AD156, AD157, AD161, AD171, AD172, AD176, AD181, AD185, AD215, AD231, AD261, AD321

Test Voltage : AC 230V/50Hz

Rating : From Adapter: Input: AC100-240V, 50-60Hz, 0.65A
Output: DC 12V, 2A

Applicant : SHENZHEN AIPEAN INDUSTRIAL COMPANY LIMITED

Address : 5th Floor, Block No.2,B District, TianRui Industrial Park, Fuyuan
1st Road, Fuyong Town, Bao'An, Shenzhen

Manufacturer : SHENZHEN AIPEAN INDUSTRIAL COMPANY LIMITED

Address : 5th Floor, Block No.2,B District, TianRui Industrial Park, Fuyuan
1st Road, Fuyong Town, Bao'An, Shenzhen

Test Standards : EN 55032:2015
EN 55035:2017
EN 61000-3-2:2014
EN 61000-3-3:2013

Test Result : PASS

Test Engineer :

Reviewed By:



1.2. Test Standards

Test Items	Test Results
Power Line Conducted Emission Test	PASS
Radiated Emission	PASS
Harmonic Current	N/A
Voltage Fluctuation And Flicker	PASS
Electrostatic Discharge Immunity	PASS
Radiated Electromagnetic Fields Immunity	PASS
Electric Fast Transient Burst Immunity	PASS
Surge Immunity	PASS
Injected Currents Susceptibility Test	PASS
Voltage Dips And Interruptions Immunity	PASS
Broad bandimpulse noise disturbances, repelitive	N/A
Broad bandimpulse noise disturbances, isolatad	N/A

Note: N/A means this test item is not applicable for this device.

1.3. Test Methodology

All measurements contained in this report were conducted with CISPR 16-1, radio disturbance and immunity measuring apparatus, and CISPR16-2, Method of measurement of disturbances and immunity.

All measurement required was performed at laboratory of Shenzhen POCE Technology Co., Ltd., at H Building, Hongfa Science and Technology Park, Tangtou, Shiyan, Bao'an District, Shenzhen, China

1.4. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS Registration Number. is L8229

The facility also complies with the radiated and AC line conducted test site criteria set forth in CISPR 16-1, CISPR16-2.

2. MEASURING DEVICE AND TEST EQUIPMENT

2.1. For Power Line Conducted Emission

Item	Equipment	Manufacturer	Model No.	Factory Number	Last Cal.
1.	Test Receiver	Rohde & Schwarz	ESPI TEST RECEIVER	ID:1164.6607K03-102109-MH	Dec. 14, 2018
2.	L.I.S.N	Rohde & Schwarz	ESH3-Z5.831.5518.52	9561-G071	Dec. 14, 2018
3.	50ΩCoaxial Switch	Anritsu	MP59B	M20531	N/A
4.	Pulse Limiter	SCHWARZ BECK	VTSD 9561-F Pulse limiter 10dB Ateennator	561-G071	Dec. 14, 2018
5.	Cable	SCHWARZ BECK	N/A	N/A	Dec. 14, 2018

2.2. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Factory Number	Last Cal.
1.	Test Receiver	Rohde & Schwarz	ESPI TEST RECEIVER	ID:1164.6607K03-102109-MH	Dec. 14, 2018
2.	Bilog Antenna	Sunol Sciences	Model JB6 Antenna	A090414	Dec. 14, 2018
3.	50ΩCoaxial Switch	Anritsu	MP59B	M20531	N/A
4.	control	Positioning Controller	Model MF-7802	MF780208362	Dec. 14, 2018
5.	Cable	SCHWARZ BECK	N/A	N/A	Dec. 14, 2018
6.	Cable	SCHWARZ BECK	N/A	N/A	Dec. 14, 2018

2.3. For Harmonic Current / Flicker Measurement

Item	Equipment	Manufacturer	Model No.	Factory Number	Last Cal.
1.	Coupling decoupling network	SCHAFFNER	M016	20812	Dec. 14, 2018
2.	PC	N/A	P2L97	N/A	Dec. 14, 2018

2.4. For Electrostatic Discharge Immunity Test

Item	Equipment	Manufacturer	Model No.	Factory Number	Last Cal.
1.	ESD Tester	Prima	ESD61002A	144305	Dec. 14, 2018

2.5. For RF Strength Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Factory Number	Last Cal.
1.	Signal Generator	HP	8648A	3625U00573	Dec. 14, 2018
2.	Amplifier	AR	500A100	17034	NCR
3.	Amplifier	AR	100W/1000M1	17028	NCR
4.	Isotropic Field Monitor	AR	FM2000	16829	NCR
5.	Isotropic Field Probe	AR	FP2000	16755	Dec. 14, 2018
6.	Biconic Antenna	EMCO	3108	9507-2534	NCR
7.	Log-periodic Antenna	AR	AT1080	16812	NCR
8.	PC	N/A	486DX2	N/A	N/A

2.6. For Electrical Fast Transient /Burst Immunity Test

Item	Equipment	Manufacturer	Model No.	Factory Number	Last Cal.
1.	Burst Tester	HTEC	HEFT 51	144303	Dec. 14, 2018
2.	Coupling Clamp	HTEC	IP-4A	147147	Dec. 14, 2018

2.7. For Surge Immunity Test

Item	Equipment	Manufacturer	Model No.	Factory Number	Last Cal.
1.	Surge Tester	HTEC	HCWG	144302	Dec. 14, 2018

2.8. For Injected Current Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Factory Number	Last Cal.
1.	Simulator	EMTEST	CWS500C	0900-12	Dec. 14, 2018
2.	CDN	EMTEST	CDN-M2	5100100100	Dec. 14, 2018
3.	CDN	EMTEST	CDN-M3	0900-11	Dec. 14, 2018
4.	Injection Clamp	EMTEST	F-2031-23MM	368	Dec. 14, 2018
5.	Attenuator	EMTEST	ATT6	0010222A	Dec. 14, 2018

2.9. For Magnetic Field Immunity Test


Item	Equipment	Manufacturer	Model No.	Factory Number	Last Cal.
1.	Magnetic Field Tester	HTEC	HPFM T	144301	Dec. 14, 2018

2.10. For Voltage Dips and Interruptions Test

Item	Equipment	Manufacturer	Model No.	Factory Number	Last Cal.
1.	Dips Tester	HTEC	HPFS	144304	Dec. 14, 2018

3. POWER LINE CONDUCTED EMISSION MEASUREMENT

3.1. Block Diagram of Test Setup

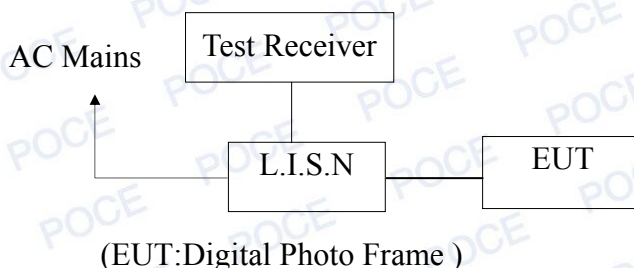

3.2. Measuring Standard

EN 55032:2015

Power Line Conducted Emission Limits (Class B)

Frequency (MHz)	Limit (dBμV)	
	Quasi-Peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0
NOTE1-The lower limit shall apply at the transition frequencies. NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.		

3.3. EUT Configuration on Measurement

The following equipments are installed on Conducted Emission Measurement to meet EN55032 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

3.4. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN55032 regulations during conducted emission measurement.


The bandwidth of the field strength meter (R&S Test Receiver ESCS30) is set at 9KHz in 150KHz~30MHz and 200Hz in 9KHz~150KHz.

The frequency range from 150kHz to 30MHz is investigated.

Conduction Uncertainty: $U_c = \pm 2.72 \text{ dB}$

Conducted Emission


EUT	:	Digital Photo Frame	Temperature:	20℃
M/N	:	AD173	Humidity	: 50%
Test Voltage	:	AC 230V/50Hz	Test Mode	: On
Test Engineer	:	Bill	Phase	: L-Line

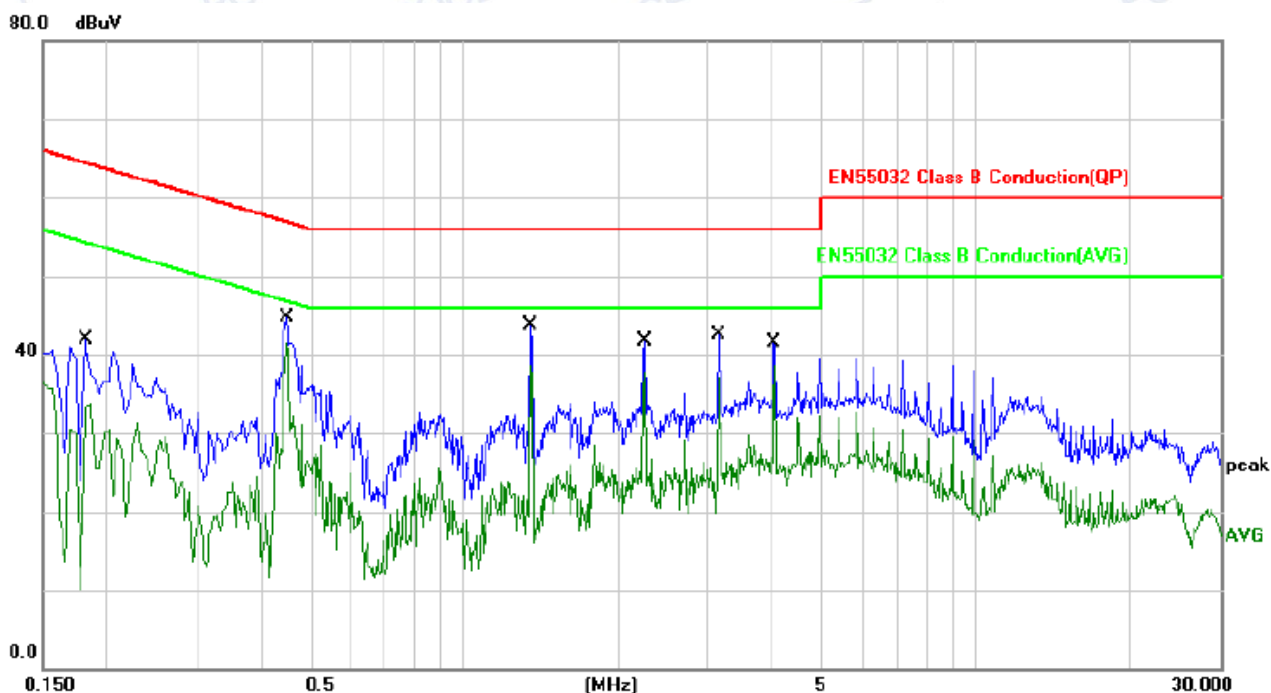

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1806	25.36	-0.13	25.23	54.45	-29.22	AVG	
2		0.1819	41.96	-0.13	41.83	64.39	-22.56	QP	
3		0.4500	44.76	-0.02	44.74	56.87	-12.13	QP	
4	*	0.4500	41.47	-0.02	41.45	46.87	-5.42	AVG	
5		1.3500	43.92	-0.17	43.75	56.00	-12.25	QP	
6		1.3500	38.72	-0.17	38.55	46.00	-7.45	AVG	
7		2.2500	42.02	-0.24	41.78	56.00	-14.22	QP	
8		2.2500	37.93	-0.24	37.69	46.00	-8.31	AVG	
9		3.1460	42.77	-0.18	42.59	56.00	-13.41	QP	
10		3.1460	37.21	-0.18	37.03	46.00	-8.97	AVG	
11		4.0460	41.77	-0.20	41.57	56.00	-14.43	QP	
12		4.0460	34.12	-0.20	33.92	46.00	-12.08	AVG	

Conducted Emission

EUT	:	Digital Photo Frame	Temperature:	20℃
M/N	:	AD173	Humidity	: 50%
Test Voltage	:	AC 230V/50Hz	Test Mode	: On
Test Engineer	:	Bill	Phase	: N-Line

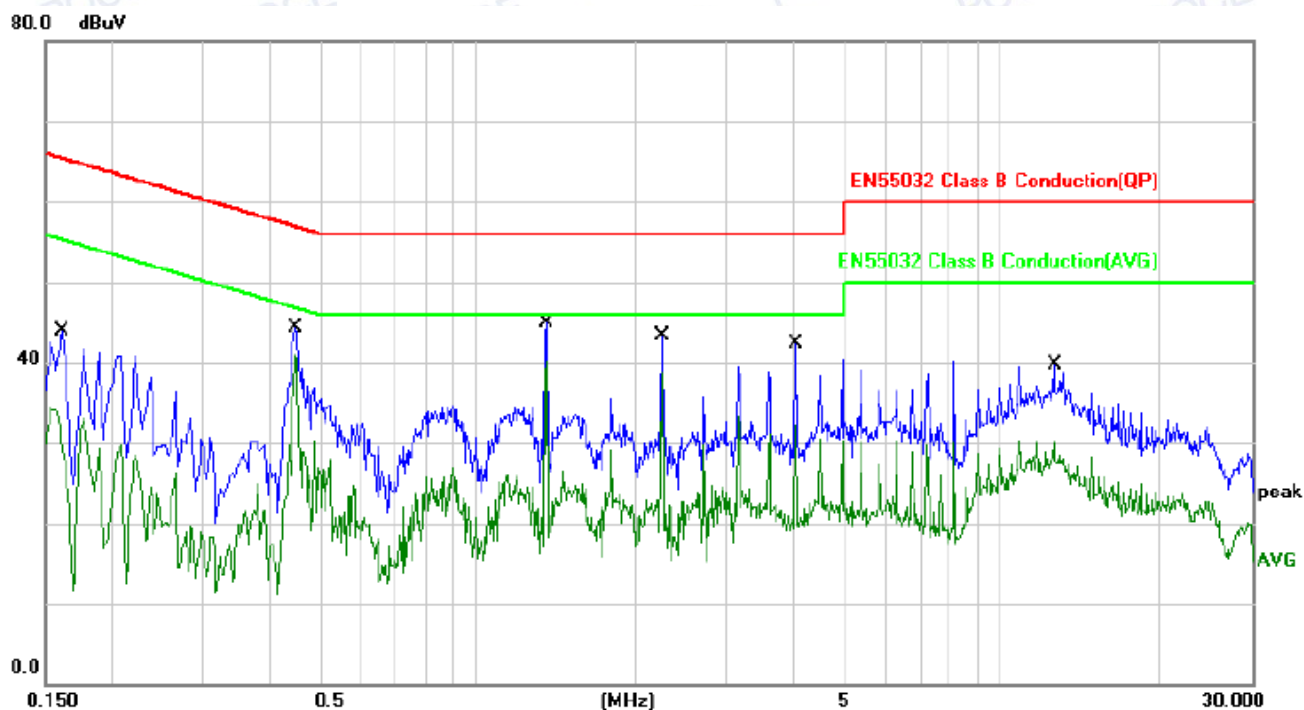


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	dBuV	Factor	ment	dBuV	dB	Detector	Comment
1		0.1620	44.07	-0.13	43.94	65.36	-21.42	QP	
2		0.1620	29.20	-0.13	29.07	55.36	-26.29	AVG	
3		0.4468	36.32	-0.02	36.30	46.93	-10.63	AVG	
4		0.4500	44.40	-0.02	44.38	56.87	-12.49	QP	
5		1.3500	38.66	-0.17	38.49	46.00	-7.51	AVG	
6		1.3540	45.09	-0.17	44.92	56.00	-11.08	QP	
7		2.2540	43.52	-0.25	43.27	56.00	-12.73	QP	
8	*	2.2540	39.02	-0.25	38.77	46.00	-7.23	AVG	
9		4.0540	42.42	-0.20	42.22	56.00	-13.78	QP	
10		4.0540	32.38	-0.20	32.18	46.00	-13.82	AVG	
11		12.6180	39.79	-0.14	39.65	60.00	-20.35	QP	
12		12.6980	28.08	-0.14	27.94	50.00	-22.06	AVG	

4. RADIATED EMISSION MEASUREMENT

4.1. Block Diagram of Test

4.1.1. Block diagram of test setup (In chamber)

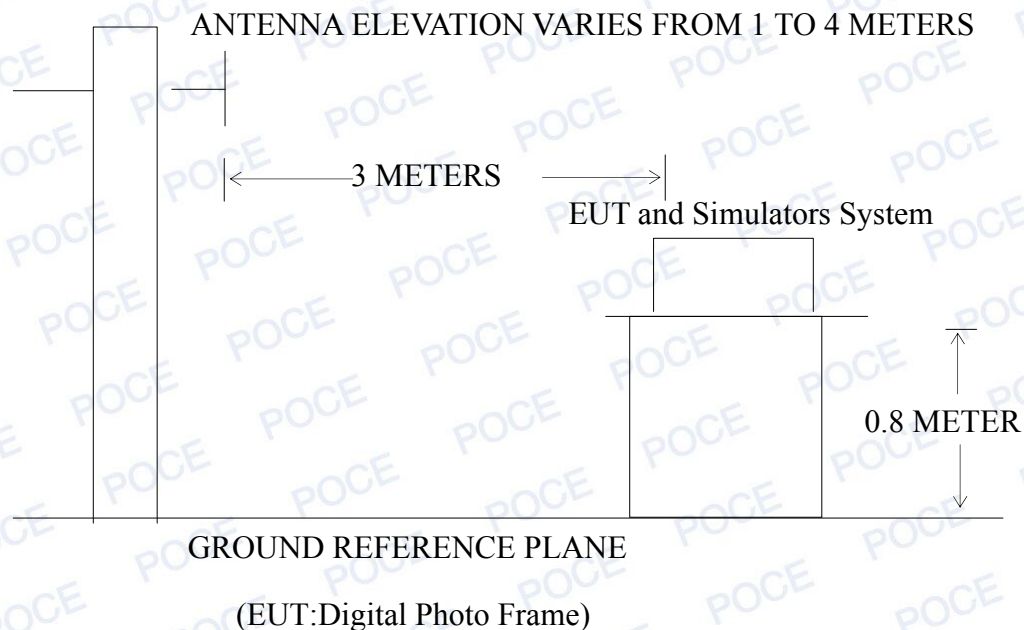

4.2. Measuring Standard

EN 55032:2015

Radiated Emission Limits

All emanations from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note: (1) The smaller limit shall apply at the combination point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.

4.3. EUT Configuration on Test

The EN55032 regulations test method must be used to find the maximum emission during radiated emission measurement.

4.4. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Bilog antenna (calibrated by Dipole Antenna) is used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the Receiver (ESCS30) is set at 120kHz.
The frequency range from 30MHz to 1000MHz is investigated.

Radiation Uncertainty: $U_r = \pm 3.84 \text{ dB}$

Radiated Emission Test Data

EUT	:	Digital Photo Frame	Temperature:	20℃
M/N	:	AD173	Humidity	: 50%
Test Voltage	:	AC 230V/50Hz	Test Mode	: On
Test Engineer	:	Bill	Polarization	: Horizontal

80.0 dBuV/m



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		109.7960	42.74	-13.59	29.15	40.00	-10.85	QP		
2		142.3241	44.24	-13.14	31.10	40.00	-8.90	QP		
3	!	207.1226	48.63	-14.25	34.38	40.00	-5.62	QP		
4		411.8240	47.93	-8.29	39.64	47.00	-7.36	QP		
5		896.9963	40.43	0.16	40.59	47.00	-6.41	QP		
6	*	962.1621	40.86	1.08	41.94	47.00	-5.06	QP		

Radiated Emission Test Data


EUT	:	Digital Photo Frame	Temperature:	20℃
M/N	:	AD173	Humidity	: 50%
Test Voltage	:	AC 230V/50Hz	Test Mode	: On
Test Engineer	:	Bill	Polarization	: Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	40.9881	47.95	-13.68	34.27	40.00	-5.73	QP		
2		55.0274	49.82	-19.19	30.63	40.00	-9.37	QP		
3		109.0284	44.24	-13.49	30.75	40.00	-9.25	QP		
4		375.9384	42.26	-9.56	32.70	47.00	-14.30	QP		
5		457.5072	40.08	-7.46	32.62	47.00	-14.38	QP		
6		793.3958	36.06	-1.71	34.35	47.00	-12.65	QP		

5. HARMONIC CURRENT EMISSION MEASUREMENT

5.1 Block Diagram of Test Setup

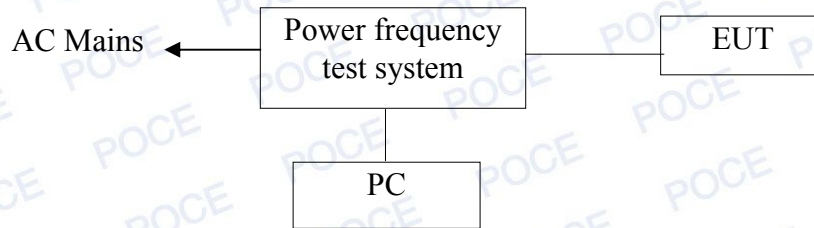

(EUT: Digital Photo Frame)

5.2 Measuring Standard


EN 61000-3-2: 2014

5.3 Description of test Equipment

Note: Equipment is less than 75W, no corresponding harmonic current limit.

6. VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT

6.1 Block Diagram of Test Setup

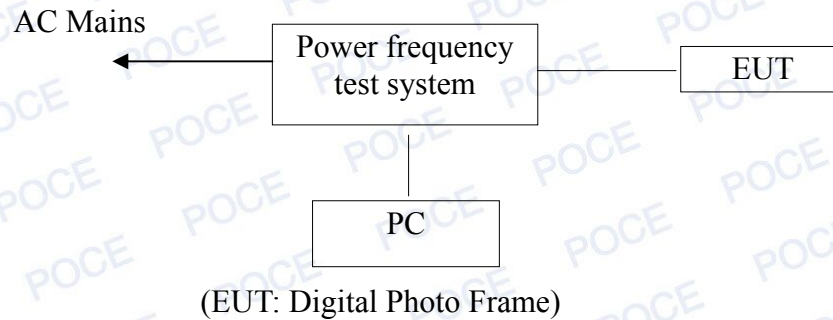

6.2 Measuring Standard

EN61000-3-3:2013

Voltage Fluctuation Flicker Test Data

EN 61000-3-3 TEST REPORT 2019-03-21 17:23

Unit: Digital Photo Frame

M/N: AD173

Test mode: On

Manufacturer: N/A

Operator: Bill

TEST SETUP

Test Freq.:	50.00 Hz.	Test Voltage:	230.0 vac
Waveform:	SINE		
Test Time:	120.0 min.	Tshort:	10.0 min.
Prog. Zo Enabled:	YES	Prog. Zo:	0.000

Voltage Change less than once per Hour: NO
Impedance selected: IEC-725 STD. REF.

Synthetic R+L Enabled: NO
Resistance: 0.380 Ohms Inductance: 460.000 uH


TEST DATA

Result:	PASS			
	EUT Data	Limit	Result	Test Enabled
Pst max	0.180	1.00	PASS	true
Plt max	0.171	0.65	PASS	true
dc %	0.00	3.00	PASS	true
dmax %	1.52	4.00	PASS	true
d(t) sec.	0.00	0.20	PASS	true
	Power Source Data			
Source Pst max	0.234	0.400	PASS	true
% THD	0.03	3.00	PASS	true


7. ELECTROSTATIC DISCHARGE IMMUNITY TEST

7.1 Block Diagram of Test Setup

7.1.1 Block Diagram of the EUT and the simulators



7.1.2 Block diagram of ESD test setup

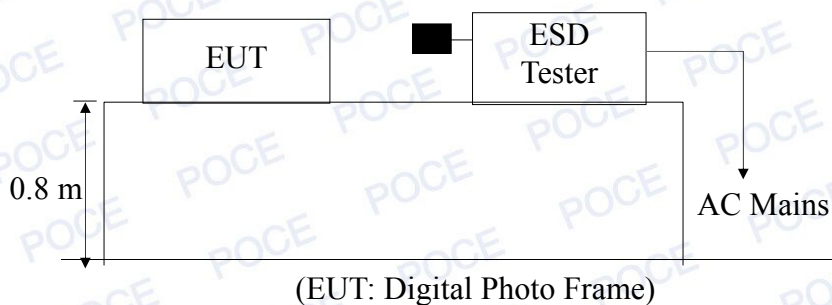

7.2 Test Standard

EN 55035:2017

Severity Level: 3 / Air Discharge: $\pm 8\text{KV}$ Level: 2 / Contact Discharge: $\pm 4\text{KV}$)

7.3 Severity Levels and Performance Criterion

7.3.1 Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	± 2	± 2
2.	± 4	± 4
3.	± 6	± 8
4.	± 8	± 15
X	Special	Special

7.3.2 Performance criterion: **B**

7.4 Test Procedure

7.4.1 Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

7.4.2 Contact Discharge:

All the procedure shall be same as Section 7.4.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

7.4.3 Indirect discharge for horizontal coupling plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

7.4.4 Indirect discharge for vertical coupling plane

At least 10 single discharge (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

Electrostatic Discharger Test Results

Standard	☐ IEC 61000-4-2 ☒ EN 55035		
Applicant	SHENZHEN AIPEAN INDUSTRIAL COMPANY LIMITED		
EUT	Digital Photo Frame	Temperature	24℃
M/N	AD173	Humidity	53%
Criterion	B	Pressure	1021mbar
Test Mode	Normal	Test Date	2019-03-21
Test Engineer	Nick		

Air Discharge

Test Points	Test Levels			Results		
	± 2KV	± 4KV	± 8KV	Passed	Fail	Performance Criterion
Front	☒	☒	☒	☒	☐	☐ A ☒ B
Back	☒	☒	☒	☒	☐	☐ A ☒ B
Left	☒	☒	☒	☒	☐	☐ A ☒ B
Right	☒	☒	☒	☒	☐	☐ A ☒ B
Top	☒	☒	☒	☒	☐	☐ A ☒ B
Bottom	☒	☒	☒	☒	☐	☐ A ☒ B

Contact Discharge

Test Points	Test Levels		Results		
	± 2 kV	±4 kV	Passed	Fail	Performance Criterion
Front	☒	☒	☒	☐	☐ A ☒ B
Back	☒	☒	☒	☐	☐ A ☒ B
Left	☒	☒	☒	☐	☐ A ☒ B
Right	☒	☒	☒	☐	☐ A ☒ B
Top	☒	☒	☒	☐	☐ A ☒ B
Bottom	☒	☒	☒	☐	☐ A ☒ B

Discharge To Horizontal Coupling Plane

Side of EUT	Test Levels		Results		
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion
Front	☒	☒	☒	☐	☐ A ☒ B
Back	☒	☒	☒	☐	☐ A ☒ B
Left	☒	☒	☒	☐	☐ A ☒ B
Right	☒	☒	☒	☐	☐ A ☒ B


Discharge To Vertical Coupling Plane

Side of EUT	Test Levels		Results		
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion
Front	☒	☒	☒	☐	☐ A ☒ B
Back	☒	☒	☒	☐	☐ A ☒ B
Left	☒	☒	☒	☐	☐ A ☒ B
Right	☒	☒	☒	☐	☐ A ☒ B


8. RF FIELD STRENGTH SUSCEPTIBILITY TEST

8.1 Block Diagram of Test

8.1.1 Block diagram of connection between the EUT and Load



8.1.2 Block diagram of RS test setup

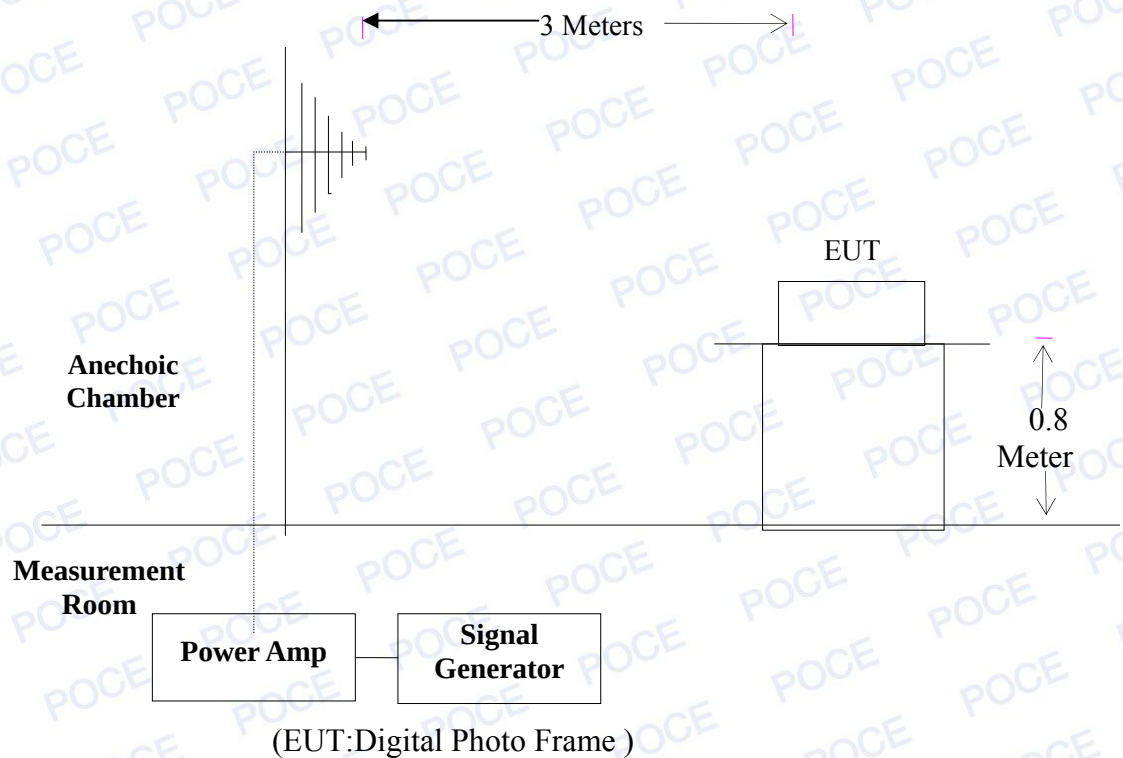

8.2 Test Standard

EN 55035:2017
Severity Level 2 at 3V / m

8.3 Severity Levels and Performance Criterion

8.3.1 Severity Levels

Level	Field Strength V/m
1.	1
2.	3
3.	10
X	Special

8.3.2 Performance Criterion : A

8.4 Test Procedure

The EUT are placed on a table which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD camera is used to monitor its screen. All the scanning conditions are as following:

Condition of Test

Remark

1. Fielded Strength
2. Radiated Signal
3. Scanning Frequency
4. Sweep time of radiated
5. Dwell Time

3V/m (Severity Level 2)
Modulated
80-1000MHz
1800MHz
2600MHz
3500MHz
5000MHz
0.0015 Decade/s
1 Sec.


RF Field Strength Susceptibility Test Results

EUT	: Digital Photo Frame	Temperature	: 22℃
M/N	: AD173	Humidity	: 50 %
Test Voltage	: AC 230V/50Hz	Test Mode	: On
Field Strength	: 3 V/m	Test Date	: 2019-03-21
Test Engineer:	Bill	Frequency Range:	80 MHz to1000 MHz
Modulation:		☐ None	☐ Pulse ☒ AM 1KHz 80%
Frequency Rang 1:		Frequency Rang 2:	
80~ 1000MHz			
Steps	1	/	%
	Horizontal	Vertical	
Front	PASS	PASS	
Right	PASS	PASS	
Rear	PASS	PASS	
Left	PASS	PASS	
Test Equipment : 1. Signal Generator : 2031 (MARCONI) 2. Power Amplifier : 500A100 & 100W/1000M1 (A&R) 3. Power Antenna : 3108 (EMCO) & AT1080 (A&R) 4. Field Monitor : FM2000 (A&R)			
Note: Note: (The Criterion) A:Normal performance within the specification limits; B:Temporary degradation or less of function or performance which is self-recoverable; C:Temporary degradation or loss of function or performance which requires operator intervention or system reset;			


9. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

9.1 Block Diagram of Test Setup

9.1.1. Block Diagram of the EUT



9.1.2. EFT Test Setup

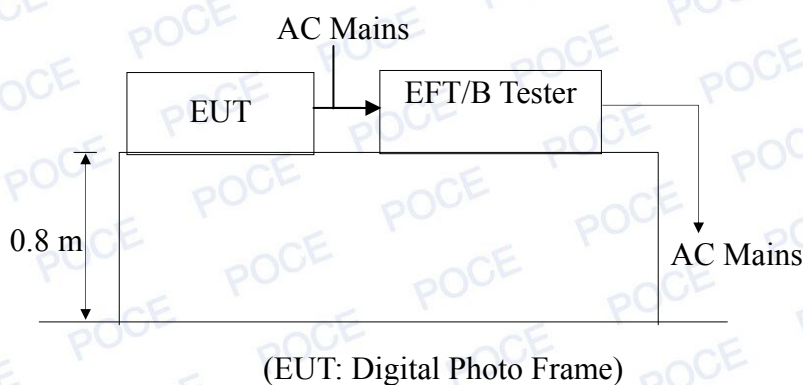

9.2 Test Standard

EN 55035:2017
Severity Level 2 at 1KV

9.3 Severity Levels and Performance Criterion

9.3.1 Severity level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 KV	0.25 KV
2.	1 KV	0.5 KV
3.	2 KV	1 KV
4.	4 KV	2 KV
X	Special	Special

9.3.2 Performance criterion: **B**

9.4 Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

9.4.1 For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

9.4.2 For signal lines and control lines ports:

No I/O ports. It's unnecessary to test.

9.4.3 For DC output line ports:

It's unnecessary to test.

Electrical Fast Transient/Burst Test Results

EUT	: Digital Photo Frame	Temperature:	20℃
M/N	: AD173	Humidity :	50%
Test Voltage	: AC 230V/50Hz	Test Mode :	On
Test Engineer	: Bill	Test Date :	2019-03-21
Line: ☒ AC Mains ☐ Signal line ☐ DC line		Coupling : ☒ Direct ☐ Capacitive	
Test Time : 120s			
Line	Test Voltage	Result	
L	1KV	PASS	
N	1KV	PASS	
L、N	1KV	PASS	
PE	±2KV	Pass	
L、PE	±2KV	Pass	
N、PE	±2KV	Pass	
L、PE、N	±2KV	Pass	
Test Equipment:Burst Tester Model : HEFT 51 Note: (The Criterion) A:Normal performance within the specification limits; B:Temporary degradation or less of function or performance which is self-recoverable; C:Temporary degradation or loss of function or performance which requires operator intervention or system reset;			

10. SURGE IMMUNITY TEST


10.1 Block Diagram of Test Setup

10.1.1 Block Diagram of the EUT



(EUT: Digital Photo Frame)

10.1.2. Surge Test Setup

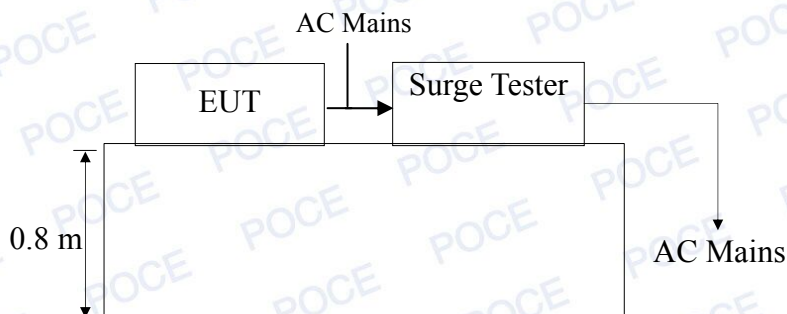

(EUT: Digital Photo Frame)

10.2 Test Standard

EN 55035:2017

Severity Level: Line to Line: Level 2, 1.0KV

10.3 Severity Levels and Performance Criterion

10.3.1. Severity level

Severity Level	Open-Circuit Test Voltage KV
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

10.3.2 Performance criterion : **B**

10.4 Test Procedure

- 1) Set up the EUT and test generator as shown on Section 10.1.2.
- 2) For line to line coupling mode, provide a 1.0 KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 4) Different phase angles are done individually.
- 5) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

Surge Immunity Test Result

EUT	:	Digital Photo Frame		Temperature:	20℃
M/N	:	AD173		Humidity	: 50%
Test Voltage	:	AC 230V/50Hz		Test Mode	: On
Test Engineer	:	Bill		Test Date	: 2019-03-21
Location	Voltage (KV)	1kV		2kV	
	Phase	+	-	+	-
L、N	0°	Pass	Pass		
	90°	Pass	Pass		
	180°	Pass	Pass		
	270°	Pass	Pass		
L、PE	0°			Pass	Pass
	90°			Pass	Pass
	180°			Pass	Pass
	270°			Pass	Pass
N、PE	0°			Pass	Pass
	90°			Pass	Pass
	180°			Pass	Pass
	270°			Pass	Pass

Test Equipment :Surge Tester Model: HCWG

Note: (The Criterion)

A:Normal performance within the specification limits;


B:Temporary degradation or less of function or performance which is self-recoverable;

C:Temporary degradation or loss of function or performance which requires operator intervention or system reset;


11. INJECTED CURRENTS SUSCEPTIBILITY TEST

11.1 Block Diagram of Test Setup

11.1.1 Block Diagram of the EUT



11.1.2 Block Diagram of Test Setup

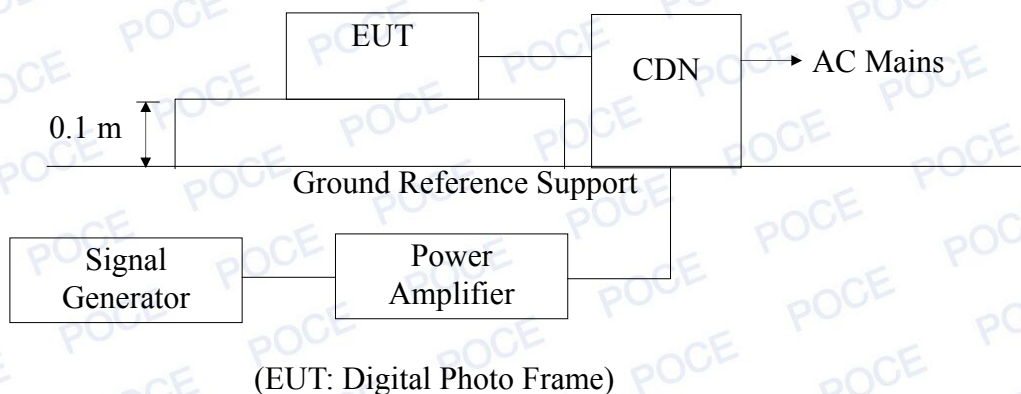

11.2 Test Standard

EN 55035:2017

Severity Level 2 at 3V (rms), 0.15MHz ~ 10MHz

Severity Level 2 and Level 1 at 3 V to 1V (rms), 10MHz ~ 30MHz

Severity Level 1 at 1V (rms), 30 MHz ~ 80MHz

11.3 Severity Levels and Performance Criterion

11.3.1 Severity level

Level	Field Strength V
1	1
2	3
3	10
X	Special

11.3.2 Performance criterion: A

11.4 Test Procedure

- 1) Set up the EUT, CDN and test generators as shown on Section 11.1.2.
- 2) Let the EUT work in test mode and measure it.
- 3) The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 150KHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.
- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.


Injected Currents Susceptibility Test Results

EUT	:	Digital Photo Frame	Temperature:	20℃
M/N	:	AD173	Humidity	: 50%
Test Voltage	:	AC 230V/50Hz	Test Mode	: On
Test Engineer	:	Bill	Test Date	: 2019-03-21
Frequency Range (MHz)		Injected Position	Strength (Unmodulated)	Result
0.15~10		AC Mains	3V	Pass
10-30		AC Mains	3 V to 1V	Pass
30-80		AC Mains	1V	Pass
Frequency Range (MHz)		Injected Position	Strength (Unmodulated)	Result
Test Equipment :Injected Currents Tester Model: CWS500C Injection Clamp Model: F-2031-23MM CDN Model: CDN-M2, CDN-M3 Note: (The Criterion) A:Normal performance within the specification limits; B:Temporary degradation or less of function or performance which is self-recoverable; C:Temporary degradation or loss of function or performance which requires operator intervention or system reset;				


12. MAGNETIC FIELD SUSCEPTIBILITY TEST

12.1 Block Diagram of Test

12.1.1 Block diagram of test setup



12.1.2 Magnetic field test setup

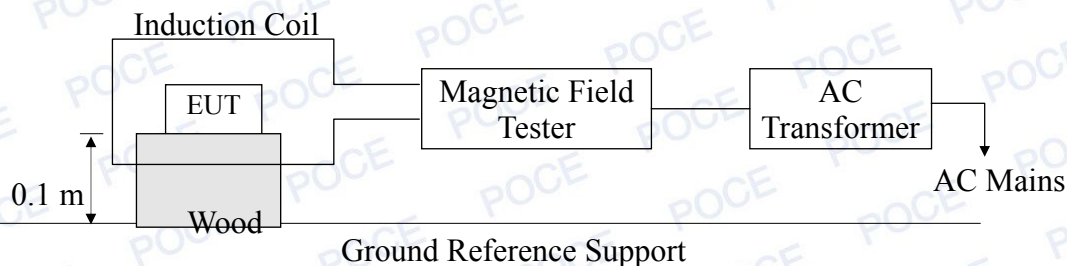

12.2 Test Standard

EN 55035:2017 (Severity Level: Level 1, 1A / m)

12.3 Severity Levels and Performance Criterion

12.3.1 Severity Levels

Level	Field Strength A/m
1	1
2	3
3	10
4	30
5	100
X	Special

12.3.2 Performance Criterion: A

12.4 Test Procedure

The EUT is placed in the middle of a induction coil (1*1m), under which is a 1*1*0.1m (high) table, this small table is also placed on a larger table,0.8 m above the ground. Both horizontal and vertical polarization of the induction coil are set on test, so that each side of the EUT is affected by the magnetic field. Also can reach the same aim by change the position of the EUT.

Magnetic Field Immunity Test Result

EUT	:	Digital Photo Frame	Temperature:	20℃
M/N	:	AD173	Humidity	: 50%
Test Voltage	:	AC 230V/50Hz	Test Mode	: On
Test Engineer	:	Bill	Test Date	: 2019-03-21
Test Level (A/M)		Testing Duration	Coil Orientation	Result
1		5 mins	X	Pass
1		5 mins	Y	Pass
1		5 mins	Z	Pass
Test Level (A/M)		Testing Duration	Coil Orientation	Result


Test Equipment :Magnetic Field Tester Model: HPFM T

Note: (The Criterion)
A:Normal performance within the specification limits;
B:Temporary degradation or less of function or performance which is self-recoverable;
C:Temporary degradation or loss of function or performance which requires operator intervention or system reset;


13. VOLTAGE DIPS AND INTERRUPTIONS TEST

13.1 Block Diagram of Test Setup

13.1.1 Block Diagram of the EUT



13.1.2 Dips Test Setup

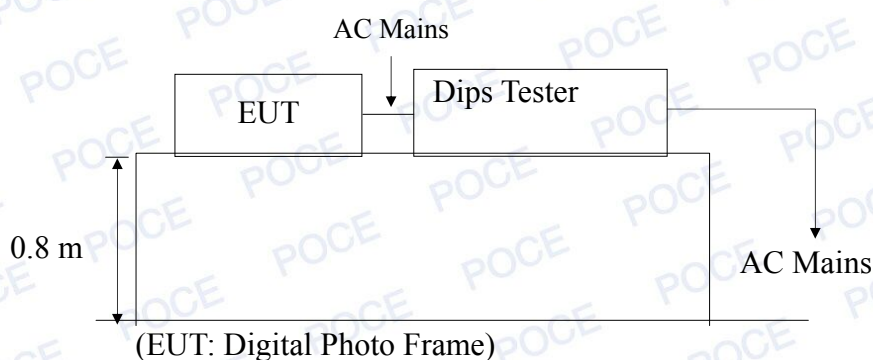

13.2 Test Standard

EN 55035:2017

13.3 Severity Levels and Performance Criterion

13.3.1 Severity level

Test Level %UT	Voltage dip and short interruptions %UT	Duration (in period)
0	100	0.5
40	60	1
70	30	5
		10
		25
		50
		*

13.3.2 Performance criterion : **B&C&C**

13.4 Test Procedure

- 1) Set up the EUT and test generator as shown on Section 13.1.2.
- 2) The interruptions is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

Voltage Dips And Interruptions Test Results

EUT	:	Digital Photo Frame	Temperature:	20℃
M/N	:	AD173	Humidity	: 50%
Test Voltage	:	AC 230V/50Hz	Test Mode	: On
Test Engineer	:	Bill	Test Date	: 2019-03-21
Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Criterion	Result
0	100	0.5P	B	Pass
70	30	25P	C	Pass
0	100	250P	C	Pass
Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Criterion	Result

Test Equipment : Voltage Dips And Interruptions Tester Model: HPFS


Note: (The Criterion)
A:Normal performance within the specification limits;
B:Temporary degradation or less of function or performance which is self-recoverable;
C:Temporary degradation or loss of function or performance which requires operator intervention or system reset;

14. PHOTOGRAPH

14.1 Photo of Conducted Emission



14.2 Photo of Radiated Emission

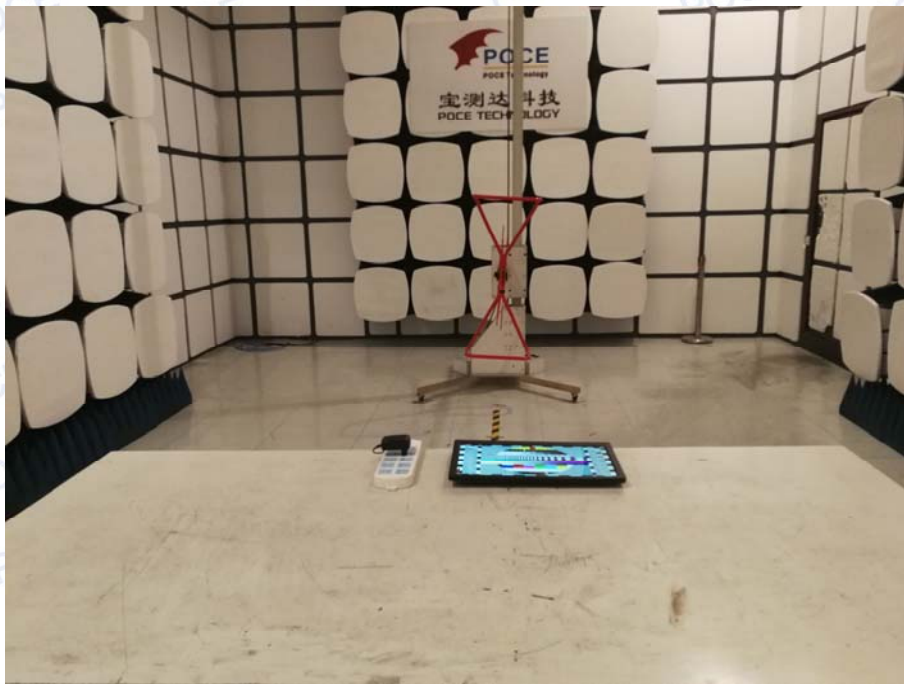

15. PHOTOGRAPHS OF EUT



Figure-1



Figure-2



Figure-3



Figure-4

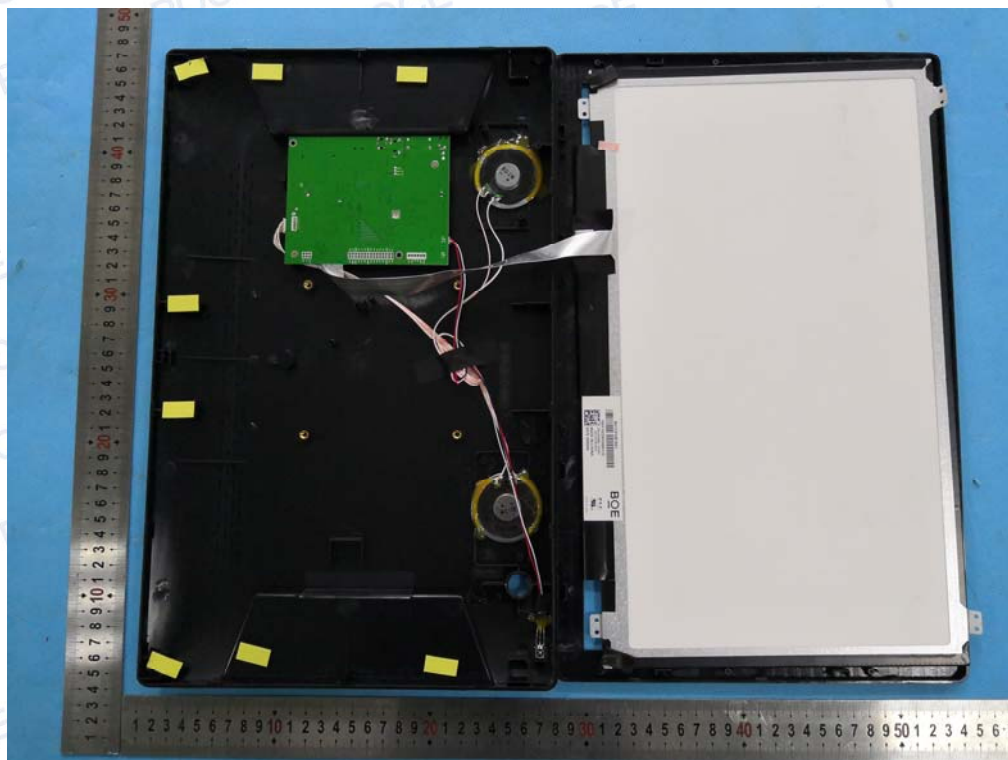


Figure-5



Figure-6

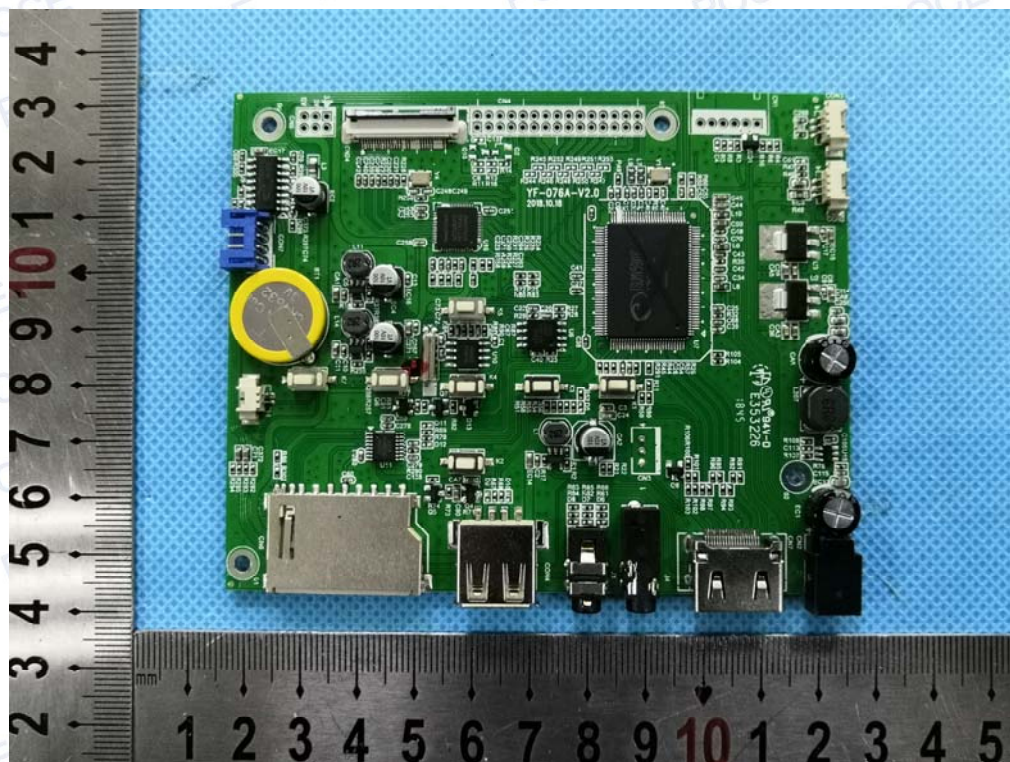


Figure-7

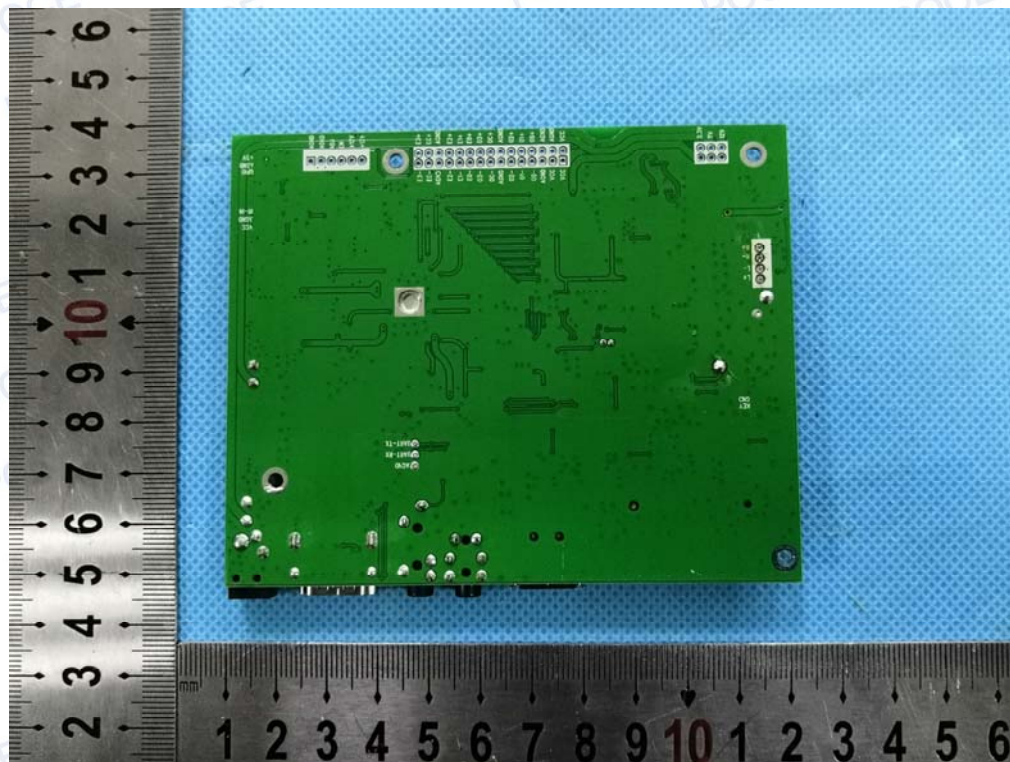


Figure-8

16. MANUFACTURER/ APPROVAL HOLDER DECLARATION

The following identical model(s):

AD173, AD701, AD702, AD703, AD704, AD706, AD718, AD719, AD801, AD802, AD803, AD806, AD101, AD102, AD103, AD104, AD105, AD106, AD107, AD116, AD121, AD122, AD123, AD124, AD125, AD126, AD127, AD131, AD132, AD133, AD134, AD135, AD141, AD142, AD143, AD145, AD151, AD152, AD153, AD154, AD155, AD156, AD157, AD161, AD171, AD172, AD176, AD181, AD185, AD215, AD231, AD261, AD321

Note: Model name only use for marking.

Belong to the tested device:

Product description	:	Digital Photo Frame
Model name	:	AD173

Remark: So no additional models tested.

*****THE END OF REPORT*****