

FCC SDOC TEST REPORT

Sample : Digital player

Trade Mark : N/A

Main Model : MP401

Additional Model : MP402, MP3-01B, S05, F37, S21, S16, M21,
M11

Report No. : UNIA23090701ER-41

Prepared for

Shenzhen Ji Feng Tong Tong Technology co., Ltd
1001, Building 3, Zhongtai Electronic Science and Technology Park,
East Ring 1st Road, Longhua, Shenzhen

Prepared by

Shenzhen United Testing Technology Co., Ltd.
D101&D401, No. 107, Kaicheng High-Tech Park, Taoyuan Community, Dalang
Sub-District, Longhua District, Shenzhen, Guangdong, China

TEST RESULT CERTIFICATION

Applicant : Shenzhen Ji Feng Tong Tong Technology co., Ltd

Address : 1001, Building 3, Zhongtai Electronic Science and Technology
Park, East Ring 1st Road, Longhua, Shenzhen

Manufacturer : Shenzhen Ji Feng Tong Tong Technology co., Ltd

Address : 1001, Building 3, Zhongtai Electronic Science and Technology
Park, East Ring 1st Road, Longhua, Shenzhen

Product description

Product..... : Digital player

Trade Mark : N/A

Model Name : MP401, MP402, MP3-01B, S05, F37, S21, S16, M21, M11

Standards : FCC Part 15 Subpart B
ANSI C63.4:2014

Date of Test

Date (s) of performance of tests..... : May 01,2023 ~ May 12,2023

Date of Issue..... : Oct. 10, 2023

Test Result..... : Pass

Prepared by:



Jason Ye/Editor

Reviewer:



Kelly Cheng/Supervisor

Approved & Authorized Signer:



Liuze/Manager

Table of Contents

Page

1 TEST SUMMARY	4
1.1 TEST PROCEDURES AND RESULTS	4
1.2 TEST LOCATION	4
1.3 MEASUREMENT UNCERTAINTY	4
1.4 ENVIRONMENTAL CONDITIONS	4
2 GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	6
2.3 DESCRIPTION OF TEST SETUP	6
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	6
2.5 MEASUREMENT INSTRUMENTS LIST	7
3 CONDUCTED EMISSIONS MEASUREMENT	8
3.1 TEST LIMIT	8
3.2 TEST SETUP	8
3.3 TEST PROCEDURE	9
3.4 TEST RESULT	9
4 RADIATED EMISSION MEASUREMENT	12
4.1 TEST LIMIT	12
4.2 TEST SETUP	13
4.3 TEST PROCEDURE	14
4.4 TEST RESULT	14
5 PHOTO OF EUT	19
6 PHOTO OF TEST	24

1 TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

Standard	Test Item	Class	Result
FCC Part 15 Subpart B ANSI C63.4:2014	Conducted Emission	Class B	PASS
	Radiated Emission	Class B	PASS

Note: (1) "N/A" denotes test is not applicable in this test report.
(2) For client's request and manual description, the test will not be executed.
(3) "--" means "no" in this test report.

1.2 TEST LOCATION

Test Laboratory : Shenzhen United Testing Technology Co., Ltd.
Address : D101&D401, No. 107, Kaicheng High-Tech Park, Taoyuan Community,
Dalang Sub-District, Longhua District, Shenzhen, Guangdong, China

1.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Conducted Measurement:

Test Site	Measurement Frequency Range	U, (dB)	NOTE
UNI	9kHz ~ 150kHz	2.96	--
	150kHz ~ 30MHz	2.44	--

B. Radiated Measurement:

Test Site	Measurement Frequency Range	U, (dB)	NOTE
UNI	9kHz ~ 30MHz	2.50	--
	30MHz ~ 1000MHz	4.80	--
	1000MHz ~ 6000MHz	4.13	--

1.4 ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35 °C
Relative Humidity:	30~60 %
Air Pressure:	950~1050 hPa

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

The following information of EUT submitted and identified by applicant:

Product:	Digital player
Trade Mark:	N/A
Main Model:	MP401
Additional Model:	MP402, MP3-01B, S05, F37, S21, S16, M21, M11
Model Difference:	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: MP401.
Power Source:	DC 3.7V by battery or DC 5V by adapter
Product Description:	The EUT is a Digital player. Based on the application, features, or specification exhibited in User's Manual, more details of EUT technical specification, please refer to the User's Manual.

I/O Port Information (☒Applicable ☐Not Applicable)


I/O Port Type	Number
USB	1
AUDIO	1

2.2 DESCRIPTION OF TEST MODES

No.	Test mode description	Worst
1	Charging mode+ BT+wired earphone playing mode	V
2	BT+wired earphone playing mode	--
3	mode +wired earphone playing mode	V
Note: 1. V means EMI worst mode. 2. All modes have been tested and only the worst mode test data recorded in the test report.		

Note: The test modes were carried out for all operation modes(include link and idle).

2.3 DESCRIPTION OF TEST SETUP



Note: The EUT tested system was configured as upper figure, unless otherwise a special operating condition is specified in the following during the testing.

2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Power Cable Length	Note
E-1	Digital player	N/A	MP401	--	EUT
E-2	Adapter	--	--	--	AE
E-3	Phone	Xiaomi	--	--	AE

Note:

1. The support equipment was authorized by Declaration of Confirmation.
2. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

2.5 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
Conduction Emissions Measurement					
1	Conducted Emission Test Software	EZ-EMC	Ver.CCS-3A1-CE	N/A	N/A
2	AMN	Schwarzbeck	NNLK8121	8121370	2024.06.11
3	AAN	TESEQ	T8-Cat6	38888	2024.06.11
4	Pulse Limiter	CYBRTEK	EM5010	E115010056	2024.06.11
5	EMI Test Receiver	Rohde&Schwarz	ESCI	101210	2024.06.11
Radiated Emissions Measurement					
1	Radiated Emission Test Software	EZ-EMC	Ver.CCS-03A1	N/A	N/A
2	Horn Antenna	Sunol	DRH-118	A101415	2025.07.14
3	Broadband Hybrid Antenna	Sunol	JB1	A090215	2025.07.28
4	PREAMP	HP	8449B	3008A00160	2024.06.11
5	PREAMP	HP	8447D	2944A07999	2024.06.11
6	EMI Test Receiver	Rohde&Schwarz	ESR3	101891	2024.06.11
7	MXA Signal Analyzer	Keysight	N9020A	MY51110104	2024.06.11
8	Active Loop Antenna	Com-Power	AL-310R	10160009	2024.06.11
9	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2025.07.14
10	Horn Antenna	A-INFOMW	LB-180400-KF	J211060660	2024.07.14
11	Loop Antenna	Beijing daze Technology	ZN30401	13015	2024.06.11
12	EM Clamp	Schwarzbeck	MDS21	03350	2024.06.11

3 CONDUCTED EMISSIONS MEASUREMENT

3.1 TEST LIMIT

Frequency (MHz)	Maximum RF Line Voltage(dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56*	56~46*
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50


Note:

1. The tighter limit applies at the band edges.
2. The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver:

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST SETUP

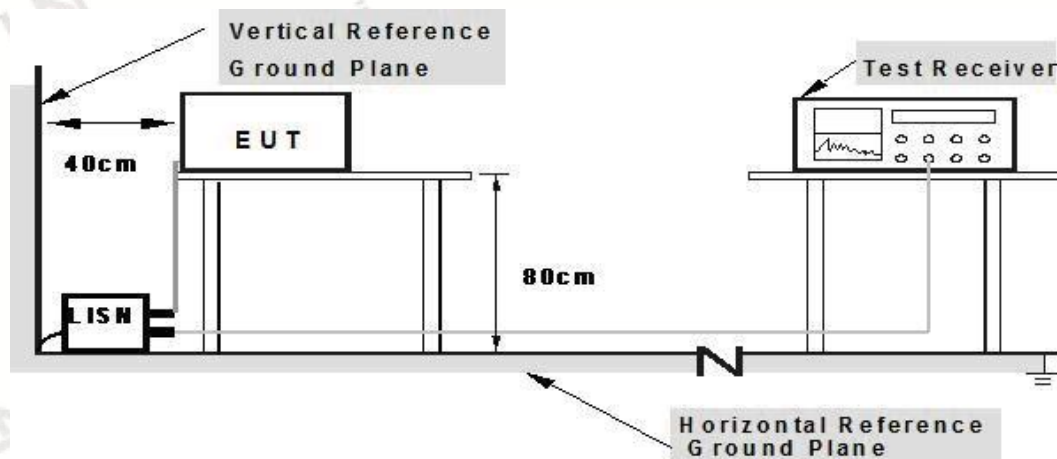

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.3 TEST PROCEDURE


1. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. For the actual test configuration, please refer to the related Item EUT Test Photos.

3.4 TEST RESULT

PASS


Note: All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.

Temperature:	24°C	Relative Humidity:	48%
Test Voltage:	AC 120V, 60Hz	Pressure:	1010hPa
Test Mode:	Mode 1	Phase:	Line

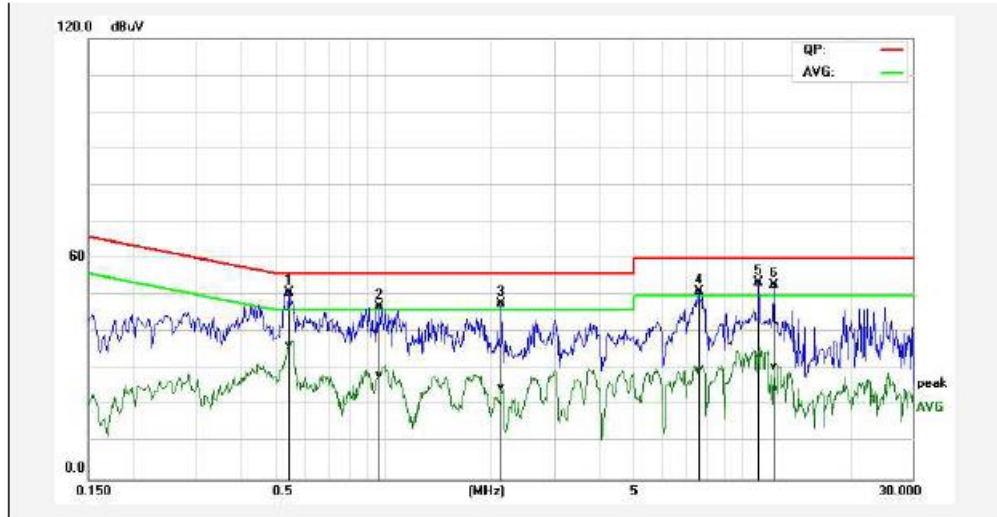

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.5460	40.93	26.40	10.04	50.97	36.44	56.00	46.00	-5.03	-9.56	Pass
2P	0.9780	36.94	18.28	10.11	47.05	28.39	56.00	46.00	-8.95	-17.61	Pass
3P	2.1380	37.66	15.00	10.16	47.82	25.16	56.00	46.00	-8.18	-20.84	Pass
4P	7.5860	40.74	19.26	10.47	51.21	29.73	60.00	50.00	-8.79	-20.27	Pass
5P	11.1899	43.18	22.83	10.51	53.69	33.34	60.00	50.00	-6.31	-16.66	Pass
6P	12.2620	42.47	20.29	10.53	53.00	30.82	60.00	50.00	-7.00	-19.18	Pass

Temperature:	24°C	Relative Humidity:	48%
Test Voltage:	AC 120V, 60Hz	Pressure:	1010hPa
Test Mode:	Mode 1	Phase:	Neutral

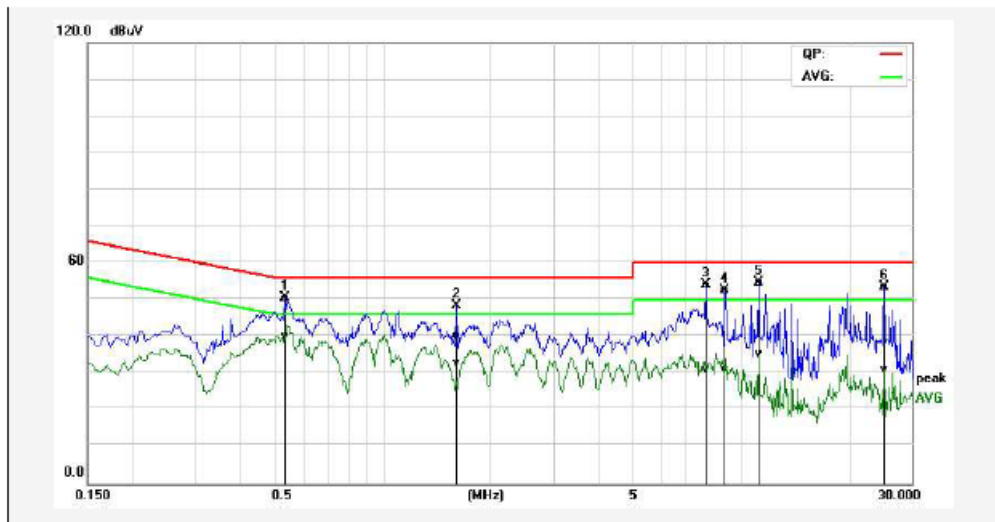

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.5340	40.58	30.08	10.04	50.62	40.12	56.00	46.00	-5.38	-5.88	Pass
2P	1.6019	30.35	22.59	10.14	40.49	32.73	56.00	46.00	-15.51	-13.27	Pass
3P	8.0060	43.60	20.69	10.47	54.07	31.16	60.00	50.00	-5.93	-18.84	Pass
4P	9.0420	42.16	20.56	10.51	52.67	31.07	60.00	50.00	-7.33	-18.93	Pass
5*	11.2060	44.32	24.64	10.51	54.83	35.15	60.00	50.00	-5.17	-14.85	Pass
6P	25.0700	42.59	20.01	10.93	53.52	30.94	60.00	50.00	-6.48	-19.06	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result=Reading + Factor, Margin=Result – Limit.

4 RADIATED EMISSION MEASUREMENT

4.1 TEST LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:


Frequency (MHz)	Class A (at 10m)	Class B (at 3m)
	dBuV/m	dBuV/m
30-88	39.0	40.0
88-216	43.5	43.5
216-960	46.5	46.0
Above 960	49.5	54.0

Notes:


1. The limit for radiated test was performed according to as following: FCC PART 15B /ICES-003.
2. The tighter limit applies at the band edges.
3. Emission level (dBuV/m)=20log Emission level (uV/m).

4.2 TEST SETUP

1. Radiated Emission Test Set-Up Frequency Below 1000MHz

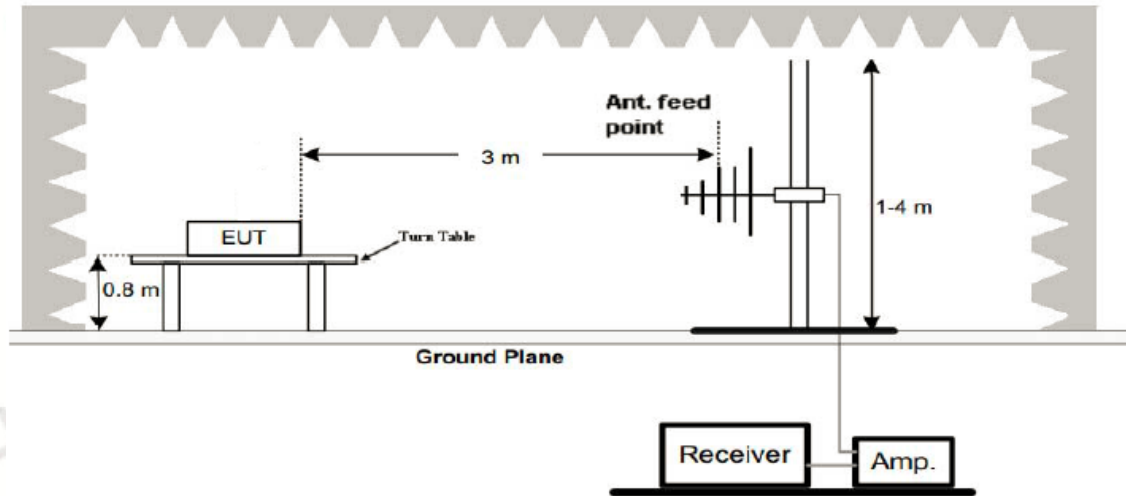

2. Radiated Emission Test Set-Up Frequency Above 1000MHz

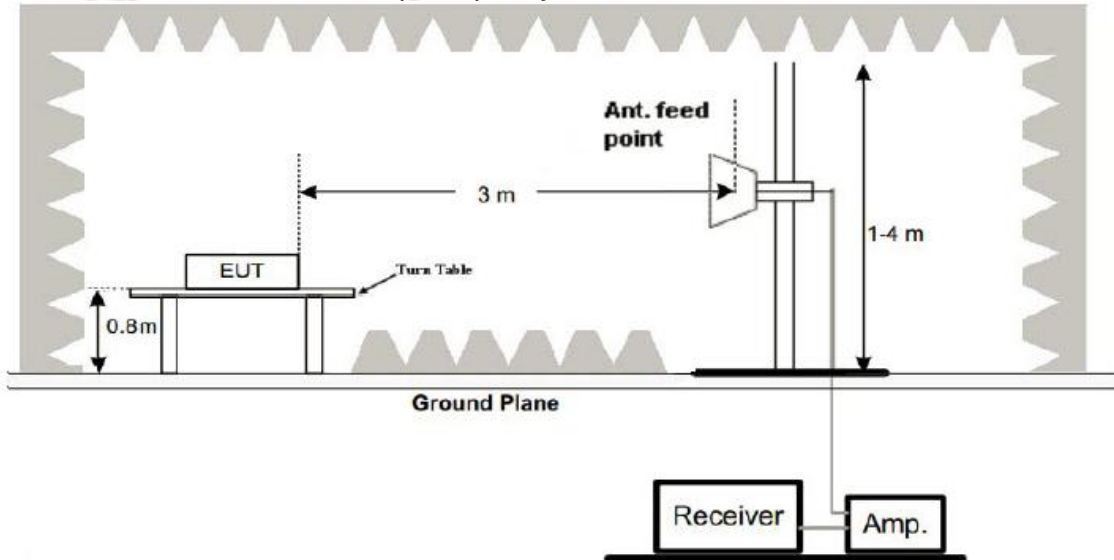

4.3 TEST PROCEDURE


1. The measuring distance of at 10 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
2. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
3. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
5. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP(AV) Limits and then no additional QP Mode measurement performed.
6. For the actual test configuration, please refer to the related Item EUT Test Photos.

4.4 TEST RESULT


PASS

Below 1000MHz Test Results:

Temperature:	24°C	Relative Humidity:	48%
Test Voltage:	AC 120V, 60Hz	Pressure:	1010hPa
Test Mode:	Mode 1	Polarization:	Horizontal

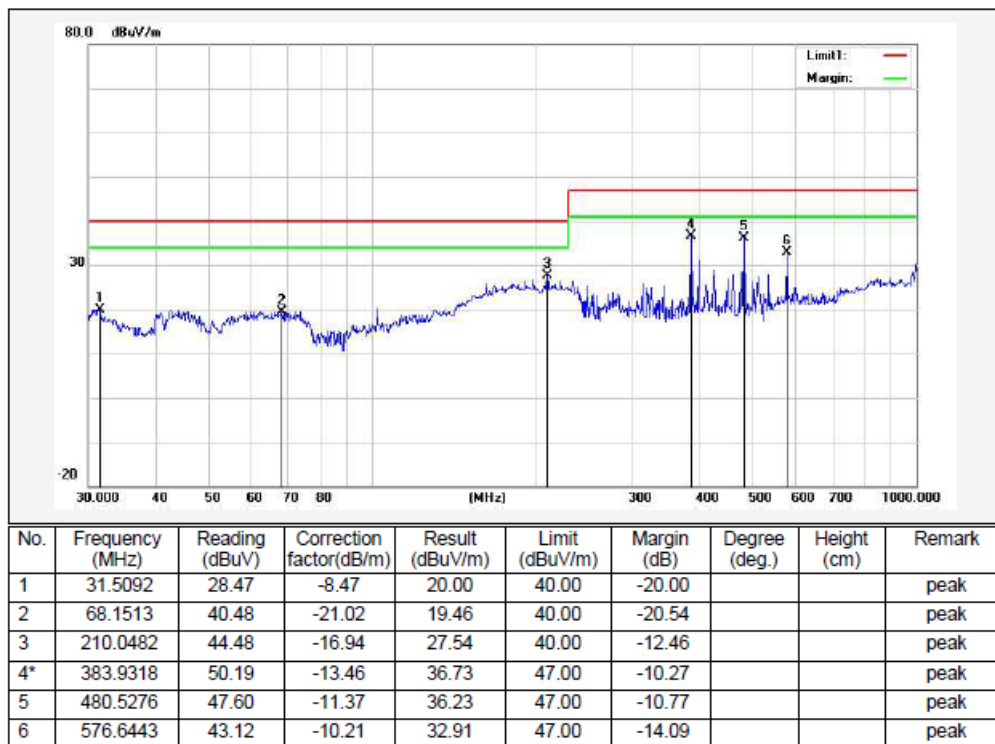


Temperature:	24°C	Relative Humidity:	48%
Test Voltage:	AC 120V, 60Hz	Pressure:	1010hPa
Test Mode:	Mode 1	Polarization:	Vertical

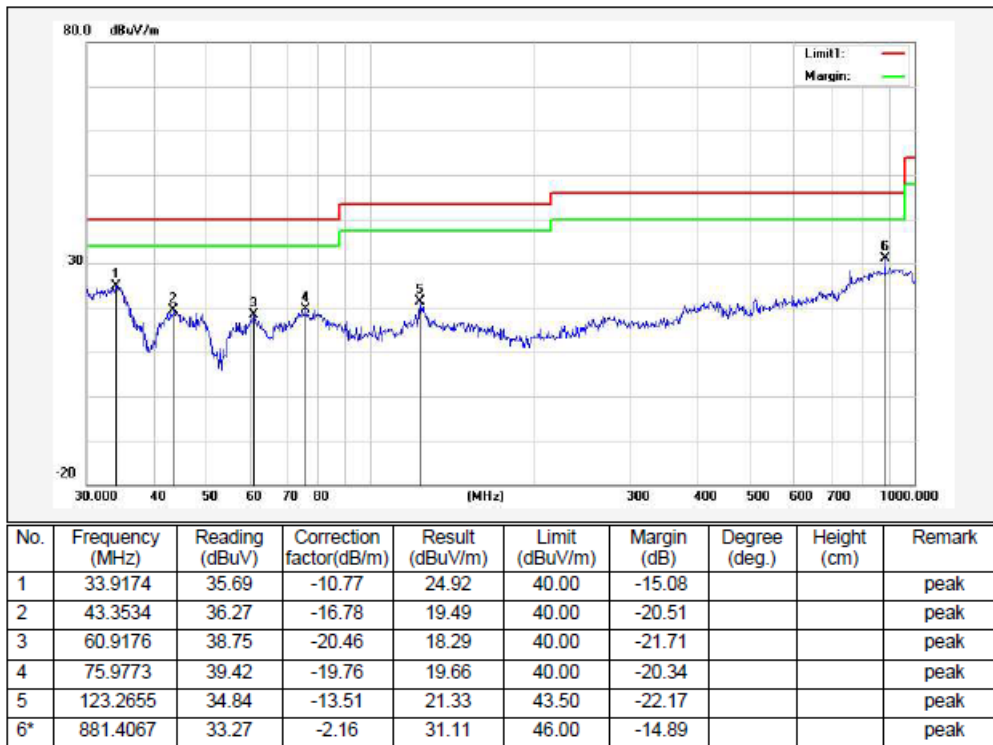


Remark: 1. Result= Reading Level+ Factor, Margin= Result – Limit
Factor=Ant. Factor + Cable Loss – Pre-amplifier

Temperature:	24°C	Relative Humidity:	48%
Test Voltage:	DC 5V	Pressure:	1010hPa
Test Mode:	Mode 2	Polarization:	Horizontal

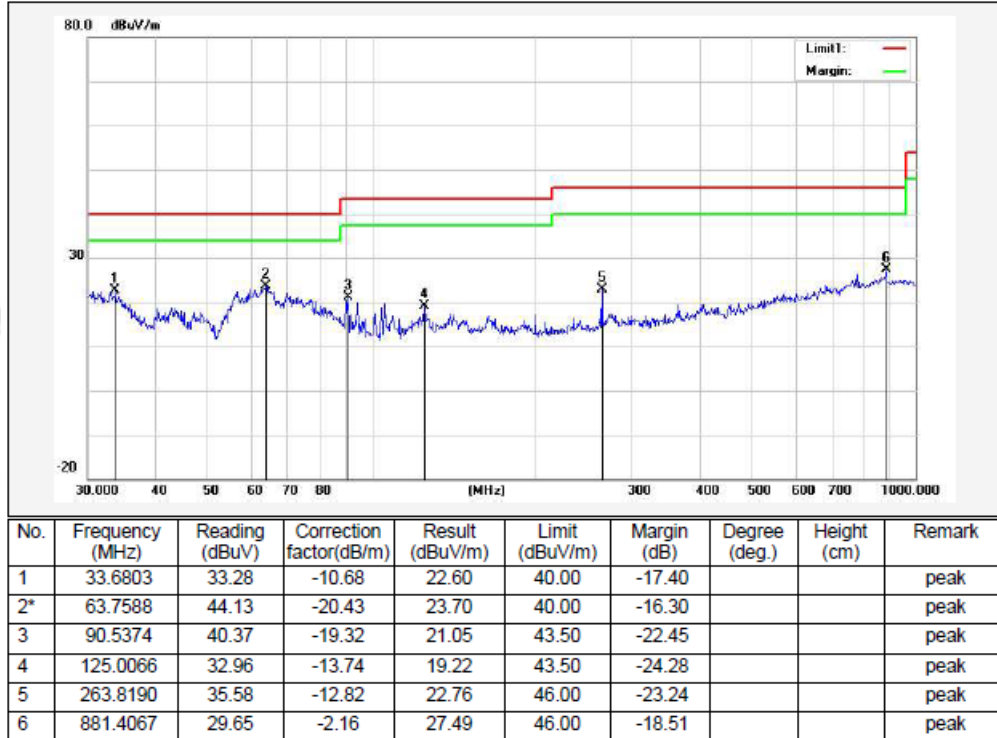

Temperature:	24°C	Relative Humidity:	48%
Test Voltage:	DC 5V	Pressure:	1010hPa
Test Mode:	Mode 2	Polarization:	Vertical

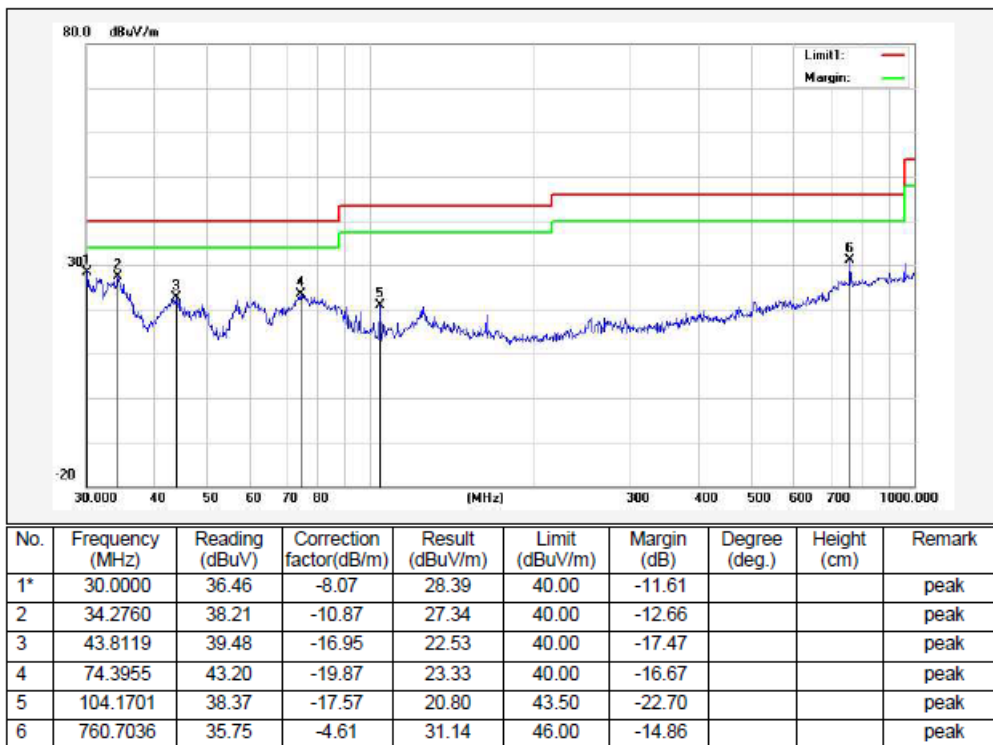

Remark: 1. Result= Reading Level+ Factor, Margin= Result – Limit
Factor=Ant. Factor + Cable Loss – Pre-amplifier
2. All test modes had been pre-tested. The mode 1&3 is the worst case and recorded in the report.
3. The radiated emission above 1GHz which are attenuated more than 20 dB below the permissible value need not be reported.

5 PHOTO OF EUT



PHOTO 01



PHOTO 02



PHOTO 03



PHOTO 04



PHOTO 05

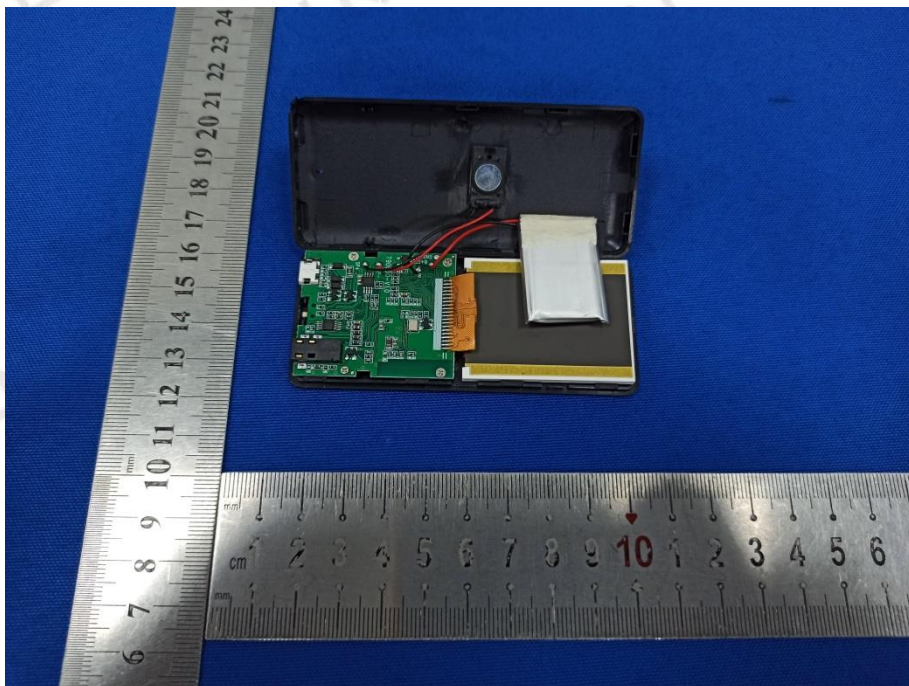


PHOTO 06

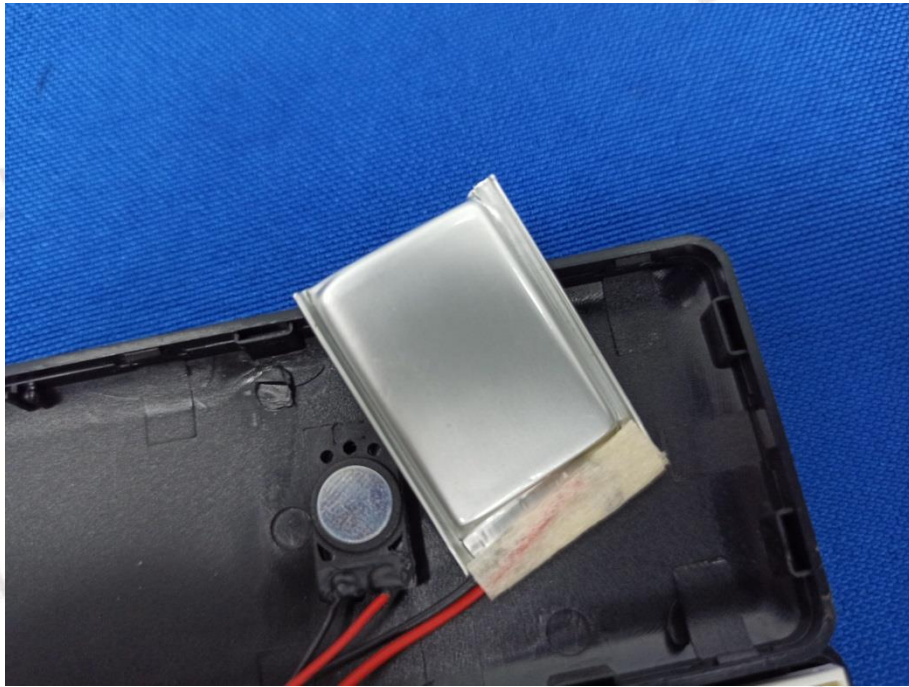


PHOTO 07



PHOTO 08



PHOTO 09



PHOTO 10

6 PHOTO OF TEST

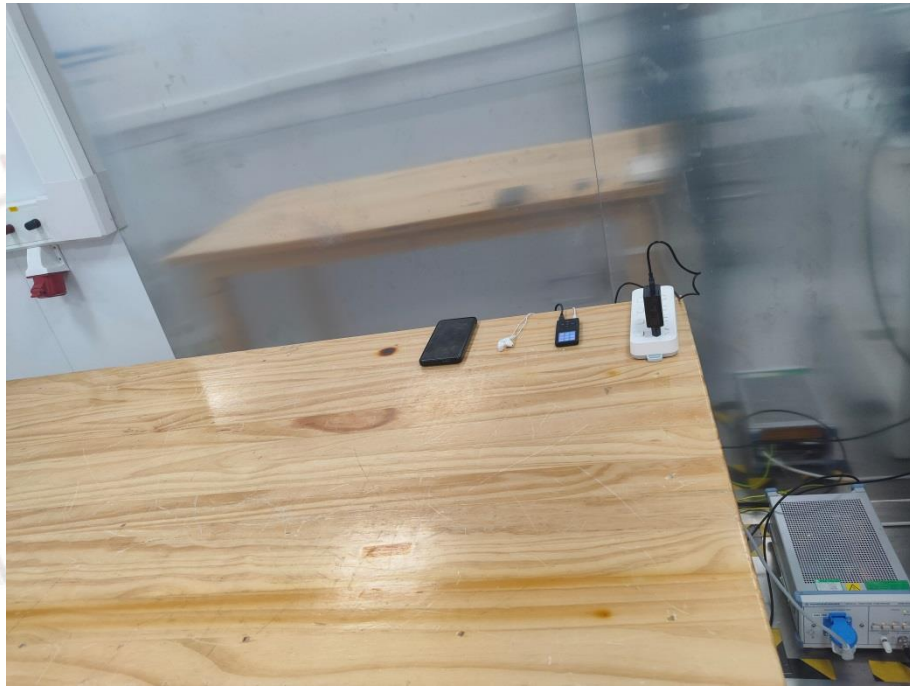


PHOTO 01


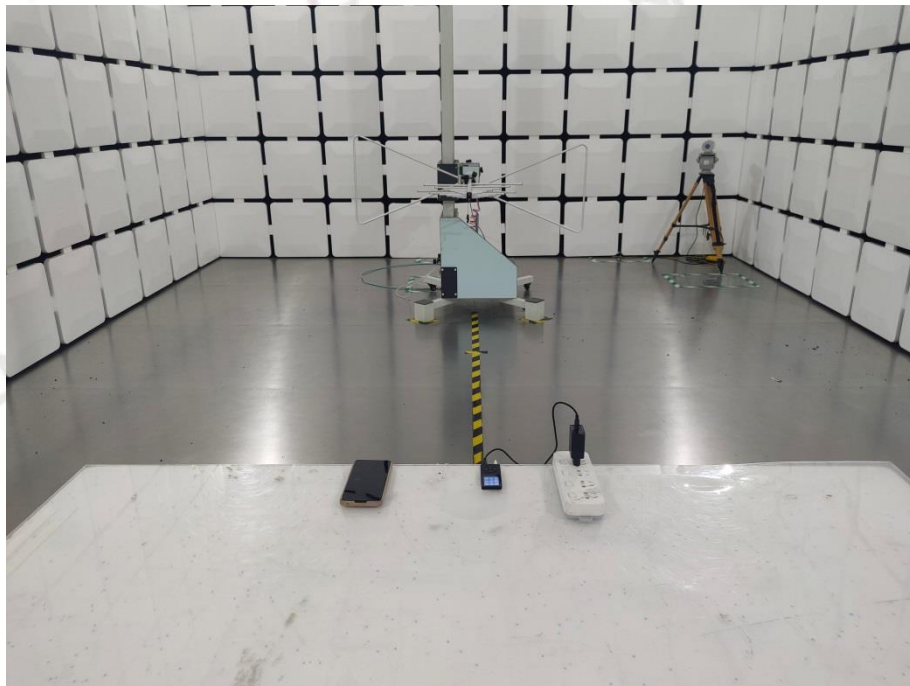


PHOTO 02

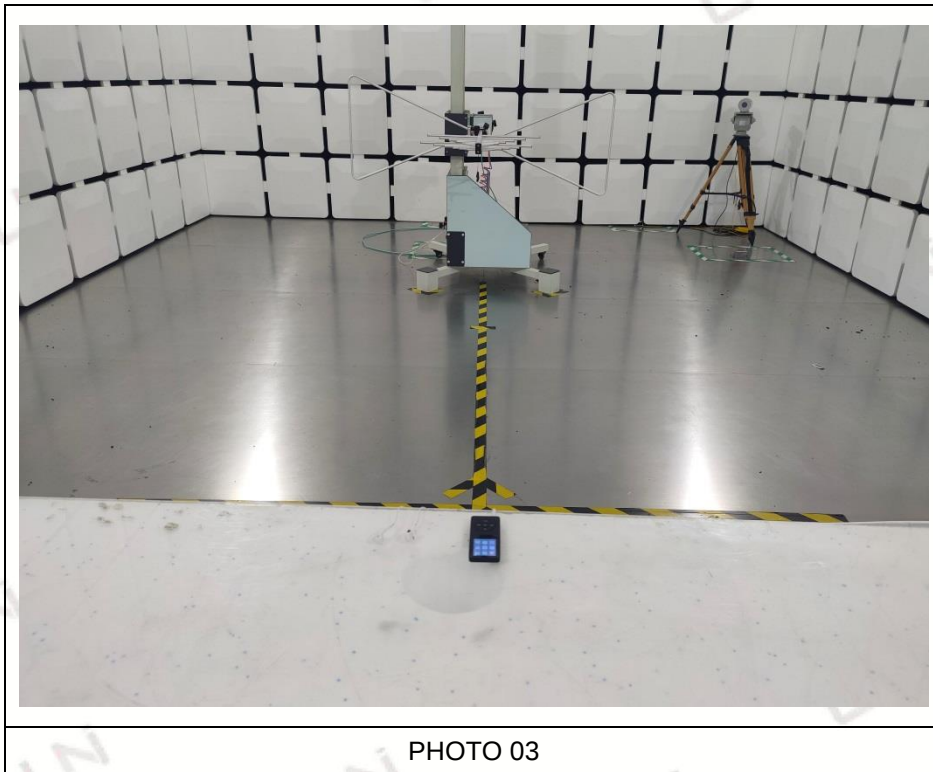

End of Report

Statement

- 1.This report must have the signature of the authorized signatory and the special seal of the report, otherwise it will be considered invalid.If there is no anti-counterfeiting electronic seal of the laboratory in the report in PDF format or it is displayed as "x", the report is invalid.
- 2.This report shall not be modified, added or deleted without authorization.
- 3.The results of this report are only valid for the EUT provided by Applicant to our laboratory for inspection (That is,EUT received by our laboratory.Without special explanation, it refers to the samples presented in the report " PHOTO OF EUT ").
- 4.If there is any objection to the test data and conclusions of this report, please submit it in writing within 10 working days after the date of issuance of the report.
- 5.Without the written consent of the laboratory, this report shall not be copied (except for full copy), nor shall it be used as publicity materials or advertising.
- 6.The cover of the report is for decoration only, not included in the body of the report.
- 7.The paper report issued by our laboratory has the same effect as the electronic report. In case of any difference between the two, the electronic report shall prevail.
- 8.The Chinese and English reports issued by our laboratory have the same effect. In case of any difference in understanding, the Chinese version shall prevail.
- 9.Please provide the complete report documents issued by our laboratory when inquiring the report.
- 10.For cases where compliance is determined based on test values, when relevant specifications, standards, documents, and customers have no relevant requirements and no other special instructions, the test report issued by this laboratory is carried out in full value and adopts ILAC-G8:09 /2019 "Simple Acceptance Rule" for judgment.
- 11.In the People's Republic of China, when there is no CMA Accredited Symbol in this report, the report is only for scientific research, teaching or internal quality control activities