



RADIO TEST REPORT-WIFI

ETSI EN 300 328 V2.1.1 (2016-11)

Product : IP Camera

Trade Mark : Sricam

Model Name : SP012

Serial Model : SP005, SP006, SP007, SP008, SP009, SP009B,
SP009C, SP010, SP011, SP013, SP014, SP015,
SP016, SP017, SP018, SP019, SP020, SP023,
NVS001, NVS002.

Report No. : SER171225621002E

Prepared for

Shenzhen Sricctv Technology Co., Ltd
The 4th Floor of Building46, 5th Industrial Park of Huaide Cuigang, Fuyong Street,
Bao' an, Shenzhen, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China
Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599
Website:<http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name.....: Shenzhen Sricctv Technology Co., Ltd
Address: The 4th Floor of Building46, 5th Industrial Park of Huaide Cuigang,
Fuyong Street, Bao' an, Shenzhen, China
Manufacturer's Name.....: Shenzhen Sricctv Technology Co., Ltd
Address: The 4th Floor of Building46, 5th Industrial Park of Huaide Cuigang,
Fuyong Street, Bao' an, Shenzhen, China

Product description

Product name: IP Camera
Trademark: Sricam
Model Name: SP012
Serial Model : SP005, SP006, SP007, SP008, SP009, SP009B, SP009C, SP010,
SP011, SP013, SP014, SP015, SP016, SP017, SP018, SP019,
SP020, SP023, NVS001, NVS002.

Standards.....: ETSI EN 300 328 V2.1.1 (2016-11)

This device described above has been tested by Shenzhen NTEK, and the test results show that the equipment under test (EUT) is in compliance with the 2014/53/EU RED Directive Art.3.2 requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test.....:

Date (s) of performance of tests: 25 Dec. 2017 ~08 Mar. 2018

Date of Issue: 08 Mar. 2018

Test Result: **Pass**

Testing Engineer :

Lake Xie

(Lake Xie)

Technical Manager :

Jason Chen

(Jason Chen)

Authorized Signatory :

Sam Chen

(Sam Chen)

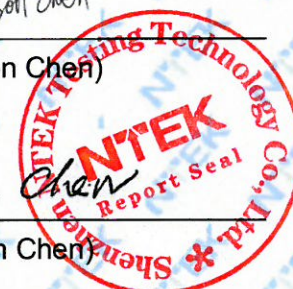


Table of Contents

Page

1 . GENERAL INFORMATION	6
1.1 GENERAL DESCRIPTION OF EUT	6
1.2 INFORMATION ABOUT THE EUT	7
1.3 TEST CONDITIONS AND CHANNEL	12
1.4 DESCRIPTION OF TEST CONDITIONS	13
1.5 DESCRIPTION OF SUPPORT UNITS	14
1.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	15
2 . SUMMARY OF TEST RESULTS	16
2.1 TEST FACILITY	17
2.2 MEASUREMENT UNCERTAINTY	17
3 . TEST PROCEDURES AND RESULTLS	19
3.1 EQUIVALENT ISOTROPIC RADIATED POWER	19
3.1.1 LIMITS OF EQUIVALENT ISOTROPIC RADIATED POWER	19
3.1.2 TEST PROCEDURE	19
3.1.3 TEST SETUP	19
3.1.4 TEST RESULTS	20
3.2 . PEAK POWER DENSITY	22
3.2.1 LIMITS OF POWER SPECTRAL DENSITY	22
3.2.2 TEST PROCEDURE	22
3.2.3 TEST SETUP	22
3.2.4 TEST RESULTS	23
3.3 . OCCUPIED CHANNEL BANDWIDTH	26
3.3.1 LIMITS OF OCCUPIED CHANNEL BANDWIDTH	26
3.3.2 TEST PROCEDURE	26
3.3.3 DEVIATION FROM TEST STANDARD	26
3.3.4 TEST SETUP	26
3.3.5 TEST RESULTS	27
3.4 . TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	32
3.4.1 LIMITS OF TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	32
3.4.2 TEST PROCEDURE	32
3.4.3 DEVIATION FROM TEST STANDARD	33
3.4.4 TEST SETUP	33
3.4.5 TEST RESULTS	34
3.5 . ADAPTIVE (CHANNEL ACCESS MECHANISM)	43
3.5.1 APPLICABILITY OF ADAPTIVE REQUIREMENTS AND LILIT FOR WIDE BAND MODULATION TECHNIQUES	43
3.5.2 TEST PROCEDURE	44
3.5.3 TEST SETUP CONFIGURATION	44

Table of Contents	Page
3.5.4 LIST OF MEASUREMENTS	45
3.5.5 INTERFERENCE THRESHOLD LEVEL	46
3.6 . TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	50
3.6.1 LIMITS OF TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	50
3.6.2 TEST PROCEDURE	50
3.6.3 DEVIATION FROM TEST STANDARD	50
3.6.4 TEST SETUP	51
3.6.5 TEST RESULTS(Radiated measurement)	52
3.6.6 TEST RESULTS(Conducted measurement)	54
3.7 . RECEIVER SPURIOUS RADIATION	57
3.7.1 LIMITS OF RECEIVER SPURIOUS RADIATION	57
3.7.2 TEST PROCEDURE	57
3.7.3 DEVIATION FROM TEST STANDARD	57
3.7.4 TEST SETUP	58
3.7.5 TEST RESULTS(Radiated measurement)	59
3.7.6 TEST RESULTS (Conducted measurement)	61
3.8 . RECEIVER BLOCKING	62
3.8.1 PERFORMANCE CRITERIA	62
3.8.2 LIMITS OF RECEIVER BLOCKING	62
3.8.3 TEST PROCEDURE	63
3.8.4 DEVIATION FROM TEST STANDARD	63
3.8.5 TEST SETUP	63
3.8.6 TEST RESULTS	64
4 . EUT TEST PHOTO	68
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

Revision History

[illegible]

1. GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

Equipment	IP Camera
Trade Mark	Sricam
Model Name.	SP012
Serial Model	SP005, SP006, SP007, SP008, SP009, SP009B, SP009C, SP010, SP011, SP013, SP014, SP015, SP016, SP017, SP018, SP019, SP020, SP023, NVS001, NVS002.
Model Difference	All the model are the same circuit and RF module, except the appearance.
The EUT is IP Camera	
Operation Frequency:	802.11b/g/n(20MHz): 2412~2472MHz 802.11n(40MHz):2422~2462MHz
Modulation Type:	IEEE 802.11b : DSSS (DBPSK, DQPSK, CCK) IEEE 802.11g/n (HT20/HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz) use 800 ns GI: 65.0/58.5/52.0/39.0/26.0/19.5/13.0/6.5 Mbps (MCS0~MCS7) 802.11n(40MHz) use 800 ns GI: 13.5/27/40.5/54/81/108/121.5/135Mbps
Adaptive/non-adaptive	Adaptive equipment
Receiver categories	802.11b:1 802.11g/n(20MHz)/n(40MHz):2
Number Of Channel	Please see Note 2.
Antenna Designation	External Antenna
Antenna Gain(Peak)	2dBi
Channel List	Refer to below
Adapter	Model:KA1503-0502000EUS Input: 100-240V~50/60Hz 0.35A Output: 5V ---2000mA
Battery	N/A
Rating	DC 5V from Adapter AC 100-240V, 50/60Hz
I/O Ports	Refer to users manual
Hardware Version	N/A
Software Version	N/A

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452	13	2472
02	2417	06	2437	10	2457		
03	2422	07	2442	11	2462		
04	2427	08	2447	12	2467		

1.2 INFORMATION ABOUT THE EUT
a) The type of modulation used by the equipment:

- ☐ FHSS
☒ other forms of modulation

b) In case of FHSS modulation:

- In case of non-Adaptive Frequency Hopping equipment:

The number of Hopping Frequencies:

- In case of Adaptive Frequency Hopping Equipment:

The maximum number of Hopping Frequencies:

The minimum number of Hopping Frequencies:

- The (average) Dwell Time:

c) Adaptive / non-adaptive equipment:

- ☐ non-adaptive Equipment
☒ adaptive Equipment without the possibility to switch to a non-adaptive mode
☐ adaptive Equipment which can also operate in a non-adaptive mode

d) In case of adaptive equipment:

The maximum Channel Occupancy Time implemented by the equipment: 2.293 ms

- ☒ The equipment has implemented an LBT based DAA mechanism

- In case of equipment using modulation different from FHSS:

- ☐ The equipment is Frame Based equipment
☒ The equipment is Load Based equipment
☐ The equipment can switch dynamically between Frame Based and Load Based equipment

The CCA time implemented by the equipment: / μ s

- ☐ The equipment has implemented a non-LBT based DAA mechanism
☐ The equipment can operate in more than one adaptive mode

e) In case of non-adaptive Equipment:

The maximum RF Output Power (e.i.r.p.):

The maximum (corresponding) Duty Cycle: / %

Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

f) The worst case operational mode for each of the following tests:

- RF Output Power
802.11 b
- Power Spectral Density
802.11 b
- Duty cycle, Tx-Sequence, Tx-gap
N/A
- Accumulated Transmit time, Frequency Occupation & Hopping Sequence (only for FHSS equipment)
N/A
- Hopping Frequency Separation (only for FHSS equipment)
N/A
- Medium Utilization
N/A
- Adaptivity & Receiver Blocking
802.11 b
- Nominal Channel Bandwidth
802.11 N40
- Transmitter unwanted emissions in the OOB domain
802.11 b
- Transmitter unwanted emissions in the spurious domain
802.11 b
- Receiver spurious emissions
802.11 b

g) The different transmit operating modes (tick all that apply):

- ☒ Operating mode 1: Single Antenna Equipment
 - ☒ Equipment with only one antenna
 - ☐ Equipment with two diversity antennas but only one antenna active at any moment in time
 - ☐ Smart Antenna Systems with two or more antennas, but operating in a (legacy) mode where only one antenna is used (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)
- ☐ Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
 - ☐ Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)
 - ☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1
 - ☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2

NOTE 1: Add more lines if more channel bandwidths are supported.

- ☐ Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
 - ☐ Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)
 - ☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1
 - ☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2

NOTE 2: Add more lines if more channel bandwidths are supported.

h) In case of Smart Antenna Systems:

- The number of Receive chains:
- The number of Transmit chains:
 - ☐ symmetrical power distribution
 - ☐ asymmetrical power distribution

In case of beam forming, the maximum (additional) beam forming gain: dB

NOTE: The additional beam forming gain does not include the basic gain of a single antenna.

i) Operating Frequency Range(s) of the equipment:

- Operating Frequency Range 1: 2412 MHz to 2472 MHz
- Operating Frequency Range 2: 2422 MHz to 2462 MHz

NOTE: Add more lines if more Frequency Ranges are supported.

j) Nominal Channel Bandwidth(s):

- Nominal Channel Bandwidth 1: 17.903MHz (n20)
- Nominal Channel Bandwidth 2: 36.669MHz (n40)

NOTE: Add more lines if more channel bandwidths are supported.

k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):

- ☒ Stand-alone
- ☐ Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)
- ☐ Plug-in radio device (Equipment intended for a variety of host systems)
- ☐ Other

l) The normal and the extreme operating conditions that apply to the equipment:**Normal operating conditions (if applicable):**

Operating temperature: 15°C~35°C

Other (please specify if applicable):

Extreme operating conditions:

Operating temperature range: Minimum: -20°C Maximum 40°C

Other (please specify if applicable): Minimum: Maximum

Details provided are for the:

- ☒ stand-alone equipment
- ☐ combined (or host) equipment
- ☐ test jig

m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and

their corresponding e.i.r.p. levels:

- Antenna Type: External Antenna

☒ Integral Antenna (information to be provided in case of conducted measurements)

Antenna Gain: 2 dBi

If applicable, additional beamforming gain (excluding basic antenna gain): dB

☐ Temporary RF connector provided

☐ No temporary RF connector provided

☐ Dedicated Antennas (equipment with antenna connector)

☐ Single power level with corresponding antenna(s)

☐ Multiple power settings and corresponding antenna(s)

Number of different Power Levels:

Power Level 1: dBm

Power Level 2: dBm

Power Level 3: dBm

NOTE 1: Add more lines in case the equipment has more power levels.

NOTE 2: These power levels are conducted power levels (at antenna connector).

- For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains

(G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable

Power Level 1: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1	2	14.2	
2			
3			

NOTE 3: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 2: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			

NOTE 4: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 3: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			

NOTE 5: Add more rows in case more antenna assemblies are supported for this power level.

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Details provided are for the:

- ☒ stand-alone equipment
☐ combined (or host) equipment
☐ test jig

Supply Voltage ☐ AC mains State AC voltage V
☒ DC State DC voltage: DC 5V

In case of DC, indicate the type of power source

- ☐ Internal Power Supply
☒ External Power Supply or AC/DC adapter: DC 5V
☐ Battery:
☐ Other:

o) Describe the test modes available which can facilitate testing:

.....

p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], IEEE 802.15.4™ [i.4], proprietary, etc.):

IEEE 802.11™ [i.3]

q) If applicable, the statistical analysis referred to in clause 5.4.1 q)

(to be provided as separate attachment)

r) If applicable, the statistical analysis referred to in clause 5.4.1 r)

(to be provided as separate attachment)

s) Geo-location capability supported by the equipment:

- ☐ Yes
☐ The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user
☒ No

t) Describe the minimum performance criteria that apply to the equipment (see clause 4.3.1.12.3 or clause 4.3.2.11.3):

.....

1.3 TEST CONDITIONS AND CHANNEL

	Normal Test Conditions	Extreme Test Conditions
Temperature	15°C - 35°C	40°C ~ -20°C Note: (1)
Relative Humidity	20% - 75%	N/A
Supply Voltage	DC 5V	/

802.11b/11g/11n(20M)

Test Channel	EUT Channel	Test Frequency (MHz)
lowest	CH01	2412
middle	CH07	2442
highest	CH13	2472


802.11n(40M)

Test Channel	EUT Channel	Test Frequency (MHz)
lowest	CH03	2422
middle	CH07	2442
highest	CH11	2462

Note:

- (1) The HT 40°C and LT -20°C was declared by manufacturer, The EUT couldn't be operate normally with higher or lower temperature.
- (2) The measurements are performed at the highest, middle, lowest available channels.

1.4 DESCRIPTION OF TEST CONDITIONS

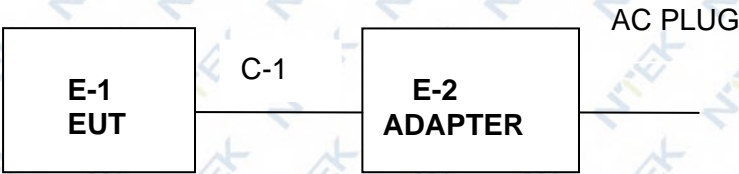

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	IP Camera	Sricam	SP012	N/A	EUT
E-2	ADAPTER	N/A	KA1503-0502000EUS	N/A	

Item	Type	Shielded Type	Ferrite Core	Length	Note
C-1	Power Cable	NO	NO	1.2m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (*) This product has two power adapter, pre-test tested two adapters, but the report shows only the worst data

1.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

EQUIPMENT TYPE	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
EMI Test Receiver	R&S	ESPI7	101318	2017.06.06	2018.06.05	1 year
Bilog Antenna	TESEQ	CBL6111D	31216	2017.04.09	2018.04.08	1 year
Turn Table	EM	SC100_1	60531	N/A	N/A	N/A
Antnna Mast	EM	SC100	N/A	N/A	N/A	N/A
Horn Antenna	EM	EM-AH-10180	2011071402	2017.04.09	2018.04.08	1 year
Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2017.07.06	2018.07.05	1 year
Test Cable (30MHz-1GHz)	N/A	R-01	N/A	2017.04.21	2020.04.20	3 year
Test Cable (1-18GHz)	N/A	R-02	N/A	2017.04.21	2020.04.20	3 year
50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2017.06.06	2018.06.05	1 year
Pre-Amplifier	EMC	EMC051835S E	980246	2017.08.09	2018.08.08	1 year
Spectrum Analyzer	Agilent	E4407B	MY45108040	2017.06.06	2018.06.05	1 year
Filter	TRILTHIC	2400MHz	29	2017.04.19	2018.04.18	1 year
Attenuator	Weinschel	33-10-33	AR4010	2017.04.19	2018.04.18	1 year
Attenuator	Weinschel	24-20-34	BP4485	2017.04.19	2018.04.18	1 year
MXA Signal Analyzer	Agilent	N9020A	MY49100060	2017.11.10	2018.11.09	1 year
ESG VETCTOR SIGNAL GENERAROR	Agilent	E4438C	MY45093347	2017.06.06	2018.06.05	1 year
PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2017.08.07	2018.08.06	1 year
Power Splitter	Mini-Circuits/USA	ZN2PD-63-S+	SF025101428	2017.04.19	2020.04.18	3 year
Coupler	Mini-Circuits	ZADC-10-63-S +	SF794101410	2017.04.19	2020.04.18	3 year
Directional Coupler	MCLI/USA	CB11-20	0D2L51502	2016.08.16	2020.08.15	3 year
Attenuator	Agilent	8495B	MY42147029	2017.04.19	2020.04.18	3 year
Power Meter	DARE	RPR3006W	15100041SNO 84	2017.08.07	2018.08.06	1 year
MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2017.04.10	2018.04.09	1 year
Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	2017.06.06	2018.06.05	1 year
temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

EN 300 328 V2.1.1 (2016-11)		
Clause	Test Item	Results
TRANSMITTER PARAMETERS		
4.3.2.2	RF Output Power	Pass
4.3.2.3	Power Spectral Density	Pass
4.3.2.4	Duty cycle, Tx-Sequence, Tx-gap	Not Applicable (See Note 1/2)
4.3.2.5	Medium Utilization (MU) factor	Not Applicable (See Note 1/2)
4.3.2.6	Adaptivity	Pass
4.3.2.7	Occupied Channel Bandwidth	Pass
4.3.2.8	Transmitter unwanted emission in the OOB domain	Pass
4.3.2.9	Transmitter unwanted emissions in the spurious domain	Pass
RECEIVER PARAMETERS		
4.3.2.10	Receiver Spurious Emissions	Pass
4.3.2.11	Receiver Blocking	Pass

Note:

1. These requirements do not apply for equipment with a maximum declared RF output power of less than 10 dBm EIRP or for equipment when operating in a mode where the RF output power is less than 10 dBm EIRP.
2. These requirements apply to non-adaptive frequency hopping equipment or to adaptive frequency hopping equipment operating in a non-adaptive mode.

2.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China

FCC Registered No.: 463705 IC Registered No.:9270A-1

CNAS Registration No.:L5516

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Radio Frequency	$\pm 1.38\text{dB}$
2	Total RF power, conducted	$\pm 0.16\text{dB}$
3	RF power density, conducted	$\pm 0.16\text{dB}$
4	All emissions, radiated	$\pm 0.21\text{dB}$
5	Temperature	$\pm 0.5^{\circ}\text{C}$
6	Humidity	$\pm 2\%$
7	DC and low Frequency voltages	$\pm 0.04\%$

2.3 MAXIMUM MEASUREMENT UNCERTAINTY (FOR ETSI EN 300 328)

For the test methods, according to ETSI EN 300 328 standard, the measurement uncertainty figures shall be calculated in accordance with ETR 100 028-1[4] and shall correspond to an expansion factor(coverage factor) $k=1.96$ or $k=2$ (which provide confidence levels of respectively **95 %** and **95.45 %** in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Maximum measurement uncertainty

No.	Item	Uncertainty
1	Occupied Channel Bandwidth	$\pm 5\%$
2	RF output Power,conducted	$\pm 1.5\text{dB}$
3	Power Spectral Density, conducted	$\pm 3\text{dB}$
4	Unwanted emissions, conducted	$\pm 3\text{dB}$
5	All emissions,radiated	$\pm 6\text{dB}$
6	Temperature	$\pm 3^{\circ}\text{C}$
7	Humidity	$\pm 3\%$
9	Time	$\pm 5\%$

3. TEST PROCEDURES AND RESULTS

3.1 EQUIVALENT ISOTROPIC RADIATED POWER

3.1.1 LIMITS OF EQUIVALENT ISOTROPIC RADIATED POWER

Refer to chapter 4.3.2.2.3 of ETSI EN EN 300 328 V2.1.1 (2016-11)


RF OUTPUT POWER	
Condition	Limit
<input type="checkbox"/> Non-adaptive wide band modulations systems	Equal to or less than the value declared by the supplier. This declared value shall be equal to or less than 20 dBm.
<input checked="" type="checkbox"/> Adaptive wide band modulations systems	≤20dBm

3.1.2 TEST PROCEDURE

Refer to chapter 5.4.2.2 of ETSI EN EN 300 328 V2.1.1 (2016-11)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

3.1.3 TEST SETUP

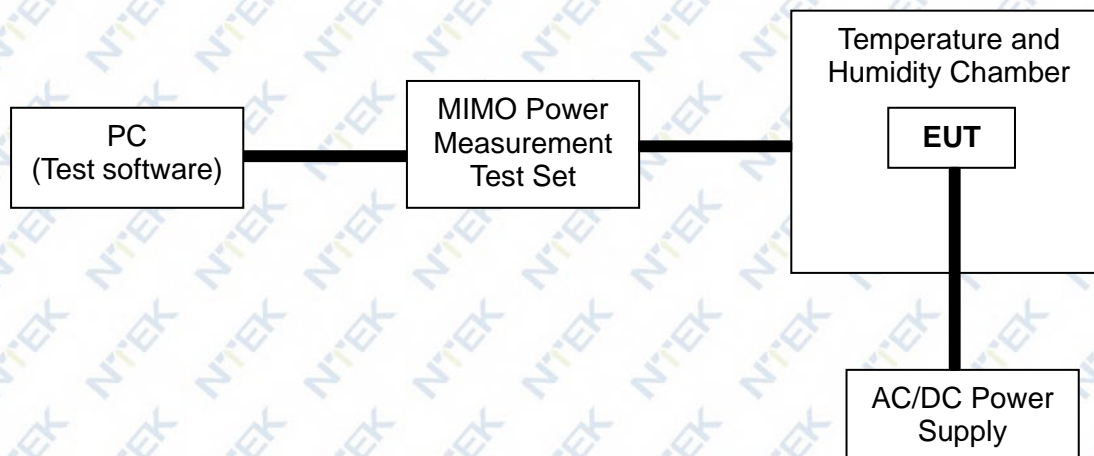

3.1.4 TEST RESULTS

EUT :	IP Camera	Model Name :	SP012
Temperature :	20°C	Relative Humidity:	55 %
Pressure :	1012 hPa	Test Voltage :	DC 5V(NORMAL)
Test Mode :	802.11b Mode CH01 / CH07 / CH13		

TEST CONDITIONS				Total e.i.r.p (dBm)		
				CH01	CH07	CH13
V nom (V)	5	T nom (°C)	20	14.0	14.1	14.2
		T max (°C)	40	14.1	13.9	13.8
		T min (°C)	-20	13.8	13.6	13.9
Max e.i.r.p Power				14.2		
Limits				20dBm		
Result				Complies		

Note : Power measurement , actual measurement for 16 Burst power.

EUT :	IP Camera	Model Name :	SP012
Temperature :	26°C	Relative Humidity:	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V(NORMAL)
Test Mode :	802.11g Mode CH01 / CH07 / CH13		

TEST CONDITIONS				Total e.i.r.p (dBm)		
				CH01	CH07	CH13
V nom (V)	5	T nom (°C)	20	9.0	9.4	9.2
		T max (°C)	40	9.2	9.1	9.3
		T min (°C)	-20	8.9	9.0	9.2
Max e.i.r.p Power				9.4		
Limits				20dBm		
Result				Complies		

Note: Power measurement, actual measurement for 13 Burst power.

EUT :	IP Camera	Model Name :	SP012
Temperature :	26°C	Relative Humidity:	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V(NORMAL)
Test Mode :	802.11n20MHz Mode CH01 / CH07 / CH13		

TEST CONDITIONS				Total e.i.r.p (dBm)		
				CH01	CH07	CH13
V nom (V)	5	T nom (°C)	20	9.7	9.0	9.5
		T max (°C)	40	9.5	9.2	9.1
		T min (°C)	-20	9.3	8.9	9.0
Max e.i.r.p Power				9.7		
Limits				20dBm		
Result				Complies		

Note: Power measurement, actual measurement for 14 Burst power.

EUT :	IP Camera	Model Name :	SP012
Temperature :	26°C	Relative Humidity:	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V(NORMAL)
Test Mode :	802.11n40MHz Mode CH03 / CH07 / CH11		

TEST CONDITIONS				Total e.i.r.p (dBm)		
				CH03	CH07	CH11
V nom (V)	5	T nom (°C)	20	9.1	9.0	9.4
		T max (°C)	40	9.4	9.2	9.6
		T min (°C)	-20	8.8	8.9	9.2
Max e.i.r.p Power				9.6		
Limits				20dBm		
Result				Complies		

Note: Power measurement, actual measurement for 14 Burst power.

3.2. PEAK POWER DENSITY

3.2.1 LIMITS OF POWER SPECTRAL DENSITY

Refer to chapter 4.3.2.3.3 of ETSI EN EN 300 328 V2.1.1 (2016-11)

RF OUTPUT POWER	
Condition	Limit
For equipment using wide band modulations other than FHSS	≤ 10 dBm/MHz

3.2.2 TEST PROCEDURE


Refer to chapter 5.4.3.2 of ETSI EN EN 300 328 V2.1.1 (2016-11)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

The setting of the Spectrum Analyzer

Start Frequency	2400MHz
Stop Frequency	2483.5MHz
Detector	RMS
Sweep Point	> 8 350; for spectrum analysers not supporting this number of sweep points, the frequency band may be segmented
Sweep time:	For non-continuous transmissions: $2 \times \text{Channel Occupancy Time} \times \text{number of sweep points}$ For continuous transmissions: 10 s; the sweep time may be increased further until a value where the sweep time has no further impact anymore on the RMS value of the signal.
RBW / VBW	10KHz / 30KHz

3.2.3 TEST SETUP

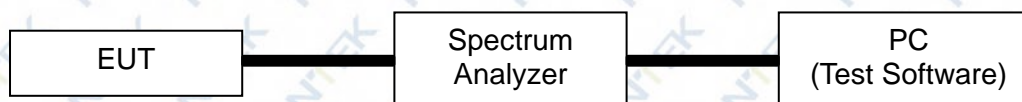


3.2.4 TEST RESULTS

EUT :	IP Camera	Model Name :	SP012
Temperature :	26°C	Relative Humidity:	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	802.11 b/g/n(HT20,HT40) Mode		


Mode	Channel Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/1 MHz) (E.I.R.P)	PASS/FAIL
802.11b	2412	7.78	10	PASS
	2442	7.83	10	PASS
	2472	7.52	10	PASS
802.11g	2412	2.56	10	PASS
	2442	2.40	10	PASS
	2472	2.88	10	PASS
802.11n(HT20)	2412	2.01	10	PASS
	2442	2.43	10	PASS
	2472	2.55	10	PASS
802.11 n(HT40)	2422	-3.62	10	PASS
	2442	-3.77	10	PASS
	2462	-3.37	10	PASS

Test Plot


(802.11b) PSD plot on channel 1

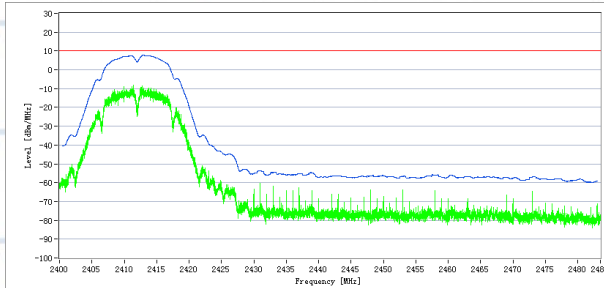


(802.11g) PSD plot on channel 1

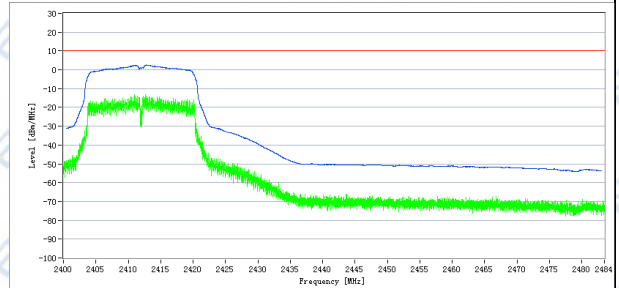


(802.11b) PSD plot on channel 7

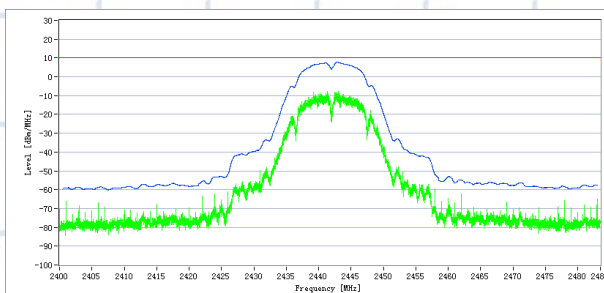


(802.11g) PSD plot on channel 7

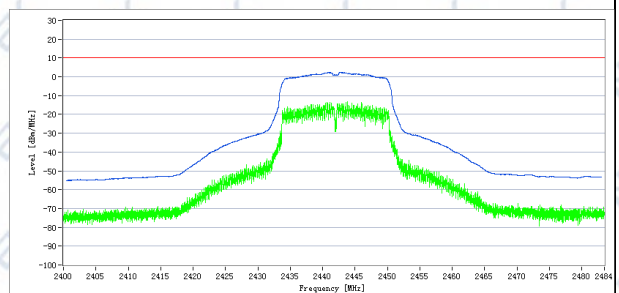

(802.11b) PSD plot on channel 13

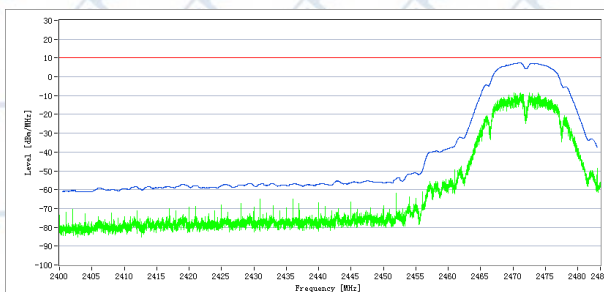


(802.11g) PSD plot on channel 13

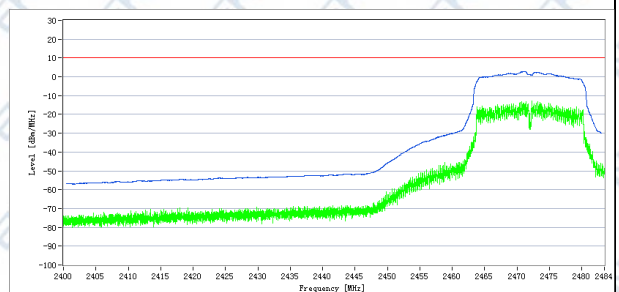


Test Plot


(802.11n20) PSD plot on channel 1

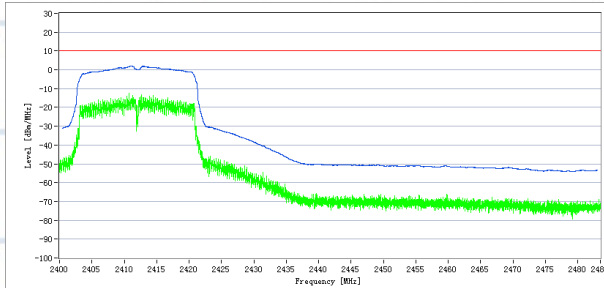


(802.11n40) PSD plot on channel 3

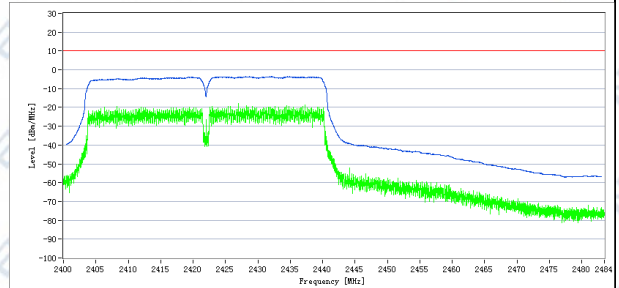


(802.11n20) PSD plot on channel 7

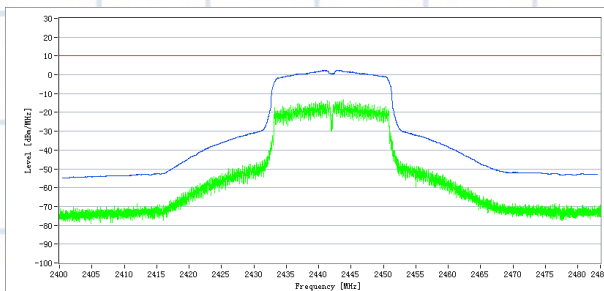


(802.11n40) PSD plot on channel 7

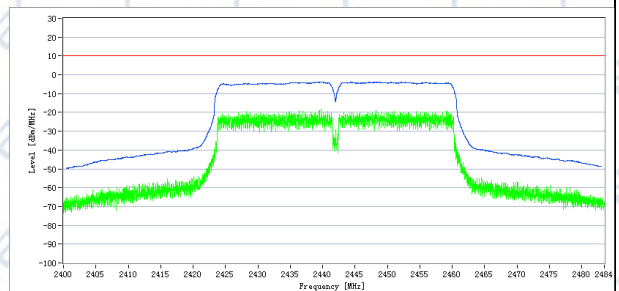

(802.11n20) PSD plot on channel 13

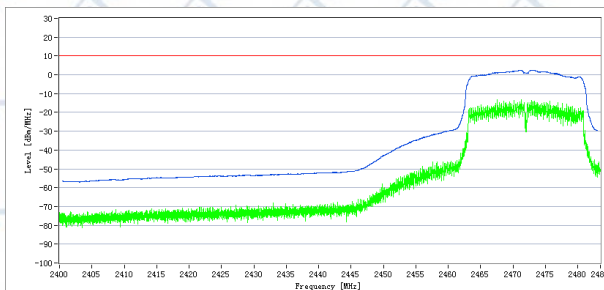

(802.11n40) PSD plot on channel 11

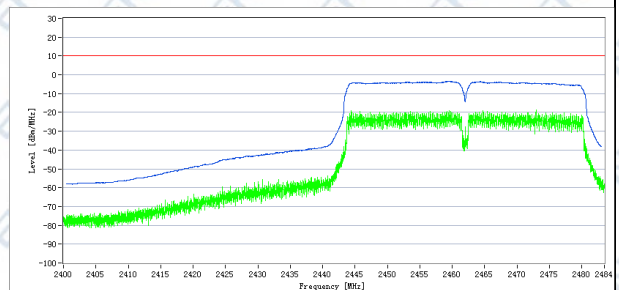

3.3. OCCUPIED CHANNEL BANDWIDTH

3.3.1 LIMITS OF OCCUPIED CHANNEL BANDWIDTH

Refer to chapter 4.3.2.7.3 of ETSI EN 300 328 V2.1.1 (2016-11)

OCCUPIED CHANNEL BANDWIDTH		
Condition		Limit
All types of equipment		Shall fall completely within the band 2400 to 2483.5 MHz
Additional requirement	For non-adaptive using wide band modulations other than FHSS system and E.I.R.P >10 dBm	Less than 20 MHz
	For non-adaptive frequency hopping system and E.I.R.P >10 dBm	Less than 5 MHz

3.3.2 TEST PROCEDURE

Refer to chapter 5.4.7.2 of ETSI EN 300 328 V2.1.1 (2016-11)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

The setting of the Spectrum Analyzer

Center Frequency	The centre frequency of the channel under test
Frequency Span	2 × Nominal Channel Bandwidth
Detector	RMS
RBW	~ 1 % of the span without going below 1 %
VBW	3 × RBW
Trace	Max hold
Sweep time	1s

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP



These measurements only were performed at normal test conditions. The measurement shall be performed only on the lowest and the highest frequency within the stated frequency range. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator. Controlling software has been activated to set the EUT on specific status.

3.3.5 TEST RESULTS

EUT :	IP Camera	Model Name :	SP012
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	802.11b/g/n(HT20,HT40) Mode CH1 / CH13, CH3 / CH11		


CHANNEL	CHANNEL FREQUENCY (MHz)	99%OCCUPIED BANDWIDTH	Measured frequencies		Limit	PASS /FAIL
		(MHz)	FL (MHz)	FH (MHz)		
802.11b						
01	2412	12.335	2404.77	2419.15	FL>2400MHz and FH<2483.5 MHz	PASS
13	2472	12.422	2464.77	2479.15		PASS
802.11g						
01	2412	17.204	2402.46	2421.38	FL>2400MHz and FH<2483.5 MHz	PASS
13	2472	17.146	2462.46	2481.38		PASS
802.11n20						
01	2412	17.903	2402.38	2421.54	FL>2400MHz and FH<2483.5 MHz	PASS
13	2472	17.861	2462.30	2481.62		PASS
802.11n40						
03	2422	36.506	2402.28	2441.72	FL>2400MHz and FH<2483.5 MHz	PASS
11	2462	36.669	2442.28	2481.40		PASS

Test Plot


(802.11b) 99% Power Bandwidth plot on channel 1




(802.11b) 99% Power Bandwidth plot on channel 13

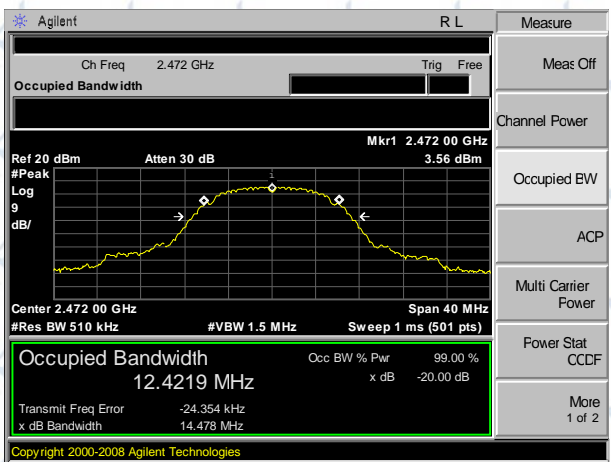

(802.11b) Measured frequencies plot on channel 1

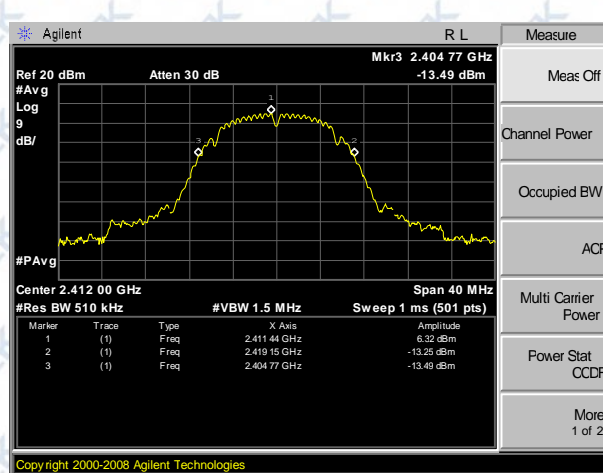


(802.11b) Measured frequencies plot on channel 13

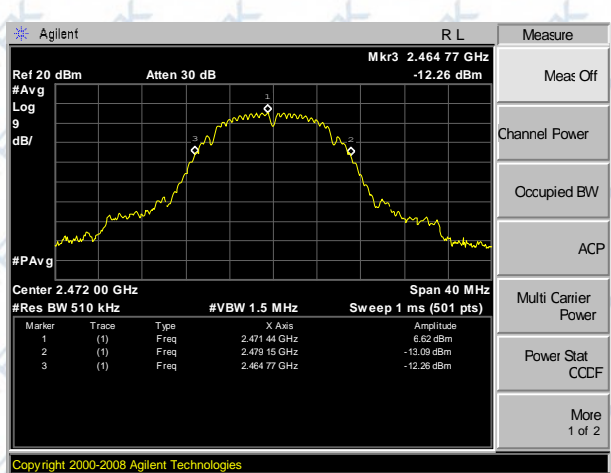


Test Plot


(802.11g) 99% Power Bandwidth plot on channel 1

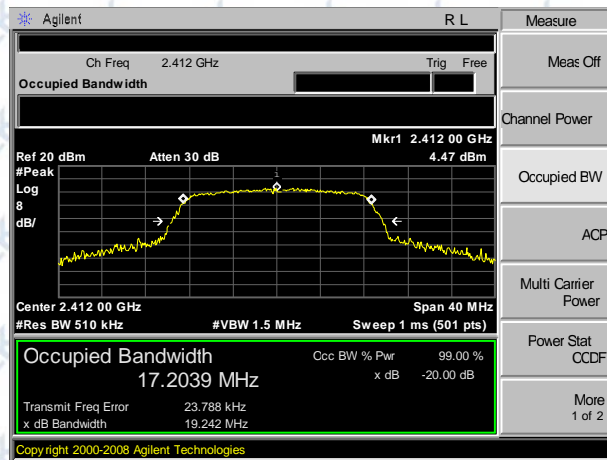


(802.11g) 99% Power Bandwidth plot on channel 13

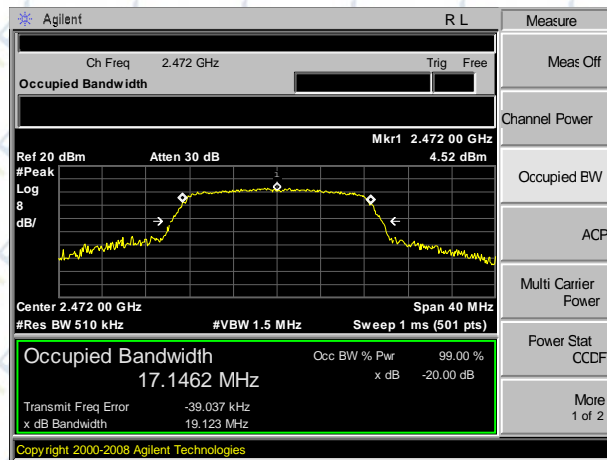

(802.11g) Measured frequencies plot on channel 1

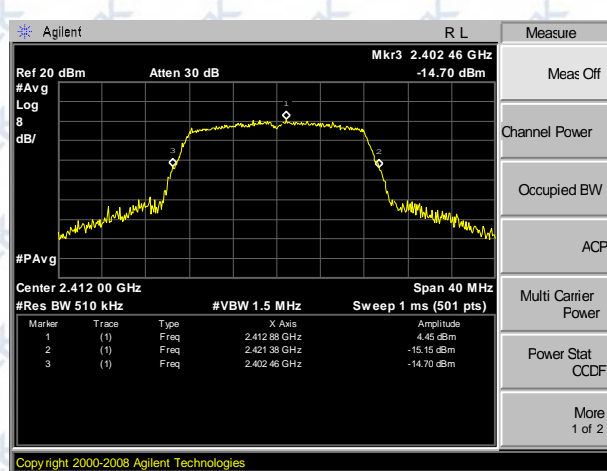


(802.11g) Measured frequencies plot on channel 13

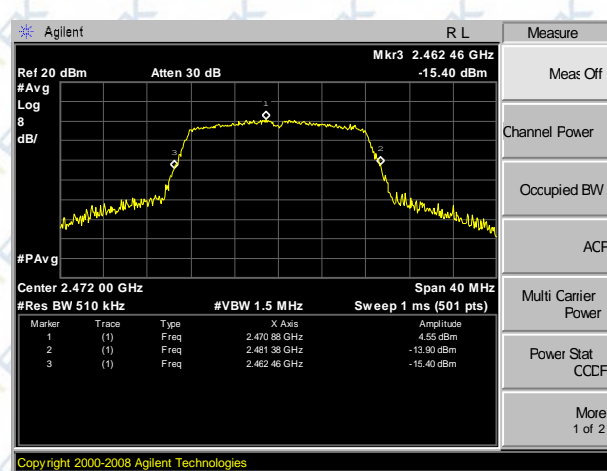


Test Plot


(802.11n20) 99% Power Bandwidth plot on
channel 1

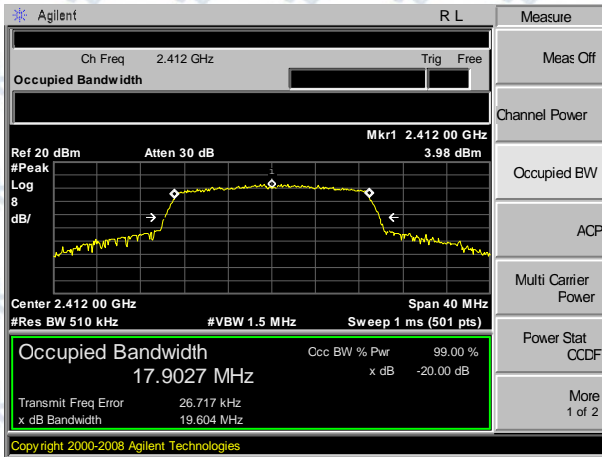


(802.11n20) 99% Power Bandwidth plot on
channel 13

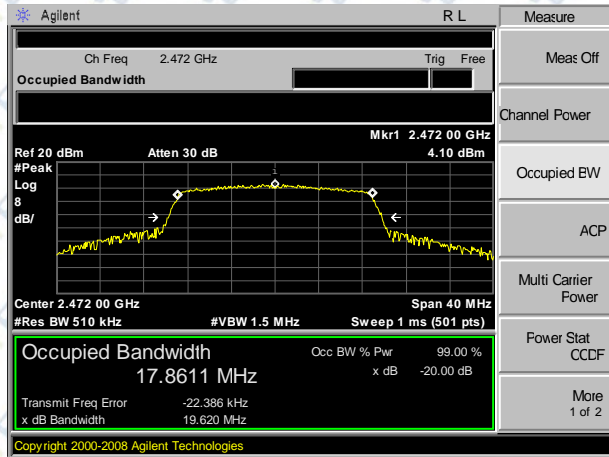

(802.11n20) Measured frequencies plot on
channel 1

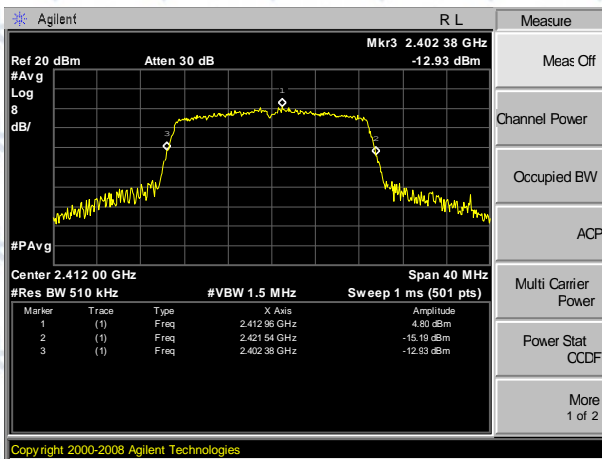


(802.11n20) Measured frequencies plot on
channel 13

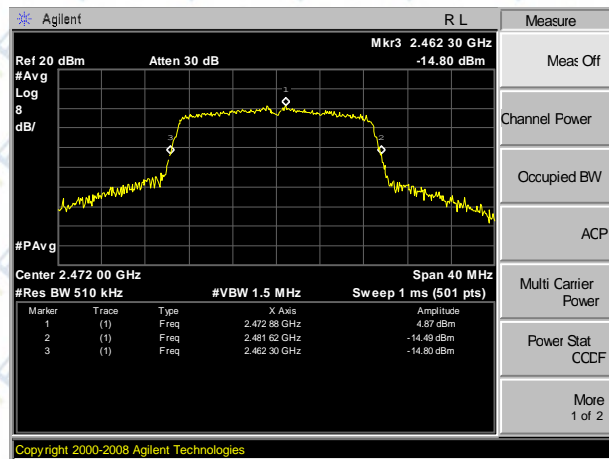


Test Plot


(802.11n40) 99% Power Bandwidth plot on
channel 3

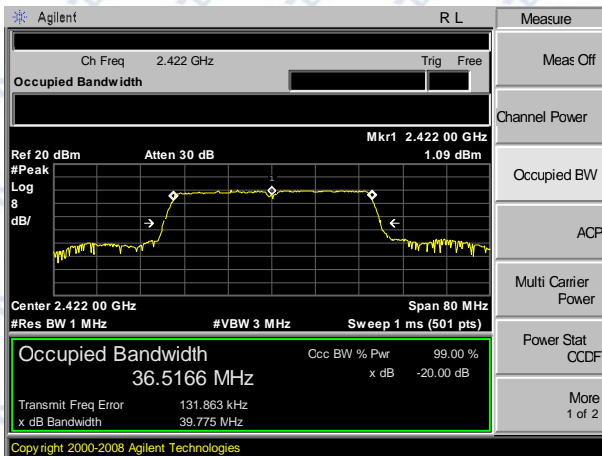


(802.11n40) 99% Power Bandwidth plot on
channel 11

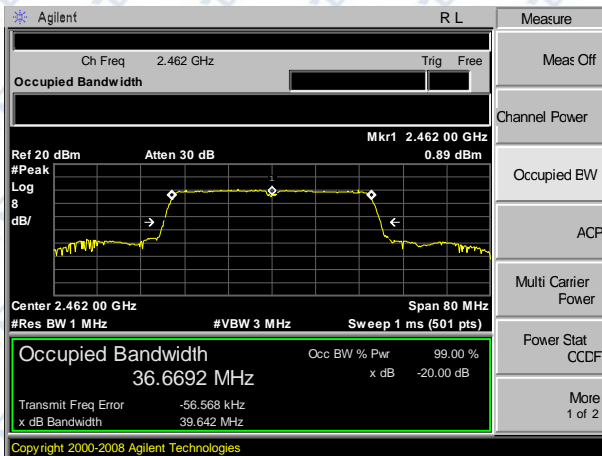

(802.11n40) Measured frequencies plot on
channel 3

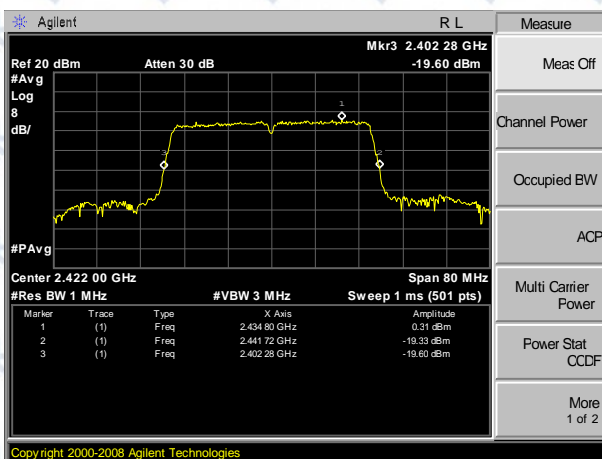

(802.11n40) Measured frequencies plot on
channel 11

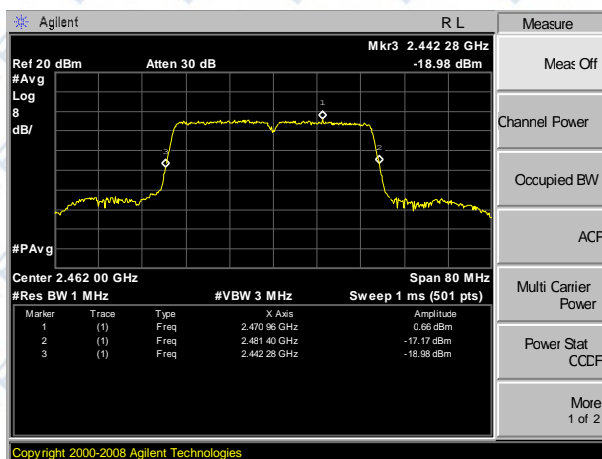


3.4. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

3.4.1 LIMITS OF TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

Refer to chapter 4.3.2.8.3 of ETSI EN 300 328 V2.1.1 (2016-11)

TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	
Condition	Limit
Under all test conditions	The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in below figure.

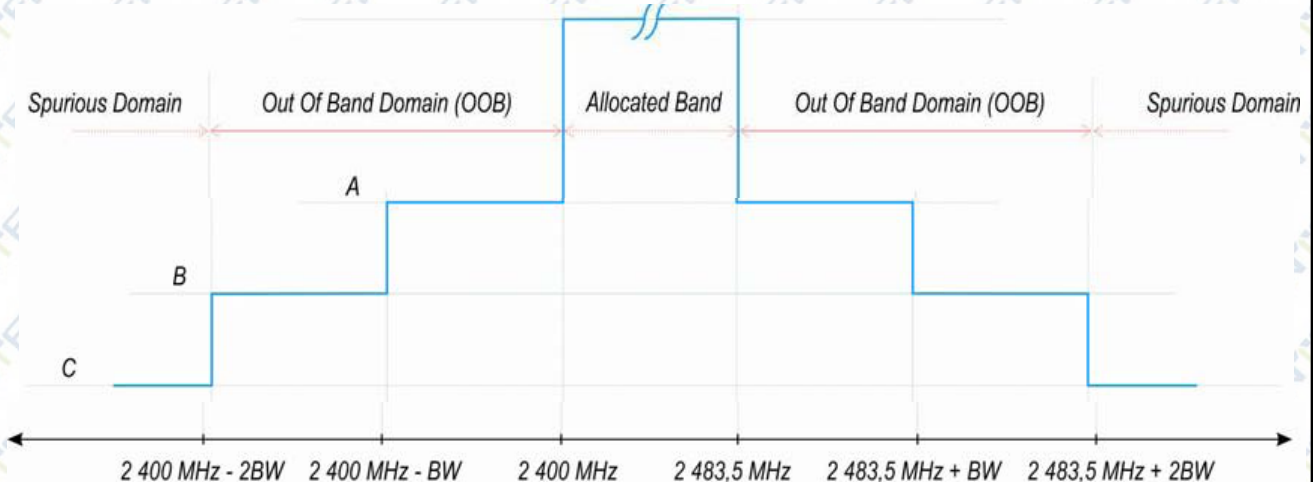

A: -10 dBm/MHz e.i.r.p.

B: -20 dBm/MHz e.i.r.p.

C: Spurious Domain limits

BW = Occupied Channel Bandwidth in MHz or 1 MHz whichever is greater

3.4.2 TEST PROCEDURE

Refer to chapter 5.4.8.2 of ETSI EN 300 328 V2.1.1 (2016-11)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement


The setting of the Spectrum Analyzer

Span	0Hz
Filter Mode	Channel Filter
Trace Mode	Max Hold
Trigger Mode	Video trigger; in case video triggering is not possible, an external trigger source may be used
Detector	RMS
Sweep Point / Sweep Mode	Sweep Time [s] / (1 μ s) or 5 000 whichever is greater/ Continuous
RBW / VBW	1MHz / 3MHz

3.4.3 DEVIATION FROM TEST STANDARD

No deviation

3.4.4 TEST SETUP

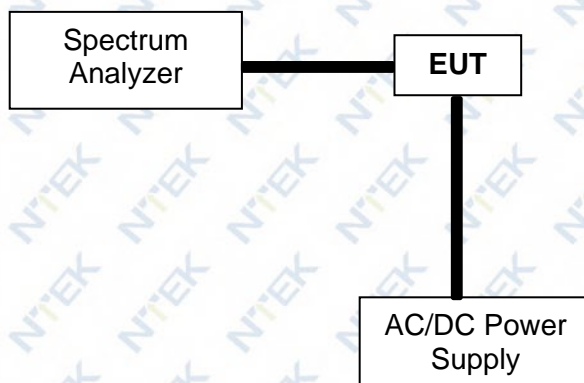

According to the EN 300328 V2.1.1 clause 5.4.8.1: These measurements shall only be performed at normal test conditions. For equipment using FHSS modulation, the measurements shall be performed during normal operation (hopping).

For equipment using wide band modulations other than FHSS, the measurement shall be performed at the lowest and the highest channel on which the equipment can operate. These operating channels shall be recorded.


The equipment shall be configured to operate under its worst case situation with respect to output power.

If the equipment can operate with different Nominal Channel Bandwidths (e.g. 20 MHz and 40 MHz), then each channel bandwidth shall be tested separately.

3.4.5 TEST RESULTS

EUT :	IP Camera	Model Name :	SP012
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Power :	DC 5V
Test Mode :	802.11b Mode CH1 / CH13		

Test Plot

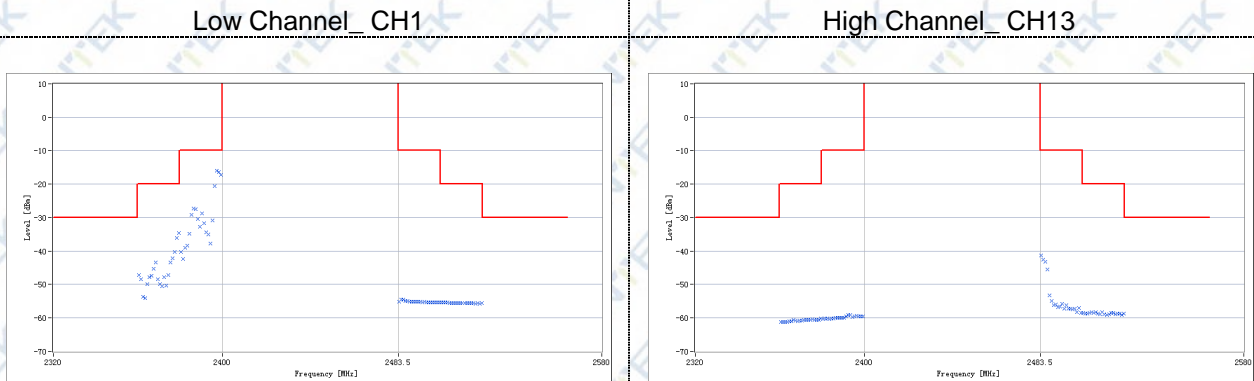

Frequency [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Frequency [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
2484.000	-55.1	-10.0	45.1	2484.000	-41.4	-10.0	31.4
2485.000	-54.4	-10.0	44.4	2485.000	-42.6	-10.0	32.6
2486.000	-54.6	-10.0	44.6	2486.000	-43.3	-10.0	33.3
2487.000	-55.0	-10.0	45.0	2487.000	-45.4	-10.0	35.4
2488.000	-54.9	-10.0	44.9	2488.000	-53.2	-10.0	43.2
2489.000	-55.0	-10.0	45.0	2489.000	-55.0	-10.0	45.0
2490.000	-55.2	-10.0	45.2	2490.000	-56.1	-10.0	46.1
2491.000	-55.1	-10.0	45.1	2491.000	-55.9	-10.0	45.9
2492.000	-55.2	-10.0	45.2	2492.000	-56.9	-10.0	46.9
2493.000	-55.1	-10.0	45.1	2493.000	-56.5	-10.0	46.5
2494.000	-55.1	-10.0	45.1	2494.000	-55.7	-10.0	45.7
2495.000	-55.2	-10.0	45.2	2495.000	-57.3	-10.0	47.3
2496.000	-55.2	-10.0	45.2	2496.000	-56.3	-10.0	46.3
2497.000	-55.3	-10.0	45.3	2497.000	-57.2	-10.0	47.2
2498.000	-55.3	-10.0	45.3	2498.000	-57.2	-10.0	47.2
2499.000	-55.3	-10.0	45.3	2499.000	-57.5	-10.0	47.5
2500.000	-55.3	-10.0	45.3	2500.000	-57.3	-10.0	47.3
2501.000	-55.4	-10.0	45.4	2501.000	-58.3	-10.0	48.3
2502.000	-55.4	-10.0	45.4	2502.000	-57.1	-10.0	47.1
2503.000	-55.4	-10.0	45.4	2503.000	-58.4	-10.0	48.4
2399.500	-17.2	-10.0	7.2	2399.500	-59.5	-10.0	49.5
2398.500	-16.4	-10.0	6.4	2398.500	-59.5	-10.0	49.5
2397.500	-16.0	-10.0	6.0	2397.500	-59.5	-10.0	49.5
2396.500	-20.6	-10.0	10.6	2396.500	-59.2	-10.0	49.2
2395.500	-30.8	-10.0	20.8	2395.500	-59.6	-10.0	49.6
2394.500	-37.8	-10.0	27.8	2394.500	-59.7	-10.0	49.7
2393.500	-35.1	-10.0	25.1	2393.500	-59.1	-10.0	49.1
2392.500	-34.4	-10.0	24.4	2392.500	-59.1	-10.0	49.1
2391.500	-31.7	-10.0	21.7	2391.500	-59.4	-10.0	49.4
2390.500	-28.7	-10.0	18.7	2390.500	-59.9	-10.0	49.9
2389.500	-32.6	-10.0	22.6	2389.500	-59.8	-10.0	49.8
2388.500	-30.5	-10.0	20.5	2388.500	-59.9	-10.0	49.9
2387.500	-27.4	-10.0	17.4	2387.500	-59.9	-10.0	49.9
2386.500	-27.2	-10.0	17.2	2386.500	-59.9	-10.0	49.9
2385.500	-29.2	-10.0	19.2	2385.500	-60.2	-10.0	50.2
2384.500	-34.8	-10.0	24.8	2384.500	-60.2	-10.0	50.2
2383.500	-38.4	-10.0	28.4	2383.500	-60.4	-10.0	50.4
2382.500	-39.0	-10.0	29.0	2382.500	-60.2	-10.0	50.2
2381.500	-42.4	-10.0	32.4	2381.500	-60.1	-10.0	50.1
2380.500	-40.2	-10.0	30.2	2380.500	-60.3	-10.0	50.3
2504.000	-55.4	-20.0	35.4	2504.000	-58.5	-20.0	38.5
2505.000	-55.4	-20.0	35.4	2505.000	-58.6	-20.0	38.6
2506.000	-55.4	-20.0	35.4	2506.000	-58.6	-20.0	38.6


2507.000	-55.4	-20.0	35.4
2508.000	-55.5	-20.0	35.5
2509.000	-55.5	-20.0	35.5
2510.000	-55.5	-20.0	35.5
2511.000	-55.5	-20.0	35.5
2512.000	-55.5	-20.0	35.5
2513.000	-55.6	-20.0	35.6
2514.000	-55.6	-20.0	35.6
2515.000	-55.6	-20.0	35.6
2516.000	-55.6	-20.0	35.6
2517.000	-55.6	-20.0	35.6
2518.000	-55.6	-20.0	35.6
2519.000	-55.6	-20.0	35.6
2520.000	-55.7	-20.0	35.7
2521.000	-55.6	-20.0	35.6
2522.000	-55.7	-20.0	35.7
2523.000	-55.6	-20.0	35.6
2379.500	-34.7	-20.0	14.7
2378.500	-36.0	-20.0	16.0
2377.500	-40.2	-20.0	20.2
2376.500	-42.1	-20.0	22.1
2375.500	-43.5	-20.0	23.5
2374.500	-47.3	-20.0	27.3
2373.500	-50.2	-20.0	30.2
2372.500	-47.9	-20.0	27.9
2371.500	-50.5	-20.0	30.5
2370.500	-50.0	-20.0	30.0
2369.500	-48.4	-20.0	28.4
2368.500	-43.4	-20.0	23.4
2367.500	-45.3	-20.0	25.3
2366.500	-47.3	-20.0	27.3
2365.500	-47.8	-20.0	27.8
2364.500	-50.0	-20.0	30.0
2363.500	-54.0	-20.0	34.0
2362.500	-53.8	-20.0	33.8
2361.500	-48.4	-20.0	28.4
2360.500	-47.2	-20.0	27.2

2507.000	-58.4	-20.0	38.4
2508.000	-58.2	-20.0	38.2
2509.000	-58.5	-20.0	38.5
2510.000	-58.3	-20.0	38.3
2511.000	-58.6	-20.0	38.6
2512.000	-58.8	-20.0	38.8
2513.000	-58.3	-20.0	38.3
2514.000	-59.0	-20.0	39.0
2515.000	-59.1	-20.0	39.1
2516.000	-59.0	-20.0	39.0
2517.000	-58.6	-20.0	38.6
2518.000	-58.5	-20.0	38.5
2519.000	-58.9	-20.0	38.9
2520.000	-58.8	-20.0	38.8
2521.000	-58.8	-20.0	38.8
2522.000	-59.2	-20.0	39.2
2523.000	-58.8	-20.0	38.8
2379.500	-60.2	-20.0	40.2
2378.500	-60.5	-20.0	40.5
2377.500	-60.6	-20.0	40.6
2376.500	-60.6	-20.0	40.6
2375.500	-60.4	-20.0	40.4
2374.500	-60.6	-20.0	40.6
2373.500	-60.6	-20.0	40.6
2372.500	-60.6	-20.0	40.6
2371.500	-60.6	-20.0	40.6
2370.500	-60.8	-20.0	40.8
2369.500	-60.8	-20.0	40.8
2368.500	-60.9	-20.0	40.9
2367.500	-60.8	-20.0	40.8
2366.500	-60.7	-20.0	40.7
2365.500	-61.0	-20.0	41.0
2364.500	-61.0	-20.0	41.0
2363.500	-61.1	-20.0	41.1
2362.500	-61.1	-20.0	41.1
2361.500	-61.2	-20.0	41.2
2360.500	-61.3	-20.0	41.3


EUT :	IP Camera	Model Name :	SP012
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Power :	DC 5V
Test Mode :	802.11g Mode CH1 / CH13		

Test Plot

Low Channel_CH1

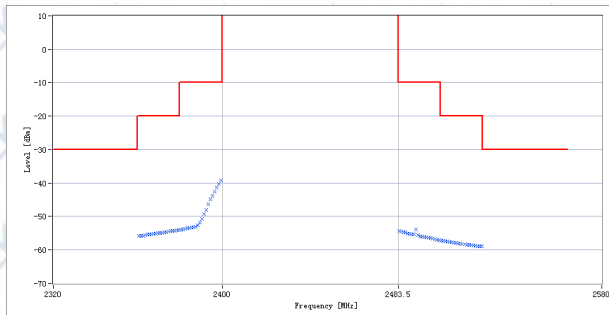

High Channel_CH13

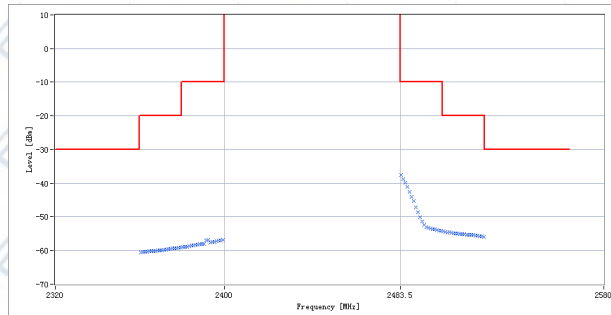

Frequency [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
2484.000	-54.3	-10.0	44.3
2485.000	-54.5	-10.0	44.5
2486.000	-54.7	-10.0	44.7
2487.000	-54.8	-10.0	44.8
2488.000	-55.0	-10.0	45.0
2489.000	-55.2	-10.0	45.2
2490.000	-55.3	-10.0	45.3
2491.000	-55.3	-10.0	45.3
2492.000	-53.9	-10.0	43.9
2493.000	-55.6	-10.0	45.6
2494.000	-55.9	-10.0	45.9
2495.000	-55.9	-10.0	45.9
2496.000	-56.1	-10.0	46.1
2497.000	-56.2	-10.0	46.2
2498.000	-56.4	-10.0	46.4
2499.000	-56.4	-10.0	46.4
2500.000	-56.6	-10.0	46.6
2501.000	-56.8	-10.0	46.8
2502.000	-56.9	-10.0	46.9
2503.000	-57.0	-10.0	47.0
2399.500	-39.2	-10.0	29.2
2398.500	-40.3	-10.0	30.3
2397.500	-41.4	-10.0	31.4
2396.500	-42.5	-10.0	32.5
2395.500	-43.8	-10.0	33.8
2394.500	-44.8	-10.0	34.8
2393.500	-46.4	-10.0	36.4
2392.500	-48.0	-10.0	38.0
2391.500	-49.3	-10.0	39.3
2390.500	-50.7	-10.0	40.7
2389.500	-51.8	-10.0	41.8
2388.500	-52.5	-10.0	42.5
2387.500	-52.9	-10.0	42.9
2386.500	-53.2	-10.0	43.2
2385.500	-53.3	-10.0	43.3
2384.500	-53.4	-10.0	43.4
2383.500	-53.6	-10.0	43.6
2382.500	-53.6	-10.0	43.6
2381.500	-53.8	-10.0	43.8
2380.500	-53.9	-10.0	43.9
2504.000	-57.2	-20.0	37.2
2505.000	-57.3	-20.0	37.3
2506.000	-57.4	-20.0	37.4
2507.000	-57.5	-20.0	37.5
2508.000	-57.6	-20.0	37.6
2509.000	-57.7	-20.0	37.7


Frequency [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
2484.000	-37.5	-10.0	27.5
2485.000	-38.9	-10.0	28.9
2486.000	-39.9	-10.0	29.9
2487.000	-41.2	-10.0	31.2
2488.000	-42.7	-10.0	32.7
2489.000	-44.0	-10.0	34.0
2490.000	-45.4	-10.0	35.4
2491.000	-47.1	-10.0	37.1
2492.000	-48.6	-10.0	38.6
2493.000	-50.1	-10.0	40.1
2494.000	-51.3	-10.0	41.3
2495.000	-52.4	-10.0	42.4
2496.000	-53.0	-10.0	43.0
2497.000	-53.3	-10.0	43.3
2498.000	-53.5	-10.0	43.5
2499.000	-53.6	-10.0	43.6
2500.000	-53.7	-10.0	43.7
2501.000	-53.9	-10.0	43.9
2502.000	-54.0	-10.0	44.0
2503.000	-54.1	-10.0	44.1
2399.500	-56.8	-10.0	46.8
2398.500	-56.9	-10.0	46.9
2397.500	-57.0	-10.0	47.0
2396.500	-57.2	-10.0	47.2
2395.500	-57.3	-10.0	47.3
2394.500	-57.4	-10.0	47.4
2393.500	-57.6	-10.0	47.6
2392.500	-56.8	-10.0	46.8
2391.500	-56.9	-10.0	46.9
2390.500	-58.0	-10.0	48.0
2389.500	-58.0	-10.0	48.0
2388.500	-58.1	-10.0	48.1
2387.500	-58.2	-10.0	48.2
2386.500	-58.4	-10.0	48.4
2385.500	-58.5	-10.0	48.5
2384.500	-58.5	-10.0	48.5
2383.500	-58.6	-10.0	48.6
2382.500	-58.8	-10.0	48.8
2381.500	-58.8	-10.0	48.8
2380.500	-58.9	-10.0	48.9
2504.000	-54.3	-20.0	34.3
2505.000	-54.5	-20.0	34.5
2506.000	-54.6	-20.0	34.6
2507.000	-54.6	-20.0	34.6
2508.000	-54.7	-20.0	34.7
2509.000	-54.8	-20.0	34.8

2510.000	-57.9	-20.0	37.9	2510.000	-54.9	-20.0	34.9
2511.000	-57.9	-20.0	37.9	2511.000	-55.0	-20.0	35.0
2512.000	-58.0	-20.0	38.0	2512.000	-55.1	-20.0	35.1
2513.000	-58.1	-20.0	38.1	2513.000	-55.2	-20.0	35.2
2514.000	-58.2	-20.0	38.2	2514.000	-55.1	-20.0	35.1
2515.000	-58.2	-20.0	38.2	2515.000	-55.3	-20.0	35.3
2516.000	-58.4	-20.0	38.4	2516.000	-55.3	-20.0	35.3
2517.000	-58.4	-20.0	38.4	2517.000	-55.4	-20.0	35.4
2518.000	-58.5	-20.0	38.5	2518.000	-55.4	-20.0	35.4
2519.000	-58.7	-20.0	38.7	2519.000	-55.6	-20.0	35.6
2520.000	-58.6	-20.0	38.6	2520.000	-55.7	-20.0	35.7
2521.000	-58.8	-20.0	38.8	2521.000	-55.7	-20.0	35.7
2522.000	-58.9	-20.0	38.9	2522.000	-55.8	-20.0	35.8
2523.000	-59.0	-20.0	39.0	2523.000	-55.9	-20.0	35.9
2379.500	-54.0	-20.0	34.0	2379.500	-59.1	-20.0	39.1
2378.500	-54.1	-20.0	34.1	2378.500	-59.1	-20.0	39.1
2377.500	-54.3	-20.0	34.3	2377.500	-59.3	-20.0	39.3
2376.500	-54.3	-20.0	34.3	2376.500	-59.3	-20.0	39.3
2375.500	-54.4	-20.0	34.4	2375.500	-59.4	-20.0	39.4
2374.500	-54.5	-20.0	34.5	2374.500	-59.5	-20.0	39.5
2373.500	-54.6	-20.0	34.6	2373.500	-59.6	-20.0	39.6
2372.500	-54.6	-20.0	34.6	2372.500	-59.7	-20.0	39.7
2371.500	-54.9	-20.0	34.9	2371.500	-59.7	-20.0	39.7
2370.500	-54.9	-20.0	34.9	2370.500	-59.8	-20.0	39.8
2369.500	-55.0	-20.0	35.0	2369.500	-59.9	-20.0	39.9
2368.500	-55.1	-20.0	35.1	2368.500	-60.0	-20.0	40.0
2367.500	-55.1	-20.0	35.1	2367.500	-60.1	-20.0	40.1
2366.500	-55.3	-20.0	35.3	2366.500	-60.1	-20.0	40.1
2365.500	-55.4	-20.0	35.4	2365.500	-60.2	-20.0	40.2
2364.500	-55.4	-20.0	35.4	2364.500	-60.3	-20.0	40.3
2363.500	-55.5	-20.0	35.5	2363.500	-60.4	-20.0	40.4
2362.500	-55.7	-20.0	35.7	2362.500	-60.4	-20.0	40.4
2361.500	-55.8	-20.0	35.8	2361.500	-60.5	-20.0	40.5
2360.500	-55.8	-20.0	35.8	2360.500	-60.5	-20.0	40.5


EUT :	IP Camera	Model Name :	SP012
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Power :	DC 5V
Test Mode :	802.11n20 Mode CH1 / CH13		

Test Plot

Low Channel CH1

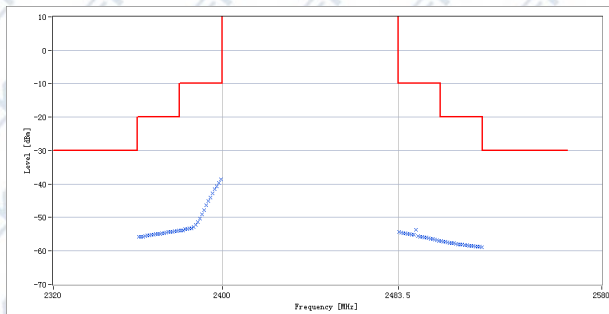

High Channel CH13

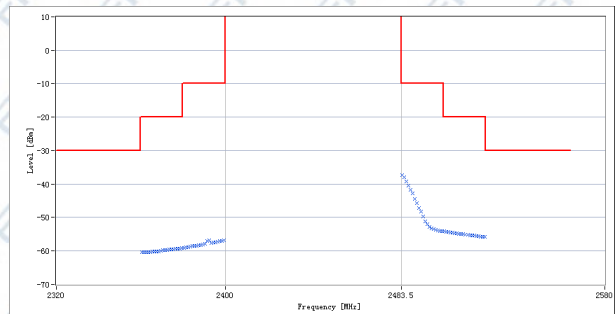

Frequency [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
2484.000	-54.2	-10.0	44.2
2485.000	-54.5	-10.0	44.5
2486.000	-54.6	-10.0	44.6
2487.000	-54.7	-10.0	44.7
2488.000	-54.9	-10.0	44.9
2489.000	-54.9	-10.0	44.9
2490.000	-55.2	-10.0	45.2
2491.000	-55.2	-10.0	45.2
2492.000	-53.7	-10.0	43.7
2493.000	-55.5	-10.0	45.5
2494.000	-55.7	-10.0	45.7
2495.000	-55.8	-10.0	45.8
2496.000	-55.9	-10.0	45.9
2497.000	-56.1	-10.0	46.1
2498.000	-56.3	-10.0	46.3
2499.000	-56.4	-10.0	46.4
2500.000	-56.4	-10.0	46.4
2501.000	-56.6	-10.0	46.6
2502.000	-56.8	-10.0	46.8
2503.000	-56.9	-10.0	46.9
2399.500	-38.7	-10.0	28.7
2398.500	-39.6	-10.0	29.6
2397.500	-40.6	-10.0	30.6
2396.500	-41.6	-10.0	31.6
2395.500	-42.8	-10.0	32.8
2394.500	-44.0	-10.0	34.0
2393.500	-45.1	-10.0	35.1
2392.500	-46.4	-10.0	36.4
2391.500	-47.8	-10.0	37.8
2390.500	-49.1	-10.0	39.1
2389.500	-50.3	-10.0	40.3
2388.500	-51.3	-10.0	41.3
2387.500	-52.1	-10.0	42.1
2386.500	-52.7	-10.0	42.7
2385.500	-53.3	-10.0	43.3
2384.500	-53.2	-10.0	43.2
2383.500	-53.4	-10.0	43.4
2382.500	-53.5	-10.0	43.5
2381.500	-53.8	-10.0	43.8
2380.500	-53.8	-10.0	43.8
2504.000	-57.1	-20.0	37.1
2505.000	-57.2	-20.0	37.2
2506.000	-57.3	-20.0	37.3
2507.000	-57.4	-20.0	37.4


Frequency [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
2484.000	-37.3	-10.0	27.3
2485.000	-38.0	-10.0	28.0
2486.000	-39.3	-10.0	29.3
2487.000	-40.4	-10.0	30.4
2488.000	-41.6	-10.0	31.6
2489.000	-42.8	-10.0	32.8
2490.000	-44.4	-10.0	34.4
2491.000	-45.6	-10.0	35.6
2492.000	-47.1	-10.0	37.1
2493.000	-48.3	-10.0	38.3
2494.000	-49.8	-10.0	39.8
2495.000	-51.1	-10.0	41.1
2496.000	-52.0	-10.0	42.0
2497.000	-52.9	-10.0	42.9
2498.000	-53.3	-10.0	43.3
2499.000	-53.5	-10.0	43.5
2500.000	-53.7	-10.0	43.7
2501.000	-53.9	-10.0	43.9
2502.000	-54.0	-10.0	44.0
2503.000	-54.1	-10.0	44.1
2399.500	-56.8	-10.0	46.8
2398.500	-56.9	-10.0	46.9
2397.500	-57.1	-10.0	47.1
2396.500	-57.2	-10.0	47.2
2395.500	-57.4	-10.0	47.4
2394.500	-57.4	-10.0	47.4
2393.500	-57.6	-10.0	47.6
2392.500	-56.8	-10.0	46.8
2391.500	-56.9	-10.0	46.9
2390.500	-57.9	-10.0	47.9
2389.500	-58.0	-10.0	48.0
2388.500	-58.2	-10.0	48.2
2387.500	-58.3	-10.0	48.3
2386.500	-58.4	-10.0	48.4
2385.500	-58.5	-10.0	48.5
2384.500	-58.5	-10.0	48.5
2383.500	-58.6	-10.0	48.6
2382.500	-58.8	-10.0	48.8
2381.500	-58.9	-10.0	48.9
2380.500	-59.0	-10.0	49.0
2504.000	-54.2	-20.0	34.2
2505.000	-54.3	-20.0	34.3
2506.000	-54.3	-20.0	34.3
2507.000	-54.4	-20.0	34.4

2508.000	-57.6	-20.0	37.6	2508.000	-54.5	-20.0	34.5
2509.000	-57.6	-20.0	37.6	2509.000	-54.7	-20.0	34.7
2510.000	-57.7	-20.0	37.7	2510.000	-54.7	-20.0	34.7
2511.000	-57.8	-20.0	37.8	2511.000	-54.8	-20.0	34.8
2512.000	-58.0	-20.0	38.0	2512.000	-55.0	-20.0	35.0
2513.000	-58.1	-20.0	38.1	2513.000	-55.0	-20.0	35.0
2514.000	-58.0	-20.0	38.0	2514.000	-55.1	-20.0	35.1
2515.000	-58.2	-20.0	38.2	2515.000	-55.2	-20.0	35.2
2516.000	-58.3	-20.0	38.3	2516.000	-55.3	-20.0	35.3
2517.000	-58.4	-20.0	38.4	2517.000	-55.4	-20.0	35.4
2518.000	-58.5	-20.0	38.5	2518.000	-55.4	-20.0	35.4
2519.000	-58.6	-20.0	38.6	2519.000	-55.5	-20.0	35.5
2520.000	-58.6	-20.0	38.6	2520.000	-55.6	-20.0	35.6
2521.000	-58.7	-20.0	38.7	2521.000	-55.7	-20.0	35.7
2522.000	-58.7	-20.0	38.7	2522.000	-55.7	-20.0	35.7
2523.000	-58.9	-20.0	38.9	2523.000	-55.7	-20.0	35.7
2379.500	-53.9	-20.0	33.9	2379.500	-59.0	-20.0	39.0
2378.500	-54.1	-20.0	34.1	2378.500	-59.2	-20.0	39.2
2377.500	-54.1	-20.0	34.1	2377.500	-59.3	-20.0	39.3
2376.500	-54.2	-20.0	34.2	2376.500	-59.3	-20.0	39.3
2375.500	-54.2	-20.0	34.2	2375.500	-59.4	-20.0	39.4
2374.500	-54.4	-20.0	34.4	2374.500	-59.6	-20.0	39.6
2373.500	-54.5	-20.0	34.5	2373.500	-59.6	-20.0	39.6
2372.500	-54.7	-20.0	34.7	2372.500	-59.6	-20.0	39.6
2371.500	-54.7	-20.0	34.7	2371.500	-59.7	-20.0	39.7
2370.500	-54.9	-20.0	34.9	2370.500	-59.8	-20.0	39.8
2369.500	-54.9	-20.0	34.9	2369.500	-60.0	-20.0	40.0
2368.500	-55.0	-20.0	35.0	2368.500	-60.1	-20.0	40.1
2367.500	-55.1	-20.0	35.1	2367.500	-60.1	-20.0	40.1
2366.500	-55.1	-20.0	35.1	2366.500	-60.2	-20.0	40.2
2365.500	-55.3	-20.0	35.3	2365.500	-60.1	-20.0	40.1
2364.500	-55.3	-20.0	35.3	2364.500	-60.3	-20.0	40.3
2363.500	-55.5	-20.0	35.5	2363.500	-60.3	-20.0	40.3
2362.500	-55.7	-20.0	35.7	2362.500	-60.4	-20.0	40.4
2361.500	-55.7	-20.0	35.7	2361.500	-60.5	-20.0	40.5
2360.500	-55.8	-20.0	35.8	2360.500	-60.5	-20.0	40.5


EUT :	IP Camera	Model Name :	SP012
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Power :	DC 5V
Test Mode :	802.11n40 Mode CH3 / CH11		

Test Plot

Low Channel_ CH3

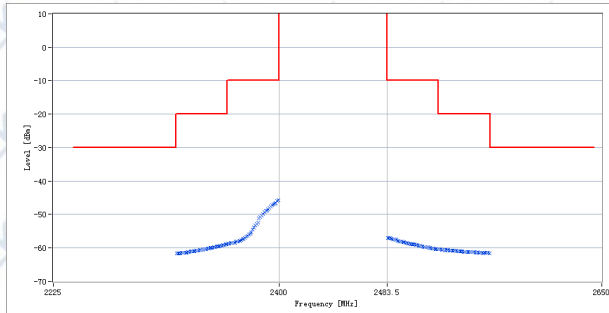

High Channel_ CH11

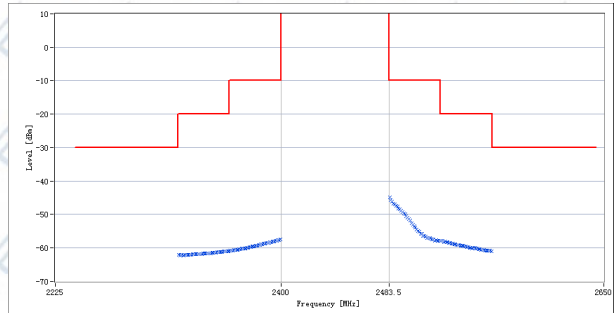

Frequency [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
2484.000	-56.9	-10.0	46.9
2485.000	-57.1	-10.0	47.1
2486.000	-57.1	-10.0	47.1
2487.000	-57.2	-10.0	47.2
2488.000	-57.3	-10.0	47.3
2489.000	-57.4	-10.0	47.4
2490.000	-57.5	-10.0	47.5
2491.000	-57.6	-10.0	47.6
2492.000	-57.8	-10.0	47.8
2493.000	-58.0	-10.0	48.0
2494.000	-58.0	-10.0	48.0
2495.000	-58.1	-10.0	48.1
2496.000	-58.2	-10.0	48.2
2497.000	-58.3	-10.0	48.3
2498.000	-58.5	-10.0	48.5
2499.000	-58.5	-10.0	48.5
2500.000	-58.7	-10.0	48.7
2501.000	-58.7	-10.0	48.7
2502.000	-58.8	-10.0	48.8
2503.000	-58.9	-10.0	48.9
2504.000	-58.9	-10.0	48.9
2505.000	-59.0	-10.0	49.0
2506.000	-59.0	-10.0	49.0
2507.000	-59.2	-10.0	49.2
2508.000	-59.4	-10.0	49.4
2509.000	-59.4	-10.0	49.4
2510.000	-59.4	-10.0	49.4
2511.000	-59.6	-10.0	49.6
2512.000	-59.7	-10.0	49.7
2513.000	-59.7	-10.0	49.7
2514.000	-59.7	-10.0	49.7
2515.000	-59.7	-10.0	49.7
2516.000	-59.9	-10.0	49.9
2517.000	-59.9	-10.0	49.9
2518.000	-60.1	-10.0	50.1
2519.000	-60.2	-10.0	50.2
2520.000	-60.2	-10.0	50.2
2521.000	-60.3	-10.0	50.3
2522.000	-60.3	-10.0	50.3
2523.000	-60.4	-10.0	50.4
2399.500	-45.6	-10.0	35.6
2398.500	-46.0	-10.0	36.0
2397.500	-46.5	-10.0	36.5
2396.500	-46.7	-10.0	36.7
2395.500	-47.0	-10.0	37.0
2394.500	-47.2	-10.0	37.2

Frequency [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
2484.000	-44.9	-10.0	34.9
2485.000	-45.7	-10.0	35.7
2486.000	-46.1	-10.0	36.1
2487.000	-46.7	-10.0	36.7
2488.000	-46.9	-10.0	36.9
2489.000	-47.4	-10.0	37.4
2490.000	-47.5	-10.0	37.5
2491.000	-48.2	-10.0	38.2
2492.000	-48.5	-10.0	38.5
2493.000	-48.8	-10.0	38.8
2494.000	-49.2	-10.0	39.2
2495.000	-49.7	-10.0	39.7
2496.000	-49.9	-10.0	39.9
2497.000	-50.6	-10.0	40.6
2498.000	-50.9	-10.0	40.9
2499.000	-51.4	-10.0	41.4
2500.000	-51.9	-10.0	41.9
2501.000	-52.7	-10.0	42.7
2502.000	-52.9	-10.0	42.9
2503.000	-53.5	-10.0	43.5
2504.000	-53.9	-10.0	43.9
2505.000	-54.5	-10.0	44.5
2506.000	-54.9	-10.0	44.9
2507.000	-55.2	-10.0	45.2
2508.000	-55.7	-10.0	45.7
2509.000	-55.8	-10.0	45.8
2510.000	-56.4	-10.0	46.4
2511.000	-56.4	-10.0	46.4
2512.000	-56.6	-10.0	46.6
2513.000	-56.9	-10.0	46.9
2514.000	-57.0	-10.0	47.0
2515.000	-57.1	-10.0	47.1
2516.000	-57.3	-10.0	47.3
2517.000	-57.4	-10.0	47.4
2518.000	-57.5	-10.0	47.5
2519.000	-57.8	-10.0	47.8
2520.000	-57.6	-10.0	47.6
2521.000	-57.8	-10.0	47.8
2522.000	-57.8	-10.0	47.8
2523.000	-57.8	-10.0	47.8
2399.500	-57.5	-10.0	47.5
2398.500	-57.7	-10.0	47.7
2397.500	-57.6	-10.0	47.6
2396.500	-57.8	-10.0	47.8
2395.500	-57.9	-10.0	47.9
2394.500	-58.2	-10.0	48.2

2393.500	-47.6	-10.0	37.6	2393.500	-58.0	-10.0	48.0
2392.500	-48.1	-10.0	38.1	2392.500	-58.2	-10.0	48.2
2391.500	-48.4	-10.0	38.4	2391.500	-58.3	-10.0	48.3
2390.500	-48.8	-10.0	38.8	2390.500	-58.5	-10.0	48.5
2389.500	-48.9	-10.0	38.9	2389.500	-58.5	-10.0	48.5
2388.500	-49.3	-10.0	39.3	2388.500	-58.5	-10.0	48.5
2387.500	-50.0	-10.0	40.0	2387.500	-58.8	-10.0	48.8
2386.500	-50.3	-10.0	40.3	2386.500	-58.7	-10.0	48.7
2385.500	-50.8	-10.0	40.8	2385.500	-58.9	-10.0	48.9
2384.500	-51.2	-10.0	41.2	2384.500	-58.9	-10.0	48.9
2383.500	-52.3	-10.0	42.3	2383.500	-59.2	-10.0	49.2
2382.500	-52.9	-10.0	42.9	2382.500	-59.1	-10.0	49.1
2381.500	-53.2	-10.0	43.2	2381.500	-59.3	-10.0	49.3
2380.500	-53.8	-10.0	43.8	2380.500	-59.4	-10.0	49.4
2379.500	-54.5	-10.0	44.5	2379.500	-59.5	-10.0	49.5
2378.500	-55.2	-10.0	45.2	2378.500	-59.4	-10.0	49.4
2377.500	-55.7	-10.0	45.7	2377.500	-59.6	-10.0	49.6
2376.500	-56.0	-10.0	46.0	2376.500	-59.6	-10.0	49.6
2375.500	-56.4	-10.0	46.4	2375.500	-59.7	-10.0	49.7
2374.500	-56.7	-10.0	46.7	2374.500	-59.9	-10.0	49.9
2373.500	-57.0	-10.0	47.0	2373.500	-59.9	-10.0	49.9
2372.500	-57.2	-10.0	47.2	2372.500	-60.1	-10.0	50.1
2371.500	-57.5	-10.0	47.5	2371.500	-60.1	-10.0	50.1
2370.500	-57.7	-10.0	47.7	2370.500	-60.2	-10.0	50.2
2369.500	-57.8	-10.0	47.8	2369.500	-60.2	-10.0	50.2
2368.500	-58.0	-10.0	48.0	2368.500	-60.3	-10.0	50.3
2367.500	-58.1	-10.0	48.1	2367.500	-60.3	-10.0	50.3
2366.500	-58.1	-10.0	48.1	2366.500	-60.5	-10.0	50.5
2365.500	-58.4	-10.0	48.4	2365.500	-60.6	-10.0	50.6
2364.500	-58.6	-10.0	48.6	2364.500	-60.5	-10.0	50.5
2363.500	-58.4	-10.0	48.4	2363.500	-60.6	-10.0	50.6
2362.500	-58.6	-10.0	48.6	2362.500	-60.8	-10.0	50.8
2361.500	-58.7	-10.0	48.7	2361.500	-60.8	-10.0	50.8
2360.500	-58.8	-10.0	48.8	2360.500	-60.8	-10.0	50.8
2524.000	-60.3	-20.0	40.3	2524.000	-57.9	-20.0	37.9
2525.000	-60.4	-20.0	40.4	2525.000	-57.9	-20.0	37.9
2526.000	-60.5	-20.0	40.5	2526.000	-58.2	-20.0	38.2
2527.000	-60.6	-20.0	40.6	2527.000	-58.1	-20.0	38.1
2528.000	-60.6	-20.0	40.6	2528.000	-58.3	-20.0	38.3
2529.000	-60.8	-20.0	40.8	2529.000	-58.3	-20.0	38.3
2530.000	-60.6	-20.0	40.6	2530.000	-58.4	-20.0	38.4
2531.000	-60.7	-20.0	40.7	2531.000	-58.6	-20.0	38.6
2532.000	-60.7	-20.0	40.7	2532.000	-58.6	-20.0	38.6
2533.000	-60.8	-20.0	40.8	2533.000	-58.7	-20.0	38.7
2534.000	-60.8	-20.0	40.8	2534.000	-58.9	-20.0	38.9
2535.000	-60.7	-20.0	40.7	2535.000	-58.9	-20.0	38.9
2536.000	-60.8	-20.0	40.8	2536.000	-59.1	-20.0	39.1
2537.000	-60.8	-20.0	40.8	2537.000	-59.1	-20.0	39.1
2538.000	-61.0	-20.0	41.0	2538.000	-59.2	-20.0	39.2
2539.000	-61.0	-20.0	41.0	2539.000	-59.3	-20.0	39.3
2540.000	-60.9	-20.0	40.9	2540.000	-59.4	-20.0	39.4
2541.000	-60.9	-20.0	40.9	2541.000	-59.4	-20.0	39.4
2542.000	-60.9	-20.0	40.9	2542.000	-59.5	-20.0	39.5
2543.000	-61.1	-20.0	41.1	2543.000	-59.5	-20.0	39.5
2544.000	-61.2	-20.0	41.2	2544.000	-59.7	-20.0	39.7
2545.000	-61.2	-20.0	41.2	2545.000	-59.8	-20.0	39.8
2546.000	-61.3	-20.0	41.3	2546.000	-59.9	-20.0	39.9
2547.000	-61.3	-20.0	41.3	2547.000	-60.0	-20.0	40.0
2548.000	-61.2	-20.0	41.2	2548.000	-60.1	-20.0	40.1
2549.000	-61.3	-20.0	41.3	2549.000	-60.0	-20.0	40.0
2550.000	-61.3	-20.0	41.3	2550.000	-60.0	-20.0	40.0
2551.000	-61.2	-20.0	41.2	2551.000	-60.2	-20.0	40.2
2552.000	-61.3	-20.0	41.3	2552.000	-60.2	-20.0	40.2
2553.000	-61.3	-20.0	41.3	2553.000	-60.3	-20.0	40.3
2554.000	-61.3	-20.0	41.3	2554.000	-60.4	-20.0	40.4
2555.000	-61.5	-20.0	41.5	2555.000	-60.5	-20.0	40.5
2556.000	-61.4	-20.0	41.4	2556.000	-60.5	-20.0	40.5
2557.000	-61.4	-20.0	41.4	2557.000	-60.6	-20.0	40.6
2558.000	-61.6	-20.0	41.6	2558.000	-60.7	-20.0	40.7
2559.000	-61.5	-20.0	41.5	2559.000	-60.8	-20.0	40.8
2560.000	-61.4	-20.0	41.4	2560.000	-60.7	-20.0	40.7
2561.000	-61.5	-20.0	41.5	2561.000	-60.8	-20.0	40.8
2562.000	-61.5	-20.0	41.5	2562.000	-60.8	-20.0	40.8
2563.000	-61.7	-20.0	41.7	2563.000	-60.9	-20.0	40.9
2359.500	-58.8	-20.0	38.8	2359.500	-60.9	-20.0	40.9
2358.500	-59.0	-20.0	39.0	2358.500	-60.9	-20.0	40.9

2357.500	-59.0	-20.0	39.0	2357.500	-61.0	-20.0	41.0
2356.500	-59.1	-20.0	39.1	2356.500	-61.0	-20.0	41.0
2355.500	-59.2	-20.0	39.2	2355.500	-61.0	-20.0	41.0
2354.500	-59.2	-20.0	39.2	2354.500	-61.1	-20.0	41.1
2353.500	-59.5	-20.0	39.5	2353.500	-61.2	-20.0	41.2
2352.500	-59.5	-20.0	39.5	2352.500	-61.3	-20.0	41.3
2351.500	-59.5	-20.0	39.5	2351.500	-61.2	-20.0	41.2
2350.500	-59.7	-20.0	39.7	2350.500	-61.3	-20.0	41.3
2349.500	-59.7	-20.0	39.7	2349.500	-61.3	-20.0	41.3
2348.500	-59.9	-20.0	39.9	2348.500	-61.4	-20.0	41.4
2347.500	-59.9	-20.0	39.9	2347.500	-61.5	-20.0	41.5
2346.500	-60.0	-20.0	40.0	2346.500	-61.4	-20.0	41.4
2345.500	-60.1	-20.0	40.1	2345.500	-61.5	-20.0	41.5
2344.500	-60.1	-20.0	40.1	2344.500	-61.5	-20.0	41.5
2343.500	-60.3	-20.0	40.3	2343.500	-61.6	-20.0	41.6
2342.500	-60.4	-20.0	40.4	2342.500	-61.6	-20.0	41.6
2341.500	-60.5	-20.0	40.5	2341.500	-61.6	-20.0	41.6
2340.500	-60.5	-20.0	40.5	2340.500	-61.7	-20.0	41.7
2339.500	-60.5	-20.0	40.5	2339.500	-61.6	-20.0	41.6
2338.500	-60.7	-20.0	40.7	2338.500	-61.8	-20.0	41.8
2337.500	-60.7	-20.0	40.7	2337.500	-61.8	-20.0	41.8
2336.500	-60.9	-20.0	40.9	2336.500	-61.8	-20.0	41.8
2335.500	-60.8	-20.0	40.8	2335.500	-61.9	-20.0	41.9
2334.500	-61.0	-20.0	41.0	2334.500	-61.9	-20.0	41.9
2333.500	-61.1	-20.0	41.1	2333.500	-61.9	-20.0	41.9
2332.500	-61.1	-20.0	41.1	2332.500	-61.8	-20.0	41.8
2331.500	-61.1	-20.0	41.1	2331.500	-61.9	-20.0	41.9
2330.500	-61.1	-20.0	41.1	2330.500	-62.1	-20.0	42.1
2329.500	-61.2	-20.0	41.2	2329.500	-62.0	-20.0	42.0
2328.500	-61.3	-20.0	41.3	2328.500	-62.0	-20.0	42.0
2327.500	-61.4	-20.0	41.4	2327.500	-62.0	-20.0	42.0
2326.500	-61.4	-20.0	41.4	2326.500	-62.0	-20.0	42.0
2325.500	-61.4	-20.0	41.4	2325.500	-62.1	-20.0	42.1
2324.500	-61.5	-20.0	41.5	2324.500	-62.2	-20.0	42.2
2323.500	-61.5	-20.0	41.5	2323.500	-62.1	-20.0	42.1
2322.500	-61.6	-20.0	41.6	2322.500	-62.1	-20.0	42.1
2321.500	-61.6	-20.0	41.6	2321.500	-62.2	-20.0	42.2
2320.500	-61.7	-20.0	41.7	2320.500	-62.1	-20.0	42.1

3.5. ADAPTIVE (CHANNEL ACCESS MECHANISM)

3.5.1 APPLICABILITY OF ADAPTIVE REQUIREMENTS AND LILT FOR WIDE BAND MODULATION TECHNIQUES

Refer to chapter 4.3.2.6 of ETSI EN 300 328 V2.1.1 (2016-11)

Requirement	Operational Mode			
	<input type="checkbox"/> Non-LBT based Detect and Avoid	<input type="checkbox"/> LBT based Detect and Avoid		
		<input type="checkbox"/> Frame Based Equipment	<input type="checkbox"/> Load Based Equipment (CCA using 'energy detect')	<input type="checkbox"/> Load Based Equipment (CCA not using any of the mechanisms referenced as note 2)
Minimum Clear Channel Assessment (CCA) Time	NA	not less than 18 us (see note 1)	(see note 2)	not less than 18 us (see note 1)
Maximum Channel Occupancy (COT) Time	<40 ms	1ms to 10 ms	(see note 2)	(13/32)*q ms (see note 3)
Minimum Idle Period	5 % minimum of 100 µs	5% of COT	(see note 2)	NA
Extended CCA check	NA	NA	(see note 2)	R*CCA (see note 4)
Short Control Signalling Transmissions	Maximum duty cycle of 10% within an observation period of 50 ms (see note 5)			

Note 1: The CCA time used by the equipment shall be declared by the supplier.

Note 2: Load Based Equipment may implement an LBT based spectrum sharing mechanism based on the Clear Channel Assessment (CCA) mode using energy detect as described in IEEE 802.11™-2012 [i.3], clause 9, clause 10, clause 16, clause 17, clause 19 and clause 20, or in IEEE 802.15.4™-2011 [i.4], clause 4, clause 5 and clause 8 providing the equipment complies with the conformance requirements referred to in clause 4.3.2.6.3.4.

Note 3: q is selected by the manufacturer in the range [4...32]

Note 4: The value of R shall be randomly selected in the range [1...q]

Note 5: Adaptive equipment may or may not have Short Control Signaling Transmissions.

Interference threshold level

The detection threshold shall be proportional to the transmit power of the transmitter: for a 20 dBm e.i.r.p. transmitter the detection threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver assuming a 0 dBi (receive) antenna assembly. This threshold level (TL) may be corrected for the (receive) antenna assembly gain (G); however, beamforming gain (Y) shall not be taken into account. For power levels less than 20 dBm e.i.r.p., the detection threshold level may be relaxed to:

$$TL = -70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW} / P_{out}) \text{ (Pout in mW e.i.r.p.)}$$

Table 9: Unwanted Signal parameters

Wanted signal mean power from companion device (dBm)	Unwanted signal frequency (MHz)	Unwanted CW signal power (dBm)
-30/ sufficient to maintain the link(see note 2)	2 395 or 2 488,5 (see note 1)	-35 (see note 2)
<p>NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1.</p> <p>NOTE 2: A typical value which can be used in most cases is -50 dBm/MHz.</p> <p>NOTE 3: The level specified is the level in front of the UUT antenna. In case of conducted measurements, this level has to be corrected by the actual antenna assembly gain.</p>		


3.5.2 TEST PROCEDURE

Refer to chapter 5.4.6.2 of ETSI EN 300 328 V2.1.1 (2016-11)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

Test method please refer to the 5.4.6.2.1.4 of ETSI EN 300 328 V2.1.1 (2016-11).

3.5.3 TEST SETUP CONFIGURATION

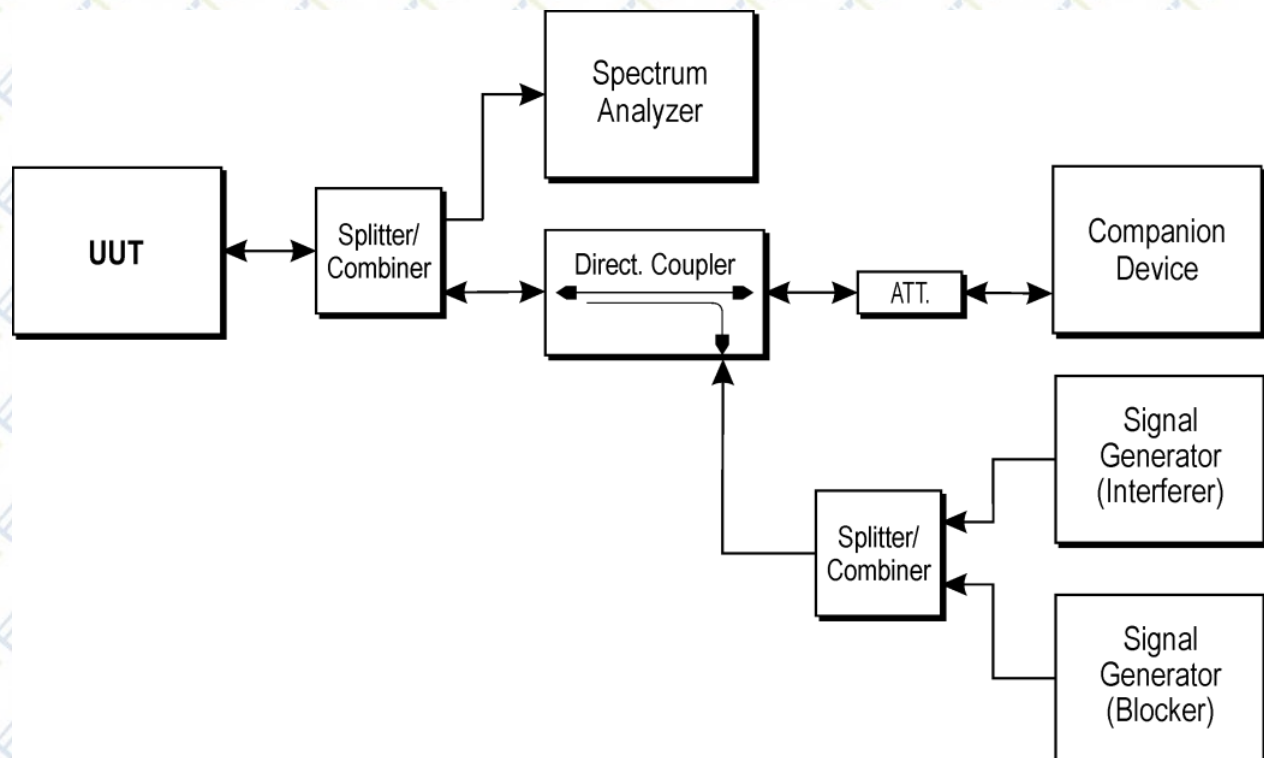

3.5.4 LIST OF MEASUREMENTS

UUT operational Mode		
Frame Based Equipment	Load Based Equipment (CCA using 'energy detect')	Load Based Equipment (CCA not using any of the mechanisms referenced)
	V	


Clause	Test Parameter	Remarks	PASS/FAIL
4.3.2.5.2.2.1	Adaptive (Frame Based Equipment)	Not Applicable	N/A
4.3.2.5.2.2.2	Adaptive (Load Based Equipment)	Applicable	PASS
4.3.2.5.3	Short Control Signaling Transmissions	Applicable	PASS

3.5.5 INTERFERENCE THRESHOLD LEVEL


EUT :	IP Camera	Model Name :	SP012
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Power :	DC 5V
Test Mode :	802.11b Mode CH1 / CH13		

802.11b Mode-2412MHz


Without interference signal and blocking signal Channel Occupancy Time: 2.292864ms
Idle Time: 0.102474ms

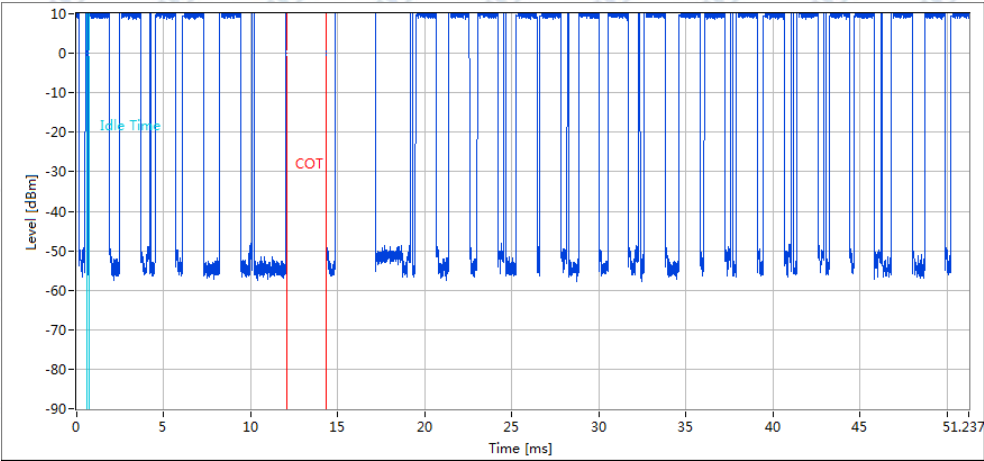

With interference signal, without blocking signal Stop Time: 6.658104ms
TxOn /(TxOn + TxOff): 0.00% (Short Control signaling transmission) right after interference signal.

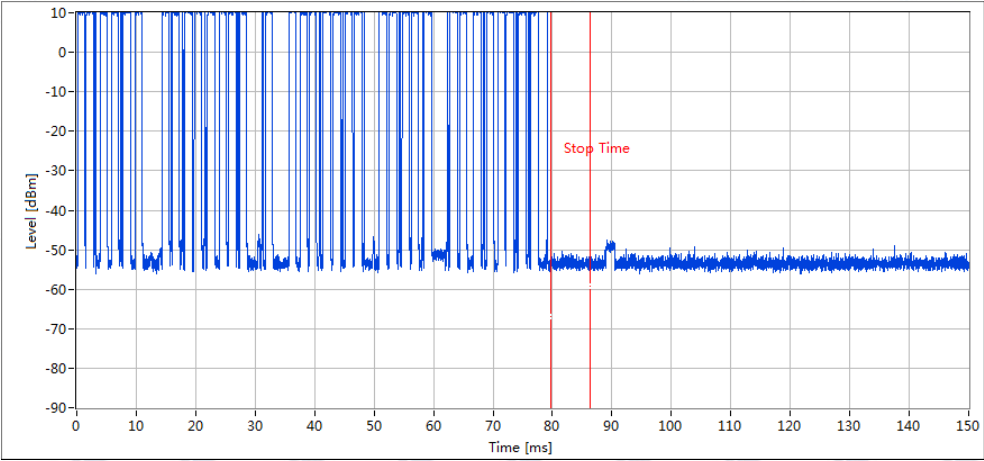


$TxOn / (TxOn + TxOff) : 0.00\%$ (Short Control signaling transmission) in long observation time.

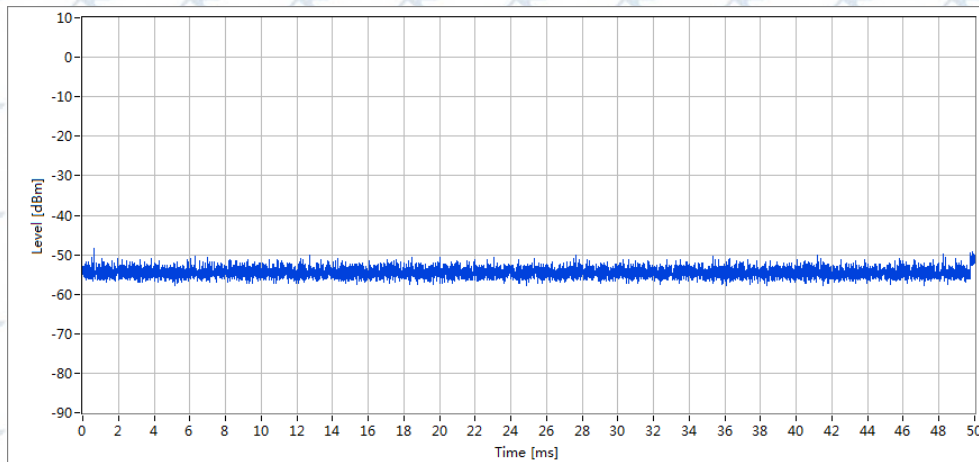

With interference signal and blocking signal

$TxOn / (TxOn + TxOff) : 0.00\%$ (Short Control signaling transmission) in long observation time.

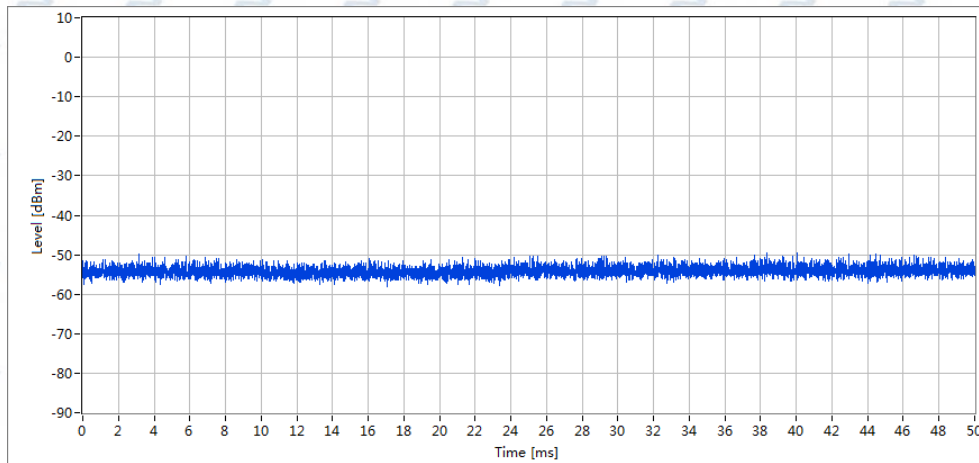


Note:


In this test, when the interference signal is added, the observation time is 60s, but only the maximum short-time control time is reported. The worst data is recorded. After adding the blocking signal, the observation time is 60s but just reported 150ms. Record the worst-case data.

802.11b Mode-2472MHz


Without interference signal and blocking signal Channel Occupancy Time: 2.302862ms
Idle Time: 0.097476ms

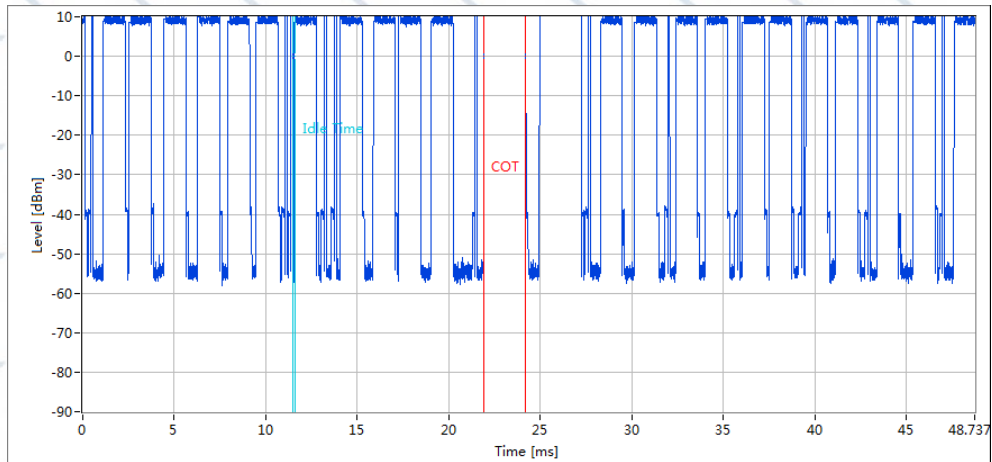

With interference signal, without blocking signal Stop Time: 8.972887ms
TxOn / (TxOn + TxOff): 0.00% (Short Control signaling transmission) right after interference signal.

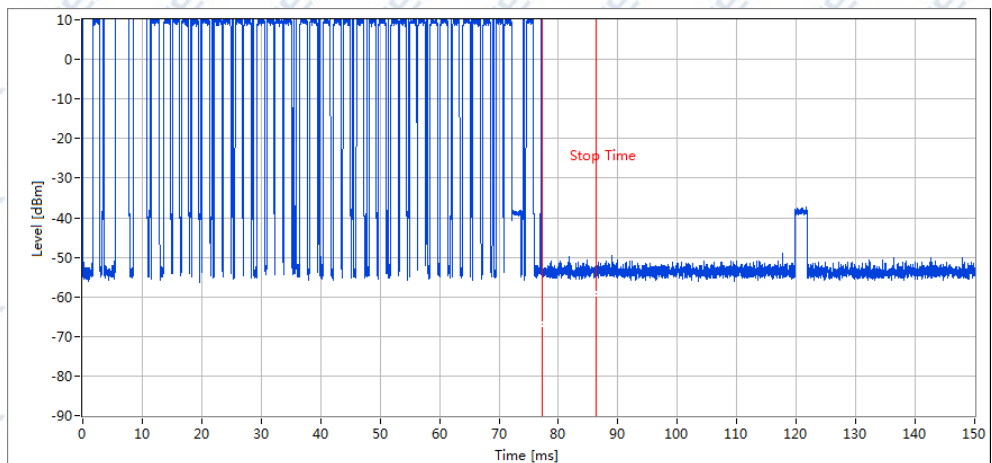


$TxOn / (TxOn + TxOff): 0.00\%$ (Short Control signaling transmission) in long observation time.

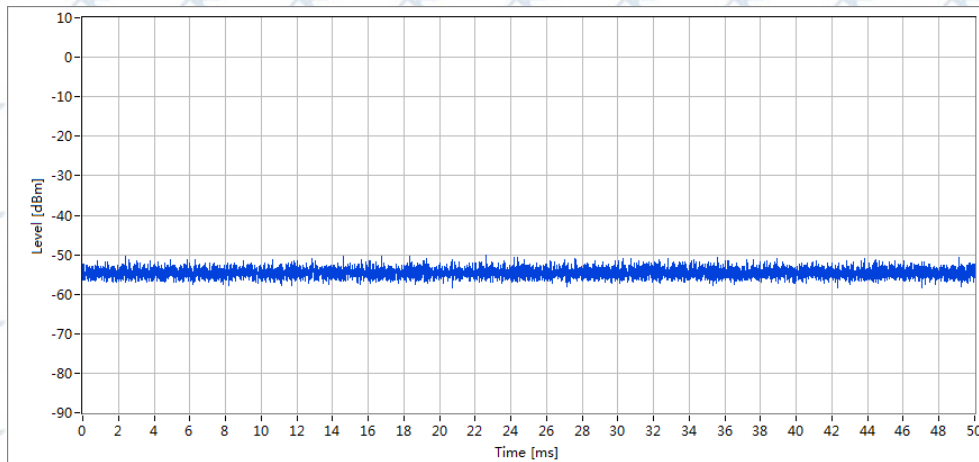

With interference signal and blocking signal

$TxOn / (TxOn + TxOff): 0.00\%$ (Short Control signaling transmission) in long observation time.

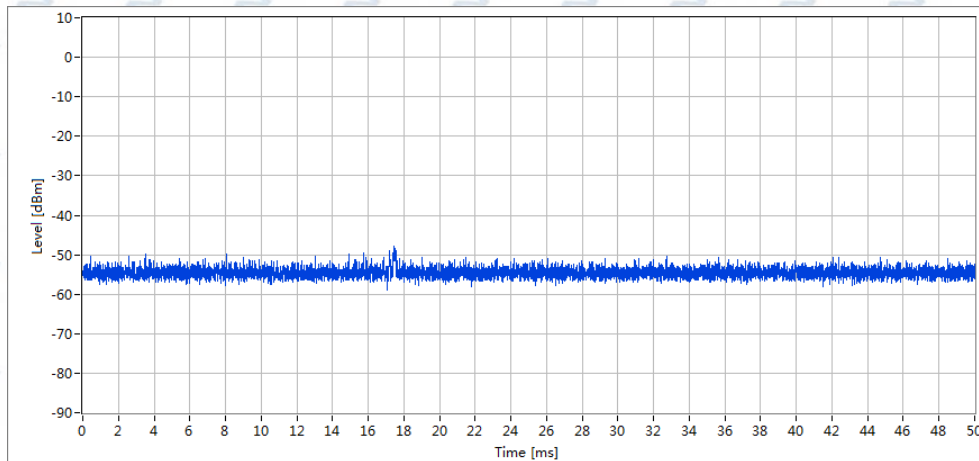

Note:

In this test, when the interference signal is added, the observation time is 60s, but only the maximum short-time control time is reported. The worst data is recorded. After adding the blocking signal, the observation time is 60s but just reported 150ms. Record the worst-case data.

3.6. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

3.6.1 LIMITS OF TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

Refer to chapter 4.3.2.9.3 of ETSI EN 300328 V2.1.1 (2016-11)

TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN		
Frequency Range	Maximum Power Limit (E.R.P.(≤ 1 GHz) E.I.R.P.(> 1 GHz))	Bandwidth
30 MHz to 47 MHz	-36dBm	100 kHz
47 MHz to 74 MHz	-54dBm	100 kHz
74 MHz to 87.5 MHz	-36dBm	100 kHz
87.5 MHz to 118 MHz	-54dBm	100 kHz
118 MHz to 174 MHz	-36dBm	100 kHz
174 MHz to 230 MHz	-54dBm	100 kHz
230 MHz to 470 MHz	-36dBm	100 kHz
470 MHz to 862 MHz	-54dBm	100 kHz
862 MHz to 1 GHz	-36dBm	100 kHz
1 GHz ~ 12.75 GHz	-30dBm	1 MHz

3.6.2 TEST PROCEDURE

Refer to chapter 5.4.9.2 of ETSI EN 300328 V2.1.1 (2016-11)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input checked="" type="checkbox"/> Radiated measurement

The setting of the Spectrum Analyzer


RBW	100K(<1GHz) / 1M(>1GHz)
VBW	300K(<1GHz) / 3M(>1GHz)

3.6.3 DEVIATION FROM TEST STANDARD

No deviation

3.6.4 TEST SETUP

Radiated measurement:

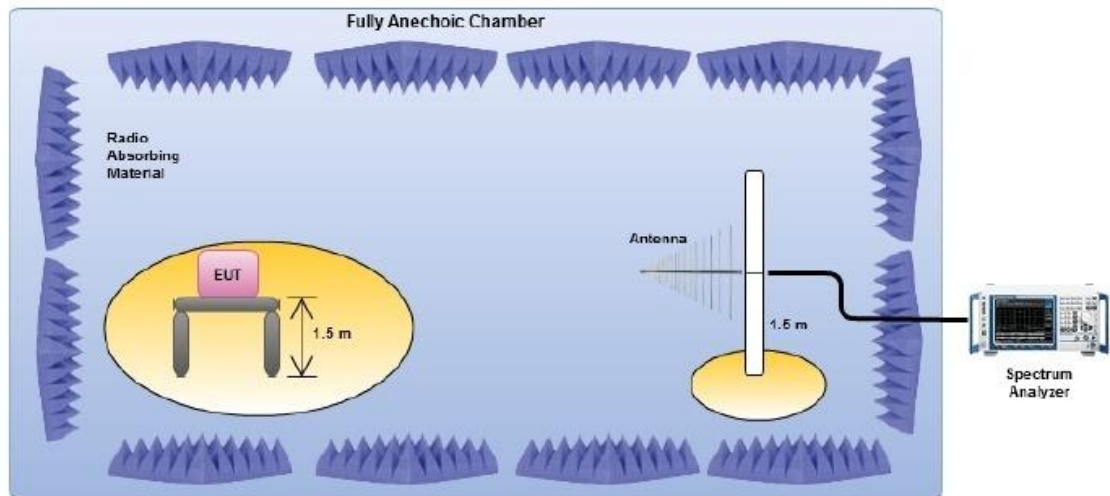

Conducted measurement:



1. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).
2. The measurements were performed when normal hopping was disabled. In this case measurements were performed when operating at the lowest and the highest hopping frequency.
3. The equipment was configured to operate under its worst case situation with respect to output power.
4. The test setup has been constructed as the normal use condition. Controlling software has been activated to set the EUT on specific status.

3.6.5 TEST RESULTS (Radiated measurement)

BELOW 1 GHz WORST- CASE DATA (30 MHz ~ 1GHz)

EUT :	IP Camera	Model Name :	SP012
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX-802.11b Mode(CH13)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	48.02	-95.26	30.97	-64.29	-54	-10.29	peak
V	56.54	-96.26	24.86	-71.40	-36	-35.40	peak
V	150.12	-96.62	26.92	-69.70	-54	-15.70	peak
V	208.36	-96.21	24.97	-71.24	-36	-35.24	peak
V	283.23	-95.90	31.82	-64.08	-36	-28.08	peak
V	387.68	-96.11	37.16	-58.95	-54	-4.95	peak
H	108.32	-95.32	28.91	-66.41	-54	-12.41	peak
H	150.86	-96.16	21.18	-74.98	-54	-20.98	peak
H	366.75	-96.50	26.92	-69.58	-54	-15.58	peak
H	581.02	-95.29	25.67	-69.62	-36	-33.62	peak
H	797.14	-96.00	30.41	-65.59	-36	-29.59	peak
H	868.06	-95.49	33.35	-62.14	-54	-8.14	peak

Remark:

- 1.Absolute Level= ReadingLevel+ Factor, Margin= Limit- Absolute Level.
- 2.All the modes had been tested, but only the worst data recorded in the report.

ABOVE 1 GHz WORST- CASE DATA (1GHz ~ 12.75GHz)

EUT :	IP Camera	Model Name :	SP012
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX-802.11b Mode(CH01/CH7/CH13)		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
operation frequency:2412							
V	1252.74	-54.49	-2.88	-57.37	-30	-27.37	peak
V	1958.73	-47.64	7.19	-40.45	-30	-10.45	peak
V	3245.79	-48.13	9.25	-38.88	-30	-8.88	peak
H	2400.31	-48.27	-3.97	-52.24	-30	-22.24	peak
H	2949.89	-52.91	0.87	-52.04	-30	-22.04	peak
H	3861.97	-54.30	9.25	-45.05	-30	-15.05	peak
operation frequency:2442							
V	1177.24	-50.82	-2.55	-53.37	-30	-23.37	peak
V	1964.55	-54.27	1.37	-52.90	-30	-22.90	peak
V	3182.65	-49.42	9.46	-39.96	-30	-9.96	peak
H	2459.76	-48.44	-1.88	-50.32	-30	-20.32	peak
H	2950.14	-48.24	1.21	-47.03	-30	-17.03	peak
H	3901.58	-51.12	9.46	-41.66	-30	-11.66	peak
operation frequency:2472							
V	1292.68	-47.24	-4.69	-51.93	-30	-21.93	peak
V	1937.99	-54.43	7.20	-47.23	-30	-17.23	peak
V	3255.89	-48.68	9.29	-39.39	-30	-9.39	peak
H	2418.92	-49.79	-2.74	-52.53	-30	-22.53	peak
H	2889.91	-52.87	0.92	-51.95	-30	-21.95	peak
H	3992.63	-47.48	9.29	-38.19	-30	-8.19	peak

Remark:


1. Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level – Limit.
2. All the modes had been tested, but only the worst data recorded in the report.

3.6.6 TEST RESULTS(Conducted measurement)

Test Name: TX Spurious below 1GHz
Operating Mode: B 2412

----- Measurement Result -----

Spurious below 1GHz:

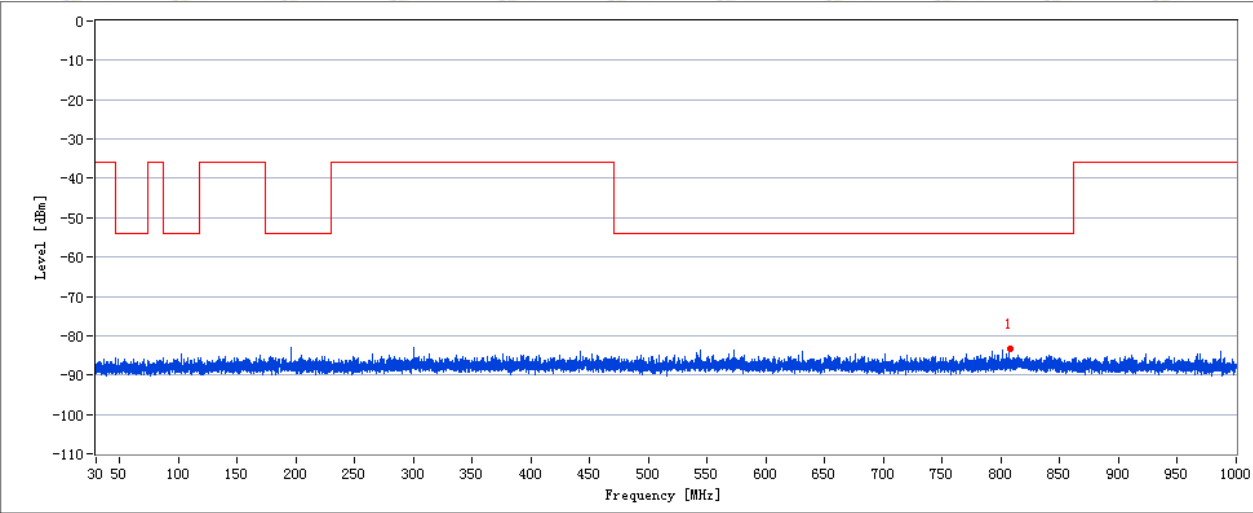


Frequency [MHz]	Pre-scan Level ERP [dBm]	Final scan Level ERP [dBm]	Limit ERP [dBm]	Margin [dB]
807.397	-83.3	-85.2	-54.0	31.2

Test Name: TX Spurious above 1GHz
Operating Mode: B 2412

----- Measurement Result -----

Spurious above 1GHz:

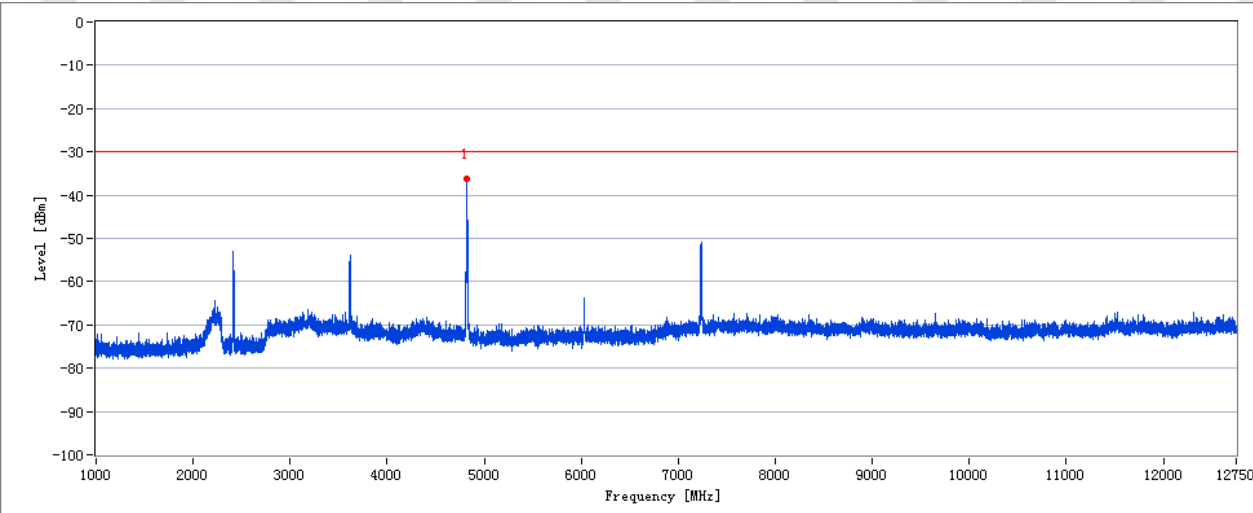


Frequency [MHz]	Pre-scan Level EIRP [dBm]	Final scan Level EIRP [dBm]	Limit EIRP [dBm]	Margin [dB]
4823.895	-36.2	-36.3	-30.0	6.3

Test Name: TX Spurious below 1GHz

Operating Mode: B 2442

----- Measurement Result -----

Spurious below 1GHz:

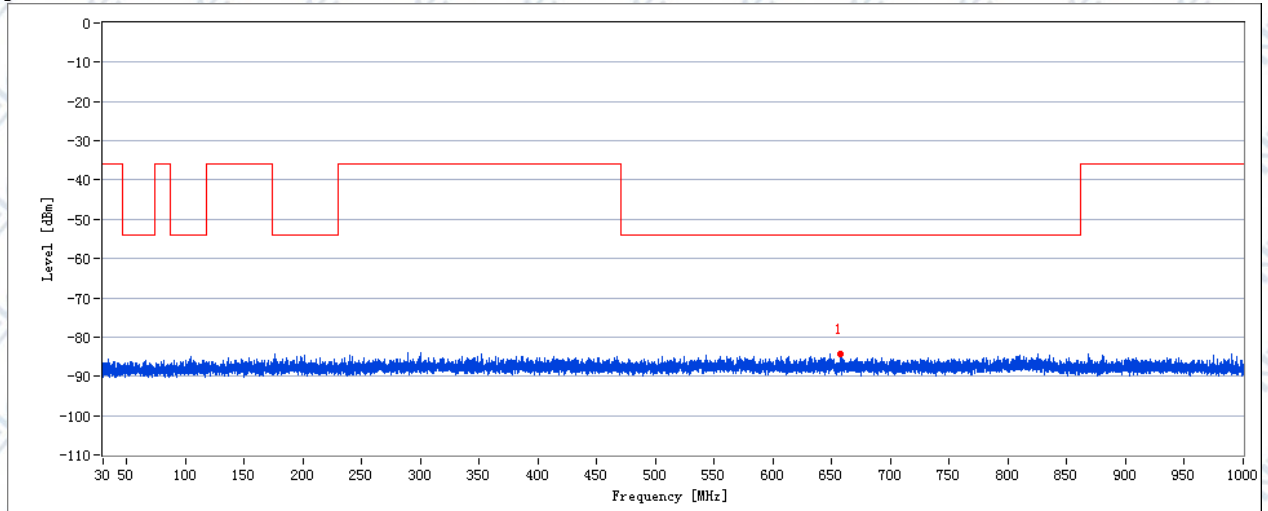


Frequency [MHz]	Pre-scan Level ERP [dBm]	Final scan Level ERP [dBm]	Limit ERP [dBm]	Margin [dB]
656.816	-84.4	-85.5	-54.0	31.5

Test Name: TX Spurious above 1GHz

Operating Mode: B 2442

----- Measurement Result -----

Spurious above 1GHz:

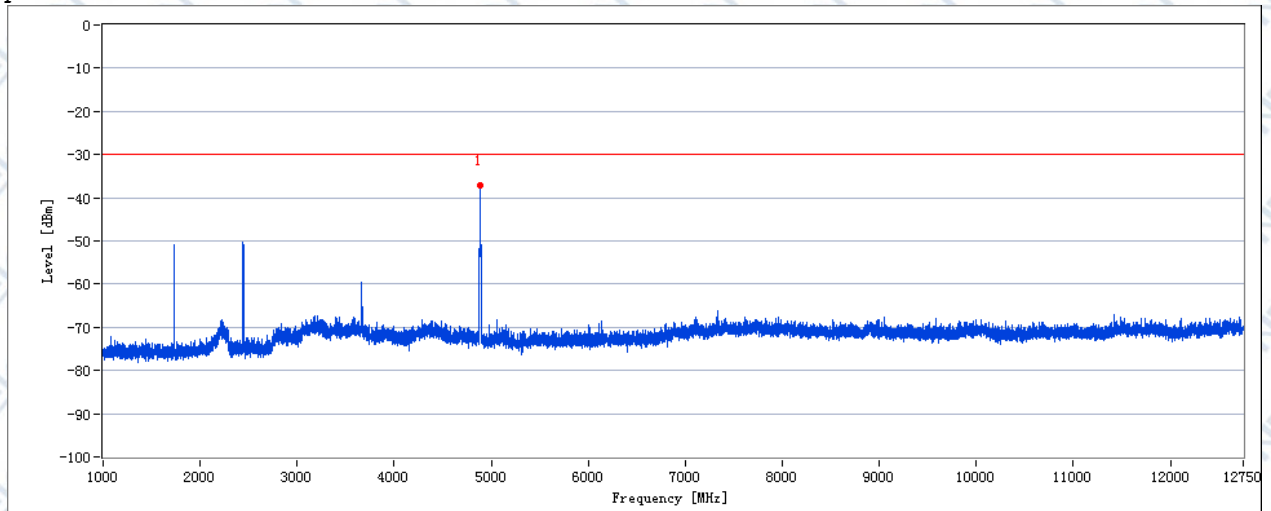


Frequency [MHz]	Pre-scan Level EIRP [dBm]	Final scan Level EIRP [dBm]	Limit EIRP [dBm]	Margin [dB]
4884.104	-37.1	-37.1	-30.0	7.1

Test Name: TX Spurious below 1GHz

Operating Mode: B 2472

Measurement Result

Spurious below 1GHz:

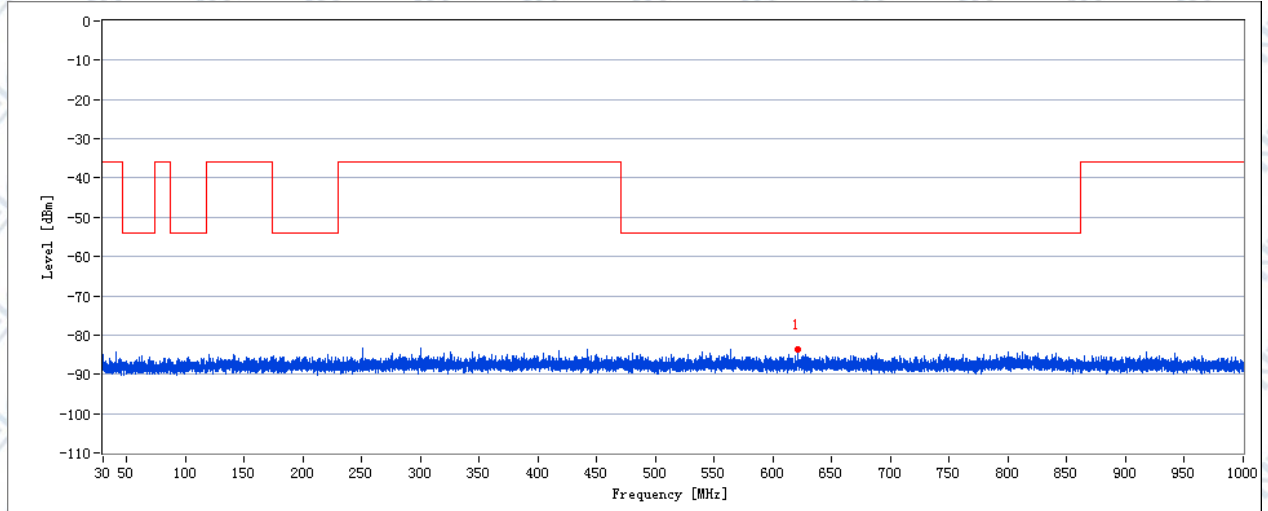


Frequency [MHz]	Pre-scan Level ERP [dBm]	Final scan Level ERP [dBm]	Limit ERP [dBm]	Margin [dB]
620.898	-83.8	-84.8	-54.0	30.8

Test Name: TX Spurious above 1GHz

Operating Mode: B 2472

Measurement Result

Spurious above 1GHz:

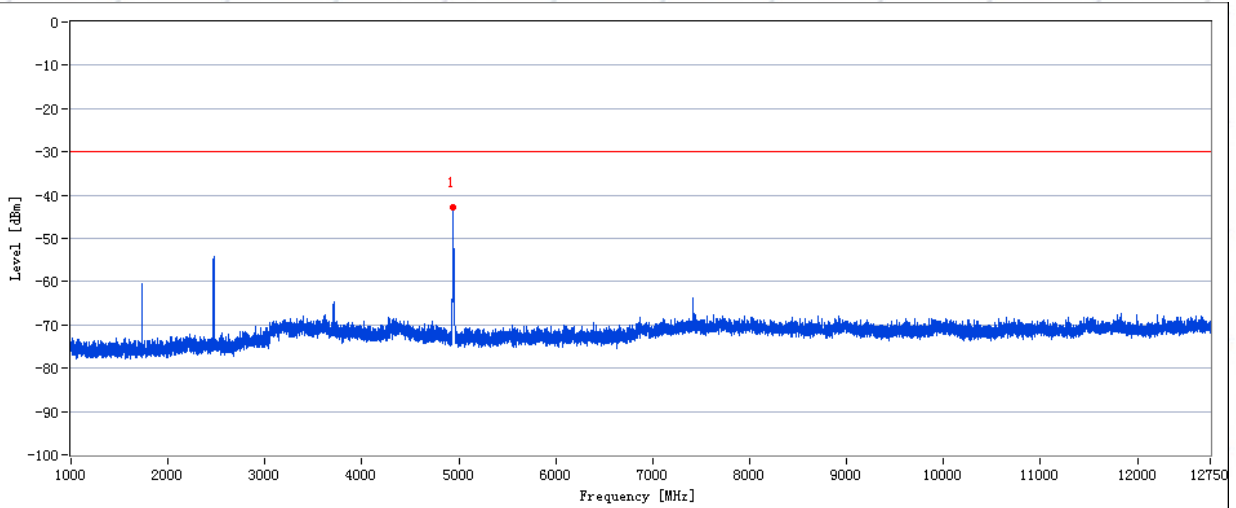

Frequency [MHz]	Pre-scan Level EIRP [dBm]	Final scan Level EIRP [dBm]	Limit EIRP [dBm]	Margin [dB]
4943.612	-42.9	-42.8	-30.0	12.8

3.7. RECEIVER SPURIOUS RADIATION

3.7.1 LIMITS OF RECEIVER SPURIOUS RADIATION

Refer to chapter 4.3.2.10.3 of ETSI EN 300 328 V2.1.1 (2016-11))

RECEIVER SPURIOUS EMISSIONS		
Frequency Range	Maximum Power Limit (E.R.P.(≤ 1 GHz) E.I.R.P.(> 1 GHz))	Measurement Bandwidth
30 MHz ~ 1 GHz	-57dBm	100KHz
1 GHz ~ 12.75 GHz	-47dBm	1MHz

3.7.2 TEST PROCEDURE

Refer to chapter 5.4.10.2 of ETSI EN 300 328 V2.1.1 (2016-11)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input checked="" type="checkbox"/> Radiated measurement

The setting of the Spectrum Analyzer


RBW	100K(<1GHz) / 1M(>1GHz)
VBW	300K(<1GHz) / 3M(>1GHz)

3.7.3 DEVIATION FROM TEST STANDARD

No deviation

3.7.4 TEST SETUP

Radiated measurement:

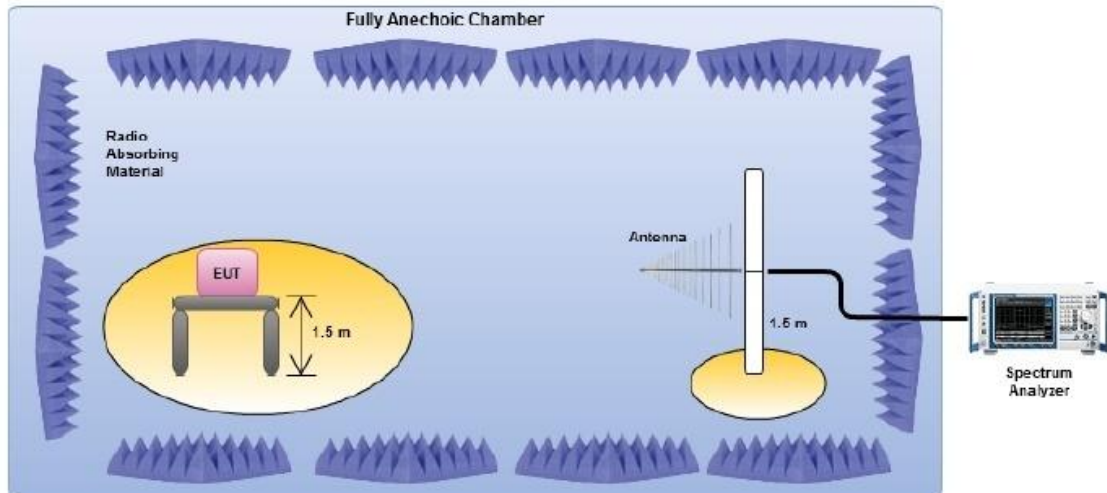

Conducted measurement:



1. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).
2. Testing was performed when the equipment was in a receive-only mode.
3. The measurements were performed when normal hopping was disabled. In this case measurements were performed when operating at the lowest and the highest hopping frequency.
4. The test setup has been constructed as the normal use condition. Controlling software has been activated to set the EUT on specific status.

3.7.5 TEST RESULTS (Radiated measurement)

RX BELOW 1 GHz WORST- CASE DATA(30 MHz ~ 1GHz)

EUT :	IP Camera	Model Name :	SP012
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode-802.11b Mode(CH13)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	41.09	-96.03	25.36	-70.67	-57	-13.67	peak
V	53.91	-96.06	18.02	-78.04	-57	-21.04	peak
V	141.37	-95.76	23.65	-72.11	-57	-15.11	peak
V	238.18	-95.04	26.62	-68.42	-57	-11.42	peak
V	289.14	-96.70	30.63	-66.07	-57	-9.07	peak
V	392.00	-95.46	33.72	-61.74	-57	-4.74	peak
H	89.66	-95.80	27.09	-68.71	-57	-11.71	peak
H	161.92	-95.77	16.97	-78.80	-57	-21.80	peak
H	380.05	-96.31	20.16	-76.15	-57	-19.15	peak
H	597.11	-96.48	24.52	-71.96	-57	-14.96	peak
H	767.02	-96.84	28.86	-67.98	-57	-10.98	peak
H	887.03	-95.93	32.61	-63.32	-57	-6.32	peak

Remark:

1. Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level – Limit.
2. All the modes had been tested, but only the worst data recorded in the report.

RX ABOVE 1 GHz WORST- CASE DATA(1GHz ~ 12.75GHz)

EUT :	IP Camera	Model Name :	SP012
Temperature :	24 °C	Relative Humidity	54%
Pressure :	1010 hPa	Test Power :	DC 5V
Test Mode :	RX Mode-802.11b Mode(CH13)		


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	1211.65	-63.33	-4.92	-68.25	-47	-21.25	peak
V	1744.58	-64.41	-1.84	-66.25	-47	-19.25	peak
V	2242.17	-63.21	-1.27	-64.48	-47	-17.48	peak
V	2796.70	-63.89	7.58	-56.31	-47	-9.31	peak
V	3438.78	-63.69	8.75	-54.94	-47	-7.94	peak
V	4892.01	-64.49	9.68	-54.81	-47	-7.81	peak
H	1488.36	-63.09	-5.62	-68.71	-47	-21.71	peak
H	2383.04	-64.29	-1.65	-65.94	-47	-18.94	peak
H	2890.32	-63.66	3.69	-59.97	-47	-12.97	peak
H	3943.60	-64.29	5.32	-58.97	-47	-11.97	peak
H	4659.70	-64.51	9.68	-54.83	-47	-7.83	peak
H	5489.57	-67.61	14.30	-53.31	-47	-6.31	peak

1. Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level – Limit.
2. All the modes had been tested, but only the worst data recorded in the report.

3.7.6 TEST RESULTS (Conducted measurement)

Test Name: RX Spurious below 1GHz


----- Measurement Result -----
 Spurious below 1GHz:

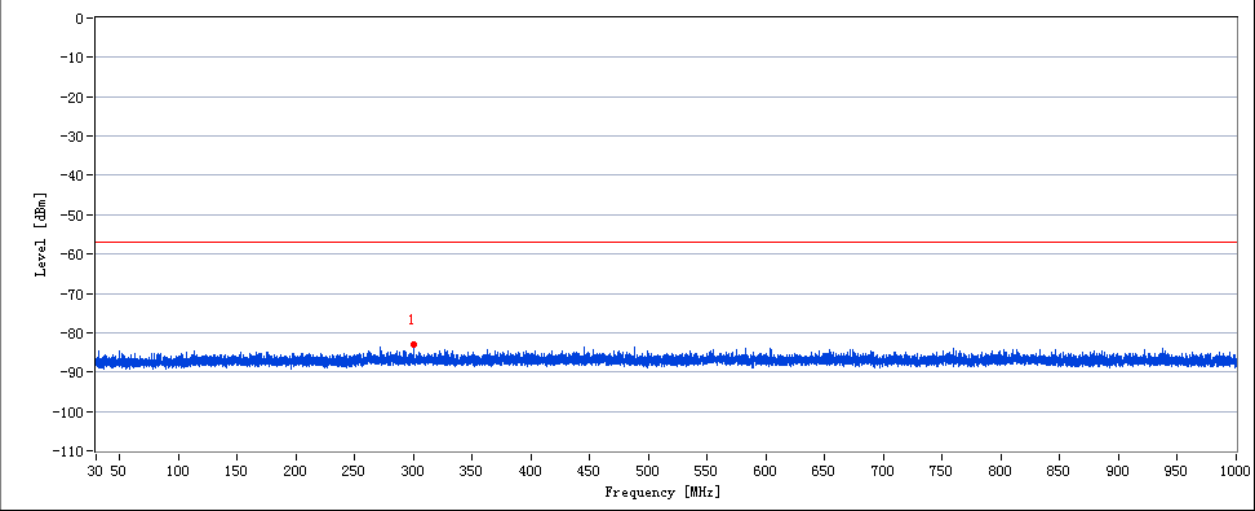

Frequency [MHz]	Pre-scan Level ERP [dBm]	Final scan Level ERP [dBm]	Limit ERP [dBm]	Margin [dB]
300.006	-83.0	-83.1	-57.0	26.1

Test Name: RX Spurious above 1GHz

----- Measurement Result -----
 Spurious above 1GHz:

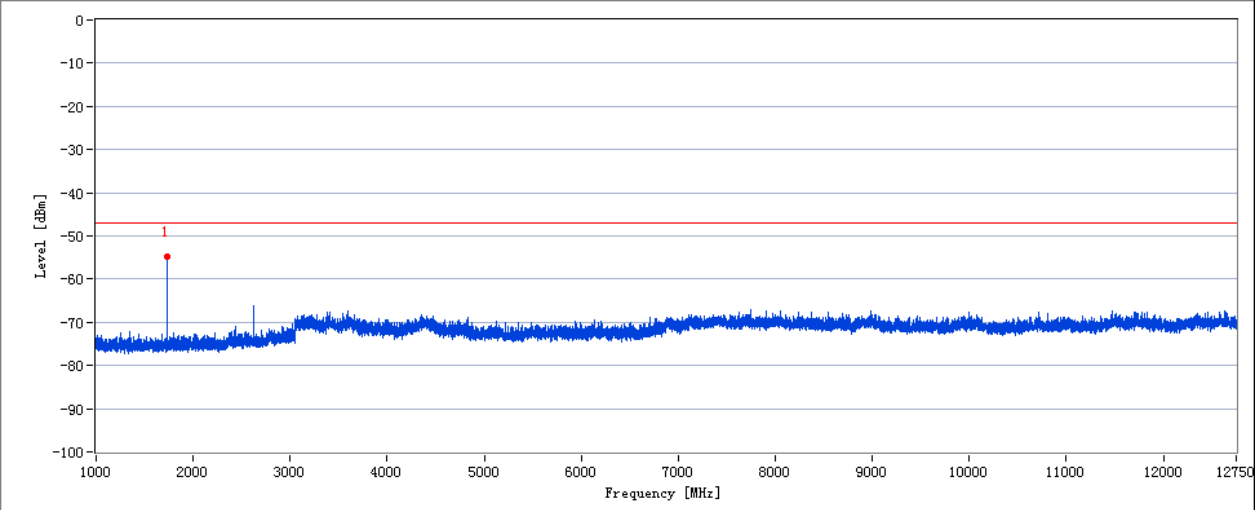

Frequency [MHz]	Pre-scan Level EIRP [dBm]	Final scan Level EIRP [dBm]	Limit EIRP [dBm]	Margin [dB]
1735.840	-54.7	-51.7	-47.0	4.7

3.8. RECEIVER BLOCKING

3.8.1 PERFORMANCE CRITERIA

The minimum performance criterion shall be a PER less than or equal to 10 %. The manufacturer may declare alternative performance criteria as long as that is appropriate for the intended use of the equipment (see clause 5.4.1.t)).

3.8.2 LIMITS OF RECEIVER BLOCKING

While maintaining the minimum performance criteria as defined in clause 4.3.2.11.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 14, table 15 or table 16.

☒ **Table 14: Receiver Blocking parameters for Receiver Category 1 equipment**

Wanted signal mean power from companion device (dBm)	Blocking signal Frequency (MHz)	Blocking signal power (dBm) (see note 2)	Type of blocking signal
$P_{min} + 6$ dB	2 380 2 503,5	-53	CW
$P_{min} + 6$ dB	2 300 2 330 2 360	-47	CW
$P_{min} + 6$ dB	2 523,5 2 553,5 2 583,5 2 613,5 2 643,5 2 673,5	-47	CW

NOTE 1: P_{min} is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria as defined in clause 4.3.2.11.3 in the absence of any blocking signal.

NOTE 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.

☒ **Table 15: Receiver Blocking parameters receiver category 2 equipment**

Wanted signal mean power from companion device (dBm)	Blocking signal Frequency (MHz)	Blocking signal power (dBm) (see note 2)	Type of blocking signal
$P_{min} + 6$ dB	2 380 2 503,5	-57	CW
$P_{min} + 6$ dB	2 300 2 583,5	-47	CW

NOTE 1: P_{min} is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria as defined in clause 4.3.2.11.3 in the absence of any blocking signal.

NOTE 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.

☐ **Table 16: Receiver Blocking parameters receiver category 3 equipment**

Wanted signal mean power from companion device (dBm)	Blocking signal Frequency (MHz)	Blocking signal power (dBm) (see note 2)	Type of blocking signal
$P_{min} + 12 \text{ dB}$	2 380 2 503,5	-57	CW
$P_{min} + 12 \text{ dB}$	2 300 2 583,5	-47	CW

NOTE 1: P_{min} is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria as defined in clause 4.3.2.11.3 in the absence of any blocking signal.

NOTE 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.

3.8.3 TEST PROCEDURE


Refer to chapter 5.4.11.2 of ETSI EN 300 328 V2.1.1 (2016-11)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

3.8.4 DEVIATION FROM TEST STANDARD

No deviation

3.8.5 TEST SETUP

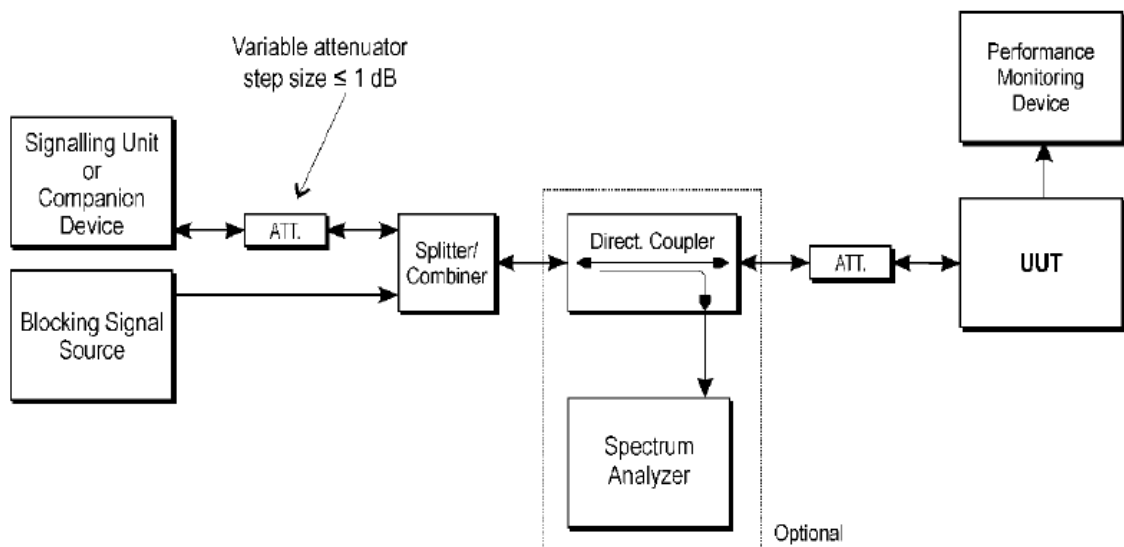

3.8.6 TEST RESULTS

EUT :	IP Camera	Model Name :	SP012
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode(802.11b-CH01/ CH 13)		

CH01:

receiver category 1

Wanted signal mean power from companion device (dBm) _{Note(1)}	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % _{Note(2)}	PER Limit %
-72 + 6 dB	2 380	-53	0.415	≤ 10%
	2 503,5		0.412	
-71 + 6 dB	2 300	-47	0.478	≤ 10%
	2 330		0.485	
	2 360		0.421	
-70 + 6 dB	2 523,5	-47	0.369	≤ 10%
	2 553,5		0.478	
	2 583,5		0.452	
	2 613,5		0.411	
	2 643,5		0.423	
	2 673,5		0.421	

CH13:

receiver category 1

Wanted signal mean power from companion device (dBm) _{Note(1)}	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % _{Note(2)}	PER Limit %
-72 + 6 dB	2 380	-53	0.413	≤ 10%
	2 503,5		0.452	
-71 + 6 dB	2 300	-47	0.474	≤ 10%
	2 330		0.485	
	2 360		0.421	
-70 + 6 dB	2 523,5	-47	0.469	≤ 10%
	2 553,5		0.478	
	2 583,5		0.462	
	2 613,5		0.414	
	2 643,5		0.424	
	2 673,5		0.451	

Note: (1) The above results were obtained from laboratory tests.

EUT :	IP Camera	Model Name :	SP012
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode(802.11g-CH01/ CH 13)		

CH01:

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(2)</small>	PER Limit %
-70+ 6 dB	2 380	-57	0.311	≤10%
	2 503,5		0.325	
-71 + 6 dB	2 300	-47	0.392	≤10%
	2 583,5		0.325	

CH13:

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(2)</small>	PER Limit %
-70+ 6 dB	2 380	-57	0.312	≤10%
	2 503,5		0.358	
-71 + 6 dB	2 300	-47	0.292	≤10%
	2 583,5		0.358	

Note: (1) The above results were obtained from laboratory tests.

EUT :	IP Camera	Model Name :	SP012
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode(802.11n20-CH01/ CH 13)		

CH01:

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(2)</small>	PER Limit %
-70+ 6 dB	2 380	-57	0.311	≤10%
	2 503,5		0.358	
-71 + 6 dB	2 300	-47	0.392	≤10%
	2 583,5		0.218	

CH13:

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(2)</small>	PER Limit %
-70+ 6 dB	2 380	-57	0.311	≤10%
	2 503,5		0.298	
-71 + 6 dB	2 300	-47	0.292	≤10%
	2 583,5		0.318	

Note: (1) The above results were obtained from laboratory tests.

EUT :	IP Camera	Model Name :	SP012
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode(802.11n40-CH03/ CH 11)		

CH03:

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(2)</small>	PER Limit %
-65+ 6 dB	2 380	-57	0.341	≤10%
	2 503,5		0.369	
-68 + 6 dB	2 300	-47	0.292	≤10%
	2 583,5		0.315	

CH11:

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(2)</small>	PER Limit %
-65+ 6 dB	2 380	-57	0.351	≤10%
	2 503,5		0.389	
-68 + 6 dB	2 300	-47	0.392	≤10%
	2 583,5		0.348	

Note: (1) The above results were obtained from laboratory tests.

4. EUT TEST PHOTO

Spurious Emissions Measurement Photos

