



RF TEST REPORT

On Behalf of

Shenzhen Miaoren Development Technology Co., Ltd

Product Name: **Smart watch / Bracelet**

Trademark: **N/A**

Model : **P6/GT20,P8,P9,P10,P20,P30,P50,P60,P70,P80,P90,
GT30,GT50,GT55,GT60,GT66,GT70,GT77,GT80,GT88,GT90**

Prepared For : **Shenzhen Miaoren Development Technology Co., Ltd**

Address: 504, building 7, Cuigang industrial zone 3, Huaide community,
Fuyong street, Bao'an District, Shenzhen

Prepared By : **ShenZhen BYS testing Co.LTD.**

Address: Floor 4, Building 2, No.38 Guangda Road, Yuanshan Street,Longgang
District, Shenzhen, China

Test Date: **Aug. 17, 2021 - Aug. 23, 2021**

Date of Report : **Aug. 23. 2021**

Report No.: **BC202104236R**

**TEST RESULT CERTIFICATION**

Applicant's name..... Shenzhen Miaoren Development Technology Co., Ltd
Address..... 504, building 7, Cuigang industrial zone 3, Huaide community,
Fuyong street, Bao'an District, Shenzhen

Manufacture's Name.... Shenzhen Miaoren Development Technology Co., Ltd
Address..... 504, building 7, Cuigang industrial zone 3, Huaide community,
Fuyong street, Bao'an District, Shenzhen

Product description

Product name..... Smart watch / Bracelet

Trademark..... N/A

Model and/or type P6/GT20

Reference:

Standards..... ETSI EN 300 328 V2.2.2 (2019-07)

This device described above has been tested by BYS, and the test results show that the equipment under test (EUT) is in compliance with the 2014/53/EU RED Art.3.2 requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BYS, this document may be altered or revised by BYS, personal only, and shall be noted in the revision of the document.

Date of Test..... :

Date (s) of performance of tests..... : Aug. 17, 2021 - Aug. 23, 2021

Date of Issue..... : Aug. 23, 2021

Test Result..... : Pass

Prepared by (Test Engineer):

Reviewer (Supervisor):

Approved (Manager):





Contents

1. General Information.....	5
1.1. Description of Device (EUT).....	5
1.2. Test Standard description.....	7
1.3. Summary of test result.....	7
1.4. Block Diagram of Configuration for test.....	8
1.5. Test mode.....	8
1.6. Test Conditions.....	9
1.7. Measurement Uncertainty (95% confidence levels, k=2).....	9
1.8. Test Equipment.....	9
2. RF output power.....	12
2.1. Limit.....	12
2.2. Test Setup.....	12
2.3. Test Procedure.....	12
2.4. Test Result.....	13
3. Dwell time, Minimum Frequency Occupation and Hopping Sequence.....	16
3.1. Limit.....	16
3.2. Test Setup.....	16
3.3. Test Procedure.....	16
3.4. Test Result.....	17
4. Hopping Frequency Separation.....	19
4.1. Limit.....	19
4.2. Test setup.....	19
4.3. Test Procedure.....	19
4.4. Test Result.....	19
5. Adaptivity.....	20
5.1. Limit.....	20
5.2. Test Setup.....	20
5.3. Test Procedure.....	20
5.4. Test Result.....	20
6. Occupied Channel Bandwidth.....	21
6.1. Limit.....	21
6.2. Test Setup.....	21
6.3. Test Procedure.....	21
6.4. Test Result.....	21
7. Transmitter unwanted emissions in the out-of-band domain.....	23
7.1. Limit.....	23
7.2. Test Setup.....	23
7.3. Test Procedure.....	23
7.4. Test Result.....	24
8. Transmitter unwanted emissions in the spurious domain.....	26
8.1. Limit.....	26
8.2. Test Procedure.....	26
8.3. Test Result.....	27
10. Receiver Spurious emissions.....	28
10.1 Limit.....	28
10.2 Test Procedure.....	28
10.3 Test Result.....	28
11. Receiver Spurious emissions.....	29
11.1 Receiver Blocking.....	29



11.2 Limit.....	29
11.3 Test Setup.....	29
11.4 Test Procedure.....	29
11.5 Test Result.....	29



1. General Information

1.1. Description of Device (EUT)

EUT Name : Smart watch / Bracelet
Model No. : P6/GT20
Model Difference : N/A

Trademark : N/A
Power supply : DC4.1V from USB or DC 4.1V from battery
Operation frequency : 2.40-2.48GHz
Modulation : GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type : PCB Antenna, Maximum Gain is 0dBi
Intend use environment : Residential, commercial and light industrial environment

a) The type of modulation used by the equipment:

- ☒ FHSS
- ☐ other forms of modulation

b) In case of FHSS modulation:

- In case of non-Adaptive Frequency Hopping equipment:
The number of Hopping Frequencies:
- In case of Adaptive Frequency Hopping Equipment:
The maximum number of Hopping Frequencies: 79
The minimum number of Hopping Frequencies: 79
The Dwell Time: 386.6ms maximum
The Minimum Channel Occupation Time: 1228.8ms maximum

c) Adaptive / non-adaptive equipment:

- ☐ non-adaptive Equipment
- ☒ adaptive Equipment without the possibility to switch to a non-adaptive mode
- ☐ adaptive Equipment which can also operate in a non-adaptive mode

d) In case of adaptive equipment:

- The Channel Occupancy Time implemented by the equipment: 1228.8ms
- ☐ The equipment has implemented an LBT based DAA mechanism
- ☒ In case of equipment using modulation different from FHSS:
 - ☐ The equipment is Frame Based equipment
 - ☐ The equipment is Load Based equipment
 - ☐ The equipment can switch dynamically between Frame Based and Load Based equipment
- The CCA time implemented by the equipment..... μ s
- The value q as referred to in clause 4.3.2.5.2.2.2
- ☒ The equipment has implemented an non-LBT based DAA mechanism
- ☐ The equipment can operate in more than one adaptive mode

e) In case of non-adaptive Equipment:

- The maximum RF Output Power (e.i.r.p.): 1.51 dBm
- The maximum (corresponding) Duty Cycle..... %
- Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

f) The worst case operational mode for each of the following tests:

- RF Output Power
- GFSK



- Power Spectral Density
- Duty cycle, Tx-Sequence, Tx-gap
- Dwell time, Minimum Frequency Occupation & Hopping Sequence (only for FHSS equipment)

GFSK

- Hopping Frequency Separation (only for FHSS equipment)

GFSK

- Medium Utilisation
- Adaptivity & Receiver Blocking
- Occupied Channel Bandwidth

GFSK

- Transmitter unwanted emissions in the OOB domain

GFSK

- Transmitter unwanted emissions in the spurious domain

GFSK

- Receiver spurious emissions

GFSK

g) The different transmit operating modes (tick all that apply):

- Operating mode 1: Single Antenna Equipment

- Equipment with only 1 antenna

- ☐ Equipment with 2 diversity antennas but only 1 antenna active at any moment in time

- ☐ Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)

- ☐ Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming

- ☐ Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)

- ☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1

- ☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

- ☐ Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming

- ☐ Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)

- ☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1

- ☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

h) In case of Smart Antenna Systems:

- The number of Receive chains:

- The number of Transmit chains:

- ☐ symmetrical power distribution

- ☐ asymmetrical power distribution

In case of beam forming, the maximum beam forming gain:

NOTE: Beam forming gain does not include the basic gain of a single antenna.

i) Operating Frequency Range(s) of the equipment:

- Operating Frequency Range 1: 2402 MHz to 2480 MHz

- Operating Frequency Range 2: MHz to MHz

NOTE: Add more lines if more Frequency Ranges are supported.

j) Occupied Channel Bandwidth(s):

Occupied Channel Bandwidth 1: 0.799MHz

Occupied Channel Bandwidth 2: 0.795MHz

NOTE: Add more lines if more channel bandwidths are supported.

k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):

- Stand-alone

- ☐ Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)

- ☐ Plug-in radio device (Equipment intended for a variety of host systems)



Other

l) The extreme operating conditions that apply to the equipment:

Operating temperature range:-10° C to 40° C

Operating voltage range: 3.7V ☐AC ☒DC

Details provided are for the: ☒stand-alone equipment
☐combined (or host) equipment

m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:

• Antenna Type

☒Integral Antenna

Antenna Gain: 0 dBi

If applicable, additional beamforming gain (excluding basic antenna gain)..... dB

☐Temporary RF connector provided

☐No temporary RF connector provided

☐Dedicated Antennas (equipment with antenna connector)

☐Single power level with corresponding antenna(s)

☐Multiple power settings and corresponding antenna(s)

Number of different Power Levels:

Power Level 1..... dBm

Power Level 2..... dBm

Power Level 3..... dBm

NOTE 1: Add more lines in case the equipment has more power levels.

NOTE 2: These power levels are conducted power levels (at antenna connector).

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Details provided are for the: ☐stand-alone equipment

☒combined (or host) equipment

☐test jig

Supply Voltage ☐AC mains State AC voltage: V

☒DC State DC voltage :4.1V

In case of DC, indicate the type of power source

☐Internal Power Supply

☐External Power Supply or AC/DC adapter

☒Battery: 3.7V

☐Other: -

o) Describe the test modes available which can facilitate testing:

The EUT can transmit with test software which named CSR Blue Suite

p) The equipment type (e.g. Smart watch / Bracelet®, IEEE 802.11™ [i.3], proprietary, etc.):

Smart watch / Bracelet

1.2. Test Standard description:

ETSI EN 300 328 V1.9.1:Electromagnetic compatibility and Radio spectrum Matters (ERM);
Wideband transmission systems; Data transmission equipment operating in the **2,4 GHz** ISM band and
using wide band modulation techniques; Harmonized EN covering the essential requirements
of article 3.2 of the RED Directive

1.3. Summary of test result



The following essential requirements and test specifications are relevant to the presumption of conformity under Article 3.2 of the RED Directive			
No	Test Parameter	Clause No	Results
Transmitter Parameters			
1	RF output power	4.3.2.1	PASS
2	Power Spectral Density	4.3.2.2	N/A
3	Duty Cycle, Tx-sequence, Tx-gap	4.3.2.3	N/A
4	Dwell time, Minimum Frequency Occupation & Hopping Sequence	4.3.1.3	PASS
5	Hopping Frequency Separation	4.3.1.4	PASS
6	Medium Utilisation (MU) factor	4.3.2.4	N/A
7	Adaptivity (adaptive equipment using modulations other than FHSS)	4.3.2.5	N/A
8	Occupied Channel Bandwidth	4.3.2.6	PASS
9	Transmitter unwanted emissions in the out-of-band domain	4.3.2.7	PASS
10	Transmitter unwanted emissions in the spurious domain	4.3.2.8	PASS
Receiver Parameters			
11	Receiver spurious emissions	4.3.2.9	PASS
12	Receiver Blocking	4.3.2.10	N/A
Note: N/A is an abbreviation for Not Applicable and means this test item is not applicable for this device according to the technology characteristic of device.			

1.4. Block Diagram of Configuration for test

EUT

1.5. Test mode

The special RF test software was used to control EUT work in Continuous Smart watch / Bracelet TX mode, and select test channel, wireless mode.



Mode	data rate (Mbps)	Channel	Frequency (MHz)
GFSK	1	Low :CH0	2402
	1	Middle: CH39	2441
	1	High: CH78	2480
π/4-DQPSK	2	Low :CH0	2402
	2	Middle: CH39	2441
	2	High: CH78	2480
8-DPSK	3	Low :CH0	2402
	3	Middle: CH39	2441
	3	High: CH78	2480

1.6. Test Conditions

	Normal Conditions	Extreme Conditions
Temperature range	15-35°C	-25°C and 55°C
Humidity range	20-75%	20-75%
Pressure range	86-106kPa	86-106kPa
Power supply	DC4.1V	3.33V and 4.07V (declared by the manufacturer.)
Note 1: The test procedure described in clause 5.1.1 of EN300 328 was used for extreme test procedure. 2: The Extreme Temperature and Extreme Voltages declared by the manufacturer.		

1.7. Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Conducted Emission Test	2.50dB	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.04 dB	Polarize: V
	3.02dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.56dB	Polarize: H
	3.84dB	Polarize: V
Uncertainty for radio frequency	1×10^{-9}	
Uncertainty for conducted RF Power	0.65dB	
Uncertainty for temperature	0.6°C	
Uncertainty for humidity	1%	

1.8. Test Equipment



Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGREN	N/A	SEL0017	2020.11.13	1Year
Spectrum analyzer	Agilent	E4407B	MY46185649	2020.11.13	1Year
Receiver	R&S	ESCI	1166.5950K03-1011	2020.11.13	1Year
Receiver	R&S	ESCI	101202	2020.11.13	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2020.11.13	1Year
Horn Antenna	EMCO	3115	640201028-06	2020.11.13	1Year
Power Meter	Anritsu	ML2495A	1204003	2020.11.13	1Year
Power Sensor	Anritsu	MA2411B	100309	2020.11.13	1Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2020.11.13	1Year
Cable	Resenberger	N/A	No.1	2020.11.13	1Year
Cable	SCHWARZBECK	N/A	No.2	2020.11.13	1Year
Cable	SCHWARZBECK	N/A	No.3	2020.11.13	1Year
Pre-amplifier	Schwarzbeck	BBV9743	9743-019	2020.11.13	1Year
Pre-amplifier	R&S	AFS33-1800 2650-30-8P-44	SEL0080	2020.11.13	1Year
Base station	Agilent	E5515C	GB44300243	2020.11.13	1 Year
Temperature controller	Terchy	MHQ	120	2020.11.13	1Year
Power divider	Anritsu	K240C	020346	2020.11.13	1 Year
Signal Generator	HP	83732B	VS3449051	2020.11.13	1 Year
Attenuator	Agilent	8491B	MY39262165	2020.11.13	1 Year
vector Signal Generator	Agilent	E4438C	MY49070163	2020.11.13	1 Year
splitter	Mini-Circuits	ZAP-50W	NN256400424	2020.11.13	1 Year
Directional Coupler	Agilent	87300C	MY44300299	2020.11.13	1 Year
vector Signal Generator	Agilent	E4438C	US44271917	2020.11.13	1 Year



Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
X-series USB Peak and Average Power Sensor	Agilent	U2021XA	MY54080020	2020.11.13	1 Year
X-series USB Peak and Average Power Sensor	Agilent	U2021XA	MY54110001	2020.11.13	1 Year
X-series USB Peak and Average Power Sensor	Agilent	U2021XA	MY53480008	2020.11.13	1 Year
X-series USB Peak and Average Power Sensor	Agilent	U2021XA	MY54080019	2020.11.13	1 Year
4 Ch.Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	TW54063507	2020.11.13	1 Year
4 Ch.Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	TW54063513	2020.11.13	1 Year
splitter	Mini	PS3-7	4463	2020.11.13	1 Year
Signal Analyzer	Agilent	N9010A	MY48030494	2020.11.13	1 Year

2. RF output power

2.1. Limit


For adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm.

The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. See clause 5.3.1 m). For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.

This limit shall apply for any combination of power level and intended antenna assembly.

Limit
20dBm

2.2. Test Setup

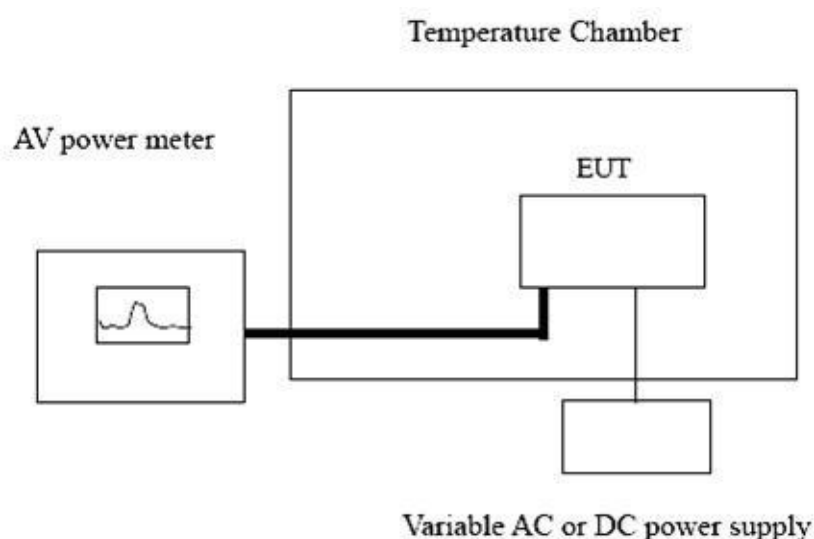

2.3. Test Procedure

Refer to ETSI EN 300 328 V1.9.1(2016-11) Clause 5.3.2.2



2.4. Test Result

EUT: Smart watch / Bracelet M/N:P6/GT20				
Test date:Aug. 20, 2021			Test Engineer: Denise Tan	
Test site: RF site				
Temperature: 25°C		Humidity: 60 %		Pressure: 100.6 KPa
Cable loss: 0.6dB		Attenuator loss: 20dB		Antenna Gain: 0dBi
Sample speed		Sample speed 1 MS/s for power sensor		
Mode	Condition	CH	Result	Limit
			Total e.i.r.p (dBm)	e.i.r.p (dBm)
GFSK	Normal 25°C/3.7V	CH0	1.17	20
		CH39	1.16	20
		CH78	1.17	20
	-20°C/3.33V	CH0	1.14	20
		CH39	1.14	20
		CH78	1.29	20
	-20°C/4.07V	CH0	1.23	20
		CH39	1.25	20
		CH78	1.25	20
	-20°C/3.33V	CH0	1.44	20
		CH39	1.5	20
		CH78	1.36	20
	-20°C/4.07V	CH0	1.36	20
		CH39	1.21	20
		CH78	1.51	20
Conclusion: PASS				

Remark: This Report only show the test plots of the worst case.



EUT: Smart watch / Bracelet M/N:P6/GT20				
Test date:Aug. 20, 2021			Test Engineer: Denise Tan	
Test site: RF site				
Temperature: 25°C		Humidity: 60 %		Pressure: 100.6 KPa
Cable loss: 0.6dB		Attenuator loss: 20dB		Antenna Gain: 0dBi
Sample speed		Sample speed 1 MS/s for power sensor		
Mode	Condition	CH	Result	Limit
			Total e.i.r.p (dBm)	e.i.r.p (dBm)
Π/4-DQP SK	Normal 25°C/3.7V	CH0	1.16	20
		CH39	1.27	20
		CH78	1.17	20
	-20°C/3.33V	CH0	1.3	20
		CH39	1.45	20
		CH78	1.1	20
	-20°C/4.07V	CH0	1.19	20
		CH39	1.37	20
		CH78	1.28	20
	-20°C/3.33V	CH0	1.23	20
		CH39	1.31	20
		CH78	1.38	20
	-20°C/4.07V	CH0	1.28	20
		CH39	1.25	20
		CH78	1.44	20
Conclusion: PASS				

Remark: This Report only show the test plots of the worst case.



EUT: Smart watch / Bracelet M/N:P6/GT20				
Test date:Aug. 20, 2021			Test Engineer: Denise Tan	
Test site: RF site				
Temperature: 25℃		Humidity: 60 %		Pressure: 100.6 KPa
Cable loss: 0.6dB		Attenuator loss: 20dB		Antenna Gain: 0dBi
Sample speed		Sample speed 1 MS/s for power sensor		
Mode	Condition	CH	Result	Limit
			Total e.i.r.p (dBm)	e.i.r.p (dBm)
8-DPSK	Normal 25℃/3.7V	CH0	1.29	20
		CH39	1.13	20
		CH78	1.18	20
	-20℃/3.33V	CH0	1.13	20
		CH39	1.16	20
		CH78	1.27	20
	-20℃/4.07V	CH0	1.16	20
		CH39	1.16	20
		CH78	1.23	20
	-20℃/3.33V	CH0	1.42	20
		CH39	1.41	20
		CH78	1.39	20
	-20℃/4.07V	CH0	1.68	20
		CH39	1.27	20
		CH78	1.48	20
Conclusion: PASS				

Remark: This Report only show the test plots of the worst case.

3. Dwell time, Minimum Frequency Occupation and Hopping Sequence

3.1. Limit

For Adaptive frequency hopping systems

Adaptive Frequency Hopping systems shall be capable of operating over a minimum of 70 % of the band specified in clause 1.

The maximum accumulated dwell time on any hopping frequency shall be 400 ms within any period of 400 ms multiplied by the minimum number of hopping frequencies (N) that have to be used.

The hopping sequence(s) shall contain at least N hopping frequencies at all times, where N is 15 or 15 divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.

The Minimum Frequency Occupation Time shall be equal to one dwell time within a period not exceeding four times the product of the dwell time per hop and the number of hopping frequencies in use.

For Non-adaptive frequency hopping systems

The accumulated Dwell Time on any hopping frequency shall not be greater than 15 ms within any period of 15 ms multiplied by the minimum number of hopping frequencies (N) that have to be used.

Non-adaptive medical devices requiring reverse compatibility with other medical devices placed on the market when earlier versions of the present document were harmonised, are allowed to have an operating mode in which the maximum dwell time is 400 ms.

The hopping sequence(s) shall contain at least N hopping frequencies where N is 15 or 15 divided by the minimum

Hopping Frequency Separation in MHz, whichever is the greater. The Minimum Frequency Occupation Time shall be equal to one dwell time within a period not exceeding four times the product of the dwell time per hop and the number of hopping frequencies in use.

3.2. Test Setup



3.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.3.4



3.4. Test Result

Hopping channel

EUT: Smart watch / Bracelet M/N:P6/GT20			
Test date:Aug. 20, 2021		Test site: RF site	Tested by: Denise Tan
Mode	Number of hopping channel	Limit	Conclusion
GFSK	79	>15	PASS
π/4-DQPSK	79	>15	PASS
8-DPSK	79	>15	PASS

Dwell time

EUT: Smart watch / Bracelet M/N:P6/GT20					
Test date:Aug. 20, 2021		Test site: RF site		Tested by: Denise Tan	
Mode	Channel	Pulse time (ms)	Dwell time(ms)	Limit	Conclusion
DH1	Low	0.38	124.1	<400ms	PASS
	Mid	0.38	124.4		
	High	0.38	125.1		
DH3	Low	1.70	276.8		
	Mid	1.70	274.1		
	High	1.70	273.6		
DH5	Low	2.82	303.5		
	Mid	2.82	303.4		
	High	2.82	304.1		
Note: DH1=1600/(79*(DH))*79*0.4* Pulse time .(DH1=2, DH3=4, DH5=6)					

Mini Frequency Occupation Time

EUT: Smart watch / Bracelet M/N:P6/GT20				
Test date:Aug. 20, 2021		Test site: RF site	Tested by: Denise Tan	
Mode	Channel	Dwell time(ms)	Mini frequency occupation Time(ms)	Conclusion
DH1	Low/Mid/High	121.6	486.4	PASS
DH3	Low/Mid/High	272.2	1088.8	
DH5	Low/Mid/High	300.8	1203.2	
Remark: Mini frequency occupation Time(ms)=4*Dwell time(ms)				

**Operating hopping Bandwidth:**

EUT: Smart watch / Bracelet M/N:P6/GT20			
Test date:Aug. 20, 2021		Test site: RF site	Tested by: Denise Tan
Mode	Bandwidth (MHz)	Limit(MHz)	Conclusion
GFSK	81.11	58.45	PASS

Hopping sequence

EUT: Smart watch / Bracelet M/N:P6/GT20			
Test date:Dec. 22, 2020		Test site: RF site	Tested by: Denise Tan
Mode	Hopping Sequence(%)	Limit	Conclusion
GFSK	97.14%	>70%	PASS
Note: 1. For adaptive systems, using the lowest and highest -20 dB points from the total spectrum envelope, it shall be verified whether the system uses 70 % of the band specified. 2. Hopping Sequence(%) = (20dB BW/83.5)*100			



4. Hopping Frequency Separation

4.1. Limit

For Non-adaptive frequency hopping systems

The minimum Hopping Frequency Separation shall be equal to Occupied Channel Bandwidth (see clause 4.3.1.7) of a single hop, with a minimum separation of 100 kHz.

For Adaptive frequency hopping systems

The minimum Hopping Frequency Separation shall be 100 kHz.

4.2. Test setup



4.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.3.5

4.4. Test Result

EUT: Smart watch / Bracelet M/N:P6/GT20				
Test date:Aug. 20, 2021		Test site: RF site	Tested by: Denise Tan	
Mode		Result (MHz)	Limit (MHz)	Conclusion
GFSK	DH1	1.07	0.1	PASS
	DH3	0.97	0.1	
	DH5	0.98	0.1	

5. Adaptivity

5.1. Limit

The frequency range of the equipment is determined by the lowest and highest

Non-LBT based Detect and Avoid:

- 1 The frequency shall remain unavailable for a minimum time equal to 1 second after which the channel maybe considered again as an 'available' channel;
- 2 $COT \leq 40 \text{ ms}$;
- 3 Idle Period = 5% of COT;
- 4 Detection threshold level = $-70\text{dBm/MHz} + 20 - P_{out \text{ E.I.R.P}}$ (P_{out} in dBm);

LBT based Detect and Avoid (Frame Based Equipment):

- 1 Minimum Clear Channel Assessment (CCA) time = 20 μs ;
- 2 CCA observation time declared by the supplier;
- 3 $COT = 1 \sim 10 \text{ ms}$;
- 4 Idle Period = 5% of COT;
- 5 Detection threshold level = $-70\text{dBm/MHz} + 20 - P_{out \text{ E.I.R.P}}$ (P_{out} in dBm);


LBT based Detect and Avoid (Load Based Equipment):

- 1 Minimum Clear Channel Assessment (CCA) time = 20 μs ;
- 2 CCA declared by the manufacturer;
- 3 $COT \leq (13 / 32) * q \text{ ms}$; $q = [4 \sim 32]$; 1.625ms~13ms;
- 4 Detection threshold level = $-73\text{dBm/MHz} + 20 - P_{out \text{ E.I.R.P}}$ (dBm);

Short Control Signalling Transmissions:

Short Control Signalling Transmissions shall have a maximum duty cycle of 10% within an observation period of 50ms.

5.2. Test Setup

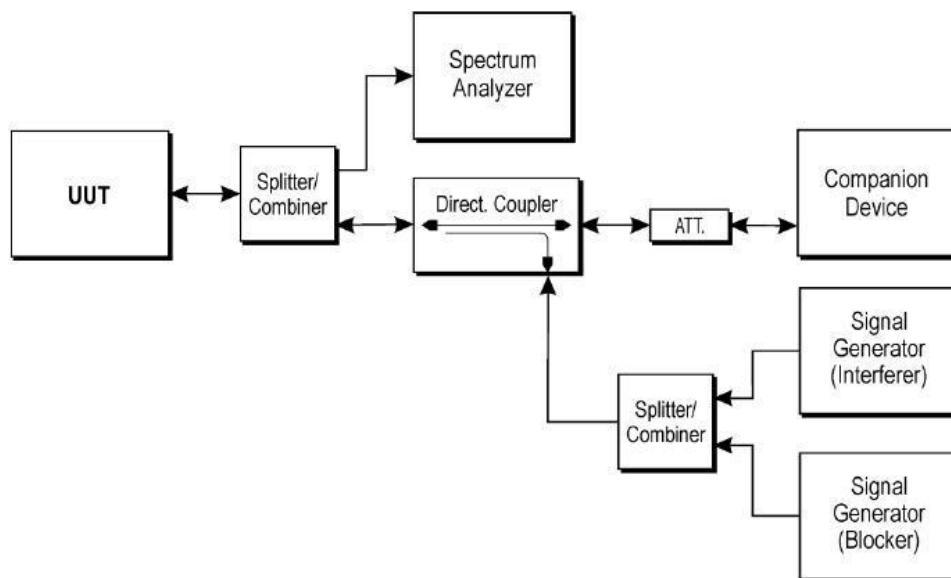

5.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.3.7.

5.4. Test Result

Not applicable

Note : The maximum output power of EUT less than 10dBm, so not applicable.



6. Occupied Channel Bandwidth

6.1. Limit

The Occupied Channel Bandwidth shall fall completely within the band given in 2.4GHz to 2.4835GHz.

In addition, for non-adaptive systems using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.

6.2. Test Setup



6.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.3.8.

6.4. Test Result

EUT: Smart watch / Bracelet				
M/N:P6/GT20				
Test site: RF site		Test date:Aug. 20, 2021		Tested by: Denise Tan
Frequency Rang				
Test mode		CH	Result	Limit
			MHz	MHz
GFSK	DH1	CH0	2482.59	>2400.0
		CH78	2481.47	<2483.5
GFSK	DH3	CH0	2402.35	>2400.0
		CH78	2481.54	<2483.5
GFSK	DH5	CH0	2402.47	>2400.0
		CH78	2481.33	<2483.5
Test Result: PASS.				



Occupied Bandwidth			
Test mode		Occupied Bandwidth (MHz)	
		Lowest CH	Highest CH
GFSK	DH1	0.781	0.785
	DH3	0.794	0.796
	DH5	0.783	0.785
Test Result: PASS.			

7. Transmitter unwanted emissions in the out-of-band domain

7.1. Limit

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 3.


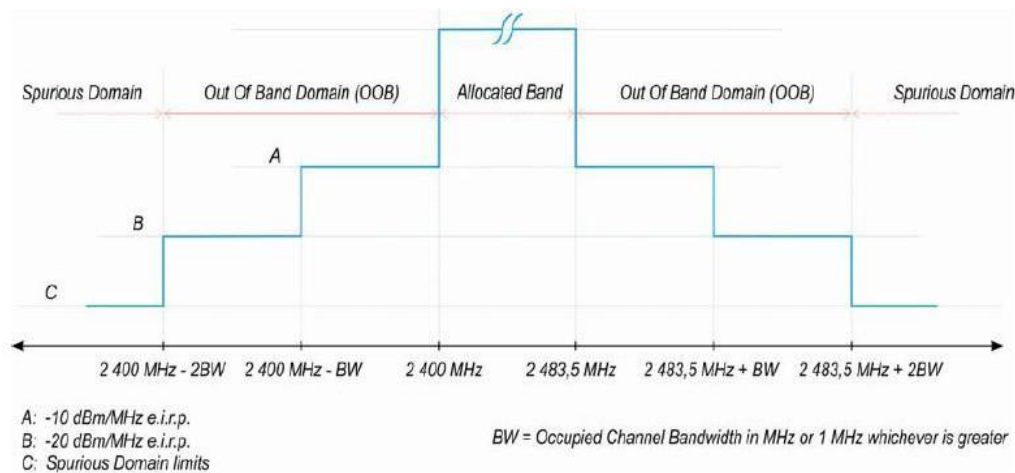


Figure 3: Transmit mask

7.2. Test Setup

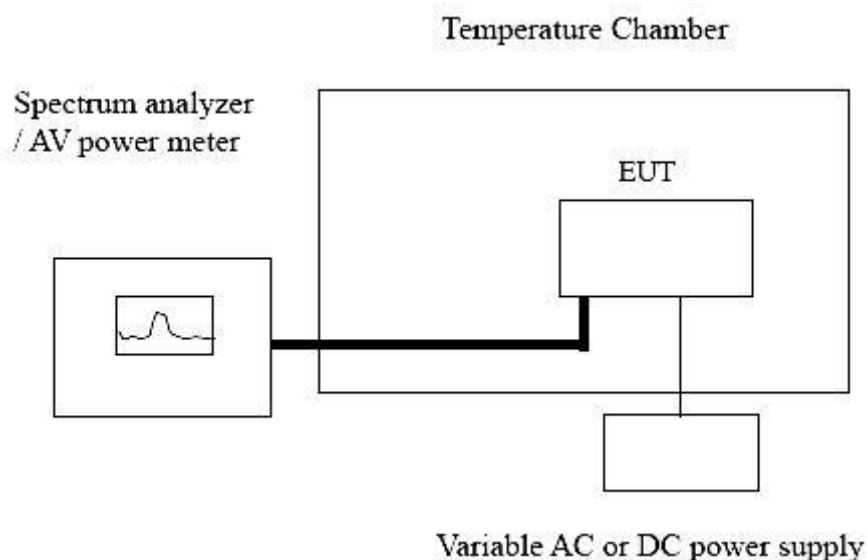

7.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.3.9.




7.4. Test Result

GFSK Hopping mode:

Test Condition			Lower Band Edge		Higher Band Edge	
Test Mode	Temp	Voltage	Segment A (dBm/MHz)	Segment B (dBm/MHz)	Segment A (dBm/MHz)	Segment B (dBm/MHz)
GFSK	Normal	Normal	-50.39	-53.09	-57.08	-58.35
	55°C	3.33	/	/	/	/
	55°C	4.07	/	/	/	/
	-25°C	3.33	/	/	/	/
	-25°C	4.07	/	/	/	/
Limit			-10	-20	-10	-20
Conclusion			PASS			
Remark: All modulations of EUT have been tested, but only show the test data of the worst case in this report.						


CH Low (Normal Temp)

Channel	Antenna	Frequency	Level	Limit
CH Low-2402	Antenna 1	2399.5	-50.37	-10
CH Low-2402	Antenna 1	2398.5	-53.06	-20

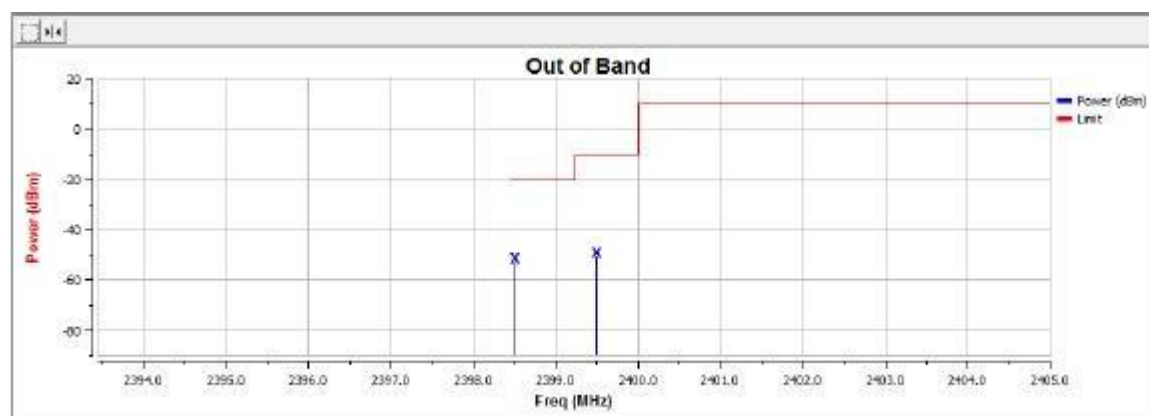

**CH High (Normal Temp)**

Channel	Antenna	Frequency	Level	Limit
CH Low-2480	Antenna 1	2484	-57.08	-10
CH Low-2480	Antenna 1	2485	-58.34	-20

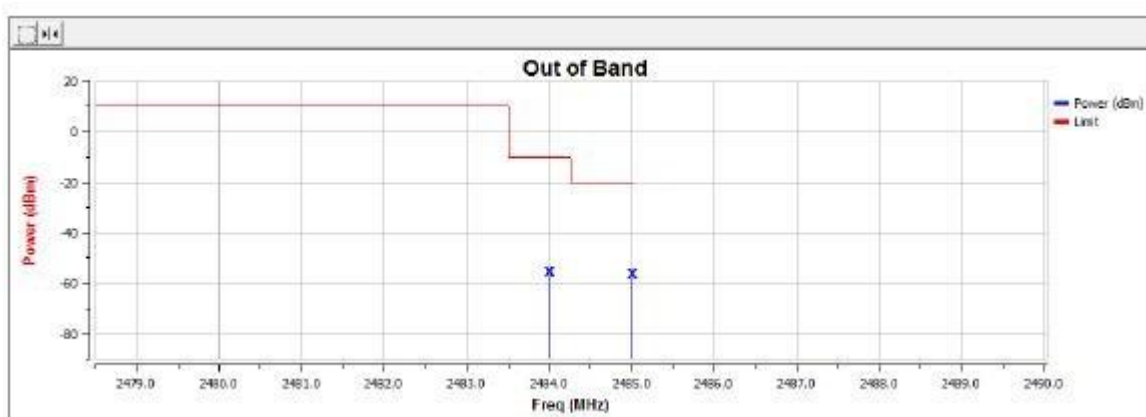

8. Transmitter unwanted emissions in the spurious domain

8.1. Limit

The transmitter unwanted emissions in the spurious domain shall not exceed the values given in table 4.

Table 4: Transmitter limits for spurious emissions

Frequency range	Maximum power, e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz)	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 862 MHz	-54 dBm	100 kHz
862 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz

8.2. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.3.10.



8.3. Test Result

Spurious emissions							
EUT: Smart watch / Bracelet							
M/N:P6/GT20							
Power: DC4.1V							
Test Date:Aug. 20, 2021		Test site: RF Site			Tested by: Denise Tan		
Ambient Temperature: 25°C		Relative Humidity: 65%					
Test Mode: GFSK Tx in CH0 2402MHz							
Frequency (MHz)	Antenna polarization	SG level (dBm)	Cable loss (dB)	Antenna Gain(dBi)	Result (dBm)	Limit (dBm)	Margin (dB)
163.59	H	-47.8	2.5	4.1	-46.1	-36	10.1
436.57	H	-53.01	2.9	8.6	-48.31	-36	12.31
4804.00	H	-38.71	8.95	10.4	-38.16	-30	8.16
7206.00	H	-39.52	12.1	11.7	-39.72	-30	9.72
163.59	V	-47.3	2.4	3.2	-46.8	-36	10.8
436.57	V	-52.59	3.4	7.9	-47.49	-36	11.49
4804.00	V	-38.11	9.95	9.8	-37.16	-30	7.16
7206.00	V	-39.76	12.6	11.9	-40.16	-30	10.16
Test Mode: GFSK Tx in CH78 2480MHz							
163.59	H	-49.35	2.5	4.1	-48.45	-36	12.45
436.57	H	-51.28	3.2	8.6	-46.58	-36	10.58
4960.00	H	-40.4	9.45	10.8	-39.85	-30	9.85
7440.00	H	-38.35	12.55	12	-37.4	-30	7.4
163.59	V	-48.19	2.9	3.6	-45.99	-36	9.99
436.57	V	-49.78	3.4	7.7	-45.08	-36	9.08
4960.00	V	-39.74	9.35	9.6	-39.49	-30	9.49
7440.00	V	-37.92	11.55	12.3	-38.77	-30	8.77
Note1: Result =SG Level – Cable loss + Antenna Gain – 2.15							
Note2: All the emissions detected are belong to narrowband emissions.							



10. Receiver Spurious emissions

10.1 Limit

The spurious emissions of the receiver shall not exceed the values given in table 5.

Table 5: Spurious emission limits for receivers

Frequency Range	Limit
30MHz to 1GHz	-57dBm
1GHz to 12.75GHz	-47dBm

10.2 Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.3.11.

10.3 Test Result

Spurious emissions							
EUT: Smart watch / Bracelet				M/N:P6/GT20			
Power: DC4.1V							
Test date:Aug. 20, 2021		Test site: RF Site			Tested by: Denise Tan		
Ambient Temperature: 25°C		Relative Humidity: 65%					
Test Mode: Rx in CH0 2402MHz							
Frequency (MHz)	Antenna polarization	SG level (dBm)	Cable loss (dB)	Antenna Gain(dBi)	Result (dBm)	Limit (dBm)	Margin (dB)
163.40	H	-69.21	3	3.6	-68.51	-57	11.51
435.41	H	-74.1	3.76	8.1	-69.76	-57	12.76
2026.00	H	-60.34	6.6	3	-63.04	-47	16.04
2413.00	H	-58.92	6.43	7.9	-57.35	-47	10.35
163.40	V	-70.72	2.2	3.4	-68.72	-57	11.72
435.41	V	-73.07	3.36	8.8	-68.43	-57	11.43
2026.00	V	-61.13	6.2	2.9	-65.03	-47	18.03
2413.00	V	-61.2	6.23	9.1	-58.33	-47	11.33
Test Mode: Rx in CH78 2480MHz							
163.40	H	-69.75	2.4	4.2	-69.65	-57	12.65
435.41	H	-72.08	3.96	9	-67.84	-57	10.84
2026.00	H	-60.24	6.7	3.5	-64.04	-47	17.04
2413.00	H	-60.7	7.33	8.2	-59.13	-47	12.13
163.40	V	-69.47	1.9	3.5	-68.57	-57	11.57
435.41	V	-71.63	3.36	8.4	-66.39	-57	9.39
2026.00	V	-59.24	5.9	2.4	-62.24	-47	15.24
2413.00	V	-59.74	7.23	8.6	-58.77	-47	11.77
Note: Result =SG Level – Cable loss + Antenna Gain – 2.15							

11. Receiver Spurious emissions

11.1 Receiver Blocking

11.2 Limit


Adaptive equipment using wide band modulations other than FHSS, shall comply with the requirements defined in clauses 4.3.2.5.1 (non-LBT based DAA) or 4.3.2.5.2 (LBT based DAA) in the presence of a blocking signal with characteristics as provided in table 6.

Table 6: Receiver Blocking parameters

Equipment Type (LBT / non- LBT)	Wanted signal mean power from companion device	Blocking signal frequency [MHz]	Blocking signal power [dBm]	Type of interfering signal
LBT	sufficient to maintain the link (see note 2)	2 395 or 2 488,5 (see note 1)	-30	CW
Non-LBT	-30 dBm			

NOTE 1: The highest blocking frequency shall be used for testing the lowest operating channel, while the lowest blocking frequency shall be used for testing the highest operating channel.
NOTE 2: A typical value which can be used in most cases is -50 dBm/MHz.

11.3 Test Setup

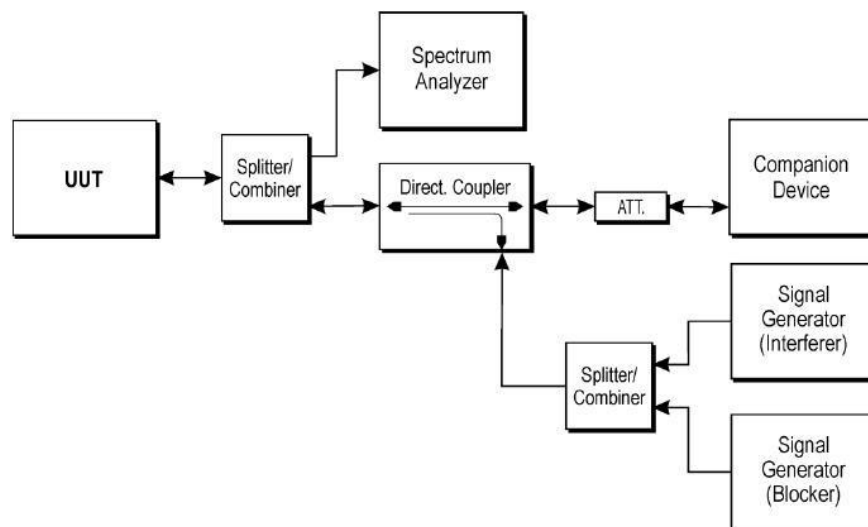

11.4 Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.3.7.

11.5 Test Result

Not applicable

Note : The maximum output power of EUT less than 10dBm, so not applicable.

Appendix I: Photos

Photo 1



Photo 2



Photo 3


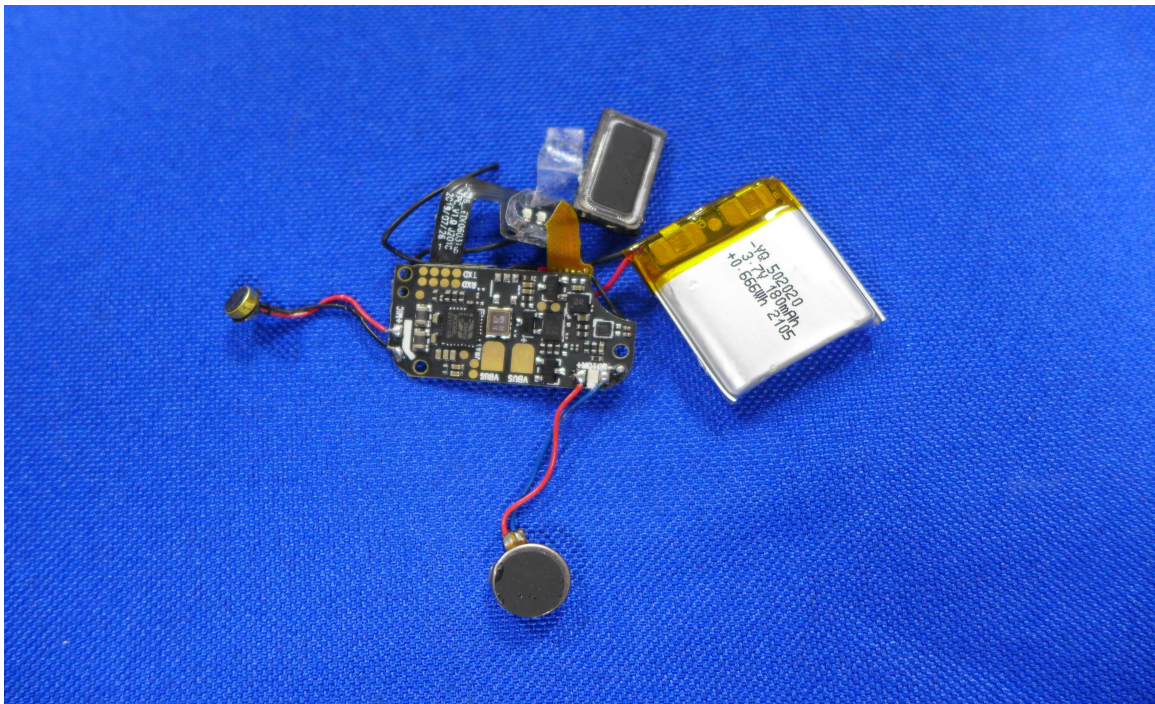


Photo 4

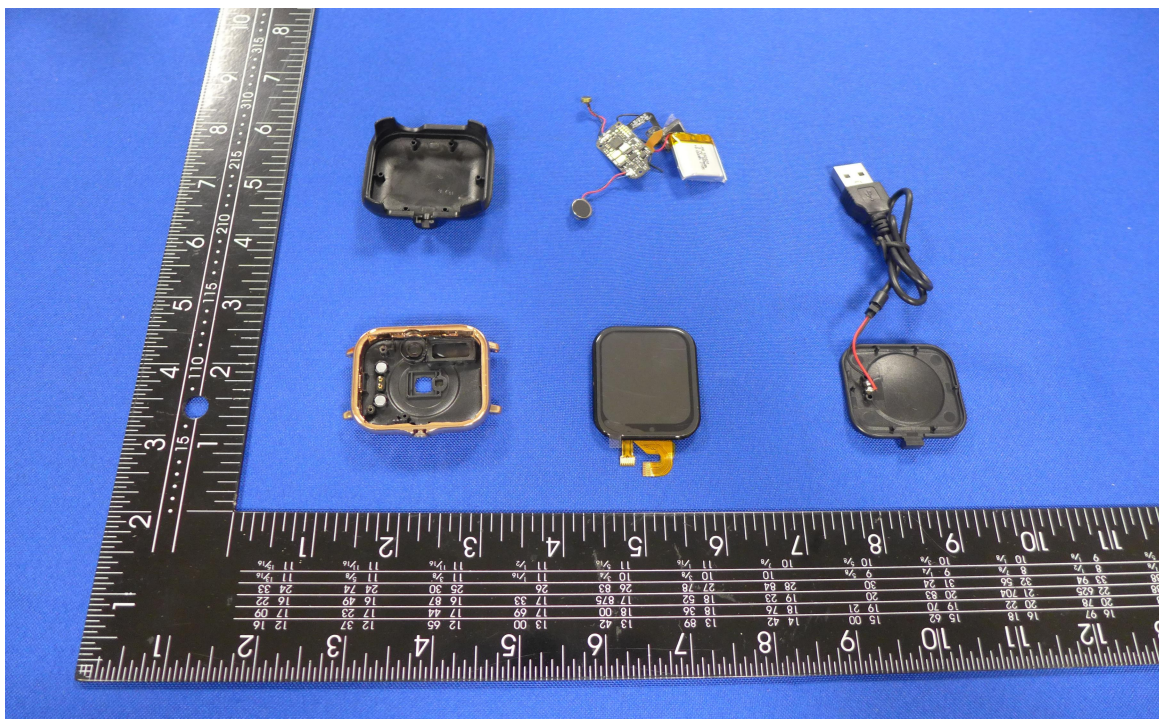

***** END OF REPORT *****