EMC Test Report

Report No.: STS2308301E01

Issued for

SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD

202, Building A2, Silicon Valley Power Intelligent Terminal Industrial Park, No. 20, Dafu Industrial Zone, Kukeng Community, Guanlan Street, Longhua District, Shenzhen China

Product Name: Smart Phone

Brand Name: OUKITEL

Model Name: WP30 Pro

Series Model(s): WP30, WP30 S, WP30 Ultra, WP30 TITAN

EN 55032:2015/A11:2020

Test Standards: EN IEC 61000-3-2:2019/A1:2021 EN 61000-3-3:2013/A2:2021

EN 55035:2017/A11:2020

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.



TEST REPORT

| | | 0 | | | | |
|---|--|------------------------|--|--------------|-------------------------------|------------------------------|
| Applicant's Name: | SHENZH | EN YUNJ | I INTELLIGE | NT TECHNO | LOGY CO.,L | .TD |
| Address: | Park, No. | 20, Dafu | | ne, Kukeng C | gent Terminal Community, G | |
| Manufacturer's Name: | SHENZH | EN YUNJ | I INTELLIGE | NT TECHNO | LOGY CO.,L | TD |
| Address: | Park, No. | 20, Dafu | ilicon Valley Industrial Zo Shenzhen Chi | ne, Kukeng Č | gent Terminal Community, G | Industrial Suanlan Street |
| Product Description: | Ü | • | | | | |
| Product Name: | Smart Ph | one | | | | |
| Brand Name: | OUKITEL | | | | | |
| Model Name | WP30 Pro |) | | | | |
| Series Model(s): | WP30, W | P30 S, W | 'P30 Ultra, W | P30 TITAN | | |
| Test Standards: | EN 55032 EN IEC 6 EN 61000 EN 55035 | 1000-3-2:)-3-3:201 | :2019/A1:202 3/A2:2021 | .1 | | |
| This report shall not be reproduct be altered or revised by STS, per Date of Test | ersonal on | | | | | |
| Date of Receipt of Test Item | : | 01 Aug. 2 | 2023 | | | |
| Date (s) of Performance of Tests | : | 01 Aug. 2 | 2023 ~ 21 Se | pt. 2023 | | |
| Date of Issue | : | 21 Sept. | 2023 | | | |
| Test Result | : | Pass | | | | |
| | | | | | | |
| Testing En | gineer | : | Stan | ·Deng | | |
| | | | (Star | Deng) | - 5 | 2. |
| Technical N | Manager | : | Ви | lun | S TES | ST SERVICES |
| | | | (Bu | ılun) | TESTING | G APPROVAL |
| Authorized | Signatory | : | Chair | 7 | HES | |

(Chris Chen)



Page 3 of 62

TABLE OF CONTENTS

| 1. TEST SUMMARY | 5 |
|---|----|
| 1.1 TEST FACTORY | 6 |
| 1.2 MEASUREMENT UNCERTAINTY | 6 |
| 2. GENERAL INFORMATION | 7 |
| 2.1 GENERAL DESCRIPTION OF THE EUT | 7 |
| 2.2 DESCRIPTION OF THE TEST MODES | 8 |
| 2.3 DESCRIPTION OF THE TEST SETUP | 9 |
| 2.4 MEASUREMENT INSTRUMENTS LIST | 10 |
| 3. EMC EMISSION TEST | 13 |
| 3.1 CONDUCTED EMISSION MEASUREMENT | 13 |
| 3.2 RADIATED EMISSION MEASUREMENT | 17 |
| 3.3 HARMONICS CURRENT | 23 |
| 3.4 VOLTAGE FLUCTUATION AND FLICKERS | 29 |
| 4. EMC IMMUNITY TEST | 31 |
| 4.1 STANDARD COMPLIANCE/SERVRITY LEVEL/CRITERIA | 31 |
| 4.2 GENERAL PERFORMANCE CRITERIA | 32 |
| 4.3 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD) | 33 |
| 4.4 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS) | 39 |
| 4.5 ELECTRICAL FAST TRANSIENT (EFT) | 42 |
| 4.6 SURGE TESTING | 46 |
| 4.7 CONDUCTED RADIO FREQUENCY DISTURBANCES (CS) | 49 |
| 4.8 POWER FREQUENCY MAGNETIC FIELD TESTING | 52 |
| 4.9 VOLTAGE INTERRUPTION/DIPS TESTING (DIPS) | 55 |
| APPENDIX 1 - TEST SETUP | 57 |



Revision History

Page 4 of 62

| Rev. | Issue Date | Report No. | Effect Page | Contents |
|------|---------------|---------------|-------------|---------------|
| 00 | 21 Sept. 2023 | STS2308301E01 | ALL | Initial Issue |
| | *** | | | 7 |



1. TEST SUMMARY

Test procedures according to the technical standards:

| EMC Emission | | | | |
|-----------------------------------|---|-------------------------|-----------|----------|
| Standard | Test Item | Limit | Judgement | Remark |
| EN 55032:2015/A11:2020 | Conducted Emission on AC And Telecom Port 150kHz to 30MHz | Class B | PASS | |
| | Radiated Emissions | Class B | PASS | NOTE (1) |
| EN IEC 61000-3-2:2019/A1:2021 | Harmonic Current Emission | Class A | PASS | NOTE (2) |
| EN 61000-3-3:2013/A2:2021 | Voltage Fluctuations & Flicker | | PASS | |
| | | | | |
| Section EN 55035:2017/A11:2020 | Test Item | Performance Criteria | Judgement | Remark |
| EN 61000-4-2:2009 | Electrostatic discharges | В | PASS | |
| EN IEC 61000-4-3:2020 | Continuous RF electromagnetic field disturbances | А | PASS | |
| EN 61000-4-4:2012 | Electrical fast transients/burst | В | PASS | |
| EN 61000-4-5:2014/A1:2017 | Surges | В | PASS | |
| EN 61000-4-6:2014+AC:2015 | Continuous induced RF disturbances | Α | PASS | |
| EN 61000-4-8:2010 | Power frequency magnetic field | А | PASS | |
| EN IEC 61000-4-11:2020 | Voltage dips and interruptions | B/C/C | PASS | NOTE (2) |

Note: (1) If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz.

> If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.

If the highest frequency of the internal sources of the EUT is between 500 MHz and 1GHz, the measurement shall only be made up to 5 GHz.

If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times of the highest frequency or 6 GHz, whichever is less.

(2) Voltage Dip: 100% reduction - Performance Criteria B

Voltage Dip: 30% reduction – Performance Criteria C

Voltage Interruption: 100% Interruption – Performance Criteria C

(3) N/A=Not Applicable.

1.1 TEST FACTORY

| Company Name: | SHENZHEN STS TEST SERVICES CO.,LTD. | |
|-------------------|---|--|
| Address: | 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China | |
| Telephone: | 86-755 3688 6288 | |
| Fax: | +86-755 3688 6277 | |
| | FCC test Firm Registration Number: 625569 | |
| Registration No.: | IC test Firm Registration Number: 12108A | |
| | A2LA Certificate No.: 4338.01 | |

Page 6 of 62

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately $\mathbf{95}$ %.

A. Conducted Measurement:

| Test Site | Method | Measurement Frequency Range | U · (dB) | NOTE |
|-----------|--------------|-----------------------------|----------|------|
| STSC01 | CISPR 16-4-2 | 9KHz ~ 150KHz | 2.14 | |
| | | 150KHz ~ 30MHz | 2.54 | |

B. Radiated Measurement:

| Test Site | Method | Measurement Frequency Range | U · (dB) | NOTE |
|-----------|--------------|-----------------------------|----------|------|
| STSC02 | CISPR 16-4-2 | 30MHz ~ 1000MHz | 3.94 | |
| | 7 | 1GHz ~ 6 GHz | 4.59 | |



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

| Product Name | Smart Pho | one | |
|-------------------------|--|---|--|
| Brand Name | OUKITEL | | |
| Model Name | WP30 Pro |) | |
| Series Model(s) | WP30, W | P30 S, WP30 Ultra, WP30 TITAN | |
| Model Difference | | del are the same circuit and RF module, except model d appearance of the color. | |
| Product Description | ITE equip combinati processin messages | is a Smart Phone. ment having a primary function of either (or a on of) entry, storage, display, retrieval, transmission, g, switching, or control of data and/or telecommunication and which may be equipped with one or more ports or information transfer. | |
| Frequency Bands | 5G NR | SA: N78: 3300-3800MHz(TX), 3300-3800MHz(RX) NSA: LTE Band 1+N78 | |
| Troquency Bands | FM 87.5-108MHz | | |
| Modulation Mode | 5G NR | DFT-s-OFDM: PI/2 BPSK, QPSK, 6QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM | |
| | FM | FM | |
| Rating | Input: DC 5V | | |
| Battery | Rated Voltage: 7.74V Charge Limit Voltage:8.9V Capacity: 5500mAh | | |
| Adapter | Input: 100-240V50/60Hz 0.2A Output: Input: 100-240V~50/60Hz 1.8A Output: DC 5.0V 3.0A 15.0W OR DC 9.0V 3.0A 27.0W OR DC 12.0V 3.0A 36.0W OR DC 15.0V 3.0A 45.0W OR DC 20.0V 5.0A 100.0W MAX PPS: DC 3.6V-20.0V 6.0A 120.0W MAX | | |
| Hardware Version Number | M159-MUB-V2 | | |
| Software Version Number | OUKITEL_WP30_Pro_V09_20230804 | | |



2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description | |
|--------------|-------------------------------------|--|
| Mode 1 | PC+USB Transmitting+SD Card | |
| Mode 2 | Charging + Audio + Video + Earphone | |
| Mode 3 | Charging + FM | |

| For Conducted Test | | |
|------------------------------------|--|--|
| Final Test Mode Description | | |
| Mode 1 PC+USB Transmitting+SD Card | | |

| For Radiated Test | | |
|------------------------------------|--|--|
| Final Test Mode Description | | |
| Mode 1 PC+USB Transmitting+SD Card | | |

| For EMS Test | | |
|-----------------|-------------------------------------|--|
| Final Test Mode | Description | |
| Mode 1 | PC+USB Transmitting+SD Card | |
| Mode 2 | Charging + Audio + Video + Earphone | |
| Mode 3 | Charging + FM | |

Note:

- 1. For conducted emission test, test mode 1 was the worst case and only this mode was presented in this report.
- 2. For radiated emission test, test mode 1 was the worst case and only this mode was presented in this report.
- 3. The device has been tested with normal voltage (For 110V, 50/60Hz and 230V, 50/60Hz). The report only shows the worst result which is tested with 230V/50Hz.



2.3 DESCRIPTION OF THE TEST SETUP

The EUT has been tested with associated equipment below and the test setup please refer to appendix 1 - test setup.

Necessary accessories

| | 1 0.00000000000000000000000000000000000 | | | | |
|------|---|--|----------------|--------|------|
| Item | Equipment | Mfr/Brand | Model/Type No. | Length | Note |
| | Adapter | N/A | HJ-PD120W-EU | N/A | N/A |
| | Type-C Cable | N/A | N/A | 100cm | NO |
| | | | | | |
| | | | | | |
| | | and the same of th | | | |

Support units

| Item | Equipment | Mfr/Brand | Model/Type No. | Length | Note |
|------|------------------|-----------|----------------|--------|------|
| | Notebook Adapter | DELL | HSTNN-CA15 | N/A | N/A |
| | Notebook | DELL | 500-320cx | N/A | N/A |
| | DC Cable | N/A | N/A | 110cm | NO |
| | | | | | |
| | | 1 | 1 | | A. |

Note:

- (1) For detachable type I/O cable should be specified the length in cm in <code>"Length_"</code> column.
- (2) "YES" means "with core"; "NO" means "without core".



2.4 MEASUREMENT INSTRUMENTS LIST

2.4.1 CONDUCTED TEST SITE

| Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Calibrated Until |
|------------------------|----------------------------|----------|------------|---------------------|---------------------|
| EMI Test Receiver | R&S | ESCI | 101427 | 2022.09.28 | 2023.09.27 |
| LISN | R&S | ENV216 | 101242 | 2022.09.28 | 2023.09.27 |
| LISN | ETS | 3810/2NM | 00023625 | 2022.09.28 | 2023.09.27 |
| Absorbing Clamp | R&S | MDS-21 | 100668 | 2023.02.28 | 2024.02.27 |
| CE Cable | N/A | C01 | N/A | 2022.09.28 | 2023.09.27 |
| Temperature & Humidity | Mieo | HH660 | N/A | 2022.09.30 | 2023.09.29 |
| Testing Software | EZ-EMC(Ver.STSLAB-03A1 CE) | | | | |

2.4.2 RADIATED TEST SITE

| Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Calibrated Until |
|--------------------------|----------------------------|------------|------------|---------------------|---------------------|
| EMI Test Receiver | R&S | ESCI | 101427 | 2022.09.29 | 2023.09.28 |
| Bi-log Antenna | TESEQ | CBL6111D | 45873 | 2021.10.08 | 2023.10.07 |
| Horn Antenna | SCHWARZBECK | BBHA 9120D | 1343 | 2022.09.28 | 2023.09.27 |
| Pre-amplifier(1-26.5G) | Agilent | 8449B | 3008A02383 | 2023.2.28 | 2024.2.27 |
| Pre-amplifier(0.1M-3GHz) | EM | EM330 | 060665 | 2023.2.28 | 2024.2.27 |
| Spectrum Analyzer | Agilent | N9020A | MY49100060 | 2022.09.28 | 2023.09.27 |
| RE Cable (9K-1G) | N/A | R01 | N/A | 2022.09.28 | 2023.09.27 |
| RE Cable (1-26G) | N/A | R02 | N/A | 2022.09.28 | 2023.09.27 |
| Temperature & Humidity | Mieo | HH660 | N/A | 2022.09.30 | 2023.09.29 |
| Testing Software | EZ-EMC(Ver.STSLAB-03A1 RE) | | | | |

2.4.3 HARMONICS AND FLICKER

| Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Calibrated Until |
|----------------------------|-------------------------|----------|------------|---------------------|---------------------|
| Harmonic Voltage & Flicker | LAPLACE | AC 2000A | 311217 | 2022.09.28 | 2023.09.27 |
| AC Power Source | MTONI | PHF-5010 | 631169 | 2022.09.28 | 2023.09.27 |
| Temperature & Humidity | Mieo | HH660 | N/A | 2022.09.30 | 2023.09.29 |
| Testing Software | HA-PC Link Version 3.03 | | | | |



2.4.4 ESD

| Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Calibrated Until |
|------------------------|--------------|----------|------------|---------------------|---------------------|
| ESD TEST GENERATOR | TESQ | NSG438 | 1175 | 2022.09.28 | 2023.09.27 |
| Temperature & Humidity | N/A | WS1066 | N/A | 2023.02.28 | 2024.02.27 |

Page 11 of 62

2.4.5 SURGE, EFT/BURST, VOLTAGE INTERRUPTION/DIPS

| Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Calibrated Until |
|--|--------------|-----------|------------|---------------------|---------------------|
| Surger Generator | HTEC | HCWG 100 | 225202 | 2023.03.01 | 2024.02.29 |
| Surger Generator | HTEC | HTW | 152104 | 2022.09.28 | 2023.09.27 |
| VOLTAGE DIPS & INTERRUPTIONS Generator | HTEC | HPFS 161P | 143803 | 2023.02.28 | 2024.02.27 |
| EFT/B Generator | HTEC | HEFT 51 | 192001 | 2022.09.28 | 2023.09.27 |
| Temperature & Humidity | Mieo | HH660 | N/A | 2022.09.30 | 2023.09.29 |

2.4.6 RS

| Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Calibrated Until | |
|--------------------------------|-----------------|-----------------------|------------|---------------------|---------------------|--|
| Power Meter | Agilent | E4419B | QB43312265 | 2022.09.28 | 2023.09.27 | |
| Power Sensor | Нр | E9300A | US39210170 | 2022.09.28 | 2023.09.27 | |
| Power Sensor | Нр | E9300A | US39210476 | 2022.09.28 | 2023.09.27 | |
| Signal Generator | Agilent | N5181A | MY56144718 | 2022.09.28 | 2023.09.27 | |
| Power Amplifier | МІСОТОР | MPA-80-1000 -250 | MPA1711489 | 2022.09.28 | 2023.09.27 | |
| Power Amplifier | МІСОТОР | MPA-1000- 6000-100 | MPA1904132 | 2022.09.28 | 2023.09.27 | |
| RS Test Antenna (0.08-1GHz) | SCHWARZBECK | VULP 9118E | 000999 | N/A | N/A | |
| RS Test Antenna (1-10GHz) | SCHWARZBECK | STLP 9149 | 000648 | N/A | N/A | |
| Temperature & Humidity | Mieo | HH660 | N/A | 2022.09.30 | 2023.09.29 | |
| Testing Software | EMC-S V1.4.0.53 | | | | | |



2.4.7 INJECTION CURRENT

| Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Calibrated Until |
|------------------------|--------------|-------------|---------------|---------------------|---------------------|
| CS | SCHLODER | CDG-6000-25 | 126A1280/2014 | 2022.09.28 | 2023.09.27 |
| CDN | SCHLODER | CDN-M2+3 | A2210275/2014 | 2022.09.28 | 2023.09.27 |
| EM Clamp | SCHLODER | EMCL-20 | 132A1283 | 2022.09.28 | 2023.09.27 |
| Attenuator | Nemtest | ATT-6DB-100 | A100W224 | 2022.09.28 | 2023.09.27 |
| Temperature & Humidity | Mieo | HH660 | N/A | 2022.09.30 | 2023.09.29 |

Page 12 of 62

2.4.8 PFMF

| Kind of Equipment | Manufacturer | Type No. | Serial No. | Last Calibration | Calibrated Until |
|------------------------|--------------|-----------|------------|------------------|------------------|
| MF Generator | HTEC | HMFG-COMB | 143903 | 2022.9.28 | 2023.9.27 |
| Magnetic Field Coil | HTEC | HCOIL 100 | 143808 | 2022.9.28 | 2023.9.27 |
| Temperature & Humidity | Mieo | HH660 | N/A | 2022.9.30 | 2023.9.29 |



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 REQUIREMENTS FOR CONDUCTED EMISSIONS FROM THE AC MAINS POWER PORTS OF THE CLASS A EQUIPMENT

| FREQUENCY (MHz) | Coupling device | Detector type / bandwidth | Class A limits dB(µV) |
|-----------------|-----------------|------------------------------|--------------------------|
| 0.15 ~ 0.5 | A.N.A.N.I. | O: P1 /O.I.I. | 79 |
| 0.5 ~ 30 | AMN | Quasi Peak / 9 kHz | 73 |
| 0.15 ~ 0.5 | AMNI | Averege / O kHz | 66 |
| 0.5 ~ 30 | AMN | Average / 9 kHz | 60 |

3.1.2 REQUIREMENTS FOR CONDUCTED EMISSIONS FROM THE AC MAINS POWER PORTS OF THE CLASS B EQUIPMENT

| FREQUENCY (MHz) | Coupling device | Detector type / bandwidth | Class B limits dB(µV) |
|-----------------|-----------------|------------------------------|--------------------------|
| 0.15 ~ 0.5 | | | 66 - 56* |
| 0.5 ~ 5 | AMN | Quasi Peak / 9 kHz | 56 |
| 5 ~ 30 | | 1.30 | 60 |
| 0.15 ~ 0.5 | | | 56 - 46* |
| 0.5 ~ 5 | AMN | Average / 9 kHz | 46 |
| 5 ~ 30 | | | 50 |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


| Receiver Parameters | Setting | | |
|---------------------|----------|--|--|
| Attenuation | 10 dB | | |
| Start Frequency | 0.15 MHz | | |
| Stop Frequency | 30 MHz | | |
| IF Bandwidth | 9 kHz | | |



3.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.4 TEST SETUP

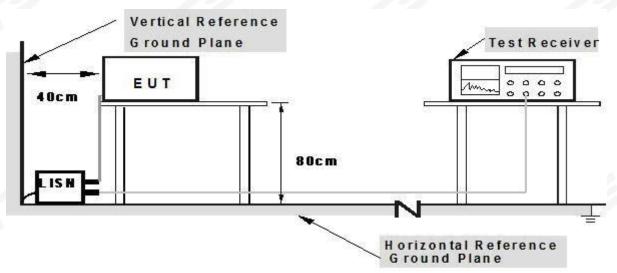

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** described unless otherwise a special operating condition is specified in the following during the testing.




3.1.6 TEST RESULTS

| Temperature: | 25.8℃ | Relative Humidity: | 57% |
|---------------|--------------|--------------------|------------|
| Phase: | L | Test Mode: | Mode 1 |
| Test Voltage: | AC 230V/50Hz | Test Date: | 2023.08.03 |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|--------------------|-------------------|------------------------|------------------|-----------------|----------------|----------|
| 1 | 0.1540 | 26.74 | 20.30 | 47.04 | 65.78 | -18.74 | QP |
| 2 | 0.1540 | 12.31 | 20.30 | 32.61 | 55.78 | -23.17 | AVG |
| 3 | 0.4220 | 21.65 | 20.55 | 42.20 | 57.41 | -15.21 | QP |
| 4 | 0.4220 | 15.57 | 20.55 | 36.12 | 47.41 | -11.29 | AVG |
| 5 | 0.7380 | 11.48 | 20.36 | 31.84 | 56.00 | -24.16 | QP |
| 6 | 0.7380 | 0.86 | 20.36 | 21.22 | 46.00 | -24.78 | AVG |
| 7 | 1.3940 | 10.26 | 20.34 | 30.60 | 56.00 | -25.40 | QP |
| 8 | 1.3940 | 0.45 | 20.34 | 20.79 | 46.00 | -25.21 | AVG |
| 9 | 4.1860 | 11.96 | 20.52 | 32.48 | 56.00 | -23.52 | QP |
| 10 | 4.1860 | 1.93 | 20.52 | 22.45 | 46.00 | -23.55 | AVG |
| 11 | 10.1820 | 13.03 | 20.94 | 33.97 | 60.00 | -26.03 | QP |
| 12 | 10.1820 | 3.43 | 20.94 | 24.37 | 50.00 | -25.63 | AVG |

- All readings are Quasi-Peak and Average values
 Margin = Result (Result = Reading + Factor) Limit
 Factor = Insertion loss + Cable loss

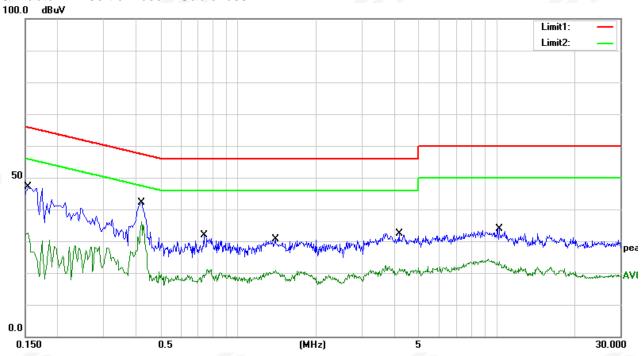


Page 16 of 62

Report No.:STS2308301E01

| Temperature: | 25.8℃ | Relative Humidity: | 57% |
|---------------|--------------|--------------------|------------|
| Phase: | N | Test Mode: | Mode 1 |
| Test Voltage: | AC 230V/50Hz | Test Date: | 2023.08.03 |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|--------------------|-------------------|------------------------|------------------|-----------------|----------------|----------|
| 1 | 0.1500 | 29.35 | 20.29 | 49.64 | 66.00 | -16.36 | QP |
| 2 | 0.1500 | 12.30 | 20.29 | 32.59 | 56.00 | -23.41 | AVG |
| 3 | 0.4180 | 22.36 | 20.56 | 42.92 | 57.49 | -14.57 | QP |
| 4 | 0.4180 | 17.08 | 20.56 | 37.64 | 47.49 | -9.85 | AVG |
| 5 | 1.9940 | 10.14 | 20.39 | 30.53 | 56.00 | -25.47 | QP |
| 6 | 1.9940 | 0.06 | 20.39 | 20.45 | 46.00 | -25.55 | AVG |
| 7 | 3.7380 | 16.32 | 20.49 | 36.81 | 56.00 | -19.19 | QP |
| 8 | 3.7380 | 5.39 | 20.49 | 25.88 | 46.00 | -20.12 | AVG |
| 9 | 8.6580 | 13.66 | 20.77 | 34.43 | 60.00 | -25.57 | QP |
| 10 | 8.6580 | 4.55 | 20.77 | 25.32 | 50.00 | -24.68 | AVG |
| 11 | 21.1220 | 9.17 | 22.87 | 32.04 | 60.00 | -27.96 | QP |
| 12 | 21.1220 | -0.55 | 22.87 | 22.32 | 50.00 | -27.68 | AVG |

- All readings are Quasi-Peak and Average values
 Margin = Result (Result = Reading + Factor) Limit
- 3. Factor = Insertion loss + Cable loss

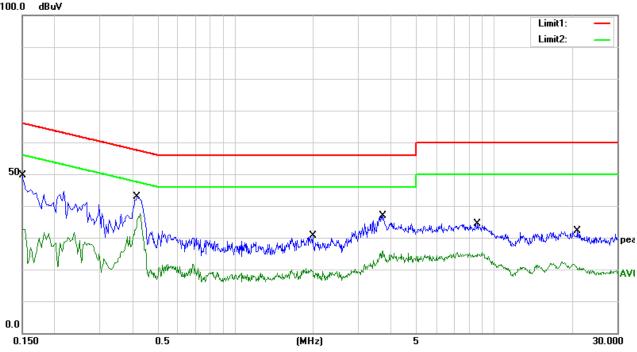



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF THE RADIATED EMISSION MEASUREMENT

| FREQUENCY | Distance | Detector type/ | Class A | Class B |
|-------------|--------------|------------------------|---------|---------|
| (MHz) | (m) | bandwidth | dBuV/m | dBuV/m |
| 30 ~ 230 | 3 | Quasi peak/ 120 kHz | 50 | 40 |
| 230 ~ 1000 | 3 | Quasi peak/ 120 kHz | | 47 |
| 1000 ~ 3000 | 3 | Peak /1 MHz | 76 | 70 |
| 3000 ~ 6000 | 3 | Peak /1 MHz | 80 | 74 |
| 1000 ~ 3000 | 3 | AV/1 MHz | 56 | 50 |
| 3000 ~ 6000 | 3 | AV/1 MHz | 60 | 54 |

Notes:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m) = 20log Emission level (uV/m).

3.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. EUT as the center to the edge of the auxiliary device, the distance from the maximum edge to the center of the antenna is 3 meter.
- c. The height of antenna is varied from 1 meter to 4 meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meter and the rotatable table was turned from 0 degrees to 360 degree to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.



3.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

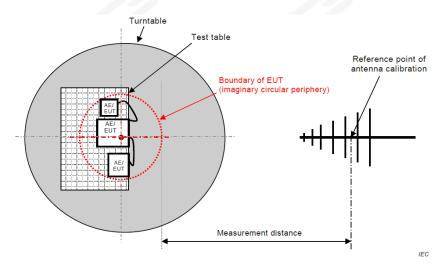


Figure C.1 - Measurement distance

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

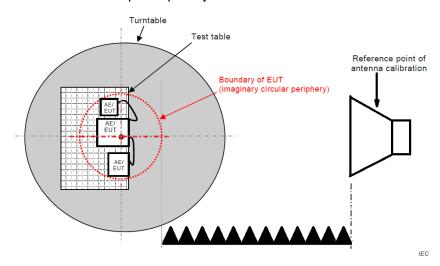


Figure C.1 – Measurement distance

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** described unless otherwise a special operating condition is specified in the following during the testing.





3.2.6 TEST RESULTS

| Temperature: | 25.3℃ | Relative Humidity: | 43% |
|---------------|------------|--------------------|------------|
| Phase: | Horizontal | Test Mode: | Mode 1 |
| Test Voltage: | DC 5V | Test Date: | 2023.09.18 |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Results (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|--------------------|-------------------|------------------------|---------------------|-------------------|----------------|----------|
| 1 | 123.6984 | 44.22 | -18.22 | 26.00 | 40.00 | -14.00 | QP |
| 2 | 206.3175 | 52.39 | -21.22 | 31.17 | 40.00 | -8.83 | QP |
| 3 | 247.6820 | 58.72 | -17.85 | 40.87 | 47.00 | -6.13 | QP |
| 4 | 311.0867 | 58.46 | -15.41 | 43.05 | 47.00 | -3.95 | QP |
| 5 | 378.5842 | 51.11 | -14.60 | 36.51 | 47.00 | -10.49 | QP |
| 6 | 721.8260 | 38.75 | -6.51 | 32.24 | 47.00 | -14.76 | QP |

- All readings are Quasi-Peak
 Margin = Result (Result = Reading + Factor) Limit
 Factor = Cable Loss + Antenna Factor Amplifier Gain

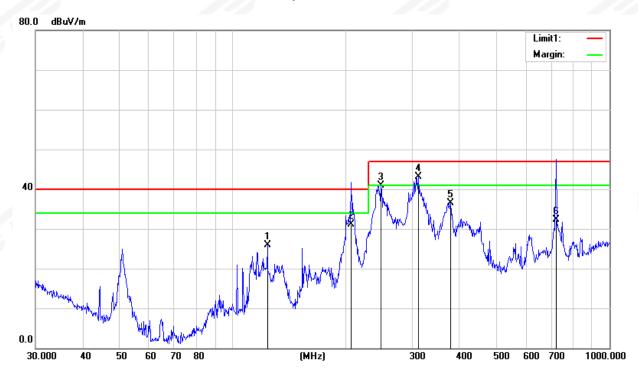



| Temperature: | 25.3℃ | Relative Humidity: | 43% |
|---------------|----------|--------------------|------------|
| Phase: | Vertical | Test Mode: | Mode 1 |
| Test Voltage: | DC 5V | Test Date: | 2023.09.18 |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Results (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|--------------------|-------------------|------------------------|---------------------|-------------------|----------------|----------|
| 1 | 50.9420 | 52.23 | -22.05 | 30.18 | 40.00 | -9.82 | QP |
| 2 | 129.0146 | 50.42 | -18.19 | 32.23 | 40.00 | -7.77 | QP |
| 3 | 197.2000 | 56.65 | -20.96 | 35.69 | 40.00 | -4.31 | QP |
| 4 | 240.1473 | 49.44 | -19.22 | 30.22 | 47.00 | -16.78 | QP |
| 5 | 308.9125 | 54.20 | -15.57 | 38.63 | 47.00 | -8.37 | QP |
| 6 | 372.0045 | 51.82 | -14.46 | 37.36 | 47.00 | -9.64 | QP |

- All readings are Quasi-Peak
 Margin = Result (Result = Reading + Factor) Limit
- 3. Factor= Cable Loss +Antenna Factor-Amplifier Gain






3.2.7 TEST RESULT (1000 - 6000 MHz)

| Temperature: | 25.3℃ | Relative Humidity: | 43% |
|---------------|------------|--------------------|------------|
| Phase: | Horizontal | Test Mode: | Mode 1 |
| Test Voltage: | DC 5V | Test Date: | 2023.08.03 |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|------------------------|------------------|-----------------|----------------|--------|
| 1 | 1895.000 | 42.49 | -1.43 | 41.06 | 70.00 | -28.94 | peak |
| 2 | 1895.000 | 33.86 | -1.43 | 32.43 | 50.00 | -17.57 | AVG |
| 3 | 2640.000 | 44.67 | 0.18 | 44.85 | 70.00 | -25.15 | peak |
| 4 | 2640.000 | 34.70 | 0.18 | 34.88 | 50.00 | -15.12 | AVG |
| 5 | 3795.000 | 44.72 | 3.83 | 48.55 | 74.00 | -25.45 | peak |
| 6 | 3795.000 | 34.27 | 3.83 | 38.10 | 54.00 | -15.90 | AVG |
| 7 | 4780.000 | 46.04 | 5.40 | 51.44 | 74.00 | -22.56 | peak |
| 8 | 4780.000 | 34.54 | 5.40 | 39.94 | 54.00 | -14.06 | AVG |
| 9 | 5330.000 | 46.03 | 6.96 | 52.99 | 74.00 | -21.01 | peak |
| 10 | 5330.000 | 35.26 | 6.96 | 42.22 | 54.00 | -11.78 | AVG |
| 11 | 5980.000 | 47.00 | 7.57 | 54.57 | 74.00 | -19.43 | peak |
| 12 | 5980.000 | 35.77 | 7.57 | 43.34 | 54.00 | -10.66 | AVG |

- All readings are Peak and Average values
 Margin = Result (Result = Reading + Factor) Limit
 Factor = Cable Loss + Antenna Factor-Amplifier Gain

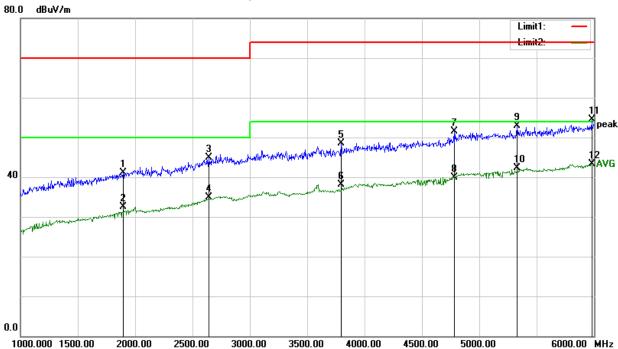




| Temperature: | 25.3℃ | Relative Humidity: | 43% |
|---------------|----------|--------------------|------------|
| Phase: | Vertical | Test Mode: | Mode 1 |
| Test Voltage: | DC 5V | Test Date: | 2023.08.03 |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|--------------------|-------------------|------------------------|------------------|-----------------|----------------|--------|
| 1 | 1940.000 | 44.42 | -1.29 | 43.13 | 70.00 | -26.87 | peak |
| 2 | 1940.000 | 34.19 | -1.29 | 32.90 | 50.00 | -17.10 | AVG |
| 3 | 2710.000 | 45.83 | 0.66 | 46.49 | 70.00 | -23.51 | peak |
| 4 | 2710.000 | 35.18 | 0.66 | 35.84 | 50.00 | -14.16 | AVG |
| 5 | 3510.000 | 47.03 | 2.46 | 49.49 | 74.00 | -24.51 | peak |
| 6 | 3510.000 | 35.92 | 2.46 | 38.38 | 54.00 | -15.62 | AVG |
| 7 | 4455.000 | 46.12 | 4.51 | 50.63 | 74.00 | -23.37 | peak |
| 8 | 4455.000 | 35.29 | 4.51 | 39.80 | 54.00 | -14.20 | AVG |
| 9 | 5420.000 | 46.72 | 7.27 | 53.99 | 74.00 | -20.01 | peak |
| 10 | 5420.000 | 34.98 | 7.27 | 42.25 | 54.00 | -11.75 | AVG |
| 11 | 5975.000 | 46.66 | 7.56 | 54.22 | 74.00 | -19.78 | peak |
| 12 | 5975.000 | 35.83 | 7.56 | 43.39 | 54.00 | -10.61 | AVG |

- All readings are Peak and Average values
 Margin = Result (Result = Reading + Factor) Limit
 Factor = Cable Loss + Antenna Factor-Amplifier Gain

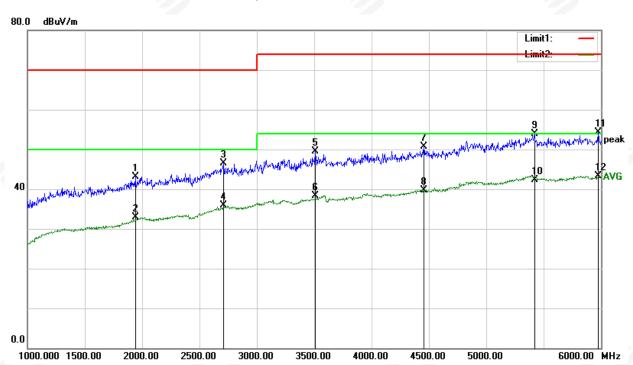



3.3 HARMONICS CURRENT

3.3.1 LIMITS OF THE HARMONICS CURRENT

| EN 61000-3-2/IEC 61000-3-2 | | | | | | | |
|----------------------------|--------------------|-----------|-----------------------------|------------------|----------|--|--|
| Equipment | Max. Permissible | Equipment | Harmonic | Max. Per | missible | | |
| Category | Harmonic Current | Category | Order | Harmonic Current | | | |
| | (in Ampers) | | n | (in A) | (mA/w) | | |
| | | | 3 | 2.30 | 3.4 | | |
| | Same as Limits | | 5 | 1.14 | 1.9 | | |
| Class A | Specified in | Class D | 7 | 0.77 | 1.0 | | |
| | 4-2.1, Table - I, | | 9 | 0.40 | 0.5 | | |
| | but only odd | | 11 | 0.33 | 0.35 | | |
| | harmonics required | | 13≤n≤39 | see Table I | 3.85/n | | |
| | | | only odd harmonics required | | | | |

3.3.2 TEST PROCEDURE


- a. The EUT was placed on the top of a wooden table 0.8 meter above the ground and operated to produce the maximum harmonic components under normal operating conditions.
- b. The classification of EUT is according to section 5 of EN IEC 61000-3-2. The EUT is classified as follows:
 - Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.
 - Class B: Portable tools. Portable tools; Arc welding equipment which is not professional equipment.
 - Class C: Lighting equipment.
 - Class D: Equipment having a specified power less than or equal to 600W of the following types: Personal computers and personal computer monitors and television receivers.
- c. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

3.3.3 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** described unless otherwise a special operating condition is specified in the following during the testing.



3.3.4 TEST SETUP

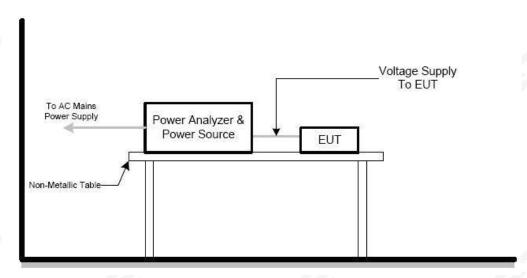





3.3.5 TEST RESULTS

EUT: Smart Phone Test category: IEC/EN 61000-3-2:2019+A1:2021 Class A

Measurement standard: IEC 61000-4-7 Ed2:1:2009 Test date:2023-09-25 Start time: 14:56:45

Test duration (sec):150

Describe:


Operator: STAR Model/Type:WP30 Pro Serial number: End time: 14:59:21

Report No.:STS2308301E01

Test Result: pass Source qualification(Power Off Load): Idle - Pass


Current & voltage waveforms

Waveform Graph

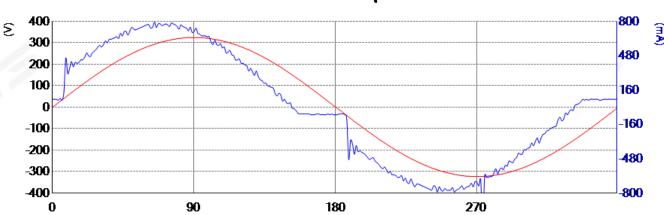

Harmonics and Class A

Harmonics Histogram

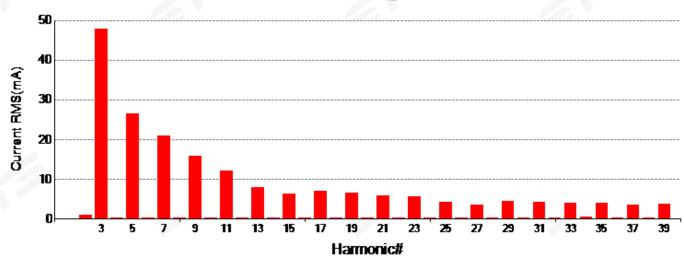



Page 26 of 62 Report No.:STS2308301E01

Harmonics Test Summary

EUT: Smart Phone

Test category: IEC/EN 61000-3-2:2019+A1:2021 Class A Measurement standard: IEC 61000-4-7 Ed2:1:2009
Test date:2023-09-25 Start time: 14:56:45

Test date:2023-09-25 Test duration (sec):150


Describe:

Operator: STAR Model/Type:WP30 Pro Serial number: End time: 14:59:21

Test Result: pass Source qualification(Power Off Load): Idle - Pass


Current & voltage waveforms

Waveform Graph

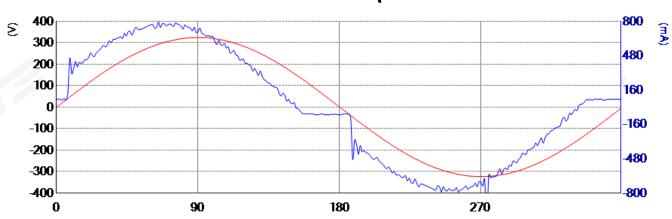

Harmonics and Class A

Harmonics Histogram

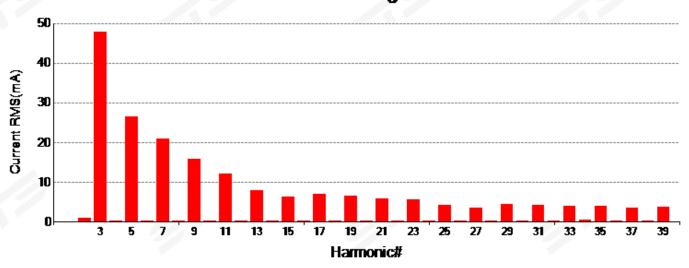





Harmonics Test Summary

EUT: Smart Phone Operator: STAR
Test category: IEC/EN 61000-3-2:2019+A1:2021 Class A Model/Type:WP30 Pro
Measurement standard: IEC 61000-4-7 Ed2:1:2009 Serial number:
Test date:2023-09-25 Start time: 14:56:45 End time: 14:59:21

Test duration (sec):150

Describe:

Test Result: pass Source qualification(Power Off Load): Idle - Pass

THC(mA): 64.780 I - THD(%): 13.5 POHC(mA):13.800 POHC Limit(mA):251.353

Parameter values during test:

V_RMS (Volts): 230.2 Frequency(Hz): 50.0 I_ RMS(mA): 495.4 Crest Factor: 1.473

Power (Watts): 106.3 Power Factor: 0.932

| Harm# | Harms(filtered) (mA) | Limit (mA) | Harms(avg) (mA) | 100%Limit | Harms(max) (mA) | 150%Limit | Status |
|--------|-------------------------|---------------|--------------------|-----------|--------------------|-----------|-------------|
| I_Fund | ` 478.600 | 1000 | ` , | | ` ' | | |
| 2 | 0.920 | 1080.000 | 0.700 | 0.065 | 1.340 | 0.083 | Pass |
| 3 | 47.760 | 2300.000 | 46.900 | 2.039 | 47.810 | 1.386 | Pass |
| 4 | 0.200 | 430.000 | 0.100 | 0.023 | 0.310 | 0.048 | Pass |
| 5 | 26.410 | 1140.000 | 26.600 | 2.333 | 26.790 | 1.567 | Pass |
| 6 | 0.200 | 300.000 | 0.100 | 0.033 | 0.260 | 0.058 | Pass |
| 7 | 20.880 | 770.000 | 21.400 | 2.779 | 21.620 | 1.872 | Pass |
| 8 | 0.200 | 230.000 | 0.100 | 0.043 | 0.400 | 0.116 | Pass |
| 9 | 15.820 | 400.000 | 15.800 | 3.950 | 15.980 | 2.663 | Pass |
| 10 | 0.200 | 184.000 | 0.100 | 0.054 | 0.200 | 0.072 | Pass |
| 11 | 12.160 | 330.000 | 11.500 | 3.485 | 12.180 | 2.461 | Pass |
| 12 | 0.170 | 153.300 | 0.100 | 0.065 | 0.310 | 0.135 | Pass |
| 13 | 7.880 | 210.000 | 7.900 | 3.762 | 8.180 | 2.597 | Pass |
| 14 | 0.170 | 131.400 | 0.100 | 0.076 | 0.170 | 0.086 | Pass |
| 15 | 6.330 | 150.000 | 6.600 | 4.400 | 6.760 | 3.004 | Pass |
| 16 | 0.220 | 115.000 | 0.100 | 0.087 | 0.330 | 0.191 | Pass |
| 17 | 6.900 | 132.400 | 6.900 | 5.211 | 6.940 | 3.494 | Pass |
| 18 | 0.110 | 102.200 | 0.100 | 0.098 | 0.220 | 0.144 | Pass |
| 19 | 6.420 | 118.400 | 7.000 | 5.912 | 7.320 | 4.122 | Pass |
| 20 | 0.260 | 92.000 | 0.100 | 0.109 | 0.380 | 0.275 | Pass |
| 21 | 5.820 | 107.100 | 6.000 | 5.602 | 6.290 | 3.915 | Pass |
| 22 | 0.170 | 83.600 | 0.100 | 0.120 | 0.260 | 0.207 | Pass |
| 23 | 5.550 | 97.800 | 5.100 | 5.215 | 5.610 | 3.824 | Pass |
| 24 | 0.220 | 76.700 | 0.100 | 0.130 | 0.260 | 0.226 | Pass |
| 25 | 4.110 | 90.000 | 4.100 | 4.556 | 4.200 | 3.111 | Pass |
| 26 | 0.200 | 70.800 | 0.100 | 0.141 | 0.400 | 0.377 | Pass |
| 27 | 3.590 | 83.300 | 3.600 | 4.322 | 3.700 | 2.961 | Pass |
| 28 | 0.200 | 65.700 | 0.100 | 0.152 | 0.220 | 0.223 | Pass |
| 29 | 4.450 | 77.600 | 4.100 | 5.284 | 4.490 | 3.857 | Pass |
| 30 | 0.220 | 61.300 | 0.200 | 0.326 | 0.380 | 0.413 | Pass |
| 31 | 4.180 | 72.600 | 4.400 | 6.061 | 4.580 | 4.206 | Pass |
| 32 | 0.170 | 57.500 | 0.100 | 0.174 | 0.240 | 0.278 | Pass |
| 33 | 4.040 | 68.200 | 4.200 | 6.158 | 4.380 | 4.282 | Pass |
| 34 | 0.380 | 54.100 | 0.200 | 0.370 | 0.420 | 0.518 | Pass |
| 35 | 4.060 | 64.300 | 3.700 | 5.754 | 4.090 | 4.241 | Pass |
| 36 | 0.130 | 51.100 | 0.100 | 0.196 | 0.240 | 0.313 | Pass |
| 37 | 3.500 | 60.800 | 3.900 | 6.414 | 4.090 | 4.485 | Pass |
| 38 | 0.350 | 48.400 | 0.200 | 0.413 | 0.400 | 0.551 | Pass |
| 39 | 3.610 | 57.700 | 3.900 | 6.759 | 4.020 | 4.645 | Pass |
| 40 | 0.240 | 46.000 | 0.200 | 0.435 | 0.290 | 0.420 | Pass |

Note: All harmonics are below the minimum limits and are ignored.



Operator: STAR

Serial number: End time: 14:59:21

Model/Type:WP30 Pro



Power Supply Quality Data

EUT: Smart Phone
Test category: IEC/EN 61000-3-2:2019+A1:2021 Class A
Measurement standard: IEC 61000-4-7 Ed2:1:2009
Test date:2023-09-25
Start time: 14:56:45

Test duration (sec):150

Describe:

Source qualification(Power Off Load): Pass

Measurements are compliant with IEC/EN61000-3-2 Ed. 4 & IEC/EN61000-4-7 Ed. 2.1

| | Nominal | Measured | Measured | Deviation | Allowed | Result |
|---------------------|---------|----------|----------|-----------|-------------|--------|
| | | Low | High | | Deviation | |
| Supply Voltage | 230 | 230.16 | 230.18 | 0.18 | 4.6 | Pass |
| Supply Frequency | 50 | 50.0 | 50.0 | 0.0 | 0.25 | Pass |
| Crest Phase | 90.0 | 90.7 | 91.2 | 1.2 | 87 - 93 | N/A |
| Crest Factor | 1.414 | 1.412 | 1.412 | 0.002 | 1.40 - 1.42 | N/A |
| Fundamental Voltage | 230.16 | - | - | - | - | - |

| Harm# | Harmonics Voltage | Harmonic Ratio | Limit | Result |
|-------|-------------------|----------------|-------|--------|
| 2 | 0.000 | 0.000 | 0.200 | Pass |
| 3 | 0.020 | 0.010 | 0.900 | Pass |
| 4 | 0.000 | 0.001 | 0.200 | Pass |
| 5 | 0.100 | 0.050 | 0.400 | Pass |
| 6 | 0.010 | 0.005 | 0.200 | Pass |
| 7 | 0.080 | 0.039 | 0.300 | Pass |
| 8 | 0.000 | 0.000 | 0.200 | Pass |
| 9 | 0.020 | 0.013 | 0.200 | Pass |
| 10 | 0.000 | 0.001 | 0.100 | Pass |
| 11 | 0.040 | 0.021 | 0.100 | Pass |
| 12 | 0.010 | 0.005 | 0.100 | Pass |
| 13 | 0.010 | 0.005 | 0.100 | Pass |
| 14 | 0.000 | 0.005 | 0.100 | Pass |
| 15 | 0.040 | 0.021 | 0.100 | Pass |
| 16 | 0.000 | 0.000 | 0.100 | Pass |
| 17 | 0.010 | 0.005 | 0.100 | Pass |
| 18 | 0.010 | 0.003 | 0.100 | Pass |
| 19 | 0.040 | 0.021 | 0.100 | Pass |
| 20 | 0.000 | 0.000 | 0.100 | Pass |
| 21 | 0.030 | 0.016 | 0.100 | Pass |
| 22 | 0.000 | 0.000 | 0.100 | Pass |
| 23 | 0.010 | 0.010 | 0.100 | Pass |
| 24 | 0.000 | 0.000 | 0.100 | Pass |
| 25 | 0.020 | 0.013 | 0.100 | Pass |
| 26 | 0.010 | 0.005 | 0.100 | Pass |
| 27 | 0.040 | 0.021 | 0.100 | Pass |
| 28 | 0.000 | 0.000 | 0.100 | Pass |
| 29 | 0.010 | 0.005 | 0.100 | Pass |
| 30 | 0.000 | 0.000 | 0.100 | Pass |
| 31 | 0.020 | 0.010 | 0.100 | Pass |
| 32 | 0.000 | 0.000 | 0.100 | Pass |
| 33 | 0.010 | 0.008 | 0.100 | Pass |
| 34 | 0.000 | 0.000 | 0.100 | Pass |
| 35 | 0.010 | 0.010 | 0.100 | Pass |
| 36 | 0.000 | 0.000 | 0.100 | Pass |
| 37 | 0.040 | 0.021 | 0.100 | Pass |
| 38 | 0.000 | 0.000 | 0.100 | Pass |
| 39 | 0.050 | 0.031 | 0.100 | Pass |
| 40 | 0.000 | 0.000 | 0.100 | Pass |



3.4 VOLTAGE FLUCTUATION AND FLICKERS

3.4.1 LIMITS OF THE VOLTAGE FLUCTUATION AND FLICKERS

| Tooto | Limit | Descriptions |
|----------------------|--------------------|----------------------------------|
| Tests | IEC/EN 61000-3-3 | Descriptions |
| P _{st} | ≤ 1.0,Tp= 10 min. | Short Term Flicker Indicator |
| Plt | ≤0.65,Tp=2 hr. | Long Term Flicker Indicator |
| $T_{dt(s)}$ | ≤ 3.3% | Relative Steady-State V-Chang |
| d _{max} (%) | ≤ 4% | Maximum Relative V-Chang |
| d _c (%) | ≤ 3.3% for > 500ms | Relative V-change Characteristic |

3.4.2 TEST PROCEDURE

a. Fluctuation and Flickers Test:


Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in Clause 6.0/4.0 of IEC/EN 61000-3-3 depend.

b. All types of voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

3.4.3 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 described unless otherwise a special operating condition is specified in the following during the testing.

3.4.4 TEST SETUP

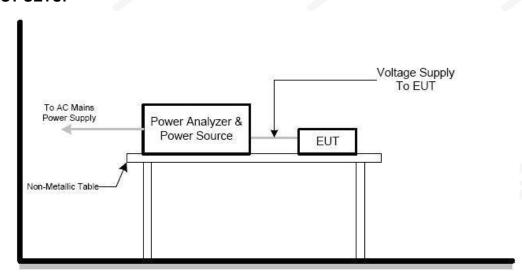



3.4.5 TEST RESULTS

EUT: Smart Phone Operator: STAR

Test category: IEC 61000-3-3 Ed3.1:2017 Model/Type:WP30 Pro
Measurement standard: IEC 61000-15 Ed2.0:2010 Serial number:
Test date:2023-08-07 Start time: 09:16:51 End time: 09:26:51

Test duration (sec):600

Describe:

Load Power :112.700 W Power Factor:0.939 Load Current : 0.244 mArms Crest Factor:4.082

Nominal Voltage : 229.99 Vrms

Test Result: pass Status: Test Completed

Psti and limit line European Limits

09:26:51

Result:

| T-max (ms): | 0.00 | Test limit (ms): | 500.00 | Pass |
|-------------------------------|------|------------------|--------|------|
| Highest dc (%): | 0.00 | Test limit (%): | 3.30 | Pass |
| Highest dmax (%): | 0.00 | Test limit (%): | 4.00 | Pass |
| Highest Pst (10 min. period): | 0.00 | Test limit: | 1.00 | Pass |



4. EMC IMMUNITY TEST

4.1 STANDARD COMPLIANCE/SERVRITY LEVEL/CRITERIA

| Tests | TEST SPECIFICATION | Test Mode | Perform. |
|--|--|---------------------------------|----------|
| Standard No. | TEST SPECIFICATION | Test Ports | Criteria |
| 1. ESD IEC/EN 61000-4-2 | 8KV air discharge 4KV contact discharge | Direct Mode | В |
| IEC/EN 61000-4-2 | 4KV HCP discharge 4KV VCP discharge | Indirect Mode | В |
| 2. RS IEC/EN 61000-4-3 | 80 MHz - 1000 MHz,1800MHz,2600MHz,3500MHz,50 00MHz, 1000Hz, 80%, AM modulated | Enclosure | А |
| 0 FFT/D | 5/50ns Tr/Th 5KHz Repetition Freq. | Power Supply Port | В |
| 3. EFT/Burst IEC/EN 61000-4-4 | 5/50ns Tr/Th 5KHz Repetition Freq. | CTL/Signal Data Line Port | В |
| 4. Surges | 1.2/50(8/20) Tr/Th us | L-N | В |
| IEC/EN 61000-4-5 | 1.2/50(8/20) Tr/Th us | L-PE N-PE | В |
| | 0.15 MHz to 80 MHz, 1000Hz 80 % , AM Modulated 150Ω source impedance | CTL/Signal Port | Α |
| 5. Injected Current IEC/EN 61000-4-6 | 0.15 MHz to 80 MHz, 1000Hz 80 %, AM Modulated 150Ω source impedance | AC Power Port | А |
| | 0.15 MHz to 80 MHz, 1000Hz 80 % , AM Modulated 150Ω source impedance | DC Power Port | А |
| 6. Power Frequency Magnetic Field IEC/EN 61000-4-8 | 50 Hz, | Enclosure | A |
| 7. Volt. Interruptions | Voltage dip 100% | | В |
| Volt. Dips | Voltage dip 30% | AC Power Port | С |
| IEC/EN 61000-4-11 | Interruption 100% | | С |

Page 31 of 62



4.2 GENERAL PERFORMANCE CRITERIA

According to **EN 55035** standard, the general performance criteria are as follows:

| | The equipment shall continue to operate as intended without operator | | | | | | |
|---|---|--|--|--|--|--|--|
| | intervention. No degradation of performance, loss of function or change of | | | | | | |
| | operating state is allowed below a performance level specified by the | | | | | | |
| | manufacturer when the equipment is used as intended. The performance level | | | | | | |
| Criterion A | may be replaced by a permissible loss of performance. If the minimum | | | | | | |
| | performance level or the permissible performance loss is not specified by the | | | | | | |
| | manufacturer, then either of these may be derived from the product description | | | | | | |
| and documentation, and by what the user may reasonably expect | | | | | | | |
| equipment if used as intended. | | | | | | | |
| | During the application of the disturbance, degradation of performance is | | | | | | |
| | allowed. However, no unintended change of actual operating state or stored | | | | | | |
| | data is allowed to persist after the test. | | | | | | |
| | After the test, the equipment shall continue to operate as intended without | | | | | | |
| | operator intervention; no degradation of performance or loss of function is | | | | | | |
| Criterion B | allowed, below a performance level specified by the manufacturer, when the | | | | | | |
| Criterion B | equipment is used as intended. The performance level may be replaced by a | | | | | | |
| | permissible loss of performance. | | | | | | |
| | If the minimum performance level (or the permissible performance loss), or | | | | | | |
| | recovery time, is not specified by the manufacturer, then either of these may be | | | | | | |
| | derived from the product description and documentation, and by what the user | | | | | | |
| | may reasonably expect from the equipment if used as intended. | | | | | | |
| | Loss of function is allowed, provided the function is self-recoverable, or can be | | | | | | |
| | restored by the operation of the controls by the user in accordance with the | | | | | | |
| Criterion C | manufacturer's instructions. A reboot or re-start operation is allowed. | | | | | | |
| | Information stored in non-volatile memory, or protected by a battery backup, | | | | | | |
| | shall not be lost. | | | | | | |
| | | | | | | | |

4.2.1 GENERAL PERFORMANCE CRITERIA TEST SETUP

The EUT tested system was configured as the statements of **2.2** or **2.3** unless otherwise a special operating condition is specified in the following during the testing.



4.3 ELECTROSTATIC DISCHARGE IMMUNITY TEST (ESD)

4.3.1 TEST SPECIFICATION

| Basic Standard: | IEC/EN 61000-4-2 |
|-----------------------|---|
| Discharge Impedance: | 330 ohm / 150 pF |
| Required Performance: | В |
| Diagharga Valtaga. | Air Discharge: 2KV/4KV/8KV (Direct) |
| Discharge Voltage: | Contact Discharge: 4KV (Direct/Indirect) |
| Polarity: | Positive & Negative |
| Number of Discharge: | Air Discharge: at least 10 times on each point Contact Discharge: at least 10 times on each point 20 times at each test point |
| Discharge Mode: | Single Discharge |
| Discharge Period: | 1 second minimum |

4.3.2 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manners:

 Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation

The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.

The time interval between two successive single discharges was at least 1 second.

The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meter from the EUT.

Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.

Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.

Vertical Coupling Plane (VCP):


The coupling plane of dimensions 0.5m x 0.5m, is placed parallel to and positioned at a distance 0.1m from the EUT, with the Discharge Electrode touching the coupling plane. The four faces of the EUT will be performed with electrostatic discharge. Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane. The four faces of the EUT will be performed with electrostatic discharge.

b. Air discharges at insulation surfaces of the EUT.It was at least ten single discharges with positive and negative at the same selected point.



4.3.3 TEST SETUP

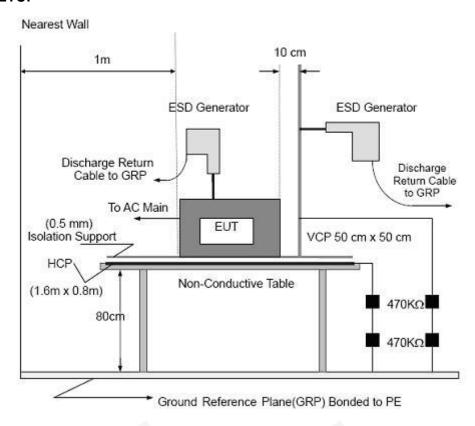

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meter high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k Ω total impedance. The equipment under test was installed in a representative system as described in section 7 of IEC /EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 0.8-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC/EN 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1 meter thickness. The GRP was consisted of a sheet of aluminum that is at least 0.25mm thick, and extended at least 0.5 meter from the EUT on all sides.





4.3.4 TEST RESULTS

| Temperature: | 25.0℃ | Relative Humidity: | 49% |
|--------------|------------|--------------------|-------------------------|
| Pressure: | 1017.8hPa | i lest voltage. | AC 230V/50Hz DC 8.8V |
| Test Mode: | Mode 1/2/3 | Test Date: | 2023.09.19 |

Page 35 of 62

| Discharge Level/KV | Polarity | Test Points | Contact Discharge | Air Discharge | Criterion | Test Result |
|-----------------------|----------|-------------|----------------------|---------------|-----------|----------------|
| 2,4 | +/- | HCP/VCP | Note1 | NA | В | Α |
| 2,4 | +/- | Green Dot | Note1 | NA | В | В |
| 2,4,8 | +/- | Red Dot | NA | Note1 | В | Α |

Note1 : The EUT function was correct during the test.

Note2 : Red Dot —Air Discharged

Green Dot —Contact Discharged





The Photo for Discharge Points of EUT














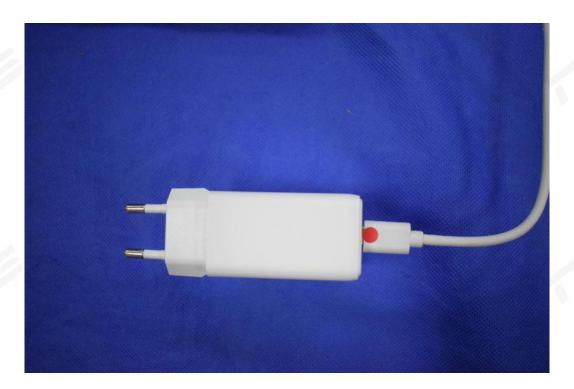



4.4 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RS)

4.4.1 TEST SPECIFICATION

| IEC/EN 61000-4-3 |
|---|
| A |
| 80 MHz-1000 MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz |
| 80 MHz; 120 MHz; 160 MHz; 230 MHz; 434 MHz; 460 MHz; 600 MHz; 863 MHz and 900 MHz |
| 3 V/m |
| 1kHz Sine Wave, 80%, AM Modulation |
| 1 % of fundamental |
| Horizontal and Vertical |
| 3 m |
| 1.5 m |
| 3s |
| |


4.4.2 TEST PROCEDURE

- a. The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- b. The frequency range is swept from 80 MHz to 1000 MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz, with the signal 80% amplitude modulated with a 1kHz sine-wave. The rate of sweep did not exceed 3s, where the frequency range is swept incrementally, the step size was 1% of preceding frequency value.
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- e. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.




4.4.3 TEST SETUP

(A) RS Test Set-Up Frequency Below 1GHz

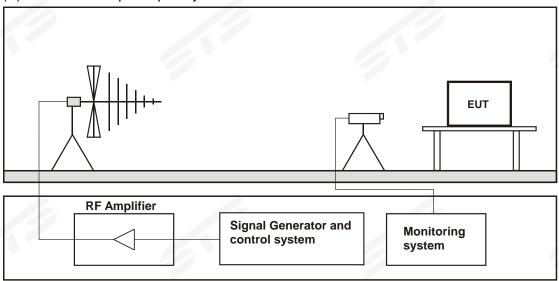

(B) RS Test Set-Up Frequency Above 1GHz

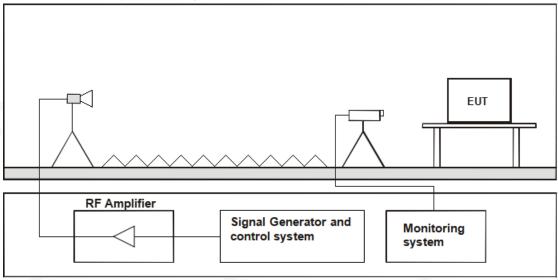

Note:

TABLE-TOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-3 was placed on a non-conductive table 0.8 meter in height. The system under test was connected to the power and signal wire according to the relevant installation instructions.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-3 was placed on a non-conductive wood support 0.1 meter in height. The system under test was connected to the power and signal wire according to the relevant installation instructions.





4.4.4 TEST RESULTS

| Temperature: | 24.4 ℃ | Relative Humidity: | 50% |
|-----------------|--------------------------|--------------------|------------|
| I IEST MOITAGE. | AC 230V/50Hz DC 8.87V | Test Date: | 2023.08.07 |
| Test Mode: | Mode 1/2 | | |

| Frequency Range (MHz) | RF Field Position | R.F. Field Strength | Azimuth | Perform. Criteria | Results | Judgement |
|--------------------------|----------------------|--|---------|----------------------|------------|-----------|
| | | | Front | | | |
| 000411- 40000411- | | 3 V/m (rms) | Rear | Δ. | | DACC |
| 80MHz - 1000MHz | H/V | AM Modulated 1000Hz, 80% | Left | Α | Α | PASS |
| 1 | | | Right | | | 1 |
| | | | Front | | | |
| 1900MLI- | H/V | 3 V/m (rms) AM Modulated | Rear | А | Α | PASS |
| 1800MHz | H / V | 1000Hz, 80% | Left | , A | A | PASS |
| | | | Right | | | |
| A. | 00MHz H / V | 3 V/m (rms) AM Modulated 1000Hz, 80% | Front | - A | | |
| 2000MH- | | | Rear | | А | PASS |
| 2600IVIH2 | | | Left | | | |
| | | | Right | | | |
| | | | Front | | | |
| 2500MIL | 11/1/ | 3 V/m (rms) | Rear | | ۸ | DAGG |
| 3500MHz | H/V | AM Modulated 1000Hz, 80% | Left | A | Α | PASS |
| | | | Right | | | |
| 1 | 100 | | Front | - A | <i>d</i> . | |
| 5000MHz | 11/2/ | 3 V/m (rms) | Rear | | А | PASS |
| | H/V | AM Modulated 1000Hz, 80% | Left | | | |
| | | | Right | | | |



4.5 ELECTRICAL FAST TRANSIENT (EFT)

4.5.1 TEST SPECIFICATION

| and the second s | | |
|--|-------------------------------|---|
| Basic Standard: | IEC/EN 61000-4-4 | |
| Required Performance: | В | 9 |
| Test Voltage: | Power Line: 1 KV | |
| | Signal/Control Line: 0.5 KV | |
| | DC network power port: 0.5 KV | |
| Polarity: | Positive & Negative | |
| Impulse Frequency: | 5 kHz | |
| Impulse Wave shape : | 5/50 ns | |
| Burst Duration: | 15ms | |
| Burst Period: | 300ms | |
| Test Duration: | Not less than 1 min | |

4.5.2 TEST PROCEDURE


The ground reference plane shall be a metallic sheet (copper or aluminum) of 0.25 mm minimum thickness; other metallic materials may be used, but they shall have at least 0.65 mm minimum thickness.


The other conditions required in the following manners:

- a. The length of power cord between the coupling device and the EUT should not exceed 1 meter.
- b. Both positive and negative polarity discharges were applied.
- c. The duration time of each test sequential was 1 minutes.



4.5.3 TEST SETUP

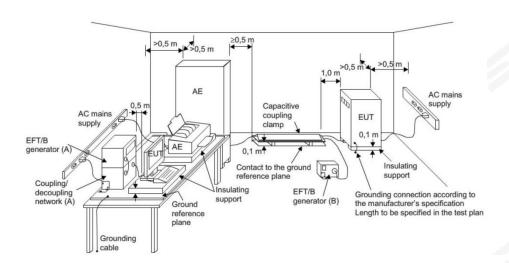

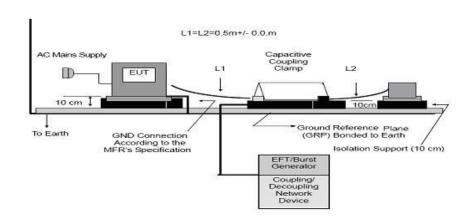

Report No.:STS2308301E01



Note:

TABLE-TOP EQUIPMENT

- a. Table-top equipment and equipment normally mounted on ceilings or walls as well as built-in equipment shall be tested with the EUT located (0.1 \pm 0.01) m above the ground reference plane.
- b. Testing of large table-top equipment or multiple systems can be performed on the floor; maintaining the same distances as for the test setup of table-top equipment.
- c. The test generator and the coupling/decoupling network shall be bonded to the ground reference plane.
- d. The ground reference plane shall be a metallic sheet (copper or aluminum) of 0.25mm minimum thickness; other metallic materials may be used, but they shall have at least 0.65 mm minimum thickness.
- e. The minimum size of the ground reference plane is 0.8m x 1m. The actual size depends on the dimension of the EUT.
- [†]. The ground reference plane shall project beyond the EUT by at least 0.1m on all sides.
- 9. The ground reference plane shall be connected to the earth (PE) for safety reasons.
- h. The EUT shall be arranged and connected to satisfy its functional requirements according to the equipment installation specifications.
- i. The minimum distance between the EUT and all other conductive structures (including the generator, AE and the walls of a shielded room), except the ground reference plane, shall be more than 0.5m.
- j. All cables to the EUT shall be placed on the insulation support 0.1m above the ground reference plane. Cables not subject to electrical fast transients shall be routed as far as possible from the cable under test to minimize the coupling between the cables.
- k. The EUT shall be connected to the earth system in accordance with the manufacturer's installation specifications; no additional earth connections are allowed.
- I. The connection impedance of the coupling/decoupling network earth cables to the ground reference plane and all connectors shall provide a low inductance.
- m. Either a direct coupling network or a capacitive clamp shall be used for the application of the test voltages. The test voltages shall be coupled to all of the EUT ports in turn including those between two units of equipment involved in the test, unless the length of the interconnecting cable makes it impossible to test.

FLOOR-STANDING EQUIPMENT

When using the coupling clamp, the minimum distance between the coupling plates and all other conductive surfaces (including the generator), except the ground reference plane beneath the coupling clamp and beneath the EUT, shall be at least 0.5m.

The distance between any coupling devices and the EUT shall be (0.5 - 0/+0.1) m for tabletop equipment testing, and (1.0 ± 0.1) m for floor standing equipment, unless otherwise specified in product standards. When it is not physically possible to apply the distances mentioned above, other distances can be used and shall be recorded in the test report.

The cable between the EUT and the coupling device, if detachable, shall be as short as possible to comply with the requirements of this clause. If the manufacturer provides a cable exceeding the distance between the coupling device and the point of only of the EUT, the excess length of this cable shall be bundled and situated at a distance of 0.1m above the ground reference plane. When a capacitive clamp is used as a coupling device, the excess cable length shall be bundled at the AE side.

Parts of the EUT with interconnecting cables of a length less than 3m, which are not tested, shall be placed on the insulating support. The parts of the EUT shall have a distance of 0.5m between them. Excess cable length shall be bundled.





4.5.4 TEST RESULTS

| Temperature: | 25.4℃ | Relative Humidity: | 50% |
|---------------|--------------|--------------------|------------|
| Test Voltage: | AC 230V/50Hz | Test Date: | 2023.08.07 |
| Test Mode: | Mode 1/2/3 | | |

| Coupling Line | | Test level Perform. Criteria | | Results | Judgement |
|---------------|-----------------|------------------------------|-----|---------|-----------|
| L | | ±1KV | | А | PASS |
| N PE | N | ±1KV | | Α | PASS |
| | PE | N/A | | N/A | N/A |
| AC line | L+N | ±1KV | 100 | А | PASS |
| | L+PE | N/A | В | N/A | N/A |
| | N+PE | N/A | | N/A | N/A |
| | L+N+PE | N/A | | N/A | N/A |
| DC network | power port Line | N/A | | N/A | N/A |
| Sigr | nal Line | N/A | | N/A | N/A |

Note: 1) N/A - denotes test is not applicable in this test report.



4.6 SURGE TESTING

4.6.1 TEST SPECIFICATION


| Basic Standard: | IEC/EN 61000-4-5 |
|------------------------|---|
| Required Performance: | В |
| Wave-Shape: | Combination Wave |
| | 1.2/50us Open Circuit Voltage |
| Test Voltage: | Power line ~ line to line: 1 KV |
| | line to ground: 2 KV |
| | Telecommunication line: 0.5 KV |
| | DC network power port: 0.5 KV |
| Surge Input/Output: | L-N, L-PE, N-PE |
| Generator Source: | (L-N)2 ohm between networks |
| Impedance: | (L-PE, N-PE)12 ohm between network and ground |
| Polarity: | Positive/Negative |
| Phase Angle: | 0°/90°/180°/270° |
| Pulse Repetition Rate: | 1 time / min. (maximum) |
| Number of Tests: | 5 positive and 5 negative at selected points |

4.6.2 TEST PROCEDURE

- a. For EUT power supply:
 - The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2meter in length (or shorter).
- b. For test applied to unshielded unsymmetrical operated interconnection lines of EUT: The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meter in length (or shorter).



4.6.3 TEST SETUP

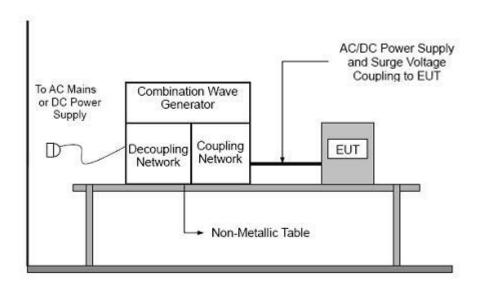





4.6.4 TEST RESULTS

| Temperature: | 24.4 ℃ | Relative Humidity: | 54% |
|---------------|---------------|--------------------|------------|
| Test Voltage: | AC 230V/50Hz | Test Date: | 2023.08.07 |
| Test Mode: | Mode 1/2/3 | | |

| | | | | Te | | | Test level | | | | | | |
|--------|--------|--------|----------|-----|-------------|---|----------------|--|------|---|----|-----------|--------|
| C | Coupli | ing Li | ine | 0.5 | 0.5 KV 1 KV | | 1 KV 2 KV 4 KV | | 1 KV | | KV | Criterion | Result |
| | | | | + | - | + | - | + | - | + | - | | |
| | | | 0° | | | Α | Α | | | | | | |
| | } L- | NI | 90° | | | Α | Α | | | | | | PASS |
| | | IN | 180° | | | Α | Α | | | | | | FASS |
| 1 | | | 270° | | ŀ | Α | Α | | | | | | |
| | | | 0° | | | | | | | | | 7 | |
| AC | | 90° | | | | | | | | | | | |
| line | L-r | | 180° | | | | | | | | | | |
| | | | 270° | | | | | | | | | В | |
| | | | 0° | | | | | | | | | | |
| | N-P | _ | 90° | | | | | | | | | | |
| | IN-P | ᄃ | 180° | | | | | | | | | | |
| 1 | | | 270° | | | | | | | | | | |
| Signal | Lina | Li | ne-Line | | | | | | | | | | |
| Signal | LINE | Line | e-Ground | | | | | The state of the s | | | | | |
| | DC | Line | | | | | | | | | | | |

Note: 1) N/A - denotes test is not applicable in this test report.



4.7 CONDUCTED RADIO FREQUENCY DISTURBANCES (CS)

4.7.1 TEST SPECIFICATION

| Basic Standard: | IEC/EN 61000-4-6 |
|---|--|
| Required Performance: | A |
| Test Frequency Range: | 0.15 MHz-80 MHz |
| Primary Function Of Telephony Test Frequencies: | 0.2 MHz; 1 MHz; 7.1 MHz; 13.56 MHz; 21 MHz; 27.12 MHz and 40.68 MHz |
| Field Strength: | 0.15 MHz - 10 MHz, 3V |
| | 10 MHz - 30 MHz, 3V to 1V |
| | 30 MHz - 80 MHz, 1V |
| Modulation: | 1kHz Sine Wave, 80%, AM Modulation |
| Frequency Step: | 1 % of fundamental |
| Dwell Time: | 3s |

4.7.2 TEST PROCEDURE

The EUT shall be tested within its intended operating and climatic conditions.

The test shell performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50-ohm load resistor.


The frequency range was swept from 150 kHz to 10 MHz, 10 MHz to 30 MHz, 30 MHz to 80 MHz using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal was modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. The sweep rate was 3s. Where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value from 150 kHz to 80MHz.

The dwell time at each frequency was less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies such as clock frequency (ies) and harmonics or frequencies of dominant interest, was analyzed separately.

Attempts was made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.



4.7.3 TEST SETUP

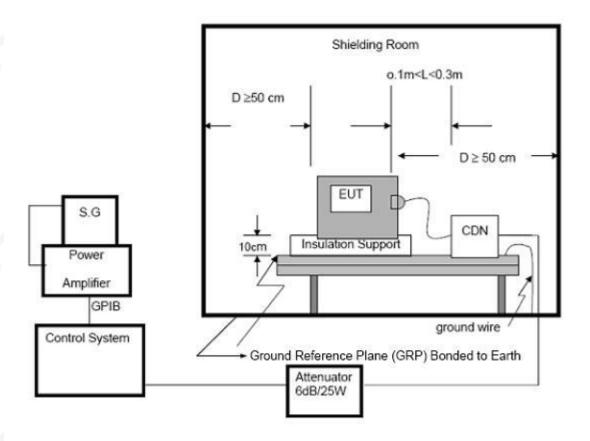

NOTE:

FLOOR-STANDING EQUIPMENT

The equipment to be tested is placed on an insulating support of 0.1 meter height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meter and 0.3 meter from the projected geometry of the EUT on the ground reference plane.





4.7.4 TEST RESULTS

| Temperature: | 24.4℃ | Relative Humidity: | 50% |
|---------------|--------------|--------------------|------------|
| Test Voltage: | AC 230V/50Hz | Test Date: | 2023.08.07 |
| Test Mode: | Mode 1/2 | | |

| Test Ports | Freq. Range | Field Oter cette | Perform. | Desulte | l da a a a a a t |
|----------------|-------------|-------------------------------|----------|---------|------------------|
| (Mode) | MHz) | Field Strength | Criteria | Results | Judgement |
| | 0.15 - 10 | 3V(rms) AM Modulated | | | |
| | 0.1.0 | 1000Hz, 80% | | | |
| Input/ Output | 10 - 30 | 3V to 1V(rms) AM Modulated | Α | А | PASS |
| AC. Power Port | | 1000Hz, 80% | A | , | 17.00 |
| | 30 - 80 | 1V(rms) AM Modulated | | | |
| | | 1000Hz, 80% | | | |
| | 0.15 - 10 | 3V(rms) AM Modulated | | N/A | N/A |
| | | 1000Hz, 80% | | | |
| Input/ Output | 10 - 30 | 3V to 1V(rms) AM Modulated | N/A | | |
| DC. Power Port | | 1000Hz, 80% | 13/7 | | |
| | 30 - 80 | 1V(rms) AM Modulated | * | | |
| | | 1000Hz, 80% | | | |
| | 0.15 - 10 | 3V(rms) AM Modulated | | N/A | N/A |
| | | 1000Hz, 80% | | | |
| Signal Line | 10 - 30 | 3V to 1V(rms) AM Modulated | N/A | | |
| * | | 1000Hz, 80% | | 4 | |
| | 30 - 80 | 1V(rms) AM Modulated | | | |
| | | 1000Hz, 80% | | | |

Note: 1) N/A - denotes test is not applicable in this test report.



4.8 POWER FREQUENCY MAGNETIC FIELD TESTING

4.8.1 TEST SPECIFICATION


| Basic Standard: | IEC/EN 61000-4-8 |
|-----------------------|-------------------------|
| Required Performance: | A |
| Frequency Range: | 50Hz |
| Field Strength: | 1 A/m |
| Observation Time: | 5 minute |
| Inductance Coil: | Rectangular type, 1mx1m |

4.8.2 TEST PROCEDURE

- a. The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- b. The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.



4.8.3 TEST SETUP

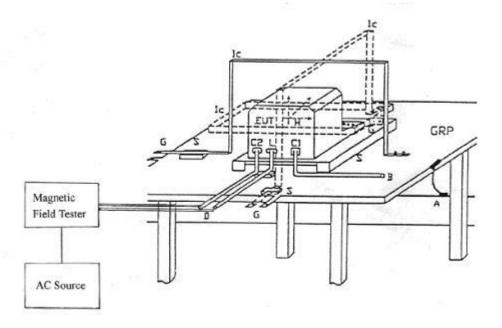

Note:

TABLE-TOP EQUIPMENT

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

FLOOR-STANDING EQUIPMENT

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 % of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.



4.8.4 TEST RESULTS

| Temperature: | 24.4°C | Relative Humidity: | 50% |
|---------------|--------------|--------------------|------------|
| Test Voltage: | AC 230V/50Hz | Test Date: | 2023.08.07 |
| Test Mode: | Mode 1/2/3 | | 7 |

Page 54 of 62

| Test Mode | Test Level | inductive coil | Duration (s) | Perform Criteria | Results | Judgement |
|-----------|------------|----------------|-----------------|---------------------|---------|-----------|
| Enclosure | 1A/m | Х | 300 | А | Α | PASS |
| Enclosure | 1A/m | Y | 300 | Α | А | PASS |
| Enclosure | 1A/m | Z | 300 | Α | А | PASS |



Report No.:STS2308301E01

4.9 VOLTAGE INTERRUPTION/DIPS TESTING (DIPS)


4.9.1 TEST SPECIFICATION

| Basic Standard: | IEC/EN 61000-4-11 | | |
|-------------------------|--|--|--|
| Required Performance: | B (For 100% Voltage Dips, 0.5 Cycle) | | |
| | C (For 30% Voltage Dips, 25 Cycles) | | |
| | C (For 100% Voltage Interruptions, 250 Cycles) | | |
| Test Duration Time: | Minimum 3 test events in sequence | | |
| Interval between Event: | Minimum 10 seconds | | |
| Phase Angle: | 0°/45°/90°/135°/180°/225°/270°/315°/360° | | |
| Test Cycle: | 3 times | | |

4.9.2 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

4.9.3 TEST SETUP

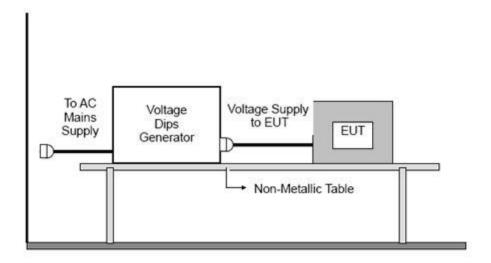





4.9.4 TEST RESULTS


| Temperature: | 24.4 ℃ | Relative Humidity: | 50% |
|---------------|---------------|--------------------|------------|
| Test Voltage: | AC 230V/50Hz | Test Date: | 2023.08.07 |
| Test Mode: | Mode 1/2/3 | 7 | 9 |

| Voltage Reduction | Duration (ms) | Perform Criteria | Results | Judgement |
|----------------------|------------------|---------------------|---------|-----------|
| Interruption 0% | 0.5 | В | А | PASS |
| Voltage dip 70% | 25 | С | А | PASS |
| Interruption 0% | 250 | С | В | PASS |



APPENDIX 1 - TEST SETUP

RE (30 - 1000 MHz)

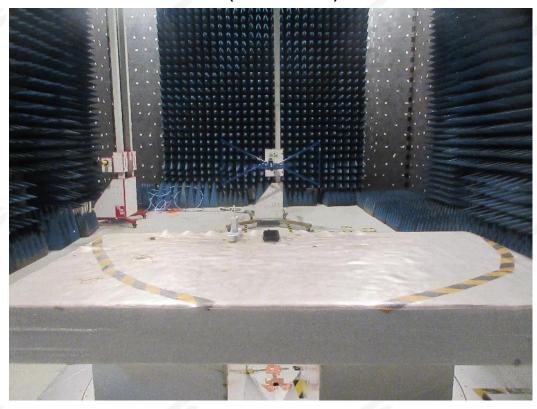

RE (1000 - 6000 MHz)





CE



Harmonic&Flick





SURGE



EFT





DIPS




ESD






cs

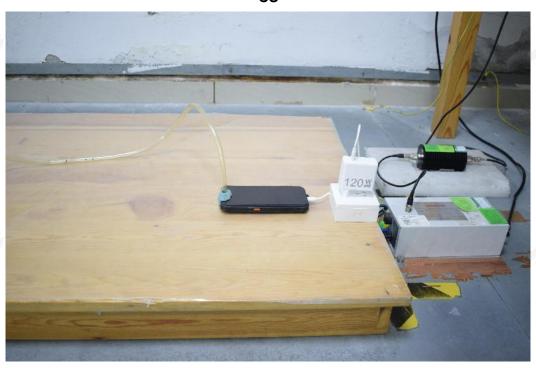

RS (80 - 1000 MHz)

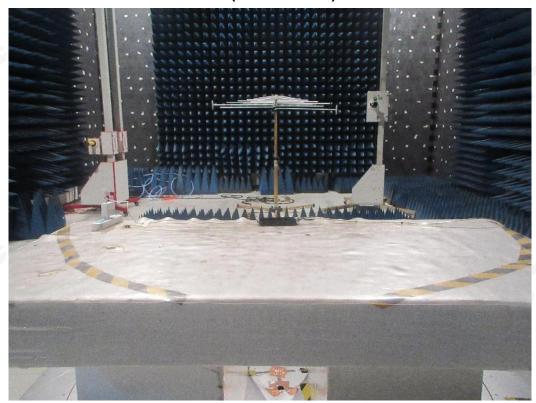



RS (1000 - 5000 MHz)



* * * * * END OF THE REPORT * * * *