

TEST REPORT

Product: Blackhead Remover

Model No.: XPRE037

Trade mark: N/A

Report No.: TCT180326E027

Issued Date: Nov. 10, 2017

Issued for:

Shenzhen YiGuangNian Innovation Technology Co., Ltd.

Room868, Block AB, Tianjing Building, Che Gong Miao Tian An Digital City,
Futian District, Shenzhen, Guangdong, China

Issued By:

Shenzhen TCT Testing Technology Co., Ltd.

1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,
Shenzhen, Guangdong, China

TEL: +86-755-27673339 FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen TCT Testing Technology Co., Ltd. This document may be altered or revised by Shenzhen TCT Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.






TABLE OF CONTENTS

1.	Test	Certification			3
2.	Test	Result Summary	<u> </u>	<u> </u>	4
3.	EUT	Description			5
4.	Test	Methodology			6
	4.1.	Decision of Final Test Mode	(0)	<u>) </u>	6
	4.2.	EUT System Operation			6
5.	Setu	p of Equipment under Test			7
	5.1.	Description of Support Units	(C)	(,C)	7
	5.2.	Configuration Of System Under Test			7
6.	Faci	lities and Accreditations			8
	6.1.	Facilities	(,0)	<u>)</u>	8
	6.2.	Measurement Uncertainty			8
7.	Emis	ssion Test			9
	7.1.	Conducted Emission	(6)	(6)	9
	7.2.	Discontinuous Disturbance			14
	7.3.	Disturbance Power Measurement			16
	7.4.	Radiated Emission	(c)	<u> </u>	18
	7.5.	Harmonic Current Emissions		/	24
		Flicker and Voltage Fluctuation			
8.	lmm	unity Test			27
	8.1.	General Performance Criteria Descri	ption		27
	8.2.	Electrostatic Discharge (ESD)			28
	8.3.	Radio-frequency Electromagnetic Fig	eld Amplitude Mod	ulated (RS)	31
	8.4.	Electrical Fast Transient (EFT)		<u>/</u>	34
	8.5.	Surges			37
	8.6.	Block Diagram of Test Setup			38
	8.7.	Radio-frequency Continuous Condu	cted (CS)	(0)	39
	8.8.	Voltage Dip & Voltage Interruptions			41
9.	Phot	tographs of Test Configuration	, ,	·····	43
10.	Phot	tographs of EUT	(C)	<u>) </u>	47



1. Test Certification

Product:	Blackhead Remover					
Model No.:	XPRE037					
Applicant:	Shenzhen YiGuangNian Innovation Technology Co., Ltd.					
Address:	Room868, Block AB, Tianjing Building, Che Gong Miao Tian An Digital City, Futian District, Shenzhen, Guangdong, China					
Manufacturer: Shenzhen YiGuangNian Innovation Technology Co., Ltd.						
Address:	Room868, Block AB, Tianjing Building, Che Gong Miao Tian An Digital City, Futian District, Shenzhen, Guangdong, China					
Test Voltage:	DC 5 V (Adapter Input AC 230 V/ 50 Hz), DC 3.7 V					
Date of Test:	Nov. 07, 2017 ~ Nov. 09, 2017					
Applicable Standards:	EN 55014-1:2006+A1:2009+A2:2011 EN 55014-2:2015 EN 61000-3-2:2014 EN 61000-3-3:2013					

The above equipment has been tested by Shenzhen TCT Testing Technology Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



2. Test Result Summary

	Emission						
Test Method	Item	Result					
	Conducted Emission	Pass					
EN 55014-1:2006+A1:2009 +A2:2011	Discontinuous Disturbance	N/A					
	Disturbance Power Measurement	N/A					
	Radiated Emission	Pass					
EN61000-3-2:2014	Harmonic Current Emissions	N/A					
EN 61000-3-3:2013	Voltage Fluctuations & Flicker	Pass					

Immunity (EN 55014-2:2015)						
Test Method	Item	Result				
EN 61000-4-2:2009	Electrostatic Discharge (ESD)	Pass				
EN 61000-4-3:2006+ A1:2008+A2:2010	Radio-frequency Electromagnetic Field Amplitude Modulated (RS)	Pass				
EN 61000-4-4:2012	Electrical Fast Transients (EFT)	Pass				
EN 61000-4-5:2014	Surges	Pass				
EN 61000-4-6:2014	Radio-frequency Continuous Conducted (CS)	Pass				
EN 61000-4-11:2004	Voltage Dips & Voltage Interruptions	Pass				

Note:

- 1. Pass: Test item meets the requirement.
- 2. Fail: Test item does not meet the requirement.
- 3. N/A: Test case does not apply to the test object.
- 4. The test result judgment is decided by the limit of test standard.
- 5. The information of measurement uncertainty is available upon the customer's request.

Page 4 of 60



3. EUT Description

Product Name:	Blackhead	Blackhead Remover						
Model No.:	XPRE037	XPRE037 Battery Capacity: 800 mAh, DC 3.7 V, 2.96 Wh						
Product Parameter:	: Battery Ca							
AC Mains:	☐Shielded ☑Not app	d ⊡Unshi licable ⊡l	elded,	Detachable	☐Un-deta	achable		
USB Line:	Shielde		elded, 🖂	Detachable m	Un-deta	achable		
Control Line:		d Unshi		Detachable	□Un-deta	achable		



4. Test Methodology

4.1. Decision of Final Test Mode

The EUT was tested together with the thereinafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were assessed:

Test Mode

Mode 1: Charging

Mode 2: Working

4.2. EUT System Operation

- 1. Set up EUT with the support equipments.
- 2. Make sure the EUT work normally during the test.



Page 6 of 60



Setup of Equipment under Test 5.

5.1. Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	ETA0U82CBC	RT10206CS/A E	1	SAMSUNG

Note:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. Configuration Of System Under Test

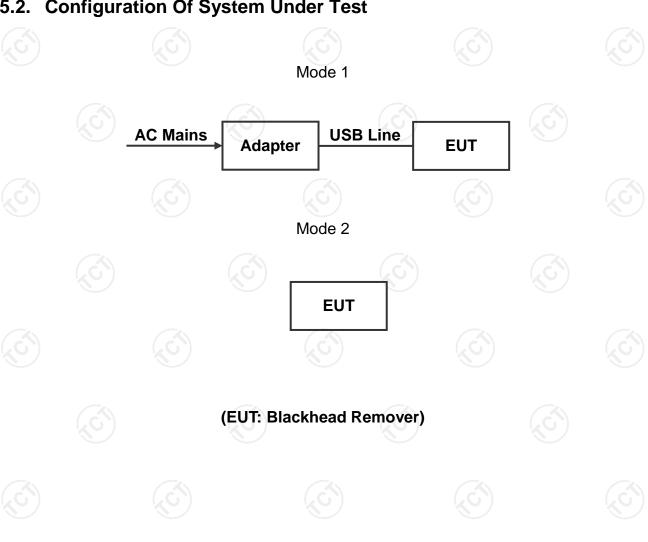

Page 7 of 60



Page 8 of 60

6. Facilities and Accreditations

6.1. Facilities

All measurement facilities used to collect the measurement data are located at TCT Lab.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	Item	MU
1.	Temperature	±0.1℃
2.	Humidity	±1.0 %
3.	Spurious Emissions, Conducted	$\pm 2.56~\mathrm{dB}$
4.	All Emissions, Radiated	±4.28 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.





7. Emission Test

7.1. Conducted Emission

7.1.1. Test Specification

Test Requirement:	EN 55014-1	
Test Method:	EN 55014-1	
Frequency Range:	150 kHz to 30 MHz	

7.1.2. Limits

Household appliances and equipment causing similar disturbances and regulation controls incorporation semiconductor devices

Frequency	At mains	terminals	At load terminals and additional terminals		
(MHz)	Quasi-peak Average ^a dB(uV) dB(uV)		Quasi-peak dB(uV)	Average ^a dB(uV)	
0.15 - 0.5	66-56	59-46	80	70	
0.5 - 5.0	56	46	74	64	
5.0 - 30.0	60	50	74	64	

a. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

Mains terminals of tools

Frequency	Rated mot not exceed	•	Rated mot above 700 veceeding	W and not	Rated motor power above 1000 W	
(MHz)	Quasi-peak dB(uV)	Average ^a dB(uV)	Quasi-peak dB(uV)	Average ^a dB(uV)	Quasi-peak dB(uV)	Average ^a dB(uV)
0.15 - 0.35	66-59	59-49	70-63	63-53	79-69	69-59
0.35 - 5.0	59	49	63	53	69	59
5.0 - 30.0	64	54	68	58	74	64

a. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

Note: The limits for the measurement with the average detector are tentative and may be modified after a period of experience.

Page 9 of 60



7.1.3. Test Instruments


Conducted Emission Shielding Room Test Site (843)							
Equipment Manufacturer Model Serial Number Calibration							
EMI Test Receiver	R&S	ESCS30	100139	Sep. 27, 2018			
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 27, 2018			

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.1.4. Test Method

Measurements were made on a ground plane that extends 1-meter minimum beyond all sides of the system under test. All power was connected to the system through Line Impedance Stabilization Networks (LISN). Conducted voltage measurements on mains lines were made at the output of the LISN. Conducted voltage on load terminals and additional terminals were made by using a 1500 Ω probe.

7.1.5. Block Diagram of Test Setup

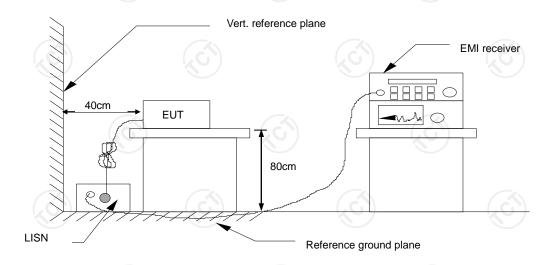

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

Page 10 of 60



7.1.6. Test Results

Test Environment:	Temp.:	25	$^{\circ}\!\mathbb{C}$	Humid.:	55 %	Press.:	96 kPa
Test Mode:	Mode 1						
Test Voltage:	DC 5 V (Adap	ter Inp	ut AC 230 \	V/ 50 Hz)		
Test Result:	Pass	.)					

Note:

L1 = Live Line / N = Neutral Line

Freq. = Emission frequency in MHz

Reading level $(dB\mu V)$ = Receiver reading

Correct Factor (dB) = LISN factor + Cable loss

Measurement ($dB\mu V$) = Reading level ($dB\mu V$) + Corr. Factor (dB)

Limit ($dB\mu V$) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)


Q.P. =Quasi-Peak AVG =average

Page 11 of 60

^{*} is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.



Please refer to following diagram for individual

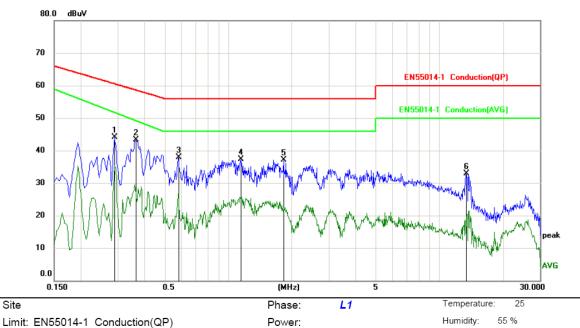

Limit: EN55014-1 Conduction(QP)


Mode: Charging

Note: DC 5V(Adapter Input AC 230V/50Hz)

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBu∀	dB	Detector	Comment
1	0.2895	32.75	11.43	44.18	60.54	-16.36	peak	
2 *	0.3660	31.85	11.38	43.23	58.59	-15.36	peak	
3	0.5820	26.60	11.28	37.88	56.00	-18.12	peak	
4	1.1490	26.05	11.28	37.33	56.00	-18.67	peak	
5	1.8330	25.53	11.61	37.14	56.00	-18.86	peak	
6	13.3575	21.41	11.55	32.96	60.00	-27.04	peak	





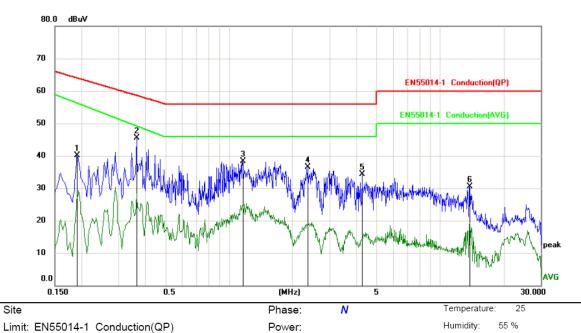

Limit: EN55014-1 Conduction(QP)

Mode: Charging

Note: DC 5V(Adapter Input AC 230V/50Hz)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBu∀	dB	Detector	Comment
1		0.1905	28.73	11.47	40.20	64.01	-23.81	peak	
2	*	0.3660	34.08	11.38	45.46	58.59	-13.13	peak	
3		1.1625	26.94	11.28	38.22	56.00	-17.78	peak	
4		2.3685	24.96	11.56	36.52	56.00	-19.48	peak	
5		4.2900	23.34	10.88	34.22	56.00	-21.78	peak	
6		13.8120	18.91	11.60	30.51	60.00	-29.49	peak	





7.2. Discontinuous Disturbance

7.2.1. Test Specification

Test Requirement:	EN 55014-1		
Test Method:	EN 55014-1		
Frequency Range:	150 kHz to 30 MHz	(c)	

7.2.2. Limits

The click limit Lq is determined from the formula:

 $Lq = L + \Delta L$

which the limits L for continuous disturbance shall be increased (see table 1): which corresponding to the click rate N shall be calculated the amount ΔL by

 $\Delta L = 44 \text{ dB for N} < 0.2$

 $\Delta L = [20 \log(30/N)] dB \text{ for } 0.2 \le N < 30$

Table 1

Frequency	At mians	terminals	At load terminals and additional terminals		
(MHz)	Quasi-peak dB(uV)	Average dB(uV)	Quasi-peak dB(uV)	Average dB(uV)	
0.15 - 0.35	66-56	59-46	80	70	
0.35 - 5.0	56	46	74	64	
5.0 - 30.0	60	50	74	64	

7.2.3. Test Instruments

Discontinuous Disturbance Shielding Room Test Site (843)							
Equipment	Manufacturer	Model	Serial Number	Calibration Due			
Clicker	Schwarzbeck	DIA1512D	21554	Sep. 27, 2018			
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 27, 2018			

Note: The calibration interval of the above test instruments is 12 months and the calibration can be traced to international system unit (SI).


7.2.4. Test Method

Measurement of a disturbance, the amplitude of which exceeds the quasi-peak limit of continuous disturbance, the duration of which is not longer than 200 ms which is separated from a subsequent disturbance by at least 200 ms.

Page 14 of 60



7.2.5. Block Diagram of Test Setup

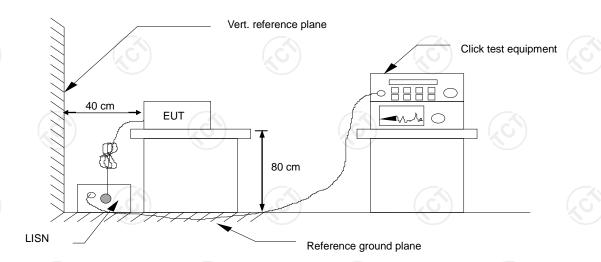

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.2.6. Test Results

Note: This test isn't applicable because the EUT doesn't have relative function.



Page 15 of 60



7.3. Disturbance Power Measurement

7.3.1. Test Specification

Test Requirement:	EN 55014-1		
Test Method:	EN 55014-1		
Frequency Range:	30 MHz to 300 MHz	(3)	

7.3.2. Limits

Frequency	Household ap similar ap	-	Rated motor power not exceeding 700 W		
(MHz)	Quasi-peak dB(pW)	Average ^a dB(pW)	Quasi-peak dB(pW)	Average ^a dB(pW)	
30 ~ 300	45-55	35-45	45-55	35-45	
Frequency	Rated motor 700 W and no 1000	ot exceeding	Rated motor power above 1000 W		
(MHz)	Quasi-peak dB(pW)	Average ^a dB(pW))	Quasi-peak dB(pW)	Average ^a dB(pW)	
30 ~ 300	49-59	55-65	55-65	35-45	

a. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

7.3.3. Test Instruments

Conducted Emission Shielding Room Test Site (843)							
Equipment	Manufacturer	Model	Serial Number	Calibration Due			
EMI Test Receiver	R&S	ESCS30	100139	Sep. 27, 2018			
Absorption Power Clamp	Da Ze technology CO.,LTD	ZN23201	0811	Sep. 27, 2018			

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


Page 16 of 60



7.3.4. Test Method

Measurements were made on a ground plane that extends 1-meter minimum beyond all sides of the system under test. All power was connected to the system through Line Impedance Stabilization Networks (LISN). The lead to be measured on is stretched in a straight line for a distance sufficient to accommodate the absorbing clamp, and to permit the necessary measuring adjustment of position for tuning. The clamp is placed around the lead so as to measure a quantity proportional to the disturbance on the lead.

7.3.5. Block Diagram of Test Setup

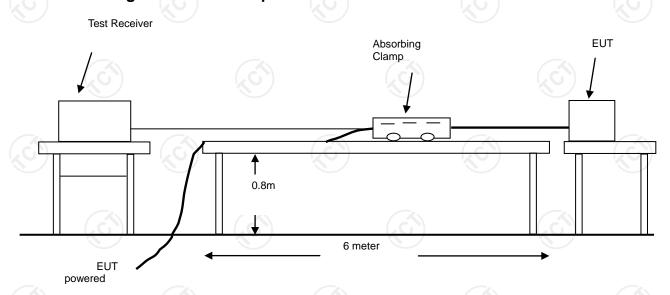

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.3.6. Test Results

Note: This test isn't applicable because the EUT doesn't have relative function.



Page 17 of 60



7.4. Radiated Emission

7.4.1. Test Specification

Test Requirement:	EN 55014-1	(C)	(C)
Test Method:	EN 55014-1		
Frequency Range:	30 MHz to 1000 MHz		
Measurement Distance:	3 m		
Antenna Polarization:	Horizontal & Vertical		

7.4.2. Limits

Frequency (MHz)	Limit (dBuV/m) (At 3m)
30 - 230	40
230 - 1000	47
Note: The lower limit shall apply at the transition f	frequency

7.4.3. Test Instruments

Radiated Emission Test Site (966)							
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due			
EMI Test Receiver	R&S	ESVD	100008	Sep. 27, 2018			
Spectrum Analyzer	R&S	FSEM	848597-001	Sep. 27, 2018			
Amplifier	HP	8447D	2727A05017	Sep. 27, 2018			
Amplifier	EM	EM30265	07032613	Sep. 27, 2018			
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 27, 2018			
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 27, 2018			

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


7.4.4. Test Method

Measurements were made in a 3-meter semi-anechoic chamber or Open Area Test Site that complies to CISPR 16. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3 meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All

Page 18 of 60



frequencies were investigated in both horizontal and vertical antenna polarity, where applicable. Block Diagram of Test Setup.

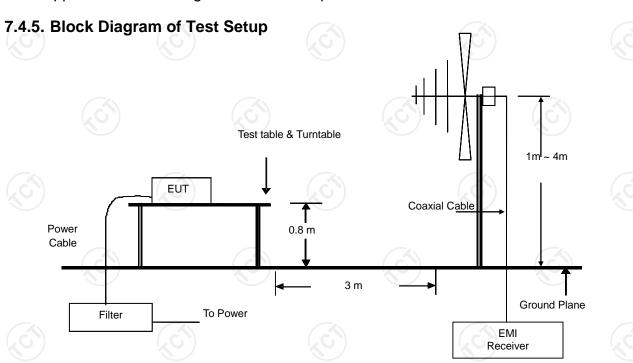

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.4.6. Test Results

Test Environment:	Temp.:	25 ℃	Humid.:	55 %	Press.:	96 kPa			
Test Mode:	Mode 1, N	Mode 1, Mode 2							
Test Voltage:	DC 5 V (A	DC 5 V (Adapter Input AC 230 V/ 50 Hz), DC 3.7 V							
Test Result:	Pass	\							

Note:

Freq. = Emission frequency in MHz

Reading level $(dB\mu V)$ = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss-AMP factor

Measurement ($dB\mu V$) = Reading level ($dB\mu V$) + Corr. Factor (dB)

Limit (dBµV) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) – Limits (dB μ V))

* is meaning the worst frequency has been tested in the test frequency range


Page 19 of 60



Humidity:

55 %

Please refer to following diagram for individual

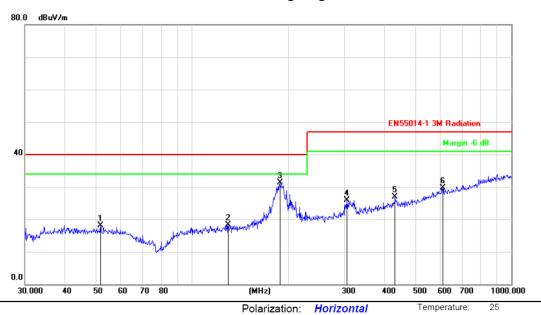


Site Limit: EN55014-1 3M Radiation

Mode: Charging

Note: DC 5V(Adapter Input AC 230V/50Hz)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment
1		51.6613	30.79	-12.77	18.02	40.00	-21.98	peak			
2	,	129.9225	33.97	-15.59	18.38	40.00	-21.62	peak			
3	* '	188.4122	44.78	-13.45	31.33	40.00	-8.67	peak			
4	;	305.6800	34.47	-8.53	25.94	47.00	-21.06	peak			
5	4	432.5457	31.75	-4.91	26.84	47.00	-20.16	peak			
6	(609.9215	30.44	-0.70	29.74	47.00	-17.26	peak			


Power:

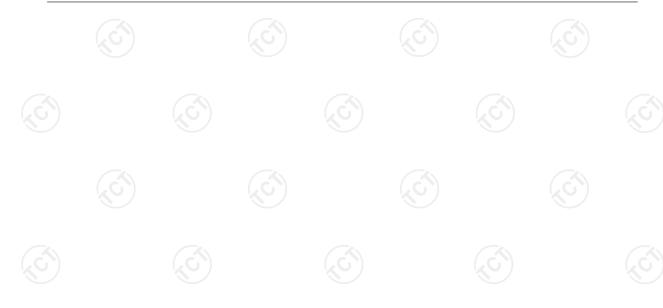



Humidity:

55 %

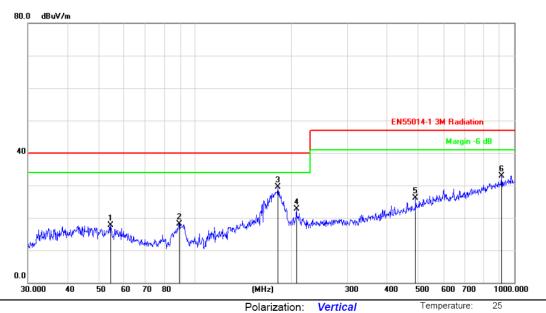

Site

Limit: EN55014-1 3M Radiation

Mode: Charging

Note: DC 5V(Adapter Input AC 230V/50Hz)


No.	Mk.	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment
1		54.4515	30.63	-12.99	17.64	40.00	-22.36	peak			
2		89.2762	32.13	-13.93	18.20	40.00	-21.80	peak			
3	*	181.9200	43.37	-13.84	29.53	40.00	-10.47	peak			
4		207.8500	35.20	-12.44	22.76	40.00	-17.24	peak			
5		490.7447	29.46	-3.35	26.11	47.00	-20.89	peak			
6		912.8618	29.42	3.44	32.86	47.00	-14.14	peak			

Power:





Humidity: 55 %

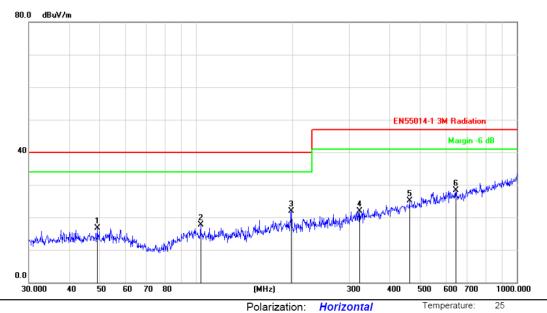

Power: DC 3.7V

Site

Limit: EN55014-1 3M Radiation


Mode: Working

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment
1		49.0144	29.42	-12.65	16.77	40.00	-23.23	peak			
2	1	103.0800	29.81	-12.07	17.74	40.00	-22.26	peak			
3	* 1	197.8925	34.80	-12.87	21.93	40.00	-18.07	peak			
4	3	323.3204	30.01	-8.02	21.99	47.00	-25.01	peak			
5	4	162.3455	29.20	-4.12	25.08	47.00	-21.92	peak			
6	6	345.1195	28.80	-0.43	28.37	47.00	-18.63	peak			





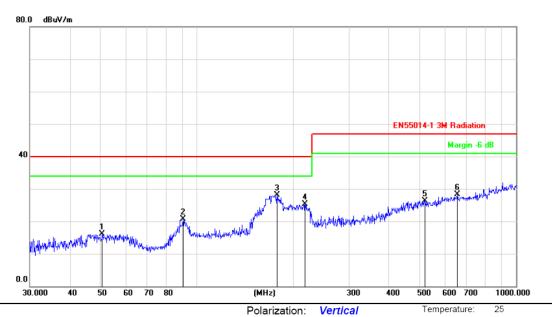

Site

Limit: EN55014-1 3M Radiation

Mode: Working

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment
1		50.5859	28.75	-12.67	16.08	40.00	-23.92	peak			
2		90.5374	34.24	-13.57	20.67	40.00	-19.33	peak			
3	*	178.1324	42.18	-14.08	28.10	40.00	-11.90	peak			
4		218.3085	37.24	-12.03	25.21	40.00	-14.79	peak			
5		519.0647	29.01	-2.66	26.35	47.00	-20.65	peak			
6		654.2318	28.64	-0.36	28.28	47.00	-18.72	peak			

Power:

DC 3.7V

Humidity:





7.5. Harmonic Current Emissions

7.5.1. Test Specification


Test Requirement:	EN 61000-3-2	(C)	(c)
Test Method:	EN 61000-3-2		
Limits:	Class A		

7.5.2. Test Instruments

Harmonic Test Equipment								
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due				
AC Power Supply	KIKUSUI	PCR4000M	UC002552	Sep. 28, 2018				
Harmonic/Flicker Analyzer	KIKUSUI	KHA1000	UD002324	Sep. 28, 2018				
Multi Outlet Unit	KIKUSUI	OT01-KHA	UF003026	Sep. 28, 2018				
Line Impedance Network	KIKUSUI	LIN1020JF	UC001738	Sep. 28, 2018				

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.5.3. Block Diagram of Test Setup

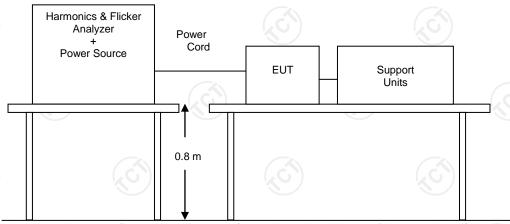

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.5.4. Test Results

Note: This test isn't applicable because the EUT doesn't have relative function.

Page 24 of 60



7.6. Flicker and Voltage Fluctuation

7.6.1. Test Specification

Test Requirement:	EN 61000-3-3	(c)	
Test Method:	EN 61000-3-3		

7.6.2. Limits

	Test Item Limit		Note				
)	Pst 1.0		Pst means short-term flicker indicator				
	Plt	0.65	Plt means long-term flicker indicator				
	Tdt (ms) 500		Tdt means maximum time that dt exceeds 3 %.				
	dmax (%)	4/6/7	Dmax means maximum relative voltage change.				
	dc (%)	3.3	Dc means relative steady-state voltage change.				

7.6.3. Test Instruments


	Flicker Test Equipment								
	Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due				
	AC Power Supply	KIKUSUI	PCR4000M	UC002552	Sep. 28, 2018				
)	Harmonic/Flicker Analyzer	KIKUSUI	KHA1000	UD002324	Sep. 28, 2018				
	Multi Outlet Unit	KIKUSUI	OT01-KHA	UF003026	Sep. 28, 2018				
Ī	Line Impedance Network	KIKUSUI	LIN1020JF	UC001738	Sep. 28, 2018				

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

Page 25 of 60



7.6.4. Block Diagram of Test Setup

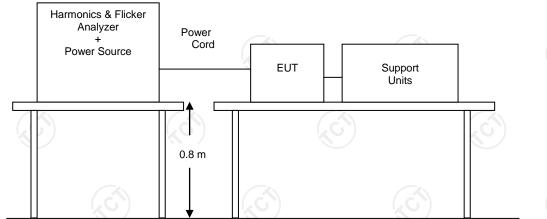

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.6.5. Test Results

Test Environment:	Temp.: 23 ℃	Humid.: 54 %	Press.:	96 kPa		
Test Mode:	Mode 1	//. <i></i>				
Test Voltage:	DC 5 V (Adapter Input AC 230 V/ 50 Hz)					
Test Result:	Pass					

Test Data of Voltage Fluctuation and Flicker

Final Test Result
Nominal Voltage
Nominal Frequency
Plt Test Duration
Flicker Margin
d Measurement Margin

Pass
230 V
50 Hz
600 s
100 %

Segment	Pst	dmax(%)	dc(%)	Tmax(ms)	Judge
Limit	1.000	4.000	3.300	500	
Seg. 1	0.008	0.078	0.004	0	Pass

Plt	Value	Judge
Limit	0.650	
Measurement	0.003	Pass



8. Immunity Test

8.1. General Performance Criteria Description

Criterion A:	The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.
Criterion B:	The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.
Criterion C:	Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.



Page 27 of 60



8.2. Electrostatic Discharge (ESD)

8.2.1. Test Specification

Test Requirement:	EN 55014-2
Test Method:	EN 61000-4-2
Storage capacitor:	150 pF
Discharge resistor:	330 ohm
Discharge Voltage:	Contact Discharge: ±4 kV Air Discharge: ±8 kV Indirect application: ±4 kV
Polarity:	Positive & Negative
Number of Discharge:	Air Discharge: Minimum 20 times at each test point Contact Discharge: Minimum 50 times at each test point
Discharge Mode:	1 time/s
Performance Criterion:	В

8.2.2. Test Instruments

Immunity Shielded Room						
Name of Equipment	Manufacturer	facturer Model Serial Number		Calibration Due		
Electrostatic Discharge Generator	Prima	ESD61002AG	PR12092502	Sep. 28, 2018		

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

8.2.3. Test Method

1. Air Discharge:

The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 20 times for each pre-selected test point. This procedure was repeated until all the air discharge completed.

2. Contact Discharge:

The test was applied on accessible metallic parts of the EUT. The generator was re-triggered for a new single discharge and repeated 50 times for each pre-selected test point. The tip of the discharge electrode was touching the EUT before the discharge switch was operated.

Page 28 of 60




3. Indirect discharge for horizontal coupling plane:

At least 10 single discharges (in the most sensitive polarity) were applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1 m from the EUT and with the discharge electrode touching the coupling plane.

4. Indirect discharge for vertical coupling plane:

At least 10 single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5 m X 0.5 m, was placed parallel to, and positioned at a distance of 0.1 m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.



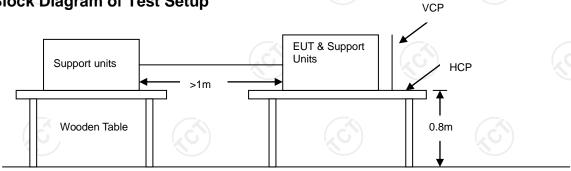

Note:

Ground Reference Plane

1. Table-top Equipment

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference P**lane. The **GRP** consisted of a sheet of aluminum at least 0.25 mm thick, and 2.5 meters square connected to the protective grounding system. A **H**orizontal **C**oupling **P**lane (1.6 m x 0.8 m) was placed on the table and attached to the **GRP** by means of a cable with 940 k total impedance. The equipment under test was installed in a representative system as described in section 7 of EN 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5 mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

2. Floor-standing Equipment

The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25 mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.



8.2.5. Test Results

Test Environment:	Temp.:	25 ℃	Humid.:	55 %	Press.:	96 kPa
Test Mode:	Mode 1, N	Node 2				
Test Voltage:	DC 5 V (Adapter Input AC 230 V/ 50 Hz), DC 3.7 V					
Test Result:	Pass				(3)	

Air Discharge						
Test Levels			Results			
Test Points		± 8 kV	Pass	Fail	Performance Criterion	Observation
Slot	4 Points	\boxtimes	\boxtimes		В	Note ⊠1
Button	4 Points		\boxtimes		В	Note ⊠1

	Contact Discharge							
_		Test Levels	Results					
Test Points		± 4 kV	Pass	Fail	Performance Criterion	Observation		
HCP	4 Points		\boxtimes		В	Note ⊠1		
VCP	4 Points		\boxtimes		В	Note ⊠1		
Metal	4 Points		\boxtimes		В	Note ⊠1		

Note:

- 1. There was no change compared with initial operation during the test.
- 2. The function of EUT is loss during the test and it can be recovered by itself operation after the test.
- 3. The function of EUT is loss during the test and it can be recoverable by manually operation after the test.

Page 30 of 60



8.3. Radio-frequency Electromagnetic Field Amplitude Modulated (RS)

8.3.1. Test Specification

Test Requirement:	EN 55014-2	$\langle C_j \rangle$
Test Method	EN 61000-4-3	
Frequency Range:	80 MHz -1000 MHz	
Test level:	3 V/m (unmodulated, r.m.s)	
Modulation:	1 kHz, 80 % AM, sine wave	
Frequency Step:	1 % of preceding frequency value	
Polarity of Antenna:	Horizontal & Vertical	
Antenna Height:	1.5 m	
Performance Criterion:	A	

8.3.2. Test Instruments


743 RS Chamber								
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due				
Signal Generator	Maconi	2022D	119246/003	Sep. 28, 2018				
Power Amplifier	M2S	A00181-1000	9801-112	Sep. 28, 2018				
Power Amplifier	M2S	AC8113/800-250A	9801-179	Sep. 28, 2018				
Power Antenna	SCHAFFNER	CBL6140A	1204	Sep. 28, 2018				

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

8.3.3. Test Method


- 1. The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- 2. The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80% amplitude modulated with a 1 kHz sine-wave. The rate of sweep did not exceed 1.5 x 10 -3 decade/s, where the frequency range is swept incrementally; the step size was 1% of preceding frequency value.
- 3. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond and was not less than 0,5 s.
- 4. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.
- 5. The EUT was performed in a configuration to actual installation conditions, a video camera and/or a audio monitor were used to monitor the performance of the EUT.

Page 31 of 60





8.3.4. Block Diagram of Test Setup

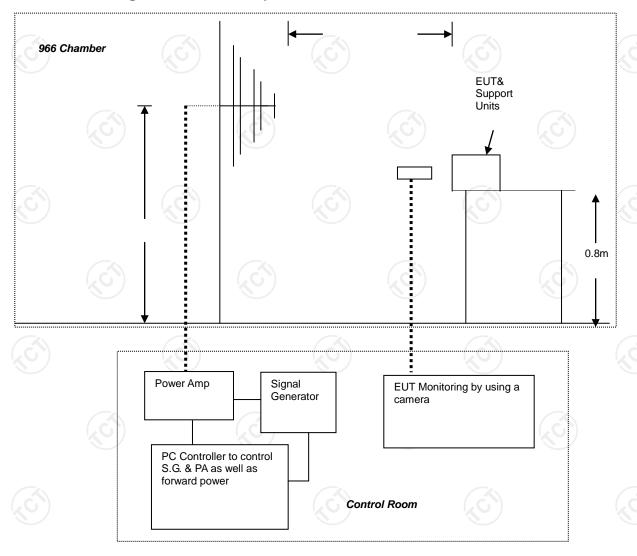

Note:

1. Table-top Equipment

The EUT installed in a representative system as described in section 7 of EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

2. Floor-standing Equipment

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

Page 32 of 60



8.3.5. Test Results

Test Environment:	Temp.:	25 ℃	Humid.:	55 %	Press.:	96 kPa
Test Mode:	Mode 1, N	Node 2		(0)		
Test Voltage:	DC 5 V (Adapter Input AC 230 V/ 50 Hz), DC 3.7 V					
Test Result:	Pass					

	Frequency(MHz)	Polarity	Position	Field Strength(V/m)	Observation
	80 ~ 1000	V&H	Front	3	Note ⊠1
1	80 ~ 1000	V&H	Rear	3	Note ⊠1
	80 ~ 1000	V&H	Left	3	Note ⊠1
	80 ~ 1000	V&H	Right	3	Note ⊠1

Note:

- 1. There was no change compared with initial operation during the test.
- 2. The function of EUT is loss during the test and it can be recovered by itself operation after the test.
- 3. The function of EUT is loss during the test and it can be recoverable by manually operation after the test.



8.4. Electrical Fast Transient (EFT)

8.4.1. Test Specification

Test Requirement:	EN 55014-2	(.c.)
rest Nequirement.	LIV 33014-2	
Test Method:	EN 61000-4-4	
Test Level:	signal lines and control lines: \pm 0,5 kV (peak) Input and output d.c. power ports: \pm 0,5 kV (peak) Input and output a.c. power ports: \pm 1kV (peak)	
Polarity:	Positive & Negative	
Impulse Frequency:	5 kHz	
Impulse Wave-shape:	5/50 ns	
Burst Duration:	15 ms	
Burst Period:	300 ms	
Test Duration:	2 minutes per level & polarity	
Performance Criterion:	B (A)	

8.4.2. Test Instruments

l	Immunity Shield Room									
	Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due					
	Fast Transient Burst Simulator	Prima	EFT61004BG	PR12074375	Sep. 28, 2018					
-	Capacitive coupling folder	Prima	EFT-CLAMP	N/A	Sep. 28, 2018					
	Single-phase transformer	Prima	JMB-3KVA	L12121902-2	Sep. 28, 2018					

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

8.4.3. Test Method

- The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support 0.1 m + 0.01 m thick. The ground reference plane was 1 m*1 m metallic sheet with 0.65 mm minimum thickness.
- 2. This reference ground plane was project beyond the EUT by at least 0.1 m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5 m.
- 3. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables.
- 4. The length of the signal and power lines between the coupling device and the EUT is 0.5 m.

Page 34 of 60



- 5. The EUT is connected to the power mains through a coupling device that directly couples the EFT/B interference signal.
- 6. Each of the Line and Neutral conductors is impressed with burst noise for 2 minutes.

8.4.4. Block Diagram of Test Setup **EUT** Support Units AC Line Non-Conductive Table EFT/Burst/ 0.8 m Surge Generator Controller Computer Comm. Line ≥ 3 m EUT To Load 10 cm AC Line Non-Conductive Table 0.8 m **Burst Generator** Injection Clamp Note:

1. Table-top Equipment

The configuration consisted of a wooden table (0.8 m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25 mm thick and 2.5 m square) connected to the protective grounding system. A minimum distance of 0.5 m was provided between the EUT and the walls of the laboratory or any other metallic structure.

2. Floor-standing Equipment

The EUT installed in a representative system as described in section 7 of IEC 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25 mm thick and 2.5 m square) connected to the protective grounding system.

Page 35 of 60



8.4.5. Test Results

Test Environment:	Temp.:	25 ℃	Humid.:	55 %	Press.:	96 kPa	
Test Mode:	Mode 1						
Test Voltage:	DC 5 V (Adapter Input AC 230 V/ 50 Hz)						
Test Result:	Pass						

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation
L (C)	+/-	(6)1	В	Note ⊠1
N	+/-	1	В	Note ⊠1
L-N	4/-	1	В	Note ⊠1
PE			<u> </u>	N/A
L – PE				N/A
N – PE		(C)	-(0)	N/A
L – N – PE				N/A
DC Port	(C)	(<u>~</u>	N/A
Control port				N/A
Signal port		<u></u>		N/A

Note:

- 1. There was no change compared with initial operation during the test.
- 2. The function of EUT is loss during the test and it can be recovered by itself operation after the test.
- 3. The function of EUT is loss during the test and it can be recoverable by manually operation after the test.

Page 36 of 60



8.5. Surges

8.5.1. Test Specification

Test Requirement:	EN 55014-2	
Test Method:	EN 61000-4-5	
Test Level:	Input a.c. power ports: Line to line: ±1 kV(peak) Line to ground: ±2 kV(peak)	3)
Polarity:	Positive & Negative	
Wave-Shape:	1.2/50 us(8 /20 us)	(6)
Generator Source Impedance:	2 ohm between networks 12 ohm between network and ground	
Test Interval:	60 s between each surge	
Number of Tests:	5 positive at 90° phase angle, and 5 negation phase angle	ive at 270°
Performance Criterion:	В	

8.5.2. Test Instruments

Immunity Shield Room						
Name of Equipment	nt Manufacturer Model		Serial Number	Calibration Due		
Lightning Surge Generator	Prima	SUG61005BG	PR12125534	Sep. 28, 2018		
Single-phase transformer	Prima	JMB-3KVA	L12121902-2	Sep. 28, 2018		

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


8.5.3. Test Method

- For line-to-line coupling mode, provide a 1 kV 1.2/50 us voltage surge (at open-circuit condition) and 8/20 us current surge to EUT selected points, and for active line / neutral lines to ground are same except test level is 2 kV.
- 2. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test.
- 3. Different phase angles are done individually.
- Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

Page 37 of 60



8.6. Block Diagram of Test Setup

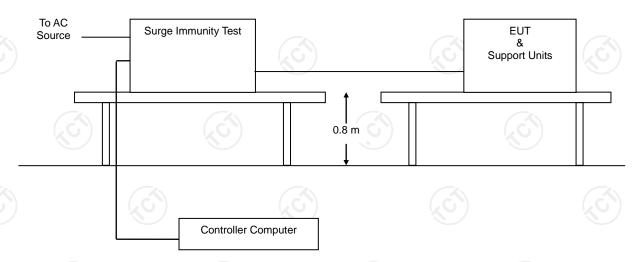

8.6.1. Test Results

Test Environment:	Temp.:	25 ℃	Humid.:	55 %	Press.:	96 kPa
Test Mode:	Mode 1	(0)				
Test Voltage:	DC 5 V (A	dapter Inpu	ut AC 230 V	// 50 Hz)		
Test Result:	Pass					

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation
L-N	+/-	(6)	В	Note ⊠1
L - PE		-		N/A
N - PE	(<u>c</u>		<u></u>	N/A
DC Port			<u></u>	N/A
Control port			(A)	N/A
Signal port		(0)	(0)	N/A

Note:

- 1. There was no change compared with initial operation during the test.
- 2. The function of EUT is loss during the test and it can be recovered by itself operation after the test.
- 3. The function of EUT is loss during the test and it can be recoverable by manually operation after the test.

Page 38 of 60



8.7. Radio-frequency Continuous Conducted (CS)

8.7.1. Test Specification

Test Requirement:	EN 55014-2
Test Method	EN 61000-4-6
Frequency Range:	0.15 MHz - 230 MHz
Test Level:	signal lines and control lines: 1 V r.m.s. (unmodulated) Input and output d.c. power ports: 1 V r.m.s. (unmodulated) Input and output a.c. power ports: 3 V r.m.s. (unmodulated)
Modulation:	1 kHz, 80 % AM, sine wave
Performance Criterion:	A S

8.7.2. Test Instrument

	CS Test							
	Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due			
	Conducted Disturbances Test System	Schloder	CDG 6000-75	126B1290	Sep. 28, 2018			
	CDN	Schloder	CDN M2+M3-16	A2210281	Sep. 28, 2018			
	Attenuator	Schloder	ATT-6DB-100	A100W225	Sep. 28, 2018			
)	EM-Clamp	Schloder	EMCL-20	132A1194	Sep. 28, 2018			

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


8.7.3. Test Method

- 1. The EUT are placed on an insulating support 0.1 m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3 m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 2. The disturbance signal described below is injected to EUT through CDN.
- 3. The EUT operates within its operational mode(s) under intended climatic conditions after power on.

Page 39 of 60



- 4. The frequency range is swept from 0.150 MHz to 80 MHz using 3 V signal level, and with the disturbance signal 80 % amplitude modulated with a 1 kHz sine wave.
- 5. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

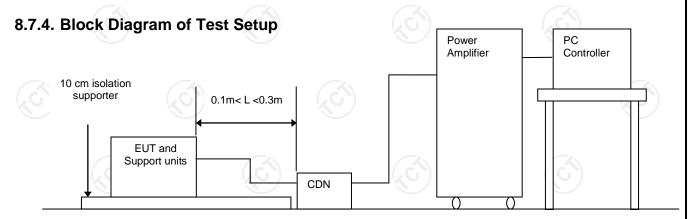

Note:

1. Table-Top and Floor-Standing Equipment

The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

8.7.5. Test Results

Test Environment:	Temp.:	25 ℃	Humid.:	55 %	Press.:	96 kPa
Test Mode:	Mode 1	Mode 1				
Test Voltage:	DC 5 V (A	DC 5 V (Adapter Input AC 230 V/ 50 Hz)				
Test Result:	Pass					

Frequency Band (MHz)	Field Strength (Vrms)	Injected Position	Injection Method	Performance Criterion	Observation
0.15 ~ 230	3	AC Mains	CDN-M2	A	Note ⊠1
0.15 ~ 230					N/A

Note:

- 1. There was no change compared with initial operation during the test.
- 2. The function of EUT is loss during the test and it can be recovered by itself operation after the test.
- 3. The function of EUT is loss during the test and it can be recoverable by manually operation after the test.



8.8. Voltage Dip & Voltage Interruptions

8.8.1. Test Specification

Test Requirement:	EN 55014-2	
Test Level:	Test specification(50Hz) 0 % of UT (Supply Voltage) for 0.5 period 40% of UT (Supply Voltage) for 10 periods 70 % of UT (Supply Voltage) for 25 periods Test specification(60Hz) 0 % of UT (Supply Voltage) for 0.5 period 40% of UT (Supply Voltage) for 10 periods 70 % of UT (Supply Voltage) for 30 periods	
Performance Criterion:	C	

8.8.2. Test Instrument

Immunity shielded room						
Name of Equipment Manufacturer Model Serial Number Calibration						
Cycle Sag Simulator	Prima	DRP61011AG	PR12106201	Sep. 28, 2018		
Single-phase transformer	Prima	JMB-3KVA	L12121902-2	Sep. 28, 2018		

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


8.8.3. Test Method

- 1. The EUT and support units were located on a wooden table, 0.8 m away from ground floor.
- 2. Setting the parameter of tests and then perform the test software of test simulator.
- 3. Conditions changes to occur at 0 degree crossover point of the voltage waveform.
- 4. Recording the test result in test record form.

Page 41 of 60



8.8.4. Block Diagram of Test Setup

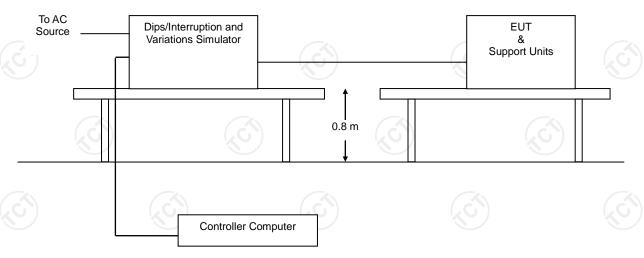

8.8.5. Test Results

Test Environment:	Temp.: 25 ℃	Humid.:	55 %	Press.:	96 kPa
Test Mode:	Mode 1				
Test Voltage:	DC 5 V (Adapter	Input AC 230	V/ 50 Hz)		
Test Result:	Pass				

	Test Power: 230 Vac, 50 Hz						
Voltage (% Reduction) Duration (cycles) Performance Criterion				Observation			
	0	0.5	□A □B ⊠C	Note ⊠1			
	40	10	□A □B ⊠C	Note ⊠1			
	70	25	□A □B ⊠C	Note ⊠1			

Note:


- 1. There was no change compared with initial operation during the test.
- 2. The function of EUT is loss during the test and it can be recovered by itself operation after the test.
- 3. The function of EUT is loss during the test and it can be recoverable by manually operation after the test.

Page 42 of 60




Photographs of Test Configuration 9.

Conducted Emission Test View

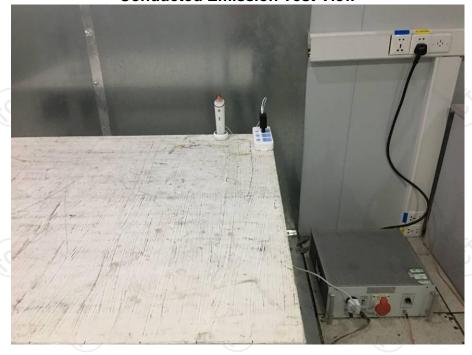



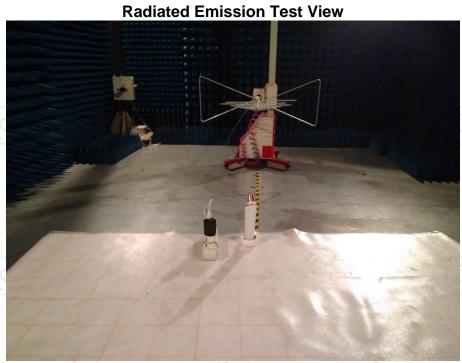


Page 43 of 60



Flicker Test View





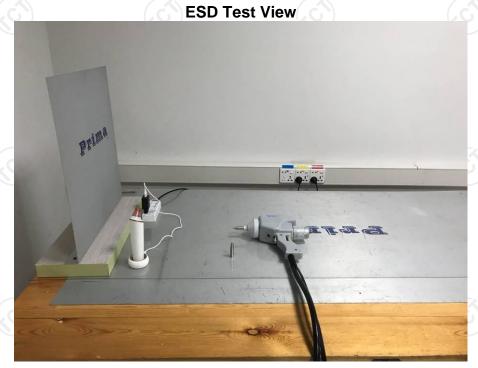




EFT Test View








CS Test View

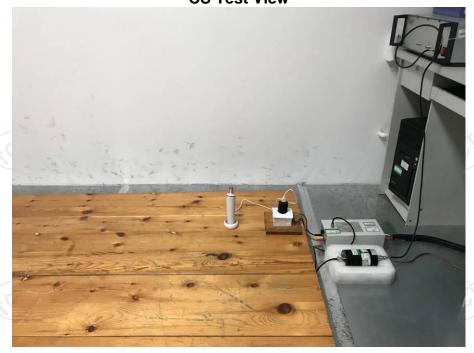

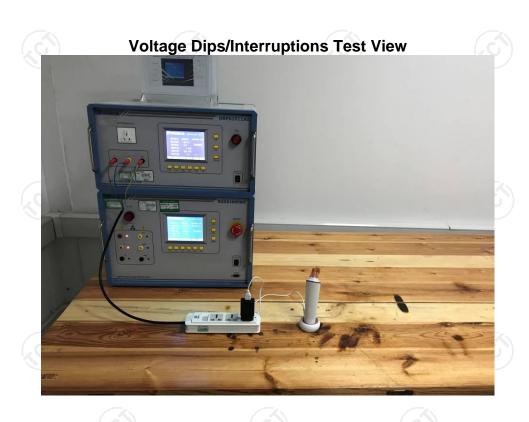



10. Photographs of EUT







Page 47 of 60









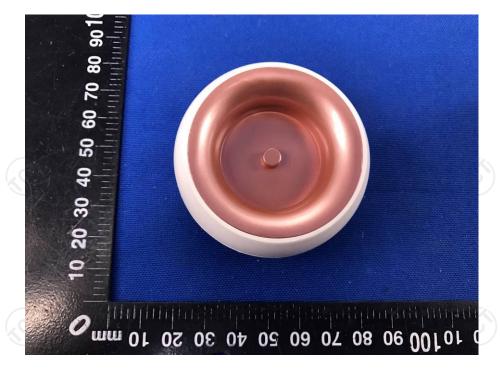

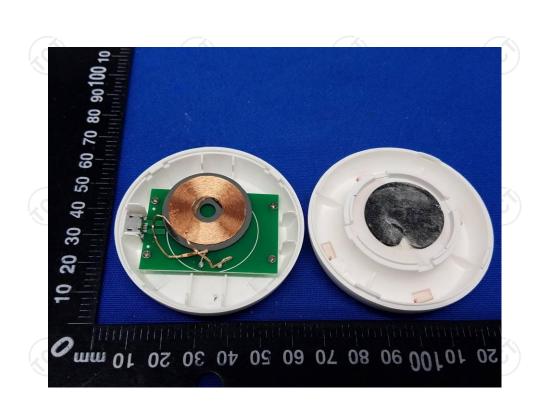




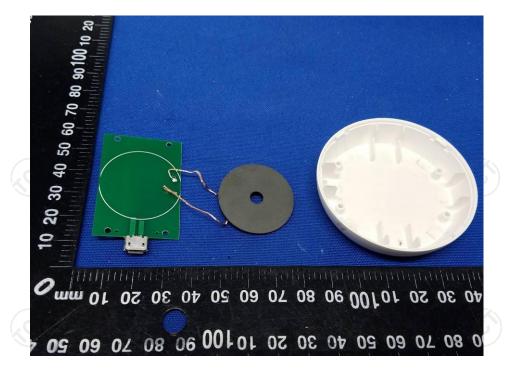

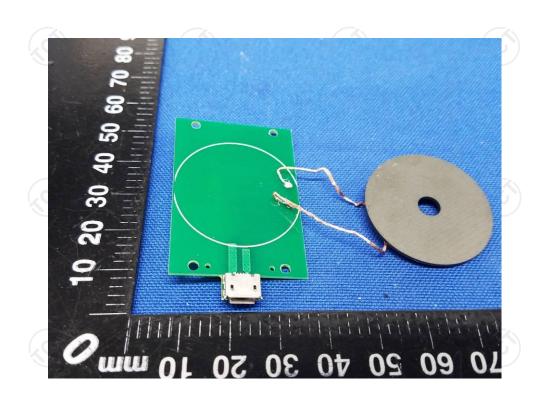



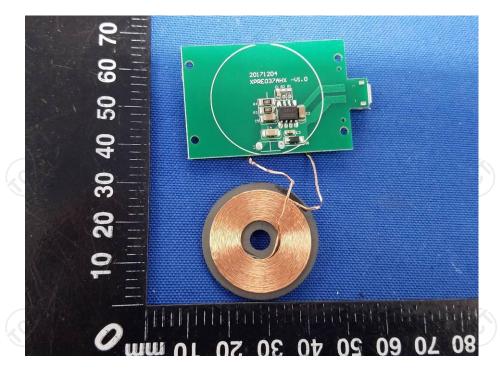

























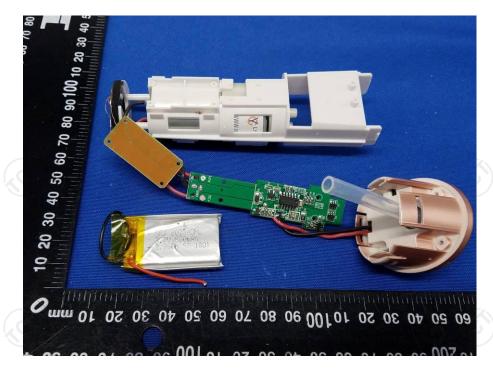







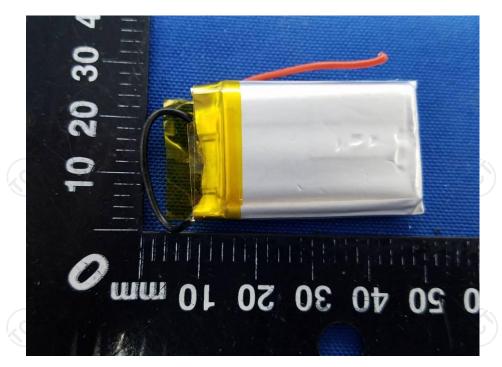







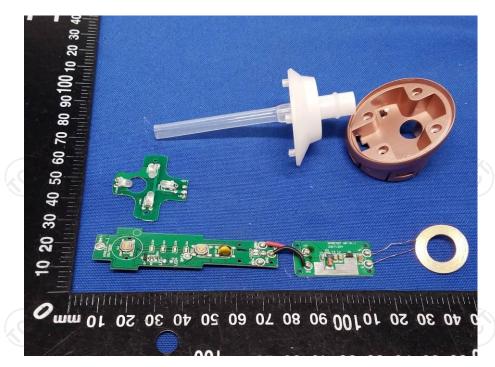

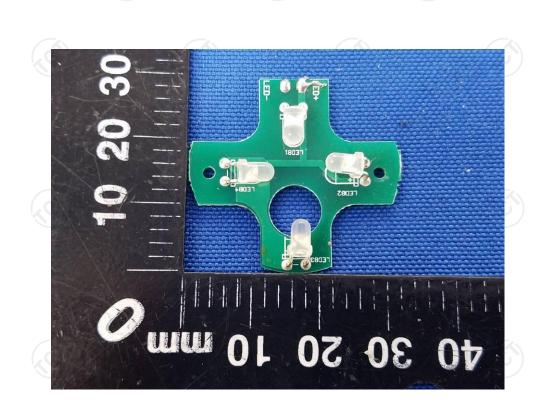





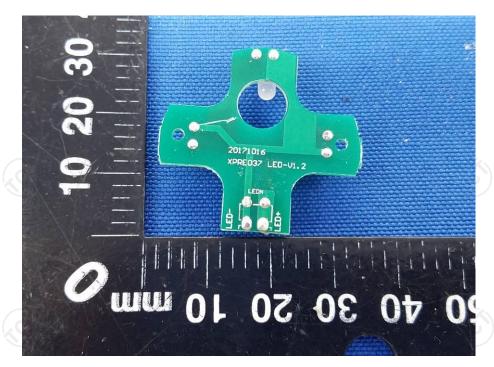

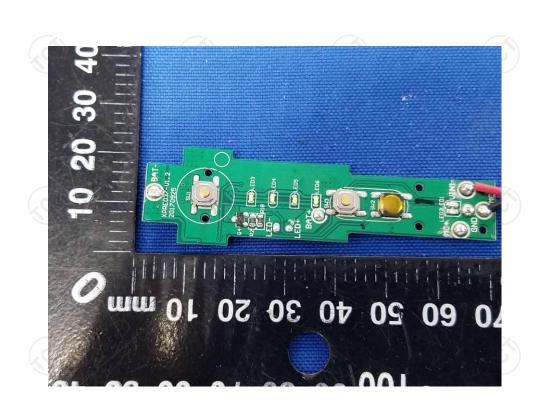




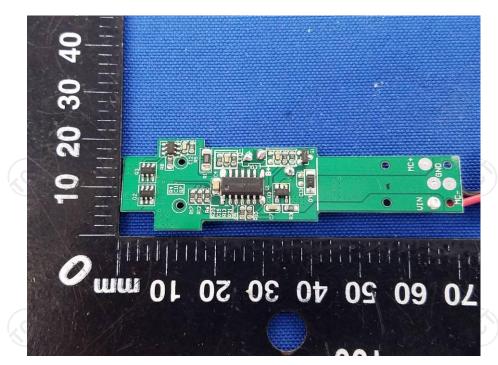

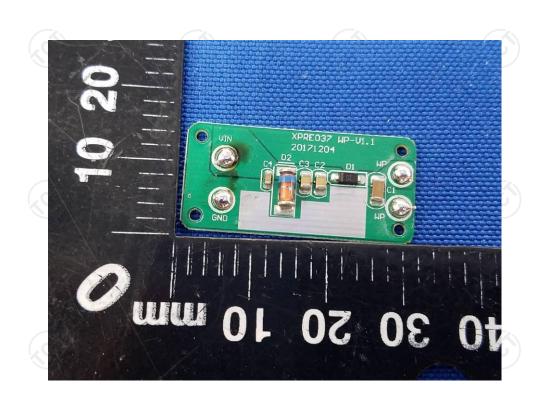



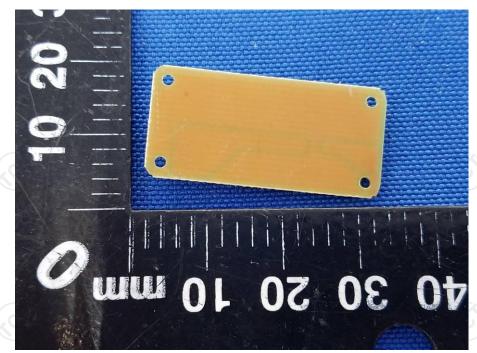

*****END OF REPORT****

