

双USB蓝牙车载充电器

产品型号：G63



使用说明

操作说明

1.初次使用

- (1) 将本设备插入汽车点烟器中，通电后会自动开机，显示电瓶电压。
- (2) 打开汽车音响置于FM收音状态，选择一个空白的FM频率，即无电台占用，只有沙沙声的频道。
- (3) FM频率调整和收音机的频率一致。

2.蓝牙配对

- (1) 设备开机后会自动进入蓝牙配对状态。
- (2) 打开手机蓝牙功能，搜索配对名“G63”
- (3) 选择“G63”配对后自动完成，首次配对完成，后续通电将会自动连接手机蓝牙。

3.调节频率

- (1) 在产品上：长按⏻键进入调频模式，用◀和▶键调节频率，长按可快速加减。
- (2) 在遥控器上：长按⏻键进入调频模式，用◀ ▶键调节频率，长按可快速加减。

4.播放TF卡/U盘里的音乐

- (1) 将U盘/TF卡插入本设备的TF卡扩展槽，本设备将会自动识别并播放TF卡中的MP3/WMA的音乐文件。
- (2) 在播放TF卡或者U盘歌曲的状态下，在产品上可以通过短按⏻键暂停音乐，在暂停状态下短按⏻键继续播放音乐；通过◀键和▶键来切换上一曲或者下一曲。

- 01 -

- (3) 在遥控器上也可以控制音乐播放、上下曲以及音量大小。

5.拨打电话

- (1) 车杯上，短按⏻键接听来电，通话状态下，如需结束通话，再次短按⏻键结束本次通话，长按拒接。
- (2) 遥控器：短按⏻键接听来电，如需结束通话，再次短按⏻键结束通话，长按拒接。

6.切换音乐来源

本设备可以播放TF卡/U盘里的音乐，也可以通过播放蓝牙设备里的音乐，如果两者或三者模式同时存在，可以双击车充上⏻键进行切换。


7.产品参数

蓝牙版本：V5.0
PD输出：5V=3A、9V=2A、12V=1.5A
USB输出：5V= 1A
点烟孔：40W*2
总功率：100W
蓝牙有效距离：10-15米
灵敏度：-42分贝+3db 360
工作电流：45mA（最大）
待机电流：25mA（最大）
工作电压：12-24V
极限电压：9-26V
FM频率：88.0MHz-107.9MHz


- 02 -

产品外观说明

车杯

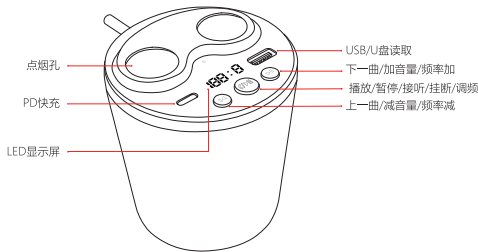

遥控器 (选配)

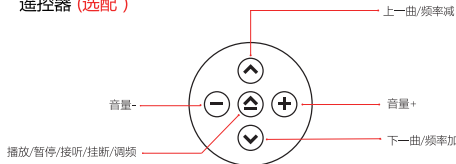

- 03 -

磁吸无线充 合格证

产品型号：G63
生产日期：
产品名称：
检 验 员：



保 修 卡

用户姓名		订单号	
通讯地址			
联系电话			
旺 旺 名			

保修条款：
1.自购买之日起，享受一年产品质量保修服务
2.如果用户在保修期内正常使用发生故障，可持本卡到本公司特约维修点维修。
3.在保修期内，有下列情况时，不享受免费保修服务
A.不按说明书要求使用本产品导致故障或损坏的；自行修理所造成故障或损坏。
B.因不可抗力外力、异常燃烧等非正常情况下出现故障或损坏的。



注：本产品兼容大多数手机，一些手机型号不同，会无法用到部分功能。

产品功能升级，不另行通知

USB Bluetooth Car Charger

Model: G63



User's manual

Instructions

1. First use

- (1) Insert the device into the car cigarette lighter, it will automatically turn on after power on and display the car battery voltage.
- (2) Turn on the car stereo and put it in the FM radio state, select any blank FM frequency from 88.0MHz to107.90MHz.
- (3) FM frequency adjustment is consistent with the frequency of the car radio.

2. Bluetooth pairing

- (1) After the device is turned on, it will automatically enter the Bluetooth pairing state.
- (2) Turn on the Bluetooth function of the mobile phone and search for the pairing name "G63"
- (3) After selecting "G63", the pairing is automatically completed. When the first pairing is completed, it will automatically connect to the Bluetooth of the mobile phone for further use when it is powered on.

3. Adjust the frequency

- (1) On the product: Long press the⏻key to enter the frequency modulation mode, use the◀and▶keys to adjust the frequency Long press to add or subtract quickly.
- (2) On the remote control: Long press⏻key to enter FM mode, use◀ ▶key to adjust frequency, Long press to add or subtract quickly.

- 01 -

4. Play music in TF card/U disk

- (1) Insert the U disk/TF card into the TF card slot of the device, and the device will automatically recognize and play MP3/WMA music files in the TF card.
- (2) In the state of playing TF card or U disk songs, you can short press the⏻key on the product to Pause or Play the music; use the◀▶keys to switch the previous or the next songs.
- (3) You can also use the remote control to play/pause the music, select the previous or next song, increase/decrease the volume.

5. Make and receive calls

- (1) On the car cup, short press the⏻key to answer the call. In the call state, if you need to end the call, short press the⏻key again to end this call, and long press to reject the call.
- (2) Remote control: Short press the⏻key to answer the call, if you need to end the call, short press the⏻key again to end to end this call, and long press to reject the call.

6. Switch music source

This device can play the music in the TF card/U disk/Bluetooth device, If two or three modes exist at the same time, you can double-click the⏻key on the car charger to switch the music source.

- 02 -


7. Product parameters

Bluetooth version: V5.0
PD output: 5V=3A, 9V=2A, 12V=1.5A
USB output: 5V=1A
Cigarette lighter hole: 40W*2
Total power: 100W
Bluetooth effective distance: 10-15 meters
Sensitivity: -42dB+3db 360
Working current: 45mA (maximum)
Standby current: 25mA (maximum)
Working voltage: 12-24V
Limit voltage: 9-26V
FM frequency: 88.0MHz-107.9MHz

- 03 -

Car product appearance description

Car cup

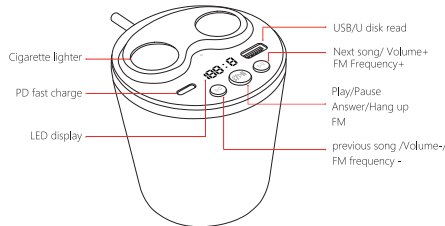

remote control (Optional)

