

智能手表

说 明 书



智能手表 APP 二维码

请在使用之前查阅说明书。

1. 使用安全及注意事项

1.1 本公司保留不作任何通知的情况下,对本说明书做内容修改的权利,恕不另行通知。

1.2 产品在使用前请先充电超过 2 小时。


1.3 本机安全密码

本机密码可防止他人在未经授权的情况下使用您的产品。原始本机密码为 1122。

为确保您个人信息的安全,请及时修改原始密码。

2. 产品概述

2.1 产品概述

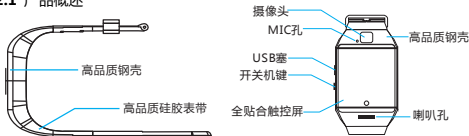

电源键：开、关机；唤醒、灭屏；返回主菜单；

USB口：充电、数据功能；

触摸屏：电容触摸屏，功能都可以在电容触摸屏上操作实现。

2.2 产品快速进入

开机后,向左拖拉进入下一页菜单,向右拖拉返回上一页菜单。

2.3 产品表盘设置

在表盘界面点击更换表盘。



设置方法：

开机，在显示表盘的情况下，点击表盘中间位置即可自动更换表盘，三个表盘循环，可以按您的心情来每天更换表盘。

2.4 产品主界面及菜单页面



3. 产品快速使用

3.1 下载同步软件

点击蓝牙通知，选择“通知服务”，在“通知应用”项，进入选择您需要推送的个人应用或者是系统应用；电话服务项功能，包含短信和来电；找手表。

注：当您使用后台清理软件或者是关闭后台应用软件时，请不要关闭此蓝牙通知服务，若关闭，将会影响手表手机之间的同步功能。

3.3 蓝牙连接和同步功能

3.3.1 从手机端连接手表

进入手机设置--打开蓝牙--搜索设备，当找到 SmartWatch 时，点击选择配对，在手表端也选择“是”，配对成功，当有电话簿请求时，请点击“确定”，同时最好选择“下次不再提示”，方便在下次连接时，电话簿可以直接同步，无须再提示您。

注：在已经有安装过同步软件，手机辅助功能中也打开此同步软件，在连接后 2-5 秒内，手机端会显示蓝牙通知已连接；同时在手表端，提示您自动同步手机的时间，即表示同步功能启用。当您有新的信息进来手机时，会及时同步到智能手表端。

3.3.2 从智能手表端连接手机

在智能手表端选择 蓝牙拨号器--点击 搜索蓝牙装置--找到 您的智能手机（比如三星 9500）--选择 点击 连接；后面过程同上 3.3.1；

3.4 功能菜单说明

3.4.1 信息

手机端的同步短信或者是本机的信息。

3.4.2 蓝牙

设置蓝牙状态，打开或者关闭蓝牙。

3.4.3 通话记录

连接蓝牙后您可以通过此菜单查看你近期内的通话状况。

3.4.4 蓝牙拨号器

从手表端去选择手机配对连接；

3.4.5 远端通知

显示从手机端同步过来的信息,比如：QQ、微信、短信、时间、whatsApp、Twitter、Facebook 等；

3.4.6 远程拍照

从手表端控制，用手机摄像头拍照；需要提前启动安卓手机的摄像头。

3.4.7 防丢

手表端寻找手机或者是与手机双向防丢；

3.4.8 设置

注：在手机设置里可以设置表盘及主题；在安全设置中，默认的安全密码为：

1122

3.4.9 计步器

在计步器设置里，向左拖页，可以看到步数。在运动过程中，若希望回到主菜单，而不停止计步功能，请按电源键；计步功能在后台会继续运行。

3.4.10 睡眠监测

按您睡眠的时间来显示你睡眠的质量。

3.4.11 久坐提醒

可以设置好时间,到时提醒您需要起身活动,建议您一小时至少起身活动一次;

3.4.12 二维码

扫描二维码,可以下载同步软件,若有新版本软件需要升级时,请与公司相关客服沟通,由公司提供新的下载出处;

3.4.13 智能查找

查找手表端的相关信息

3.4.14 闹铃

3.4.15 日历

3.4.16 计算器

3.4.17 情景模式

3.4.18 文件管理

3.4.19 音乐播放器

可以播放本地音乐和蓝牙连接的智能手机的音乐;

3.4.20 主题, 详见主题设置

3.4.21 相机

3.4.22 相册

3.4.23 录音

3.4.24 手机 QQ

手机 QQ 需要您手表使用 SIM 卡, 并且有上网功能

3.4.27 浏览器

浏览器需要您手表使用 SIM 卡，并且有上网功能

3.4.28SIM 卡应用

4. 表带 NFC 功能简述：

4.1 使用环境

4.1.1 使用我们配套的 NFC 表带，更换表带有可能使您的手表无法实现此功能，请谨慎。

4.1.2 与您的 NFC 手机或其它支持 NFC 功能的终端配套使用。

4.1.3 NFC 手机端安装有关于可执行 NFC 功能的 APK，比如：NFC Task Launcher 等。

4.2 实现与手机的快速连接功能

4.2.1 :使用我们产品配套的 NFC 表带,并确保智能手表蓝牙在正常使用状态。

4.2.2 : 将 NFC 手机解锁

4.2.3 表带 NFC 位置靠近支持 NFC 的手机即可完成蓝牙快速连接配对。

4.3 表带 NFC 功能的个性化创建

举例：

手机：小米 2A

软件：NFC Task Launcher





★小提示：在写入标签的时候，如果无法写入成功，有可能是因为手机的天线与NFC标签没有对准，可以来回移动手机来确认天线的位置直到写入成功。

5. 使用注意事项

5.1 在使用前请充满电，充电时间需要 1-2 小时；

5.2 充电线可以使用安卓智能手机的充电线及正品充电器；或者使用标准配置的配件；

5.3 蓝牙在使用过程中超过距离断开，双向防丢启用过之后，在未重新连接前是不能使用寻找功能的；

5.4 蓝牙在使用过程中，偶尔会有断开情况，请重新连接一次（超过 5 分钟未连接时，需要手动连接一次）；连接时请注意选择同意电话本的同步；不然在使用过程中，将不能显示来电的电话本；

5.5 音乐功能，按安卓手机不同，将可能显示歌曲的名字或者有部分手机是不显示歌曲名称，这是正常情况，是因手机不同而造成；

6. 常见故障排除

在使用手机过程中出现任何问题，请参照下列条款加以解决。如果问题仍然存在，请联系经销商或指定维修人员。

6.1 手表无法开机

按开机键时间过短，请按时间超过 3 秒。

电池电量过低，请连接充电器充电。

6.2 手表会自行关机

电池电量过低，请连接充电器充电。

6.3 手表使用的时间很短

电池电量未充满，请确保有足够的充电时间（充满最短 2 小时）。

使用了 SIM 卡，但是使用地点信号很差，导致手机使用电流大。

6.4 手表无法正常充电

请检查电池是否可用，使用几年后电池的性能会降低。

充电器是否工作正常，可以更换新充电器尝试

充电连接 USB 线接口是否连接好，可以再尝试一次

6.5 接到来电时没有显示呼叫者姓名

蓝牙连接时，未选择上传通讯录；或者是未勾选一直上传通讯录；

断开再连接时，未同步通讯录，请再次配对重新连接。

6.6 通话的声音品质不太好

你的智能手表与手机距离太远，请靠近；蓝牙信号太差

你的手机所处信号不好，更换一个打接电话的位置

保修卡

客户资料

型号		售机单位	(签章)
客户姓名		联系电话	
销售电话		购买日期	
产品 IMEI 码			
客户地址			
销售地址			
摘 要			
日期	故障现象	检修	备注

Smart Watch Phone



smart watch APP User Guide

Please read the manual before use.

1. Safety Warning


- ◆ The information in this document won't be modified or extended in accordance with any notice.
- ◆ The watch should be charging 2 hours at least before use.

Security Code

- ◆ The original code is 1122, this code can prevent your watch in use by others without your permission.
- ◆ Please change the original code to insure your personal information safe.

2. Product details:

2.1 Product details

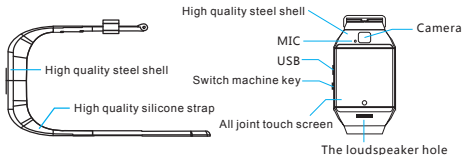

Power button: Power On/Off ; Awaken/turn off screen ; Back to main menu

USB port: Charging/Data ;

Touch screen: each function (main menu) will be shown and displayed on capacitive touch screen.

2.2 Products quick into

You can enter into next page by sliding screen to the left, and return to last page by sliding screen right; enter into the notice board after sliding from up to down, and return to main menu from down to up. It will be in mistake for a click if the drag distance too short.

2.3 Clock Display



Setting method :

Power on, when the phone in clock mode, please click middle screen and set different clock interfaces if you like.

2.4 Product theme settings

A product theme settings screen showing a digital clock displaying '14:23' and '2015-11-10'. Below the clock are several icons, including a red envelope, a blue phone, and a green person.



3.Product quick use

3.1 Download the Sync software.

Scan QR code , down load the APP which can match your android phone.This APP only use for the Sync between watch and phone, will not take your phone GPRS.

If you already download the related softwares,please check the version and use the newest related softwares in order to ensure all function normal use.Please update the software when it has new one.

3.2 Install and use the Sync software

Android Application installation :

Please install the android application in your smart phone. You can storage it into your phone memory or install by Sync assistant.

Android application usage (already installed)

(Smart phone) Setting -- Accessibility—Enter into Bluetooth notice(service),enabled this service. (please choose "sure" when shown a warning notices) the application runs on the background automatically and sync function will be switched on as below:



Click the Bluetooth notices and choose the Notification service,select your Personal or System application in Notify application.

Telephone service is including SMS, incoming call and seek watch.

Notice :

Please don't shut the Bluetooth notify service when you are clearing software by background or close background application software.It will affect the Sync function between watch and phone if shut it.

3.3 Bluetooth Connection and Sync function

3.3.1 From phone to watch

Phone setting—turn on the Bluetooth --search for devices , please click pair devices when found SmartWatch,and also choose "yes" in your mobile phone, paired done.

Please choose "sure" when there is phone book request , meanwhile you'd better choose" no remind again", this is convenience when you connect next time(without remind again),

Notice: The Sync software can open in sync APP already installed and Accessibility,

the mobile will show Bluetooth connected done after 2-5min;the watch will inform you the time of Sync with phone, than the Sync switched on. The message will sync to you watch when it incoming to mobile .

3.3.2 From watch to phone

BT Dialer on SmartWatch—search new device—found your smart watch (such as s9500) -- connect. The processes of next are same with 3.3.1

3.4 Base function

3.4.1 Message

Sync phone or watch message.

3.4.2Bluetooth

Sets the Bluetooth status, turn on/off.

3.4.3Calls records

You can check your phone call records after you connect with the Bluetooth.

Shown all records including miss call, dialed calls and receive call; You can check the date, time and phone number of the miss call after you choose it, but only can call this number.

3.4.4 BT dialer

Paired devices from smart watch

3.4.5 Remote notifier

When there is SMS, incoming messages from QQ and other applications on the connected phone, the watch phone will alert you to read them.

3.4.6 Remote cameras

Use phone camera take photos, but remote by watch, its need switch on the camera of phone in advance.

3.4.7Anti lost

Watch seek phone, or phone seek watch.

3.4.8Setting

Notice: sets clocks display and theme in phone setting. In the security Settings, the safe code is 1122.

3.4.9 Pedometer

It can be adopted as a tool to avoid insufficient or excessive exercise by measuring calories or calories consumption based on collected data, such as number of steps.

If you want return to main menu but keep pedometer during the exercise, please press the power button.

3.4.10Sleep monitor

Show your sleep quality base on your sleep times.

3.4.11Sedentary remind

You can set a time to remind you up to do some exercise, we suggest you this time could be one hours.

3.4.12 Quick response

It can download sync software when scan the quick response ,if there is a new version need to update, please contact with our servicer, our company will provide a new link for your download.

3.4.13Smart search

Search information about watch

3.4.14 Alarm

3.4.15Calendar

3.4.16Calculator

3.4.17Profiles

3.4.18File manager

3.4.19Audio player

Can play music from local or smart phone after connect with Bluetooth.

3.4.20Theme setting

3.4.21Camera

3.4.22Image viewer

3.4.23Sounder recorder

3.4.24Phone QQ

QQ need your phone has SIM card and can surf the Internet.

3.4.25Browser

Browser need your phone has SIM card and can surf the Internet.

3.4.26SIM tool

4.NFC function.

4.1 , Operating Environment.

4.1.1 Please use our NFC strap, if you change the strap you can not use this feature.

4.1.2 Use with your NFC mobile phones or other support NFC function terminal.

4.1.3 Use of NFC notice: First install APK file of NFC such as: NFC Task Launcher etc.

4.2, How to fast connection of smart phone.

4.2.1 Use our NFC strap and make your smart phone Bluetooth is turn on.

4.2.2 Unlock NFC of your smart phone.

4.2.3 The position of NFC on the strap close to smart phone can fast finish the bluetooth connection.

4.3, Create NFC function.

Sample:

Mobile model: Millet 2A

software : NFC Task Launcher.





★小提示：在写入标签的时候，如果无法写入成功，有可能是因为手机的NFC天线与NFC标签没有对准，可以来回移动手机来确认天线的位置直到写入成功。

Warm tip: When you writing the tag if the tag can't write successful, that might be the mobile NFC antenna and NFC tags are not aligned, you can move back and forth the mobile phone to confirm the position of the antenna until written to success.

5. Notice

5.1 Full charge before use, the charge time need 1-2 hours.

5.2 Use the accessories cable and charger, or your android phone accessories .

5.3 Bluetooth will disconnect when exceed the distances, after switch on the Anti lost, the smart search function can't be use before reconnect with Bluetooth.

5.4 Please reconnect with BT if it's disconnected occasionally(please Manual connect if the Bluetooth disconnect over 5 minutes).Please agree the phone book Sync otherwise there is no called phone book.

5.5 When playing the music, some of music's name can shown and some can't, it is normal, because android phone are difference.

5.6 Bad phone call voice.

Watch and phone are separated too far, please be more close ;Bad signal of BT.

Bad signal of your own phone call place, please change a more better place for phone call.

6. Common trouble shooting

Please refer below key function for any problems with the watch, if the problem is still unsolved, please contact with our dealer or serviceman appointed.

6.1 Unable to switch on

The time of press the power button too short, please keep it more than 3 seconds.

Low power, please charge it.

6.2 Shut down automatically

Low power, please charge the watch

6.3 Using time too short.

Battery is not full, please make sure it is full power (full charge need 2 hours at least).

During the use of SIM card, the power will be run off soon if the signal too poor.

6.4 Unable to charge.

The battery's life will be reduce after few years, please check if the battery are work.

Change a new charger if it is unworkable.

Please check the USB slot connecting good, if no, please try again.

6.5 No caller's name when incoming call

Forgot to choose upload the phone book when connected with BT, or unselected keep upload the phone book.

Forgot to sync the phone book when reconnected, please pair the device and connect BT again.