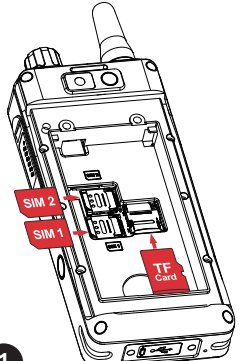
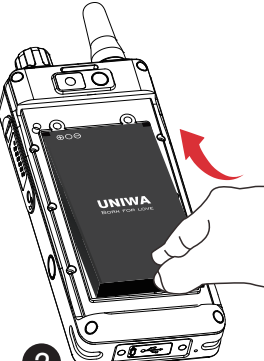
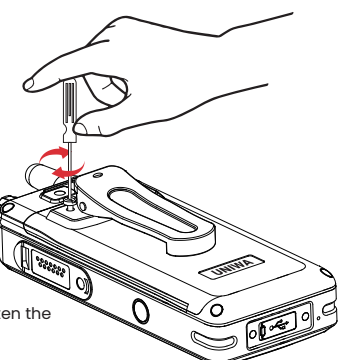

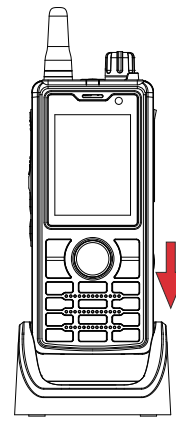
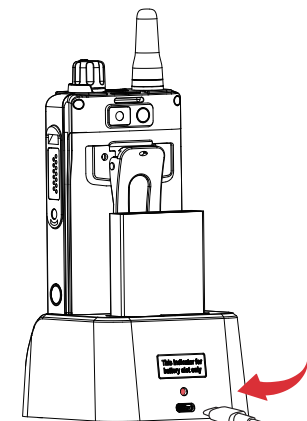



纸张：100G书纸
印刷：双面印刷，四色印刷
折页方式：弹簧折
尺寸：87*150mm

UNIWA BORN FOR LOVE  F41 User Manual V1.1	Table of Contents 1. Product Introduction.....02 - 1. Overview.....02 - 2. Features.....02 - 2. Technical Specifications.....02 2. Standard Package Contents.....05 3. Equipment Appearance.....05 - 1. Front layout of the device.....05 - 2. Back layout of the device.....06 - 3. Side button and interface layout.....06 4. Equipment Installation.....07 - 1. Insert SIM card and TF card07 - 2. Dedicated Charging Base (optional).....08 5. Power On/Off.....09 6. Intercom Settings.....09 - 1. PoC Setting.....09 - 2. Registration and Account Login.....10 - 3. Create/Join a Group.....10 - 4. Using PTT.....10 7. Smart Key Setting.....10 8. Equipment Maintenance & Care.....11 9. After-Sales Service & Support.....11
---	---

  06	Equipment Installation 1. Installation of SIM card and TF card  1 Insert SIM card and TF card  2 Install battery according to the arrow  3 Close back cover and tighten the screws	Note: Before installing the battery, make sure you have removed the insulating tape from the battery contacts, as shown in the figure on the right.  2. Dedicated Charging Base (optional)  1 Put UNIWA F41 into the base  2 Use the matching power adaptor  3 The indicator light on the base will turn red when charging. The LED indicator on the top of UNIWA F41 turns red when charging and turns green when fully charged.	Power On/Off Power on: Press and hold the power button for 5 seconds, the device starts and displays the power-on animation. Power off: Press and hold the power button for 2 seconds, the screen displays the power off option, click "Power off" or "Restart" to confirm. Intercom Settings 1. PoC Setting UNIWA F41 has been adapted to the commonly used public intercom software such as Zello, Real-PTT, Pocstar, and XinPoC. You can also search and install other intercom apps through Google "Playstore". If the user has own exclusive intercom app, he can adapt it through the "key values" below. The "key values" list is as follows: - Press and hold the SOS key to send a broadcast: android.intent.action.F41.SOS - Press the PTT key to send a broadcast: android.intent.action.ptt.down - Lift the PTT key to send a broadcast: android.intent.action.ptt.up - PTT key value: KEYCODE_F11 - Turn the knob left and send a broadcast: android.intent.action.F41.leftrotate - Turn the knob right and send a broadcast: android.intent.action.F41.rightrotate - Volume up key: KEYCODE_VOLUME_UP - Volume down key: KEYCODE_VOLUME_DOWN - Back key: KEYCODE_BACK - Power key: KEYCODE_POWER	- Key value and broadcast value of the PTT key of the M6 headset: Key value: KEYCODE_MEDIA_PLAY_PAUSE - Contained PTT key broadcast: Press: android.intent.action.ptt.down Lift: android.intent.action.ptt.up 2. Registration and Account Login - Run the installed intercom app. - Enter username and password, or log in to your account using the login method provided by the company. 3. Create/Join a Group - Enter the "Group" option in the PoC intercom app. - Select "Create Group" or "Join Group" to join by group number or QR code. - The 360-degree knob on the top of the intercom can be used to switch groups during intercom. 4. Using PTT - Press and hold the PTT button on the left side of UNIWA F41 to start the intercom call, and release the PTT button to end the intercom call. Usually the intercom app will emit a prompt tone and the LED indicator light will turn blue. - Some intercom app has GPS, photo taking, video and other functions, which can be used according to the intercom software manual. Smart Key Setting The round button on the right side of the intercom is the Smart Key. Open the "Settings" menu and find the "Smart Key" option. In the Smart key settings, you can choose three different operation modes (single click, double click, long press): - Assign to a specific task (such as starting recording, turning on the flashlight, taking a screenshot, etc.) - Set to quickly launch an application (such as opening the camera, message, file management, etc.) After completing the customization, save your settings. Press the Smart key to confirm that it works as expected.	Equipment Maintenance & Care General cleaning and maintenance - Use a soft, dry cloth to gently wipe the device, and avoid chemical cleaners. - Avoid long-term charging or use at low power to protect battery life - Use the original charger and avoid non-standard charging devices. After-Sales Service & Support - If need after-sales service, please contact the device purchase channel or visit our official website.
---	--	--	--	---	---