


Bluetooth Transceiver BR10Manual

Thank you for purchasing our Bluetooth transceiver! This product has the characteristics of low distortion, low power consumption, low delay, high fidelity, stereo and so on.

I. Schematic illustration

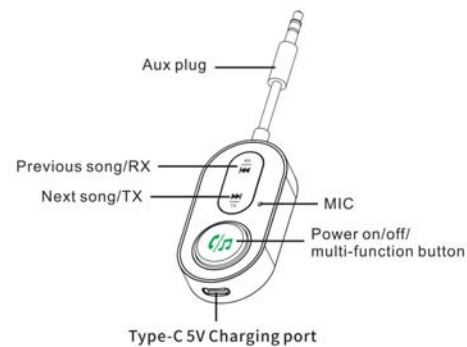


II. Product features

1. Bluetooth V5.3
2. Supports connecting two phones in RX mode
3. Supports connecting two headphones to play at the same time in TX mode
4. Support Bluetooth receiver/ transmitter
5. Automatically connect the paired Bluetooth device after power on
6. 10 minutes no device connection, automatic shutdown
7. TX mode play time: about 18 hours after full charge
8. RX mode play time: about 13 hours after full charge
9. Support Bluetooth DSP technology of stereo music.

III. Operating instructions

1. RX mode, blue indicator light

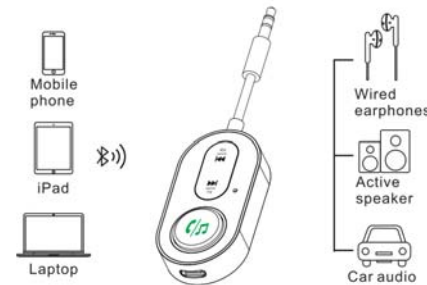

2. Connect / Reset Bluetooth Pairing for the first time:

2.1 Long press "⏮" 3 seconds to turn on, press and hold the "⏮" button for 2 seconds to switch to RX mode, and the blue light will flash quickly.

(To reset Bluetooth, double-click "⏮" to clear Bluetooth)

2.2 Turn on the Bluetooth of the mobile phone to search for the pairing name: "BR10", click to connect, the blue light is always on when the Bluetooth connection is successful

2.3 Connect the second mobile phone, the operation is same as 2.2.
After two mobile phones connect success, the indicator are flashing slowly. (Note: when you want to play the music of the second mobile phone, you need to pause the music of the current mobile phone, and then click again to play the music of the second mobile phone)

3. Music Control:

Click "⏮" previous song

Click "⏭" next song

Click "⏮" button to play/pause.

4. Bluetooth Hands-free Calling

4.1 Answering the call

In the connection state, when a call comes in, click the "⏮" button to answer, and press again to hang up.

4.2 Reject the call

When a call comes in but you don't want to answer it, press and hold the "⏮" button 2 seconds to reject the call.

4.3 Private answering

When you want to switch the mobile phone to answer during the call, press and hold the

"⏮" button 2 seconds to switch to the mobile phone to answer.

5. TX mode, green indicator light



5.1 Long press "⏮" 3S to turn on, press and

hold  button for 2 seconds to switch to TX mode, and the green light will flash, the product will automatically search for and connect nearby Bluetooth devices (such as Bluetooth headphones, Bluetooth speakers).

After successful connection, the green light will be always on.

5.2 Connect the second device, click the " " button, and the green light flash quickly, start searching and connecting to nearby Bluetooth devices, after successful connection, the green light flashes slowly.

*If the second device is not successfully connected after 2 minutes of searching, the search will automatically stop.

6. Music playback

6.1 Connect the 3.5mm plug with the sound source (mobile phone, MP3, computer, etc.) and play music

7. Automatically re-connection

When you turn off the product without clearing the pairing information, turning on again will automatically connect to the paired Bluetooth devices.

8. Double-click " " button to clear all Bluetooth pairing information.

IV. Charge

1. The red light is always on when charging under the state of shut down
2. Under the starting state of RX mode, when charging the red light is always on, and the blue indicator is also on.
3. Under the starting state of TX mode, when charging the red light is always on, and the green indicator is also on.
4. The red light goes out when it is fully charged.

V. Low voltage alarm/Automatic shutdown:

1. In RX mode, when the battery level is low, the red light starts to flash, and the voice prompt for low battery level is given once every 30 seconds., after 5 consecutive prompts, the device shut down automatically.
2. In TX mode, when the battery is low, the red light starts flashing and automatically shuts down after 2 minutes.
3. If there is no device connection or other operation for 10 minutes after the product is turned on, the product will automatically shut down.

VI. Technology Specs:

Charging Voltage	5V
Charging Current	366mA
Working Current	20mA
Shut Off Current	41uA
Charging Time	About 1H
Working Time	RX13H / TX18H
Battery Capacity	240mAh
Bluetooth Version	Version 5.3
Bluetooth Frequency	2.402-2.480GHz
Bluetooth Transmission	Straight Line10M

Distance	
Bluetooth Mic Effective Distance	0.5~2M

VII. Troubleshooting:

No response on power	· Long press the power button again · Plug in the charging cable to charge for 5 minutes before turning it on
Can't play	· Make sure the connected device is working properly · Clear bluetooth pairing and re-pair bluetooth · Is the audio cable plugged in properly
Can't charge	· Please unplug the charging cable and re-insert it · Try switching to another charger
No reaction on and off	Long press and hold the power button for 8 seconds to resume factory Settings

VIII. Warm tips:

1. Do not use this product in a dusty and humid environment with extremely high and low temperatures.
2. Do not drop the product to avoid surface damage or breakdown.
3. Do not disassemble the product, if you have any questions, please contact your dealer
4. Due to continuous improvement and enhancement of technology, changes in product performance and functionality are subject to change without notice.

IX. Packaging

1. Manual
2. Main Device
3. TYPE-C charging cable